



Fachgebiet  
Dynamik und Betrieb technischer Anlagen

d|b|t|a

# Styleguide for Dissertations and Theses

Documentation of the  $\text{\LaTeX}$  Template

Under the scientific supervision of  
**Prof. Dr.-Ing. habil. Jens-Uwe Repke**

Version 2.2.3  
Berlin, Dezember 2019

Technische Universität Berlin  
Fakultät III – Prozesswissenschaften  
Institut für Prozess- und Verfahrenstechnik  
Fachgebiet Dynamik und Betrieb technischer Anlagen



*I dedicate this great thesis to my gold fish, which has  
always been there for me*



# Eidesstattliche Erklärung

Hiermit erkläre ich an Eides statt, dass ich die vorliegende Arbeit selbstständig und eigenhändig sowie ausschließlich unter Verwendung der aufgeführten Quellen und Hilfsmittel angefertigt habe.

---

FIRST NAME SECOND NAME

Berlin, 13. Dezember 2019

I hereby confirm that I prepared this thesis independently and by exclusive reliance on literature or tools indicated herein.

---

FIRST NAME SECOND NAME

Berlin, December 13, 2019



# **Danksagung**

Ein paar nette Worte / Some nice words...





# Zusammenfassung

## Deutsch

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

**Schlüsselwörter:** *Schlüsselwort1; Schlüsselwort2; Schlüsselwort3*

## English

Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language. Hello, here is some text without a meaning. This text should show what a printed text will look like at this place. If you read this text, you will get no information. Really? Is there no information? Is there a difference between this text and some nonsense like “Huardest gefburn”? Kjift – not at all! A blind text like this gives you information about the selected font, how the letters are written and an impression of the look. This text should contain all letters of the alphabet and it should be written in of the original language. There is no need for special content, but the length of words should match the language.

**Keywords:** *Keyword<sub>1</sub>; Keyword<sub>2</sub>; Keyword<sub>3</sub>*

# Publikationen

This thesis is partially based on already published contributions. In the following, these are divided into Journal articles, papers within conference proceedings, oral presentations without papers, and a list of all supervised theses.

**This is only needed for dissertations and automatically removed if `isDiss` is false.**

The following items do *not* appear in the references at the end of this dissertation if the `\printpublication` command is used! If you cite the reference in the text as well, it also appears at the end.

Theses and dissertations are cited using a used-defined entry type in Jabref (see Abschn. 1.10.6) called `thesis` in which you may enter the type as `Bachelorarbeit`, `Masterarbeit`, `Dissertation`, `Bachelor's thesis`, ... The entry type is part of the available `.bib` file in this template. If you want to create it on your own, it contains the entries `author`, `title`, `school`, `year`, `type`.

## Zeitschriftenbeiträge

- E. Esche, C. Hoffmann, M. Illner, D. Müller, S. Fillinger, G. Tolksdorf, H. Bonart, G. Wozny und J.-U. Repke (2017): MOSAIC - Enabling Large-Scale Equation-Based Flow Sheet Optimization. *Chemie Ingenieur Technik* 89 (5), 620–635. DOI: 10.1002/cite.201600114

## Konferenzbeiträge

- A. Penteado, H. R. Godini, E. Esche, G. Lovato, J. A. D. Rodrigues und J.-U. Repke (2018): Optimal Design of a CO<sub>2</sub> Removal Section for a Biogas-based Oxidative Coupling of Methane Process. *Blucher Chemical Engineering Proceedings*. Bd. 1. Editora Blucher. DOI: 10.5151/cobeq2018-co.021

## Vorträge ohne Proceedings

- H. R. Godini, T. Karsten, C. Hoffmann, O. Görke, G. Wozny und J.-U. Repke (2017): Integrated Membrane Reactors for Efficient Ethylene and Methanol Production. *Third European Workshop on Membrane Reactors*. March 9–10, Verona (Italy)

## Betreute Abschlussarbeiten

- C. Hoffmann (2015): Real-time Optimization and Moving-horizon State Estimation for a Hydroformylation Plant. *Masterarbeit*. Technische Universität Berlin
- C. Hoffmann (2013): Simulation von Absorptionsprozessen mit ASPEN Plus für das Absorptionsmittel Methyldiethanolamin-Piperazin. *Bachelorarbeit*. Technische Universität Berlin

# Inhaltsverzeichnis

<b>Abbildungsverzeichnis</b>	<b>i</b>
<b>Tabellenverzeichnis</b>	<b>iii</b>
<b>Algorithmenverzeichnis</b>	<b>v</b>
<b>Codeverzeichnis</b>	<b>vii</b>
<b>Symbolverzeichnis</b>	<b>ix</b>
<b>Abkürzungsverzeichnis</b>	<b>xi</b>
<b>ToDo-Verzeichnis</b>	<b>xiii</b>
<b>1 Guidelines</b>	<b>1</b>
1.1 Most Important Style Specifications for L <sup>A</sup> T <sub>E</sub> X and Word . . . . .	1
1.2 First Steps . . . . .	2
1.3 General Information . . . . .	4
1.4 Form . . . . .	5
1.5 Appearance . . . . .	6
1.6 Template Structure . . . . .	6
1.6.1 Features . . . . .	7
1.6.2 Main Document . . . . .	7
1.6.3 00_Arara_and_Latexindent . . . . .	8
1.6.4 01_Document_administration . . . . .	8
1.6.5 02_Prematter . . . . .	9
1.6.6 03_Content . . . . .	11
1.6.7 04_Appendix . . . . .	12
1.6.8 05_Literature_and_Index . . . . .	12
1.6.9 Figures . . . . .	12
1.7 Language: English or German? . . . . .	13
1.8 L <sup>A</sup> T <sub>E</sub> X Editor Settings and Maintenance . . . . .	13
1.8.1 Biber and Makeindex . . . . .	13
1.8.2 Compiling the Document . . . . .	14
1.8.3 Updating Packages in T <sub>E</sub> XLive and MiK <sub>T</sub> E <sub>X</sub> . . . . .	15

## INHALTSVERZEICHNIS

1.9	Extra Features . . . . .	16
1.9.1	Compatibility with PDF/A . . . . .	16
1.9.2	Support for Overleaf or other online editors . . . . .	16
1.9.3	Automatic Indenting of .tex Files . . . . .	17
1.9.4	Index . . . . .	19
1.9.5	Software for Vector Graphics . . . . .	19
1.10	Templates for Typical Elements of a Thesis . . . . .	21
1.10.1	Figures . . . . .	21
1.10.2	Tables . . . . .	22
1.10.3	Numbers and Units . . . . .	23
1.10.4	Equations . . . . .	24
1.10.5	Acronyms and Abbreviations . . . . .	24
1.10.6	References . . . . .	25
1.10.7	Chemistry and Chemical Reactions . . . . .	26
1.10.8	Theorems, Lemmas, Proofs, Remarks, Definitions, and Algorithms . . . . .	27
1.10.9	Autorefs . . . . .	28
1.10.10	ToDos . . . . .	30
<b>2</b>	<b>Introduction</b>	<b>31</b>
2.1	Motivation and Objective . . . . .	31
2.2	Literature Review . . . . .	31
2.3	Outline of Work . . . . .	31
<b>3</b>	<b>Theoretical Background</b>	<b>33</b>
<b>4</b>	<b>Methods</b>	<b>35</b>
4.1	New Section . . . . .	35
4.2	New Section . . . . .	36
<b>5</b>	<b>Results and Discussion</b>	<b>39</b>
<b>6</b>	<b>Conclusion and Outlook</b>	<b>41</b>
6.1	Conclusion . . . . .	41
6.2	Outlook and Future Directions . . . . .	41
<b>A</b>	<b>Code Examples</b>	<b>43</b>
A.1	AMPL . . . . .	43
A.2	Matlab . . . . .	43
<b>B</b>	<b>Examples of the longtable Environment</b>	<b>45</b>
<b>C</b>	<b>Automatic Indenting in arara</b>	<b>49</b>

## INHALTSVERZEICHNIS

<b>D</b>	<b>Package Dependencies</b>	<b>51</b>
<b>E</b>	<b>Auto-completion</b>	<b>55</b>
<b>F</b>	<b>Large Figures</b>	<b>59</b>
F.1	Include as Figure . . . . .	59
F.2	Include as Page . . . . .	59
	<b>Literaturverzeichnis</b>	<b>65</b>
	<b>Indexverzeichnis</b>	<b>67</b>





# Abbildungsverzeichnis

1.1	Covers of this template . . . . .	10
1.2	Setting up <code>biber</code> and <code>makeindex</code> in Texmaker . . . . .	14
1.3	Before and after automatic indenting with <code>latexindent</code> . . . .	18
1.4	Image generated with Asymptote . . . . .	19
1.5	This is the caption of the figure in the List of Figures . . . . .	22
1.6	A wrapped figure . . . . .	22
1.7	Jabref . . . . .	26
1.8	Hydroformylation reaction scheme . . . . .	26
C.1	Directives for arara execution for automatic indenting . . . . .	50
F.1	Example of a large figure for DIN A3; taken from Wikipedia . . .	61



# Tabellenverzeichnis

1.1	A wrapped table . . . . .	22
1.2	This is the caption of the Table in the List of Tables . . . . .	23
1.3	Exemplary table with an annotation . . . . .	23
B.1	Name appearing in the List of Tables . . . . .	45
B.2	The caption of a long table on the first page . . . . .	46
D.1	List of all packages in this template . . . . .	51
E.1	List of recommended auto-complete commands in Texmaker . .	55



# Algorithmenverzeichnis

1.1	How to write algorithms . . . . .	28
-----	-----------------------------------	----



# Codeverzeichnis

1.1	Setting up <code>latexindent</code> in Texmaker . . . . .	18
1.2	Command lines for externalization in TikZ . . . . .	20
A.1	Code example for AMPL . . . . .	43
A.2	Code example for Matlab . . . . .	43
C.1	Setting up <code>arara</code> for <code>latexindent</code> in Texmaker . . . . .	50





# Symbolverzeichnis

## Konstanten

Symbol	Beschreibung	Einheit
$\pi$	Kreiszahl = 3,141 59...	1
$e$	Euler'sche Zahl = 2,718 28...	1
$R$	Universelle Gaskonstante = 8,314 46	J mol <sup>-1</sup> K <sup>-1</sup>

## Dimensionslose Kennzahlen

Symbol	Beschreibung	Definition
$Re$	Reynoldszahl	$\frac{wd\rho}{\eta}$

## Griechische Symbole

Symbol	Beschreibung	Einheit
$\alpha$	Non-randomness factor in NRTL-Modell	1
$\alpha$	Parameter in Gleichung für Verdampfungsenthalpie	J mol <sup>-1</sup>
$\alpha$	Trennfaktor für binäre VLEs	1
$\Delta$	Differenz	verschieden

## Indizes

Symbol	Beschreibung
$i$	Index für Komponenten

## SYMBOLVERZEICHNIS

$j$	Index für Komponenten
$k$	Index der Strukturgruppe

### Lateinische Symbole

Symbol	Beschreibung	Einheit
$A$	Parameter in Antoine-Gleichung	1
$A$	Porter-Parameter	1
$B$	Parameter in Antoine-Gleichung	K
$B$	Zweiter Virialkoeffizient (Leiden-Form)	$\text{m}^3 \text{mol}^{-1}$
$B'$	Zweiter Virialkoeffizient (Berlin-Form)	$\text{Pa}^{-1}$

### Operatoren

Symbol	Beschreibung	Definition
$\nabla$	Nabla-Operator	$\left[ \frac{\partial}{\partial x_1}, \dots, \frac{\partial}{\partial x_n} \right]^T$
rot	Rotationsoperator	$\text{rot } \vec{g} = \nabla \times \vec{g}$

### Superskripte

Symbol	Beschreibung
E	Exzess
III	Phase/Zustand 3
II	Phase/Zustand 2
I	Phase/Zustand 1

### Subskripte

Symbol	Beschreibung
0	Reinstoff
0	zu Beginn der Reaktion
c	Kritisch

# Abkürzungsverzeichnis

If the horizontal space is too small or too large for you abbreviations, change the allocated space by entering the longest abbreviation in the `\settowidth{}` command in `f_Abbreviations.tex`.

## Numerics



<b>ab</b>	active bound
<b>DAE</b>	Differential-algebraic equation (system)

## Software

<b>SUNDIALS</b>	Suite of nonlinear and differential-algebraic equation solvers
-----------------	--



## ToDo-Verzeichnis

 change that asap! . . . . .	30
 change that later at some point . . . . .	30
Abbildung: I want to add the results of my current experiment here . . .	30



# 1 Guidelines

This chapter introduces the guidelines for writing a thesis at the Process Dynamics and Operations Group. It is recommended to use  $\text{\LaTeX}$  as the code of this style guide can directly be used for the thesis. However, a Word version of this template is also available. In the template, the correct fonts, font sizes, citation style, and so forth are already set.

## 1.1 Most Important Style Specifications for $\text{\LaTeX}$ and Word

- page format: A4, double page, justification, 11 pt for standard font size;
- line spacing:
  - Word: 1.2;
  - $\text{\LaTeX}$ : linespacing is set with the `setspace` package any may not be changed;
- fonts :
  - Word: Palatino Linotype (text) and Arial (headings);
  - $\text{\LaTeX}$ : the font types are specified within this template and may not be changed;
- margins:
  - Word: 38 mm (top), 45 mm (bottom), 20 mm (inside), 35 mm (outside);

binding correction: 20 mm (only possible when double page is selected); exception: front page;

- $\text{\LaTeX}$ : the given settings for BCOR and DIV may not be changed;
- maximum number of pages (only content, excluding lists of ... and appendix): 80 pages (bachelor thesis), 100 pages (master thesis);
- the layout of the front page is fixed and must not be changed, neither in  $\text{\LaTeX}$  nor in Word;
- of course, loading additional packages in  $\text{\LaTeX}$  for functionality is fine.

**Attention:** If these specifications are (partially) ignored, it will have an impact on the evaluation.

### 1.2 First Steps

- 1) **carefully read this whole chapter**
- 2) install  $\text{\LaTeX}$ . On Windows, MikTeX<sup>1</sup> or TeXLive<sup>2</sup> are suitable distributions. MacTeX<sup>3</sup> or TeXShop<sup>4</sup> can be used on a Mac. On Linux, you typically also install TeXLive<sup>5</sup>; make sure to install an up-to-date version of TeXLive on a Linux machine. This template expects a TeXLive distribution  $\geq 2018$ . It is not tested with older versions anymore.
- 3) install a suitable  $\text{\LaTeX}$  editor. We recommend Texmaker<sup>6</sup>, which is available for all operating systems. An extensive list of editors is available on Wikipedia<sup>7</sup>.

---

<sup>1</sup><https://miktex.org/>, February 2019

<sup>2</sup><https://tug.org/texlive/windows.html>, February 2019

<sup>3</sup><http://www.tug.org/mactex/>, February 2019

<sup>4</sup><https://pages.uoregon.edu/koch/texshop/>, February 2019

<sup>5</sup><https://tug.org/texlive/quickinstall.html>, February 2019

<sup>6</sup><http://www.xm1math.net/texmaker/>, February 2019

<sup>7</sup>[https://en.wikipedia.org/wiki/Comparison\\_of\\_TeX\\_editors](https://en.wikipedia.org/wiki/Comparison_of_TeX_editors), February 2019



- 4) install a suitable program for your literature. We recommend Jabref<sup>8</sup>. It is a Java-based, platform-independent program that generates appropriate `.bib` files for L<sup>A</sup>T<sub>E</sub>X. A short introduction to Jabref is given in Abschn. 1.10.6.
- 5) set the language of the document in the `a_Packages.tex` file with the `babel` package. You will notice that this text is written in English while certain headings are in German. This is because the `babel` package is currently loaded with `ngerman` as default language (see Abschn. 1.7).
- 6) change the necessary entries in `c_Meta.tex` (e.g. your name, matriculation number, etc.), set the right value of the `isDiss` variable and the `isMT` variable (if it is a thesis) in this file
- 7) check whether `biber` and `makeindex` were set up correctly. Detailed information on this matter can be found in Abschn. 1.8.1
- 8) check whether you can compile this document without errors (see Abschn. 1.8.2). This should always be the case as long as all necessary packages are installed. This template was successfully compiled with a T<sub>E</sub>XLive 2018 and a T<sub>E</sub>XLive 2019 distribution (older L<sup>A</sup>T<sub>E</sub>X distributions potentially contain older package version and are thus not supported anymore). **Some problems appeared when users did not have the newest versions of the used packages in this template. If you run into trouble, please update all your packages.**<sup>9</sup> See some more instructions for T<sub>E</sub>XLive and MiK<sub>T</sub>E<sub>X</sub> in Abschn. 1.8.3
- 9) remove the „Guidelines“ chapter from this document by deleting it and removing it from the `0_Text.tex` file in the folder `03_Content`
- 10) add your own `.bib` file for your references or use the present one (it is recommended to simply use the given one)
- 11) start writing your thesis – good luck!

---

<sup>8</sup><http://www.jabref.org/>, February 2019

<sup>9</sup><https://tex.stackexchange.com/questions/55437/how-do-i-update-my-tex-distribution>, January 2019

## 1 GUIDELINES

- 12) note that not all of the shown items in the following sections *must* be part of your thesis. If a certain aspect does not apply to you, for example a List of Algorithms, just remove it from the thesis.

### 1.3 General Information

- 1) the current „Prüfungsordnung“ overrides the following rules if they contradict the „Prüfungsordnung“.
- 2) the thesis must be written in German or English.
- 3) a thesis is a scientific-technical documentation that must satisfy requirements regarding structure and form. It should be precisely formulated and well-written, i.e. no orthographic or grammar mistakes, etc.
- 4) the thesis should be logically structured.
- 5) the thesis should present its scientific-technical content while remaining comprehensible. Germans tend to formulate complex phrases with many sub-clauses. This should be avoided. Hence, the author should repeatedly put him- or herself into the position of the reader and evaluate the thesis in this regard.
- 6) the Figure, i.e. picture, diagram, photo, is preferred to long explanations.
- 7) results must be tractable. Hence, the applied methods, assumptions, boundary conditions, experiments, and computer codes must be pointed out and explained in sufficient detail.
- 8) calculations should be documented. This is of course difficult for large models. In this case, the code should be attached to the printed or digital appendix.
- 9) the thesis should focus on the central themes and aspects. Other information should be referenced appropriately, but does not have to be repeated extensively.

## 1.4 Form

- 1) physical units must always be given and are preferably stated in SI units. Units must not be stated in brackets:

- *WRONG*: Pressure  $P$  [Pa];
- *RIGHT*: Pressure  $P$  in Pa.

The only correct use of square brackets is shown here for the voltage:  
 $[U] = V$ , i.e. the unit of the voltage is Volt.

- 2) a List of Symbols and a List of Abbreviations must be included. This is done with the `nomencl` and the `acro` package in this template. In addition, symbols should be explained in the text after their first appearance. A List of Algorithms or other lists can be added if necessary.
- 3) figures, tables, and equations must be numerated and referenced in the text. This is automatically done using the `caption` package (see Abschn. 1.10) and the `\autoref` command (Abschn. 1.10.9). For example, a Figure is named Figure chapter.Num (Figure 2.1). The numeration is done automatically in this template. In addition, figures and tables must also be explained and discussed in the text.
- 4) figures should be chosen to support comprehension. In particular, the most important details and relevant labels must be *readable*.
- 5) extensive tables or figures that are repeatedly referenced in the text should be put in the appendix.
- 6) information or data not generated by the author must always be referenced. Citations/references are used to
  - document and justify one's own statements,
  - differ between one's own statements and those made by others,
  - help the reader to assess the origin of a statement

## 1 GUIDELINES

All information not generated by the author must be marked with a short reference, which is accompanied by the extensive reference in the bibliography. It is not important if this information appears directly or indirectly in the text. We either use the authoryear or the numerical short citation.

The most important rule is: The references must be complete and follow a consistent format. This is more important than following a specific citation style. If possible, the DOI/ISBN of an article/book should be part of the citation. This is also included automatically in this template. The commands and some examples are shown in Abschn. 1.10.6.

### 1.5 Appearance

- 1) the format of the page numbering and the appendix chapters is already specified and may not be changed.
- 2) there is a maximum of four indenture levels (chapter, section, subsection, paragraph) in the text and a maximum of three levels in the table of contents. The subsubsection should not be used as four numbers are bad style for structuring a text.
- 3) important aspects can be emphasized with *italics*, **bold writing**, or using the *emphasize command* `\emph`. Underlining words should be avoided.
- 4) paragraphs should not start in the last two lines of a page („Schusterjunge“ or orphan) or end in the first two lines of a page („Hurenkind“ or widow). This is automatically achieved with the `nowidow` package in this template.

### 1.6 Template Structure

This section describes the structure of this template. Questions, problems, or additional feature requests can be posted on the gitlab webpage of this template.<sup>10</sup>

---

<sup>10</sup>[https://gitlab.tu-berlin.de/dbta/Thesis\\_template/issues](https://gitlab.tu-berlin.de/dbta/Thesis_template/issues), February 2019

### 1.6.1 Features

- 1) valid for theses or dissertations
- 2) can be used in German and English based on the settings of the `babel` package
- 3) can be used with online editors, such as Overleaf (see Abschn. 1.9.2)
- 4) generation of List of Algorithms with the `algorithm2e` package and KOMA script
- 5) generation of List of Codes with the `listings` package and KOMA script
- 6) generation of List of Symbols (Latin, Greek, etc.) with the `nomencl` package
- 7) generation of List of Abbreviations with the `acro` package
- 8) generation of List of References with the `biblatex` package and `biber`
- 9) DOI/ISBN/URL are automatically included in the List of References if they are available in the `.bib` file
- 10) generation of an Index with the `imakeidx` package
- 11) ToDos and missing figures with the `todonotes` package
- 12) extra features, such as PDF/A compatibility, Overleaf support, and automatic indenting of  $\text{\LaTeX}$  code
- 13) various templates for typical elements of a thesis included

### 1.6.2 Main Document

- is called `main.tex`
- this document must be compiled in  $\text{\LaTeX}$  or should be chosen as master document

## 1 GUIDELINES

### 1.6.3 00\_Arara\_and\_Latexindent

The following files are located in this folder:

- 1) `localSettings.yaml`
  - contains the local settings for automatic indenting
  - more information can be found in Abschn. 1.9.3 and Anhang C

### 1.6.4 01\_Document\_administration

The following files are located in this folder:

- 1) `a_Packages.tex`
  - contains all packages, which are loaded
  - packages are sorted based on their application
  - all packages of this template and their references are stated in Tab. D.1
- 2) `b_Commands.tex`
  - contains further commands regarding format and look of the document
  - also sorted
- 3) `c_Meta.tex`
  - contains meta information regarding author, title, keywords, etc.
  - contains a boolean variable to select whether it is a dissertation or a bachelor/master thesis
  - contains a boolean variable to select whether it is a master or a bachelor thesis
- 4) `d_NomenclatureCommands.tex`
  - defines structure of the List of Symbols

- optional argument defines the class of a symbol (Latin, Greek, ...)
- `makeindex` is used for the generation of the List of Symbols. A short instruction how to run `makeindex` correctly in Texmaker is given in Abschn. 1.8.1.

### 5) `e_AbbreviationDefinitions.tex`

- defines the abbreviations in the text
- examples are provided
- abbreviations can be subdivided into classes
- more information can be found in the `acro` documentation

### 6) `f_CodeLanguageSpecifications.tex`

- can be used to define a set of keywords and comment commands for a certain programming language
- if you want to apprehend your code in your thesis, you can either copy the code to an `lstlistings` environment (see examples in Anhang A) or directly include your files

## 1.6.5 02\_Prematter

The following files are located in this folder:

### 1) `a_Cover.tex`

- creates the cover page. Depending on the values of `isDiss` set in `c_Meta.tex`, the correct cover is printed. The covers for both thesis and dissertation are shown in Abb. 1.1.

### 2) `b_Dedication.tex`

- dedicate your dissertation to someone
- only included if `isDiss` is true

## 1 GUIDELINES



**Abb. 1.1:** Covers of this template.

### 3) b\_Task.pdf

- contains a scan of the task for the thesis
- only included if `isDiss` is false

### 4) c\_Declaration.tex

- declaration that the thesis was written honestly

### 5) d\_Acknowledgements.tex

- thank important people

### 6) e\_Abstract.tex



## 1.6 TEMPLATE STRUCTURE

- summarize your thesis in German and English

### 7) `f_Publications.tex`

- states all publications that were written in preparation of the dissertation
- only included if `isDiss` is true

### 8) `g_Nomenclature.tex`

- presents all symbols and explains them
- examples are provided

### 9) `h_Abbreviations.tex`

- prints the defined abbreviations and explains them

## 1.6.6 03\_Content

The following files are located in this folder:

### 1) `0_Text.tex`

- loads all chapters

### 2) `X_iii.tex`

- contains the single chapters
- can be split further if deemed necessary

## 1 GUIDELINES

### 1.6.7 04\_Appendix

The following files are located in this folder:

- 1) 0\_Appendix.tex
  - loads all appendix chapters
- 2) X\_Appendix.tex
  - contains the Xth appendix

### 1.6.8 05\_Literature\_and\_Index

The following files are located in this folder:

- 1) Bibliography.bib
  - contains the literature
- 2) myindexstyle.ist
  - contains the style for the Index (see Abschn. 1.9.4)

### 1.6.9 Figures

This folder is added to the `graphicspath` in the `b_Commands.tex` file and contains all figures in this template. Being added to the `graphicspath` means that you may include figures without having to specify a path. However, it might become a little confusing if all your figures are placed within one folder. Luckily, several different folders can be added to the `graphicspath`.

## 1.7 Language: English or German?

The language of this document is set with the `babel` package. The order of the loaded languages determines the default language. Usually, `ngerman` is default (and hence the *second*) language. The `babel` package automatically sets the localized names for Tables and Figures, provides the correct hyphenation, and does more language-related things. In case the thesis is written in English, the order of the languages when loading the `babel` package must be changed. If the language is English, the output decimal marker for SI units (`siunitx` package) is also automatically changed to a period.

## 1.8 L<sup>A</sup>T<sub>E</sub>X Editor Settings and Maintenance

### 1.8.1 Biber and Makeindex

- command line for setting up `biber` in Texmaker (see Abb. 1.2):

1) Windows:

```
"C:/path_to/biber.exe" %  
in TEXLive, biber is located in bin/win32
```

2) Linux:

```
"/usr/path_to/biber" %
```

3) MacOS:

```
"/usr/path_to/biber" %.bcf
```

- command line for setting up `makeindex` in Texmaker (see Abb. 1.2):

1) Windows:

```
"C:/path_to/makeindex.exe" %.nlo -s nomencl.ist -o %.nls  
in TEXLive, makeindex is located in bin/win32
```

2) Linux:

```
"/usr/path_to/makeindex" %.nlo -s nomencl.ist -o %.nls
```

## 1 GUIDELINES

### 3) MacOS:

```
"/usr/path_to/makeindex" %.nlo -s nomencl.ist -o %.nls
```

Note that `path_to` depends on your system. If the  $\text{\LaTeX}$  distribution is in your system path, simply writing `biber` or `makeindex` (without extension) instead of the whole path should suffice. If you use another editor than Texmaker, check your editor's documentation to find out how to run `biber` and `makeindex` in this software. However, the paths/commands should be similar to those above.

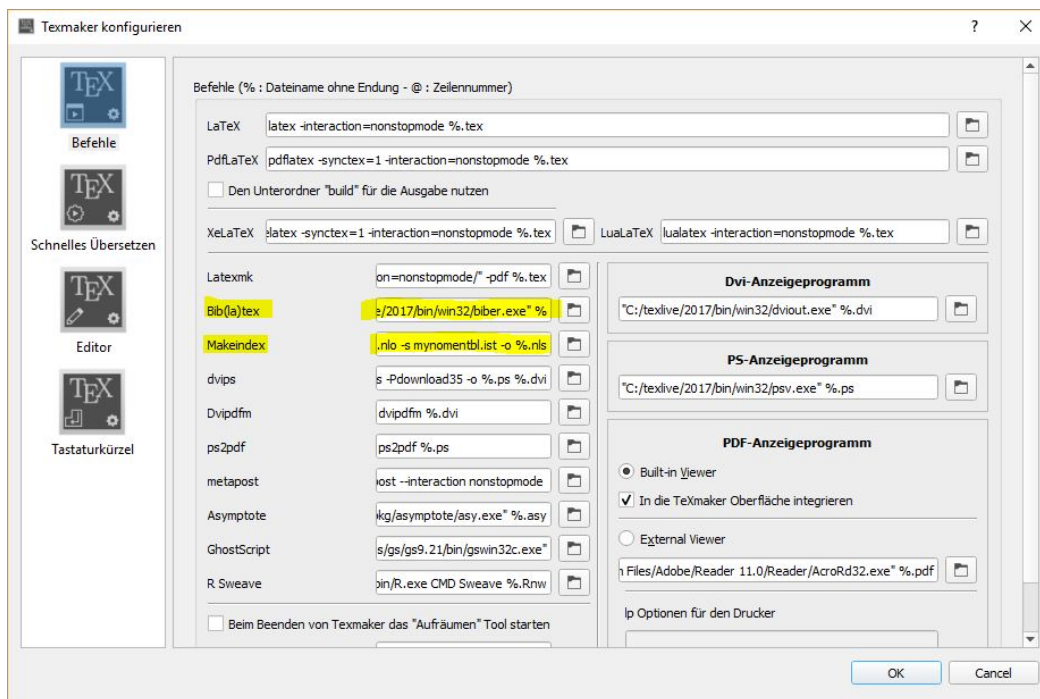


Abb. 1.2: Setting up `biber` and `makeindex` in Texmaker. Zoom in if you need more details.

## 1.8.2 Compiling the Document

The following commands/scripts must be run to compile the document completely:

## 1.8 L<sup>A</sup>T<sub>E</sub>X EDITOR SETTINGS AND MAINTENANCE

- 1) PDFL<sup>A</sup>T<sub>E</sub>X: This generates a first PDF. At this point, the List of References and the List of Symbols are missing.
- 2) `biber`: Run `biber` (Texmaker standard short key: F11) after you set it up according to Abschn. 1.8.1. This creates the necessary temporary reference file.
- 3) `makeindex`: Run `makeindex` (Texmaker standard short key: F12) after you set it up according to Abschn. 1.8.1. This creates the necessary temporary nomenclature file.
- 4) PDFL<sup>A</sup>T<sub>E</sub>X (three times): The first run should already generate the List of References and the List of Symbols. The second run should update all citations etc. in the PDF. Sometimes, a third run is necessary if some references within the text have changed again. In this case, a third run is necessary. Check the output of Texmaker.

### 1.8.3 Updating Packages in T<sub>E</sub>XLive and MiK<sub>T</sub>E<sub>X</sub>

As stated above, compilation problems appeared with this template when old versions of the packages were used. Unfortunately, there does not seem to be a possibility to automatically check for updates of packages when they are included in a L<sup>A</sup>T<sub>E</sub>X document.

In case you have issues when compiling this document, start with updating all your packages. The following instructions are valid for a Windows operating system.

**T<sub>E</sub>XLive** manages the packages via the `tlmgr` (T<sub>E</sub>XLive 2018) or `tlshell` (T<sub>E</sub>XLive 2019). The GUI of the `tlmgr` is located in `texlive/year/bin/win32`. In this folder, you find a file called `tlmgr-gui.exe` or `tlshell.exe`, respectively. Use this program to update your packages.

**MiK<sub>T</sub>E<sub>X</sub>** manages the packages in the MiK<sub>T</sub>E<sub>X</sub> console (package manager in older versions). Use this application to update your packages.

## 1 GUIDELINES

Similar applications are available on all other operating systems. Restart your  $\text{\LaTeX}$  editor after updating all packages and see whether you can compile this template without errors. If your problem persists, please add an issue on the gitlab webpage of this template.<sup>11</sup>

### 1.9 Extra Features

The following sections introduce a few extra features. None of them are necessary for a thesis (except for PDF/A for a dissertation), but they might be of use for some people.

#### 1.9.1 Compatibility with PDF/A

Dissertations are stored as PDF/A at the university library. To ensure compatibility of this template with PDF/A, the `pdfx` package is used with the option `a-2b`. The compiled PDF was successfully validated with Callas<sup>12</sup>, as recommended by the university library<sup>13</sup>. Note that contrary to the descriptions given in the linked document in Fußnote 13, a specific color profile is *not* necessary if you use an up-to-date version of the `pdfx` package as it automatically includes a free color profile. Check the documentation of the `pdfx` package to find how to include other color profiles. Normally, the default should however suffice. The `pdfx` package also loads the `hyperref` package. **Note that the `pdfx` package cannot ensure that all your included PDFs fulfill the PDF/A standard. Hence, check your PDF for PDF/A compatibility whenever you included external files.**

#### 1.9.2 Support for Overleaf or other online editors

This template was successfully tested with Overleaf<sup>14</sup>, an online editor for  $\text{\LaTeX}$  documents. If you would like to write in such an online environment, simply

---

<sup>11</sup>[https://gitlab.tu-berlin.de/dbta/Thesis\\_template/issues](https://gitlab.tu-berlin.de/dbta/Thesis_template/issues), February 2019

<sup>12</sup><https://conversion.ub.tu-berlin.de/>, December 2018

<sup>13</sup>[https://www.ub.tu-berlin.de/fileadmin/pdf/Verlag/UV\\_pdfaDE.pdf](https://www.ub.tu-berlin.de/fileadmin/pdf/Verlag/UV_pdfaDE.pdf), December 2018

<sup>14</sup><https://de.overleaf.com/>, January 2019

upload the template folder to a new empty project and compile it online. In this way, you do not have to install any L<sup>A</sup>T<sub>E</sub>X distribution locally. **Note that this is not advised if you have sensitive data, for example from a company. In this case, your data should remain on your computer!**

Currently (August 2019), there is an error message when using this template on Overleaf with the `nomenc1` and the `scrhack` package, potentially because Overleaf uses T<sub>E</sub>XLive 2017 at the moment. If you want to use this template on Overleaf, load the `scrhack` package with the option `nomenc1=false`. In addition, you need to upload a current version of the `nomenc1` package (`.sty` file) to the Overleaf project folder. Replace the `\setchemfig{atom sep=20pt}` command with `\setatomsep{20pt}`. These minor issues will disappear as soon as Overleaf updates to T<sub>E</sub>XLive 2018 or 2019 later this year.

### 1.9.3 Automatic Indenting of .tex Files

Indenting *can* be used for structuring one's document, e.g. by indenting everything within an `equation` environment, but is certainly *not* a must-have for a thesis. If you do not need automatic indenting, you can skip this section.

Unfortunately, L<sup>A</sup>T<sub>E</sub>X does not offer automatic indenting as do, for example, Matlab or Python. However, the perl script-based `latexindent`<sup>15</sup> can be used for automatic indenting of the source code. This executable is part of every L<sup>A</sup>T<sub>E</sub>X distribution. There are two ways of using `latexindent`: directly running `latexindent` or calling it via `arara`<sup>16</sup>. The `arara` software is also part of every L<sup>A</sup>T<sub>E</sub>X distribution and can be used for T<sub>E</sub>X automation.<sup>17</sup> The first option is described here for a Windows operating system (the instructions for Linux and Mac should be similar; only the file extension `.exe` is probably different). With this option, it is only possible to indent one file at a time (the file that is currently open in Texmaker). The second option can automatically indent all files in the document and is described in Anhang C.

<sup>15</sup><https://github.com/cmhughes/latexindent.pl>, February 2019

<sup>16</sup><https://tex.stackexchange.com/questions/126241/autoindent-in-texmaker>, January 2019

<sup>17</sup><https://github.com/cereda/arara>, February 2019


## 1 GUIDELINES

To get automatic indenting, add a user command in Texmaker (User → User Commands → Edit User Commands). You might call one menu item `latexindent`. The command is shown in Code 1.1. This means that `latexindent` is executed with writing rights (`-w`) on the current `.tex` file with local settings (`-l`) in the given path. These local settings are the only issue, because the absolute path can of course change if you move your folder. However, the relative path would always change depending on which file you actually want to indent.

The local settings are important as they specify that only one backup is created. For more information, please refer to the documentation of `latexindent`. You can then execute your new user command in Texmaker with the opened file in question. Afterwards, update your file by clicking on File → Reload document from file. The result is shown in Abb. 1.3. **Note that automatic indenting might not be available for online editors.**

```
"C:/path_to_texlive/year/bin/win32/latexindent.exe" -w %.tex -l="
absolute_path_to_thesis_template/Thesis_template/
LaTeX_template_thesis/00_Arara_and_Latexindent/localSettings.yaml"
```

Code 1.1: Setting up `latexindent` in Texmaker.

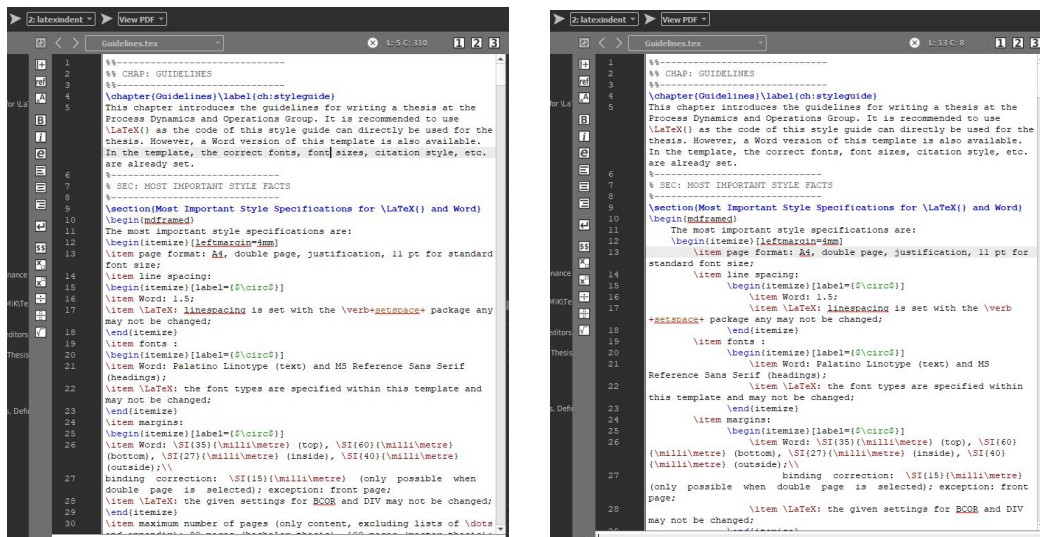

(a) Before.

(b) After.

Abb. 1.3: Before (left) and after (right) automatic indenting with `latexindent`.




### 1.9.4 Index

If you want to give the reader the possibility to quickly scan your document for the interesting keywords, you can generate an Index at the end of your thesis. This is certainly not necessary for a bachelor or master thesis, but can be used for a dissertation. In this template, the `imakeidx` package is used. This automatically executes `makeindex` during compilation. If you do not want an Index, remove the `\makeindex` command from the `b_Commands.tex` file and the `\printindex` command from the `main.tex` file.

The Index works as follows: You simply write your text and add the keyword to the index with the `\index{}` command. You can combine keywords to categories, e.g. Thermodynamics might be one keyword. Now you can add other keywords to this category with `\index{keyword!subkeyword}`. This could be equations of state or activity models. The results are shown in the Indexverzeichnis.

### 1.9.5 Software for Vector Graphics

Figures are an important part of every thesis. Normally, these figures are generated by the author, who is hence responsible for their quality. Vector graphics are generally preferred to raster graphics (JPG, PNG, ...) as their quality does not depend on the resolution. There are a few programs

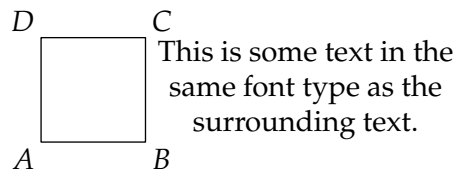

*Abb. 1.4: Image generated with Asymptote.*

for generating figures within  $\text{\LaTeX}$ , which are listed in the following. Plotting within  $\text{\LaTeX}$  has a few advantages, for example: the figure always has the same font type as the text, and global settings can be applied to all figures within one document. Typically, one can either compile all figures whenever  $\text{\PDFLaTeX}$  is executed, or only compile the changed figures, or generate the PDFs in a separate file and include the PDF in the document.

## 1 GUIDELINES

**Asymptote** is a powerful vector graphics program<sup>18</sup>. It can be made visible to all  $\text{\LaTeX}$  distributions with a package<sup>19</sup>. Asymptote can directly generate a PDF output. An example of an image generated with Asymptote is shown in Abb. 1.4. In this case, the image was generated externally and is now included as a PDF. The code of this image is located in the `Examples` folder of this template.

**TikZ** is another vector graphics tool<sup>20</sup>. It is also available for all  $\text{\LaTeX}$  distributions.<sup>21</sup> Asymptote and TikZ are similar as all images are produced based on commands (similar to  $\text{\LaTeX}$  code). Choose between these two programs based on your own preferences.

In TikZ, it is recommended to externalize your figure, i.e. they are only redrawn if something was changed. In this case, add the lines in Code 1.2 *below* the section on `makeindex` in the `b_Commands.tex` file to make sure everything works smoothly. First of all, the external library is loaded, secondly, externalization is started. Importantly, shell escape must be enabled here. In addition, the `\includepdf` command is excluded from externalization. Finally, the `\todo` command is redefined so it also disables externalization locally. More on these issues can be found here<sup>22,23</sup>. **You need to create the folder `TikZ` if you use this prefix.**

```
\usetikzlibrary{external}
\tikzexternalize[prefix=TikZ/,shell escape=-enable-writel8,optimize
  command away=\includepdf]
\tikzset{external/system call={pdflatex \tikzexternalcheckshellescape -
  halt-on-error -interaction=batchmode -jobname "\image" "\texsource"}}
\makeatletter
\renewcommand{\todo}[2][\tikzexternaldisable\@todo[#1]{#2}\tikzexternalenable}
\makeatother
```

*Code 1.2: Command lines for externalization in TikZ.*

<sup>18</sup><http://asymptote.sourceforge.net/>, March 2019

<sup>19</sup><https://ctan.org/pkg/asymptote>, March 2019

<sup>20</sup><https://sourceforge.net/projects/pgf/>, March 2019

<sup>21</sup><https://www.ctan.org/pkg/pgf>, March 2019

<sup>22</sup><https://tex.stackexchange.com/questions/135504/includepdf-causes-an-error-message-from-pgfplots-externalization>, August 2019

<sup>23</sup><https://tex.stackexchange.com/questions/42486/todonotes-and-tikzexternalize>, August 2019

**PSTricks** was designed for PostScript vector graphics<sup>24</sup> and is available for all  $\text{\LaTeX}$  distributions.<sup>25</sup> Due to its PostScript origin, it cannot directly be used with  $\text{\PDFLaTeX}$ . If you want to compile with  $\text{\PDFLaTeX}$ , the best solution is using the package `auto-pst-pdf`<sup>26</sup>.

**Inkscape** is a graphics tool, which is not used with commands (as are the others), but which is similar to Visio or Powerpoint in its use.<sup>27</sup> However, Inkscape exports an additional file containing the  $\text{\LaTeX}$  specifications for an image. Hence, the text of an exported image will adapt to the font size and type of the  $\text{\LaTeX}$  document.

## 1.10 Templates for Typical Elements of a Thesis

This section introduces templates for the typical elements of a thesis, such as figures, tables, equations, etc.

### 1.10.1 Figures

A template for a Figure is given in Abb. 1.5. Abbildung 1.5 should not be abbreviated at the beginning of a sentence. Note that the often used `\ref` command is not used here. Instead, Abschn. 1.10.9 introduces the `\autoref` command. In addition, a short command for including figures was set up with the `xparse` package: `\myfigure[opt1][opt2]{arg1}[opt3]{arg2}[opt4]`. Therein,

- `opt1` is the preferred location of the float, e.g. `tbh`
- `opt2` is the fraction of the linewidth the figure should cover. It can be a value between 0 and 1
- `arg1` is the file name of the figure
- `opt3` is the short caption for the List of Figures

<sup>24</sup><http://www.tug.org/PSTricks/main.cgi/>, March 2019

<sup>25</sup><https://www.ctan.org/pkg/pstricks-base>, March 2019

<sup>26</sup><https://ctan.org/pkg/auto-pst-pdf?lang=de>, March 2018

<sup>27</sup><https://inkscape.org/de/>, March 2019

## 1 GUIDELINES

- `arg2` is the caption of the figure in the text
- `opt4` is the label of the figure

# d|b|t|a

## Fachgebiet Dynamik und Betrieb technischer Anlagen

**Abb. 1.5:** *This is the caption of the Figure in the text. Is is placed below the Figure. It can be longer here and contain additional information, such as references or keys for the graphs. Note that one-line captions are justified. A full stop is automatically added after the last sign.*

Although it is not seen on a regular basis in theses or dissertations, a Figure may also be surrounded by text. The `wrapfig` package is used for this purpose. It depends on the Figure's size if this is a good or a bad idea. Make sure that readability of the Figure is still given. An example is given in Abb. 1.6.



**Abb. 1.6:** *A wrapped figure.*

### 1.10.2 Tables

A template for a Table is given in Tab. 1.2. Tabelle 1.2 should not be abbreviated at the beginning of a sentence. A common issue in  $\text{\LaTeX}$  are footnotes within tables. However, there is the `threeparttable` package to deal with this. In such a `threeparttable` environment, annotations can be easily added (Tab. 1.3). Normal tables in  $\text{\LaTeX}$  cannot go over several pages. For longer tables, see the `longtable` package in Anhang B. This template also loads the `threeparttablex` package, which extends the annotation feature to the `longtable` environment. The `wrapfig` package can also be used for wrapped tables as shown in Tab. 1.1. Again, make sure that the Table is small enough.

**Tab. 1.1:** *A wrapped table.*

Variable	Mean	Std. Dev.
<i>a</i>	4	$\pm 0,1$

## 1.10 TEMPLATES FOR TYPICAL ELEMENTS OF A THESIS

**Tab. 1.2:** This is the caption of the Table in the text. Is is placed above the table. It can be longer and contain additional information. Vertical lines should be avoided in tables. A full stop is automatically added after the last sign.

Entry 1	Entry 2	Entry 3	Unit column	<i>Italics</i>
Unit 1	Unit 2	Unit 3	Some text	<i>Some text</i>
1	2	3	J	<i>bla</i>
4	5	6	Pa m <sup>-2</sup>	<i>bla bla</i>

**Tab. 1.3:** Exemplary table with an annotation.

Variable	Mean	Std. Dev.
<i>a</i>	4	±0,1*

\* This standard deviation is only true if I measured correctly

### 1.10.3 Numbers and Units

Numbers are treated differently in this template depending on whether they appear in plain text or math mode. In the text, text figures are used as they are better readable. In math mode or Tables, numbers should be typeset with lining figures. If you do not like the text figures, delete the option `osf` when loading the `mathpazo` package.

Units are also very important. However, there are some rules when typesetting units. For example, they are never written in italics. They should also have the right space between them. For this purpose, the `siunitx` package is suggested.

- `numbers (\num{number})`: 3,141 59 (text) and 3,141 59 (math mode)
- `exponentials (\num{numbere6})`: 1,3 · 10<sup>6</sup> (text) and 1,3 · 10<sup>6</sup> (math mode)
- `units (\si{\unit})`: J mol<sup>-1</sup> K<sup>-1</sup>
- `numbers+units (\SI{number}{\unit})`: 8,314 J mol<sup>-1</sup> K<sup>-1</sup>
- `ranges (\SIrange{number1}{number2}{\unit})`: 4 bis 10 K.
- `uncertainty (\num{number (uncertainty)})`: 410,33 ± 0,55

## 1 GUIDELINES

- uncertainty with units (`\SI{number(uncertainty)}{\unit}`):  
(410,33 ± 0,55)J
- own units can also be defined as has been done for kJ mol<sup>-1</sup> and kJ mol<sup>-1</sup> K<sup>-1</sup>

### 1.10.4 Equations

An exemplary Equation is given in Gl. (1.1). Gleichung (1.1) should not be abbreviated at the beginning of a sentence. The efficient used commands to generate the partial derivative were made with the `xparse` package.

$$\left(\frac{\partial^2 f}{\partial x^2}\right) = \left[\frac{\partial^4 g}{\partial x^4}\right]. \quad (1.1)$$

For important equations, you might want to use a box:

$$\boxed{E = mc^2} \quad (1.2)$$

### 1.10.5 Acronyms and Abbreviations

Abbreviations are defined in `e_AbbreviationDefinitions.tex` using the `acro` package. New abbreviations must typically be explained at their first appearance in the text. The `\ac` command uses the defined acronyms (see List of Abbreviations) for doing that. For example, the **Suite** of **nonlinear** and **differential-algebraic** equation solvers (SUNDIALS) is explained here, but not afterwards because SUNDIALS was already defined. It seems to be more to write, but thus you make sure that an abbreviations is explained only at its first appearance ... even if you change your text completely. In addition, you link your abbreviations to the List of Abbreviations. The `acro` package also contains specific commands for the plural of the long and the short form of the abbreviations; check the documentation for more information. Moreover, the abbreviations are automatically added to the Index. Note that expressions, such as e.g. or i.e., *should not* be added to the List of Abbreviations.

### 1.10.6 References

$\LaTeX$  – or more precisely `biber` – includes literature if it is stored as `.bib` file. It is however not recommended to manually write in `.bib` files, but one should use a program for administrating literature. Examples of such programs are Mendeley or Jabref (Abb. 1.7). In Jabref, one can add literature via the DOI or the ISBN. Furthermore, it offers templates for all standard document classes, such as articles, books, online references, and more.

In the following, a few examples of the authoryear short reference are stated. For more information, the reader is referred to the documentation of the `biblatex` package. `Biblatex` and `biber` are used because they are compatible with UTF8. Hence, Umlaute, such as `ä`, do not have to be rewritten as was the case in `bibtex`. In addition, `biblatex` supports editing of the citation style via  $\TeX$  and  $\LaTeX$  commands. Hence, the tedious editing of bibliography styles (`.bst` files), which were used with `bibtex`, is not necessary anymore.

**Note that references to books should contain the page number.**

- book: (Coker, 2007, S. 221), Coker (2007, S. 221)
- article: (Abrams und Prausnitz, 1975), Abrams und Prausnitz (1975)
- conference paper: (Penteado u. a., 2018), Penteado u. a. (2018)
- online: (NIST Chemistry Webbook, 2017), NIST Chemistry Webbook (2017)
- dissertation: (Cuda, 2012), Cuda (2012)
- bachelor/master thesis: (Hoffmann, 2015), Hoffmann (2015)

These commands are used as

- `\textcite{bibtexkey}`:  
„Abrams und Prausnitz (1975) stated that thermodynamics are great.“
- `\parencite{bibtexkey}`:  
„Thermodynamics are great (Abrams und Prausnitz, 1975).“

## 1 GUIDELINES

#	entry...	author/editor	title	year	journal/book...	bibtexkey	ranking
1	Electro...	Plastics Insight. n.d.	Polyvinyl chloride (PVC) market size worldwide from 20...	2018		Statista2018	
2	Article	Alberton et al.	Accelerating the parameters identifiability procedure: S...	2013	Computers & ...	Alberton20...	
3	TechRe...	Ausfelder et al.	Flexibilitätsoptionen in der Grundstoffindustrie: Methodi...	2018		Koperniku...	
4	Book	Azapagic et al.	Sustainable Development in Practice: Case Studies for...	2004		Azapagic2...	
5	Article	Balasubramanian et al.	Film Model for Ethylene Dichloride Formation. Adsorpti...	1966	Industrial & E...	Balasubra...	
6	Article	Bennett et al.	New pressure drop correlation for sieve tray distillation ...	1983	AIChE Journal	Bennett19...	
7	Article	Bigg et al.	Binary Vapor-Liquid Equilibria Involving 1,2-Dichloroeth...	1964	Journal of Ch...	Bigg1964	
8	Book	Dreher et al.	Chloroethanes and Chloroethylenes in: Ullmann's Enc...	2014		Dreher2014	
9	Electro...	Process Systems Enterprise	gPROMS	1997-...		gPROMS2...	
10	PhDTh...	Esche	MINLP optimization under uncertainty of a mini plant for...	2015		Esche2015	
11	Article	Esche et al.	MOSAIC - Enabling Large-Scale Equation-Based Flow ...	2017	Chemie Ingen...	Esche2017	
12	Book	Fischer et al.	Poly(Vinyl Chloride) in: Ullmann's Encyclopedia of Indu...	2014		Fischer2014	
13	Book	Fourer et al.	AMPL: A Modeling Language for Mathematical Program...	2002		Fourer2002	
14	Book	Gmehling et al.	Chemical Thermodynamics for Process Simulation	2012		Gmehling...	
15	Article	Graciano et al.	Performance comparison of parameter estimation tech...	2014	Computers & ...	Graciano2...	
16	Book	Green and Perry	Perry's Chemical Engineers' Handbook, Eighth Edition	2007		Green2007	
17	TechRe...	Verband der chemischen Industrie ...	Chemiewirtschaft in Zahlen 2018	2018		VCi2018	
18	Article	Kissell and Manning	Vapor-Liquid Equilibrium Data for the Binary Mixtures C...	1962	Journal of Ch...	Kissell1962	
19	TechRe...	Kohler et al.	dena-Netzstudie II	2010		dena2010	
20	Article	López et al.	Nonlinear ill-posed problem analysis in model-based ...	2015	Computers & ...	DianaClo...	
21	Article	Merchan et al.	Computer-Aided Process and Plant Development. A R...	2015	Chemie Ingen...	Merchan2...	
22	Article	Müller et al.	An algorithm for the identification and estimation of rele...	2014	Computers & ...	Mueller2014	

Abb. 1.7: Jabref.

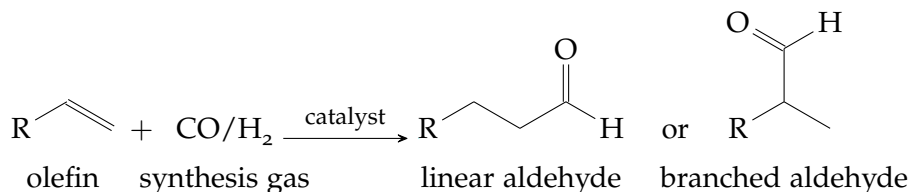


Abb. 1.8: Hydroformylation reaction scheme to demonstrate the two chemistry packages.

### 1.10.7 Chemistry and Chemical Reactions

Sometimes, it is necessary to state chemical reactions or molecules. For this purpose, the `chemfig` and the `chemformula` package, which is loaded as part of the `chemmacros` package, are used as shown in Abb. 1.8. Molecular formulas should not be written in math mode, but can be typeset with the `\ch{ }` command, e.g. `H2O`. Note that chemical formulae, e.g. `CO2` for carbon dioxide, *should not* be added to the List of Symbols or the List of Abbreviations, while abbreviations, e.g. MEA for monoethanolamine, *should* be added to the List of Abbreviations. Greek letters in chemicals are not typeset in italics, therefore the `upgreek` package is loaded to typeset  $\gamma$ -Aluminium instead of  $\gamma$ -Aluminium.



### 1.10.8 Theorems, Lemmas, Proofs, Remarks, Definitions, and Algorithms

All of these items are introduced in the following. Note that frames and their colors are arbitrary. You might want to change the color or the linewidth. You can do this in the `b_Commands.tex` file.

**Theorems:** Theorems can be defined using the `amsthm` package in combination with the `mdframed` package for a possible frame. An exemplary Theorem is given in Satz 1.1.

**Satz 1.1 (What is theorem'd):** *Let  $f$  be a function whose derivative exists in every point, then  $f$  is a continuous function.*

**Lemmas:** Lemmas can be defined using the `amsthm` package in combination with the `mdframed` package for a possible frame. An exemplary Lemma is given in Hilfssatz 1.1.

**Hilfssatz 1.1 (What needs to be lemma'd):** *Given two line segments whose lengths are  $a$  and  $b$ , respectively, there is a real number  $r$  such that  $b = ra$ .*

**Proofs:** Proofs can be defined using the `amsthm` package. They are typically not numerated as they follow a certain Theorem or Lemma.

*What needs to be proven.* To prove it by contradiction, try and assume that the statement is false, proceed from there, and at some point, you will arrive at a contradiction. □

**Remarks:** Remarks can be defined using the `amsthm` package in combination with the `mdframed` package for a possible frame. An exemplary Remark is given in Bem. 1.1.

**Bemerkung 1.1** (What the remarker remarks): *This statement is true, I guess.*

**Definitions:** Definitions can be defined using the `amsthm` package in combination with the `mdframed` package for a possible frame. An exemplary Definition is given in Def. 1.1. Gleichung (1.3) can also be referenced.

**Definition 1.1** (What the definition defines): *This is a definition. It defines itself.*

$$c = \infty \tag{1.3}$$

**Algorithms:** Algorithms can be displayed using the `algorithm2e` package. An example is shown in Alg. 1.1.

---

**Algorithmus 1.1:** How to write algorithms

---

**Data:** this text

**Result:** how to write algorithm

initialization;

**while** *not at end of this document* **do**

    read current;

**if** *understand* **then**

        go to next section;

        current section becomes this one;

**else**

        go back to the beginning of current section;

**end**

**end**

---

### 1.10.9 Autorefs

The `hyperref` package also supplies an `\autoref` command, which is linked to `babel`. In this case, Fig. or Tab. are localized and you do not have to remember whether you used Fig. or Figure or something else in the text. As stated above,

the long version of an item should be used at the beginning of a sentence (the `\Autoref{label}` command was defined for this purpose). Some short forms are equal to their long forms as there is not really a good abbreviation:

1) German ...

- ..., siehe Kap. 1. Kapitel 1 zeigt, dass ...
- ..., siehe Abschn. 1.10. Abschnitt 1.10 zeigt, dass ...
- ..., siehe Abschn. 1.8.1. Abschnitt 1.8.1 zeigt, dass ...
- ..., siehe Abb. 1.5. Abbildung 1.5 zeigt, dass ...
- ..., siehe Tab. 1.2. Tabelle 1.2 zeigt, dass ...
- ..., siehe Gl. (1.1). Gleichung (1.1) zeigt, dass ...
- ..., siehe Satz 1.1. Satz 1.1 zeigt, dass ...
- ..., siehe Hilfssatz 1.1. Hilfssatz 1.1 zeigt, dass ...
- ..., siehe Bem. 1.1. Bemerkung 1.1 zeigt, dass ...
- ..., siehe Def. 1.1. Definition 1.1 zeigt, dass ...
- ..., siehe Alg. 1.1. Algorithmus 1.1 zeigt, dass ...

2) English ...

- ..., see Chap. 1. Chapter 1 shows that ...
- ..., see Sec. 1.10. Section 1.10 shows that ...
- ..., see Sec. 1.8.1. Section 1.8.1 shows that ...
- ..., see Fig. 1.5. Figure 1.5 shows that ...
- ..., see Tab. 1.2. Table 1.2 shows that ...
- ..., see Eq. (1.1). Equation (1.1) shows that ...

## 1 GUIDELINES


- ..., see Theorem 1.1. Theorem 1.1 shows that ...
- ..., see Lemma 1.1. Lemma 1.1 shows that ...
- ..., see Remark 1.1. Remark 1.1 shows that ...
- ..., see Def. 1.1. Definition 1.1 shows that ...
- ..., see Alg. 1.1. Algorithm 1.1 shows that ...

### 1.10.10 ToDos

In your thesis, you always have parts where you will have to do something more later on. You can mark these sections with the `\todo[option]{text}` command. Something that should be done later might be green. You can also include a „missing figure“ if you currently do not have it. When you do not have any more ToDos, remove the List of ToDos from the `main.tex`.

change that  
asap!

change that  
later at some  
point

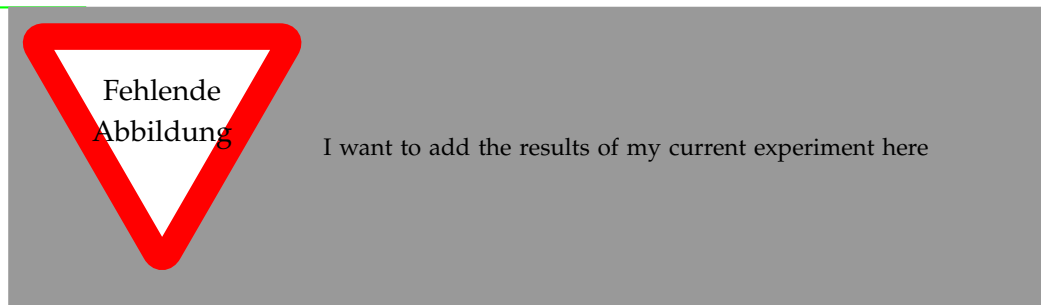

## **2 Introduction**

Some introducing words ...

### **2.1 Motivation and Objective**

Why this subject is important and what is the goal of this thesis ...

### **2.2 Literature Review**

What are the most relevant publications in this field? Only name those with the largest impact on your work. A more detailed description of different models/approaches/methods can be given in the theoretical part of your work.

### **2.3 Outline of Work**

What is the structure of this thesis?



## **3 Theoretical Background**

Some introducing words ...

In this chapter, all fundamentals that are necessary to understand this work are introduced.





## 4 Methods

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

### 4.1 New Section

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen.

## 4 METHODS

An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

### 4.2 New Section

Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen

und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln. Dies hier ist ein Blindtext zum Testen von Textausgaben. Wer diesen Text liest, ist selbst schuld. Der Text gibt lediglich den Grauwert der Schrift an. Ist das wirklich so? Ist es gleichgültig, ob

#### 4 METHODS

ich schreibe: „Dies ist ein Blindtext“ oder „Huardest gefburn“? Kjift – mitnichten! Ein Blindtext bietet mir wichtige Informationen. An ihm messe ich die Lesbarkeit einer Schrift, ihre Anmutung, wie harmonisch die Figuren zueinander stehen und prüfe, wie breit oder schmal sie läuft. Ein Blindtext sollte möglichst viele verschiedene Buchstaben enthalten und in der Originalsprache gesetzt sein. Er muss keinen Sinn ergeben, sollte aber lesbar sein. Fremdsprachige Texte wie „Lorem ipsum“ dienen nicht dem eigentlichen Zweck, da sie eine falsche Anmutung vermitteln.

## **5 Results and Discussion**



## **6 Conclusion and Outlook**

Some introducing words ...

### **6.1 Conclusion**

### **6.2 Outlook and Future Directions**





# Anhang A

## Code Examples

### A.1 AMPL

```
1  reset; # all blue words are keywords in this language
2          # they are defined in the file 01_Document_administration/
3          # f_CodeLanguageSpecifications.tex
4  model simulation.mod;
5  data simulation.dat;
6  include initial.dat;
7  option ipoptoptions "halt_on_ampl_error_yes";
8
9  let e0_param := 4;
10
11 solve;
```

*Code A.1: Code example for AMPL.*

### A.2 Matlab

```
1  clc
2  clear
3  close all
4
5  e0_param = 4;
6
7  j=0;
```

## ANHANG A CODE EXAMPLES

```
8 for i=1:e0_params % this loop is incredibly smart
9     if 1==2
10         j=j+1;
11     else
12         j=j-1;
13     end
14 end
```

*Code A.2: Code example for Matlab.*

## Anhang B

### Examples of the longtable Environment

Especially in the appendix, it is common that long tables appear, which contain experimental or simulated data. For this purpose, the `longtable` environment can be used. The `\autoref` command to reference tables works for them as well (Tab. B.1).

**Tab. B.1:** *This is a longtable, because it is a long table.*

Ragged right Result A	Ragged left Result B	Justified Result C	Parbox Result D
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.

ANHANG B EXAMPLES OF THE LONGTABLE ENVIRONMENT

Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.

*Tab. B.2: The caption of a long table on the first page.*

Ragged right Result A	Ragged left Result B	Justified Result C	Parbox Result D
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.

Continued on next page

*Tab. B.2 (continued).*

Ragged right Result A	Ragged left Result B	Justified Result C	Parbox Result D
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.
Text.	Text.	Text.	Longer text to create li- ne breaks.



## Anhang C

### Automatic Indenting in arara

In the following, the instructions on using `arara` for automatic indenting are shown for a Windows operating system. It is assumed that the instructions are similar on a Unix system, because `arara` is platform independent. However, this has not been verified, yet. In addition, we expect every person using this template to have installed  $\text{\TeX Live} \geq 2018$  and the following instructions are only valid for these cases. If you *have* to use an older  $\text{\TeX Live}$  version, please check earlier commits of this template for the necessary instructions and files.

#### 4.0 ( $\text{\TeX Live} \geq 2018$ ):

1. Add a user command for `arara` to Texmaker<sup>1</sup>.
2. Add the command in Code C.1 to the beginning of the `main.tex` file (right before anything else). Note that the `%` before `arara` is *intentional* and necessary. This command executes the automatic file indenting for all files (and files in subfolders) that are stated within the square brackets as soon as `arara` is started. An example is given in Abb. C.1.
3. Execute `arara` (if you added it as the first user command, the shortcut `Alt+Shift+F1` may be used).
4. Update your files by clicking on `File → Reload all documents from file`.
5. Your source code should now be nicely indented.

---


<sup>1</sup><https://tex.stackexchange.com/questions/107989/integration-of-arara-in-texmaker>, January 2019

6. In case errors appear, arara always creates a backup with the file extension `.latexindentbackup`.

**Note that arara 4.0 does not work with subdirectories by default. To resolve this issue, simply follow the instructions described in the github repository of arara.<sup>2</sup>**

```
% arara: indentsubdir: { overwrite : yes, files : [ folder/file1.tex,
  folder/file2.tex ] , settings: local, where: 00_Arara_and_Latexindent
  /localSettings.yaml }
```

*Code C.1: Setting up arara for latexindent in Texmaker.*

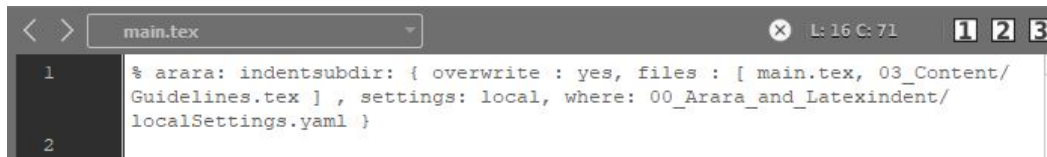

*Abb. C.1: Directives for arara execution for automatic indenting. These commands must be added at the beginning of `main.tex`.*

---

<sup>2</sup><https://github.com/cereda/arara/issues/119>, February 2019



## Anhang D

### Package Dependencies

*Tab. D.1: List of all packages in this template.*

Package name	Reference
<b>Document class</b>	
KOMA script	<a href="https://ctan.org/pkg/koma-script">https://ctan.org/pkg/koma-script</a>
<b>Document and encoding</b>	
babel	<a href="https://ctan.org/pkg/babel?lang=de">https://ctan.org/pkg/babel?lang=de</a>
calc	<a href="https://ctan.org/pkg/calc?lang=de">https://ctan.org/pkg/calc?lang=de</a>
datetime2	<a href="https://ctan.org/pkg/datetime2">https://ctan.org/pkg/datetime2</a>
fontenc	<a href="https://ctan.org/pkg/fontenc">https://ctan.org/pkg/fontenc</a>
ifthen	<a href="https://ctan.org/pkg/ifthen">https://ctan.org/pkg/ifthen</a>
inputenc	<a href="https://ctan.org/pkg/inputenc">https://ctan.org/pkg/inputenc</a>
microtype	<a href="https://ctan.org/pkg/microtype">https://ctan.org/pkg/microtype</a>
morewrites	<a href="https://ctan.org/pkg/morewrites?lang=de">https://ctan.org/pkg/morewrites?lang=de</a>
pdfpages	<a href="https://ctan.org/pkg/pdfpages?lang=de">https://ctan.org/pkg/pdfpages?lang=de</a>
scrhack	part of <a href="https://ctan.org/pkg/koma-script">https://ctan.org/pkg/koma-script</a>
scrlayer-scrpage	<a href="https://ctan.org/pkg/scrlayer-scrpage">https://ctan.org/pkg/scrlayer-scrpage</a>
textcomp	<a href="https://ctan.org/pkg/textcomp">https://ctan.org/pkg/textcomp</a>
todonotes	<a href="https://ctan.org/pkg/todonotes?lang=de">https://ctan.org/pkg/todonotes?lang=de</a>
xparse	<a href="https://ctan.org/pkg/xparse">https://ctan.org/pkg/xparse</a>
<b>Tables</b>	
array	<a href="https://ctan.org/pkg/array?lang=de">https://ctan.org/pkg/array?lang=de</a>

Continued on next page

*Tab. D.1 (continued).*

Package name	Reference
booktabs	<a href="https://ctan.org/pkg/booktabs">https://ctan.org/pkg/booktabs</a>
longtable	<a href="https://ctan.org/pkg/longtable">https://ctan.org/pkg/longtable</a>
multirow	<a href="https://ctan.org/pkg/multirow">https://ctan.org/pkg/multirow</a>
tabu	<a href="https://ctan.org/pkg/tabu?lang=de">https://ctan.org/pkg/tabu?lang=de</a>
tabularx	<a href="https://ctan.org/pkg/tabularx">https://ctan.org/pkg/tabularx</a>
threeparttable	<a href="https://ctan.org/pkg/threeparttable?lang=de">https://ctan.org/pkg/threeparttable?lang=de</a>
threeparttablex	<a href="https://ctan.org/pkg/threeparttablex">https://ctan.org/pkg/threeparttablex</a>
<b>Graphics</b>	
graphicx	<a href="https://ctan.org/pkg/graphicx">https://ctan.org/pkg/graphicx</a>
overpic	<a href="https://ctan.org/pkg/overpic">https://ctan.org/pkg/overpic</a>
wrapfig	<a href="https://ctan.org/pkg/wrapfig?lang=de">https://ctan.org/pkg/wrapfig?lang=de</a>
<b>Fonts, math, and symbols</b>	
amsmath	<a href="https://ctan.org/pkg/amsmath">https://ctan.org/pkg/amsmath</a>
amssymb	
amsthm	<a href="https://ctan.org/pkg/amsthm">https://ctan.org/pkg/amsthm</a>
cancel	<a href="https://ctan.org/pkg/cancel">https://ctan.org/pkg/cancel</a>
chemfig	<a href="https://ctan.org/pkg/chemfig">https://ctan.org/pkg/chemfig</a>
chemmacros	<a href="https://ctan.org/pkg/chemmacros?lang=de">https://ctan.org/pkg/chemmacros?lang=de</a>
courier	<a href="https://ctan.org/pkg/courier">https://ctan.org/pkg/courier</a>
helvet	<a href="https://ctan.org/pkg/helvet?lang=de">https://ctan.org/pkg/helvet?lang=de</a>
icomma	<a href="https://ctan.org/pkg/icomma">https://ctan.org/pkg/icomma</a>
mathpazo	<a href="https://ctan.org/pkg/mathpazo">https://ctan.org/pkg/mathpazo</a>
mathtools	<a href="https://ctan.org/pkg/mathtools">https://ctan.org/pkg/mathtools</a>
nicefrac	<a href="https://ctan.org/pkg/nicefrac">https://ctan.org/pkg/nicefrac</a>
upgreek	<a href="https://ctan.org/pkg/upgreek">https://ctan.org/pkg/upgreek</a>
<b>Units</b>	
siunitx	<a href="https://ctan.org/pkg/siunitx">https://ctan.org/pkg/siunitx</a>
<b>Text</b>	
algorithm2e	<a href="https://ctan.org/pkg/algorithm2e">https://ctan.org/pkg/algorithm2e</a>
blindtext	<a href="https://ctan.org/pkg/blindtext">https://ctan.org/pkg/blindtext</a>
caption	<a href="https://ctan.org/pkg/caption">https://ctan.org/pkg/caption</a>

Continued on next page

Tab. D.1 (continued).

Package name	Reference
enumitem	<a href="https://ctan.org/pkg/enumitem">https://ctan.org/pkg/enumitem</a>
footnote	<a href="https://ctan.org/pkg/footnote">https://ctan.org/pkg/footnote</a>
mdframed	<a href="https://ctan.org/pkg/mdframed">https://ctan.org/pkg/mdframed</a>
nowidow	<a href="https://ctan.org/pkg/nowidow">https://ctan.org/pkg/nowidow</a>
placeins	<a href="https://ctan.org/pkg/placeins">https://ctan.org/pkg/placeins</a>
setspace	<a href="https://ctan.org/pkg/setspace">https://ctan.org/pkg/setspace</a>
subcaption	<a href="https://ctan.org/pkg/subcaption">https://ctan.org/pkg/subcaption</a>
xcolor	<a href="https://ctan.org/pkg/xcolor">https://ctan.org/pkg/xcolor</a>
<b>References</b>	
biblatex	<a href="https://ctan.org/pkg/biblatex">https://ctan.org/pkg/biblatex</a>
csquotes	<a href="https://ctan.org/pkg/csquotes">https://ctan.org/pkg/csquotes</a>
<b>Lists of Symbols and Abbreviations</b>	
acro	<a href="https://ctan.org/pkg/acro?lang=de">https://ctan.org/pkg/acro?lang=de</a>
nomencl	<a href="https://ctan.org/pkg/nomencl?lang=de">https://ctan.org/pkg/nomencl?lang=de</a>
<b>Index</b>	
imakeidx	<a href="https://ctan.org/pkg/imakeidx?lang=de">https://ctan.org/pkg/imakeidx?lang=de</a>
<b>Code</b>	
listings	<a href="https://ctan.org/pkg/listings">https://ctan.org/pkg/listings</a>
<b>Hyperref and pdfx</b>	
hyperref	<a href="https://ctan.org/pkg/hyperref">https://ctan.org/pkg/hyperref</a>
pdfx	<a href="https://ctan.org/pkg/pdfx">https://ctan.org/pkg/pdfx</a>



# Anhang E

## Auto-completion

Texmaker (and probably many other editors) offer the possibility to define additional commands for automatic completion. This means they are suggested when you type a command. They can be edited under User → Customize Completion. The commands, which are assumed to be used on a regular basis in a thesis, are stated in Tab. E.1. You can simply copy each line and add it to your Texmaker. This takes approximately five minutes and saves you a lot of time when you actually write something, especially units.

*Tab. E.1: List of recommended auto-complete commands in Texmaker.*

Command	Explanation
<code>\ac{@}</code>	Acronym in text
<code>\ampere</code>	A unit
<code>\Autoref{#label#}</code>	Autoref with capitalized first letter
<code>\bar</code>	bar unit
<code>\begin{algorithm}</code>	new algorithm
<code>\begin{definition}</code>	new definition
<code>\begin{lemmaenv}</code>	new lemma
<code>\begin{longtable}{@}</code>	new long table
<code>\begin{mdframed}</code>	new frame
<code>\begin{remarkenv}</code>	new remark
<code>\begin{tablenotes}</code>	table notes in three part table
<code>\begin{theoremenv}</code>	new theorem

Continued on next page

Tab. E.1 (continued).

Command	Explanation
<code>\begin{threeparttable}</code>	new three part table
<code>\bottomrule</code>	bottom rule in tabulars
<code>\celsius</code>	°C unit
<code>\ch{@}</code>	new chemical formula
<code>\cubic</code>	for cubed unit
<code>\enquote{@}</code>	new quote in current language
<code>\gram</code>	g unit
<code>\joule</code>	J unit
<code>\kelvin</code>	K unit
<code>\kilo</code>	for kilo in units
<code>\mega</code>	for mega in units
<code>\metre</code>	m unit
<code>\midrule</code>	mid rule in tabulars
<code>\milli</code>	for milli in units
<code>\missingfigure[@]{@}</code>	new missing figure with options
<code>\missingfigure{@}</code>	new missing figure without options
<code>\mole</code>	mol unit
<code>\myfigure[@][@]{@}[@]{@}[@]</code>	new figure
<code>\nomenclature{@}{@}{@}{@}</code>	new symbol
<code>\num{@}</code>	new number
<code>\parencite[@]{#bib#}</code>	new paren cite with options
<code>\parencite{#bib#}</code>	new paren cite without options
<code>\pascal</code>	Pa unit
<code>\pder[@][@]{@}</code>	partial derivative
<code>\per</code>	division command in units
<code>\roundbrack{@}</code>	round brackets around argument
<code>\si{@}</code>	new unit
<code>\SI{@}{@}</code>	new number with unit
<code>\SIrange{@}{@}{@}</code>	new range for units
<code>\squared</code>	for squared unit
<code>\textcite[@]{#bib#}</code>	new text cite with option

Continued on next page

*Tab. E.1 (continued).*

Command	Explanation
<code>\textcite{#bib#}</code>	new text cite without option
<code>\todo[@]{@}</code>	new todo with option
<code>\todo{@}</code>	new todo without option
<code>\toprule</code>	top rule in tabulars
<code>\tothe{@}</code>	for power in units
<code>\verb</code>	for verbat output
<code>\volt</code>	V unit
<code>\watt</code>	W unit





# **Anhang F**

## **Large Figures**

This appendix contains two examples of how to include a large figure, e.g., a P&I diagram, into the thesis when it is desirable to have it in DIN A3.


### **F.1 Include as Figure**

In this case, the page format is changed to DIN A3 and the figure is included as a float (see Abb. F.1).

### **F.2 Include as Page**


In another approach, the page format is changed to DIN A3 and the figure is included as PDF to cover the whole page. The disadvantage of this approach is having no caption to reference the figure in the text. This may be resolved with a reference to the page, here: page 63.



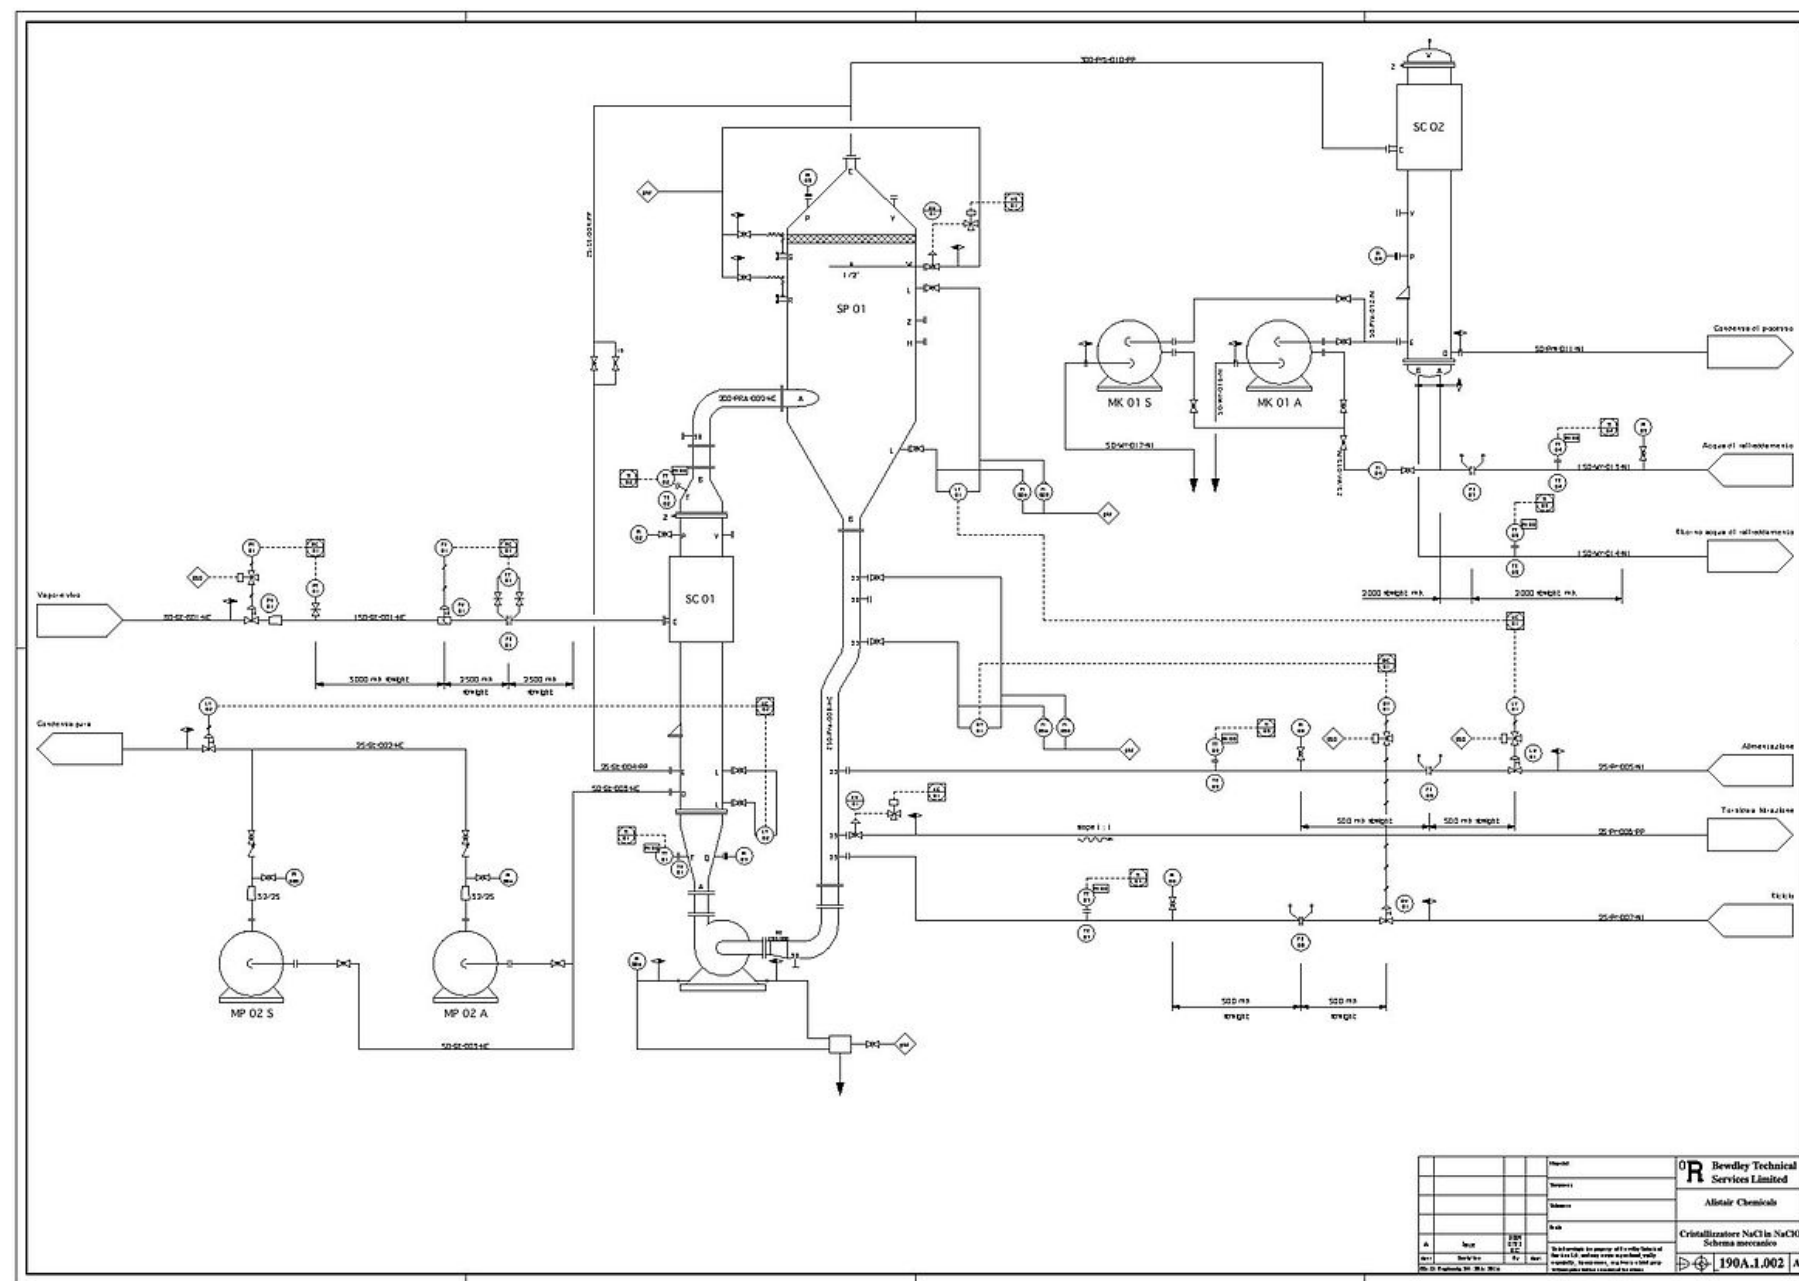

*Abb. F.1: Example of a large figure for DIN A3; taken from Wikipedia.*

*This page intentionally left blank*

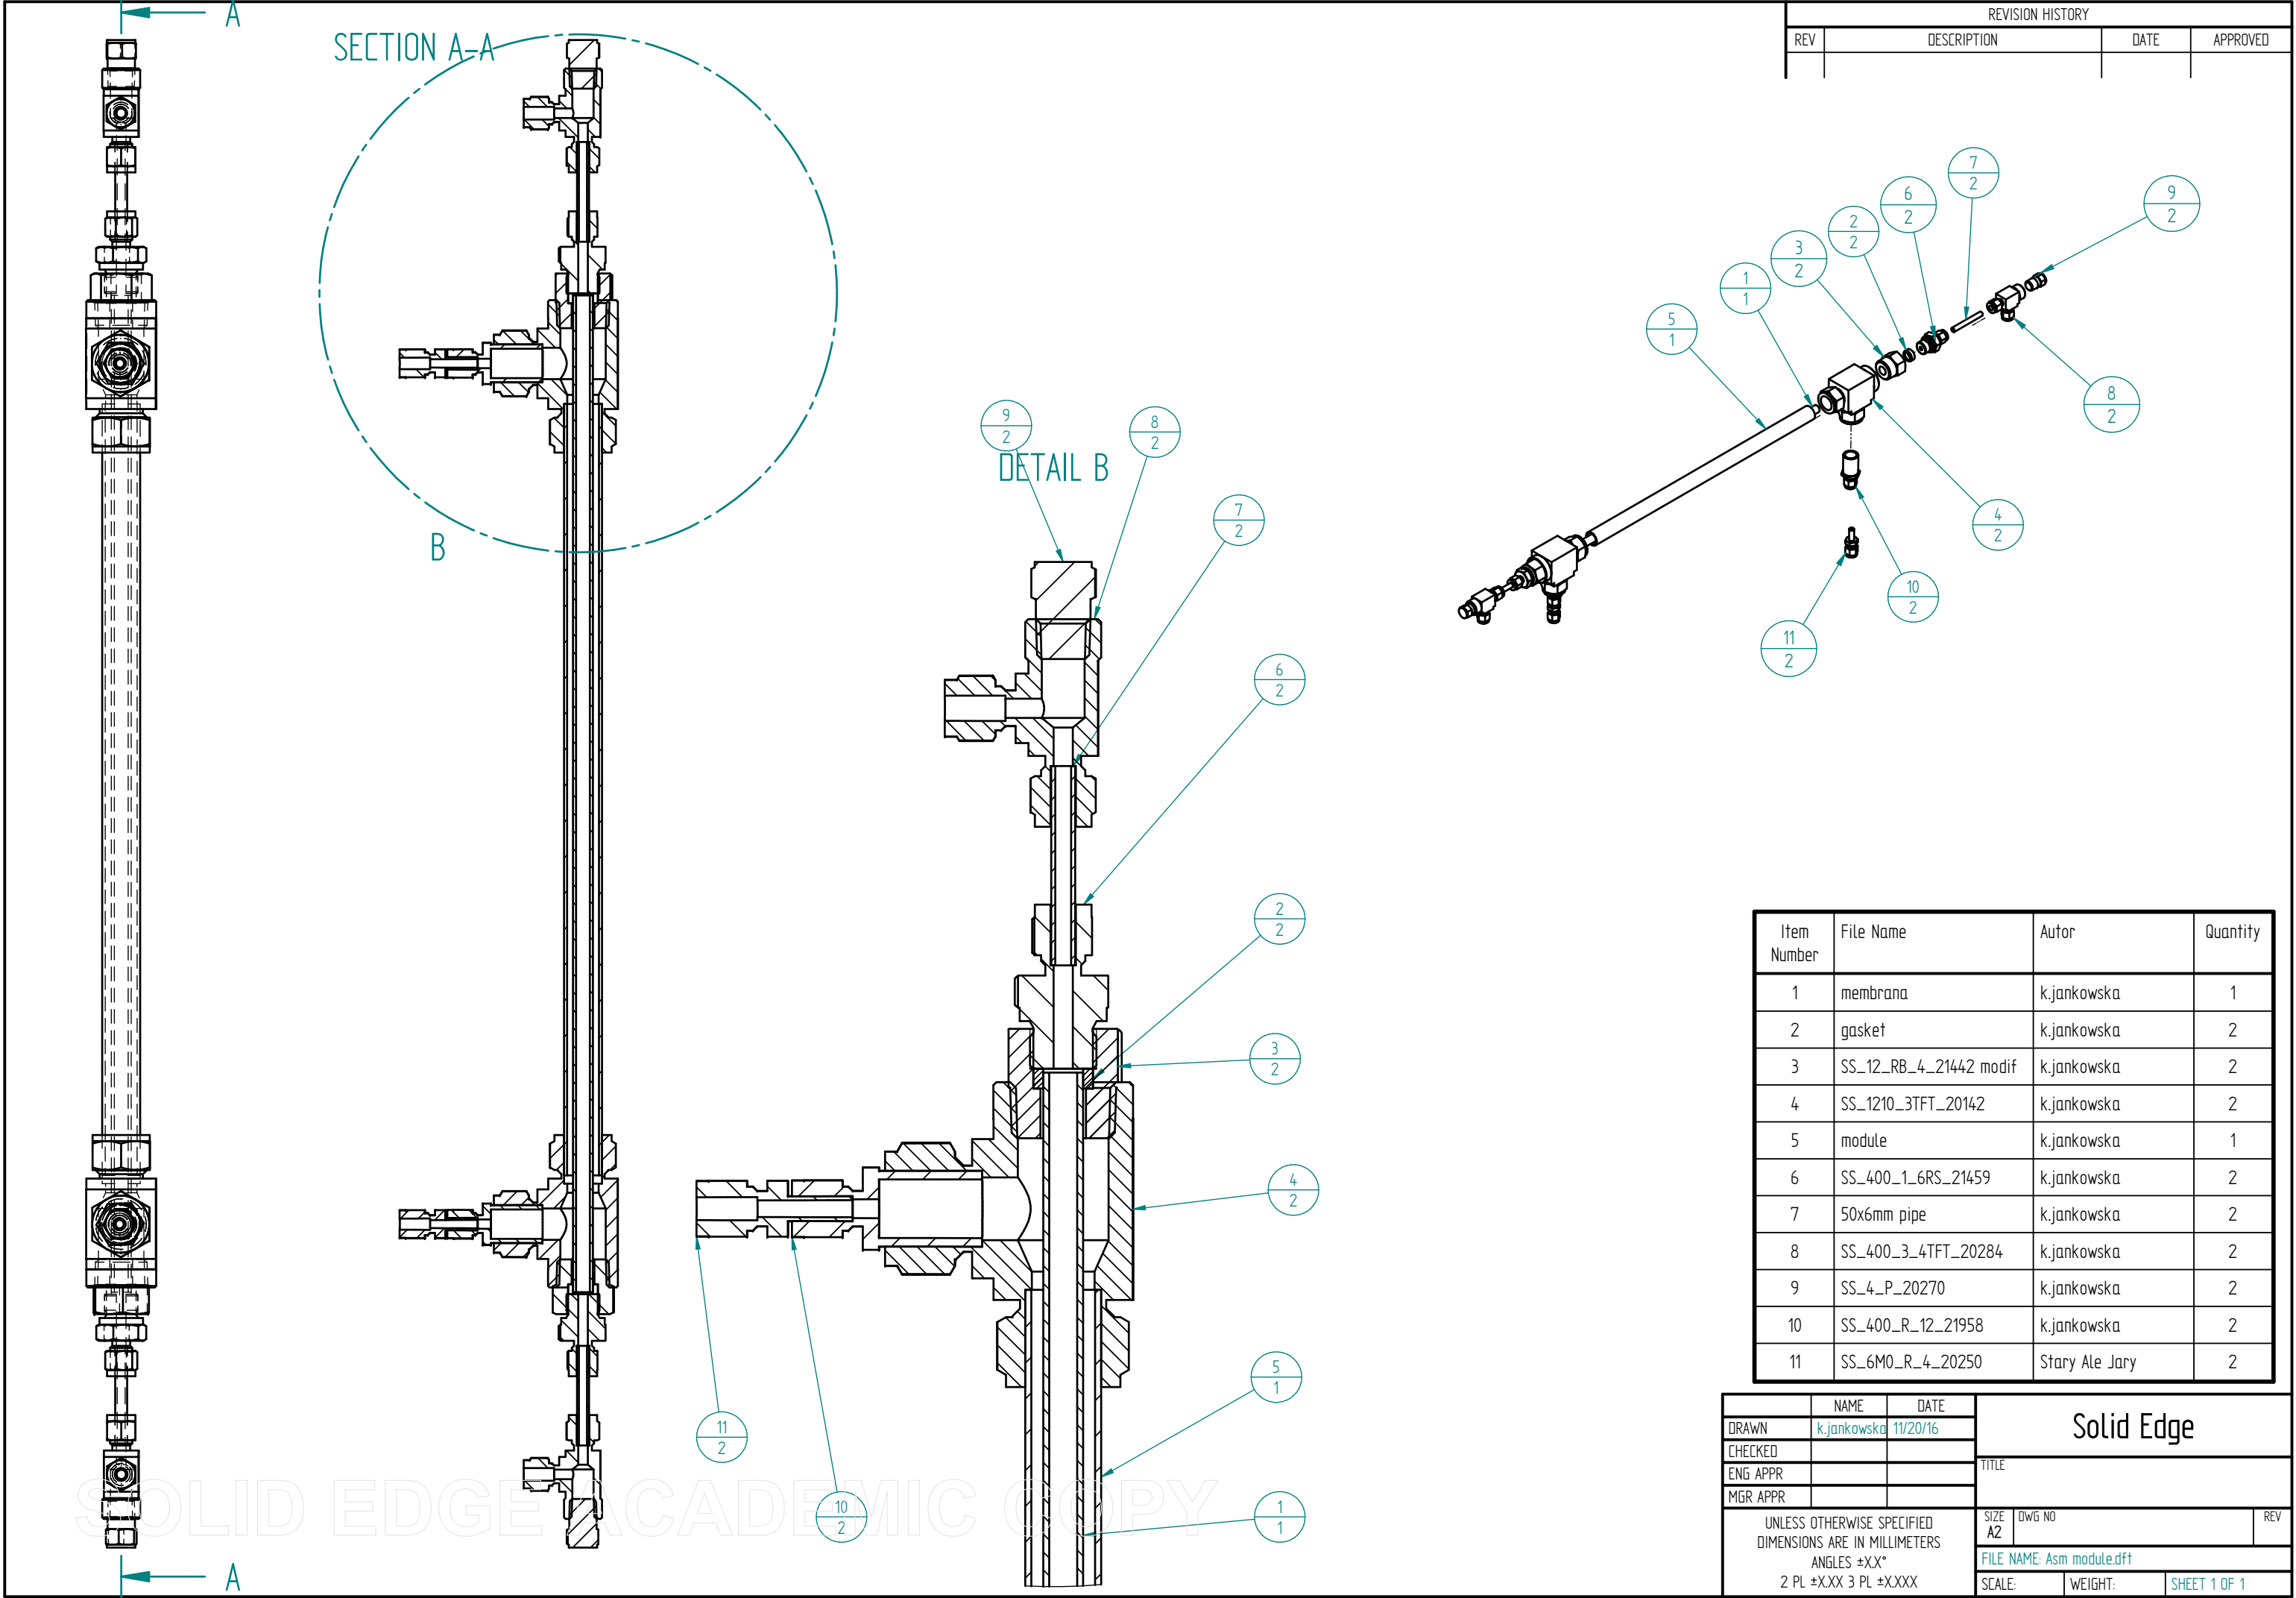

*This page intentionally left blank*

## Literaturverzeichnis

- Abrams, D. S. und J. M. Prausnitz (1975): Statistical thermodynamics of liquid mixtures: A new expression for the excess Gibbs energy of partly or completely miscible systems. *AIChE Journal* 21, 116–128. DOI: 10.1002/aic.690210115 (zit. auf S. 25).
- Coker, A. K., Hrsg. (2007): *Ludwig's Applied Process Design for Chemical and Petrochemical Plants*. Gulf Professional Publishing. ISBN: 9780080469706 (zit. auf S. 25).
- Cuda, P. (2012): Exergoeconomic Analysis and Optimization of Organic Rankine Cycles. *Dissertation*. University of Ontario Institute of Technology. DOI: 10.1016/j.energy.2012.01.064 (zit. auf S. 25).
- Hoffmann, C. (2015): Real-time Optimization and Moving-horizon State Estimation for a Hydroformylation Plant. *Masterarbeit*. Technische Universität Berlin (zit. auf S. 25).
- NIST Chemistry Webbook (2017): *Benzene - Phase Change Data*. URL: <http://webbook.nist.gov/cgi/cbook.cgi?ID=C71432&Units=SI&Mask=4%5C#Thermo-Phase> (letzter Zugriff 23. 05. 2016) (zit. auf S. 25).
- Penteado, A., H. R. Godini, E. Esche, G. Lovato, J. A. D. Rodrigues und J.-U. Repke (2018): Optimal Design of a CO<sub>2</sub> Removal Section for a Biogas-based Oxidative Coupling of Methane Process. *Blucher Chemical Engineering Proceedings*. Bd. 1. Editora Blucher. DOI: 10.5151/cobeq2018-co.021 (zit. auf S. 25).





# Indexverzeichnis

## C

### Commands

<code>\ac{}</code> .....	24
<code>\Autoref{}</code> .....	29
<code>\autoref{}</code> .....	5, 21, 28
<code>\ch{}</code> .....	26
<code>\includepdf{}</code> .....	20
<code>\index{}</code> .....	19
<code>\printindex</code> .....	19
<code>\ref{}</code> .....	21
<code>\settowidth{}</code> .....	xi
<code>\todo{}</code> .....	20, 30

## F

### Files

<code>o_Appendix.tex</code> .....	12
<code>o_Text.tex</code> .....	3, 11
<code>a_Cover.tex</code> .....	9
<code>a_Packages.tex</code> .....	3, 8
<code>b_Commands.tex</code> .....	8, 19, 20, 27
<code>b_Dedication.tex</code> .....	9
<code>b_Task.pdf</code> .....	10
<code>c_Declaration.tex</code> .....	10
<code>c_Meta.tex</code> .....	3, 8
<code>d_Acknowledgements.tex</code> .....	10
<code>d_NomenclatureCommands.tex</code> .....	8

<code>e_AbbreviationDefinitions.tex</code> .....	9, 24
<code>e_Abstract.tex</code> .....	10
<code>f_CodeLanguageSpecifications.tex</code> .....	9
<code>f_Publications.tex</code> .....	11
<code>g_Nomenclature.tex</code> .....	11
<code>h_Abbreviations.tex</code> .....	11
<code>main.tex</code> .....	7, 19, 30

## P

### Packages

<code>acro</code> .....	5, 7, 24
<code>algorithm2e</code> .....	7, 28
<code>amsthm</code> .....	27, 28
<code>babel</code> .....	3, 7, 13
<code>biblatex</code> .....	7, 25
<code>caption</code> .....	5
<code>chemfig</code> .....	26
<code>chemformula</code> .....	26
<code>chemmacros</code> .....	26
<code>hyperref</code> .....	16, 28
<code>imakeidx</code> .....	7, 19
<code>listings</code> .....	7
<code>longtable</code> .....	22, 45
<code>mathpazo</code> .....	23
<code>mdframed</code> .....	27, 28

## INDEXVERZEICHNIS

nomenc1 ..... 5, 7, 17  
nowidow ..... 6  
pdfx ..... 16  
scrhack ..... 17  
setspace ..... 1  
siunitx ..... 13, 23  
threeparttable ..... 22  
threeparttablex ..... 22  
todonotes ..... 7  
upgreek ..... 26  
wrapfig ..... 22  
xparse ..... 24

## S

### Scripts

arara ..... 17, 49, 50  
biber ..... 3, 7, 13–15, 25  
latexindent ..... 17, 18  
makeindex ... 3, 9, 13–15, 19

SUNDIALS ..... 24

## T

Thermodynamics ..... 19

Activity models ..... 19

Equations of State ..... 19