```sql
CREATE DATABASE Student;
USE Student;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90),
(102, 'Varun', 'SOCSE', 80),
(103, 'Vaibhav', 'SOCSE', 70),
(104, 'Raghavendra', 'SOCSE', 60);
SELECT *
FROM Student;
```

Output

Result Grid | Filter Rows: | Export:

Student_ID	Name	Department	Marks
101	Manu	SOCSE	90
102	Varun	SOCSE	80
103	Vaibhav	SOCSE	70
104	Raghavendra	SOCSE	60

```sql
CREATE DATABASE CollegeDB;
USE CollegeDB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90),
(102, 'Varun', 'SOCSE', 80),
(103, 'Vaibhav', 'SOCSE', 70),
(104, 'Raghavendra', 'SOCSE', 60);
SELECT Name, Department, Marks
FROM Student;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Name	Department	Marks
Manu	SOCSE	90
Varun	SOCSE	80
Vaibhav	SOCSE	70
Raghavendra	SOCSE	60

SQL File 1* SQL File 2* SQL File 3*

Limit to 1000 rows

```sql
CREATE DATABASE CollegeAB;
USE CollegeAB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90),
(102, 'Varun', 'SOCSE', 80),
(103, 'Vaibhav', 'SOCSE', 70),
(104, 'Raghavendra', 'SOCSE', 60);
SELECT Name, Marks
FROM Student
WHERE Marks > 80;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Cont

	Name	Marks
▶	Manu	90

SQL File 1* SQL File 2* SQL File 3* SQL File 4*

Limit to 1000 rows

```sql
CREATE DATABASE CollegeEB;
USE CollegeEB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90),
(102, 'Varun', 'SOCSE', 80),
(103, 'Vaibhav', 'SOB', 70),
(104, 'Raghavendra', 'SOCSE', 60);
SELECT Name, Marks
FROM Student
WHERE Department = 'SOCSE';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Name	Marks
Manu	90
Varun	80
Raghavendra	60


SQL File 1* SQL File 2* SQL File 3* SQL File 4* SQL File 5*

Limit to 1000 rows

```sql
CREATE DATABASE CollegeHB;
USE CollegeHB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
SELECT Name, Marks
FROM Student
WHERE City = 'Delhi';
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Name	Marks
Raghavendra	60

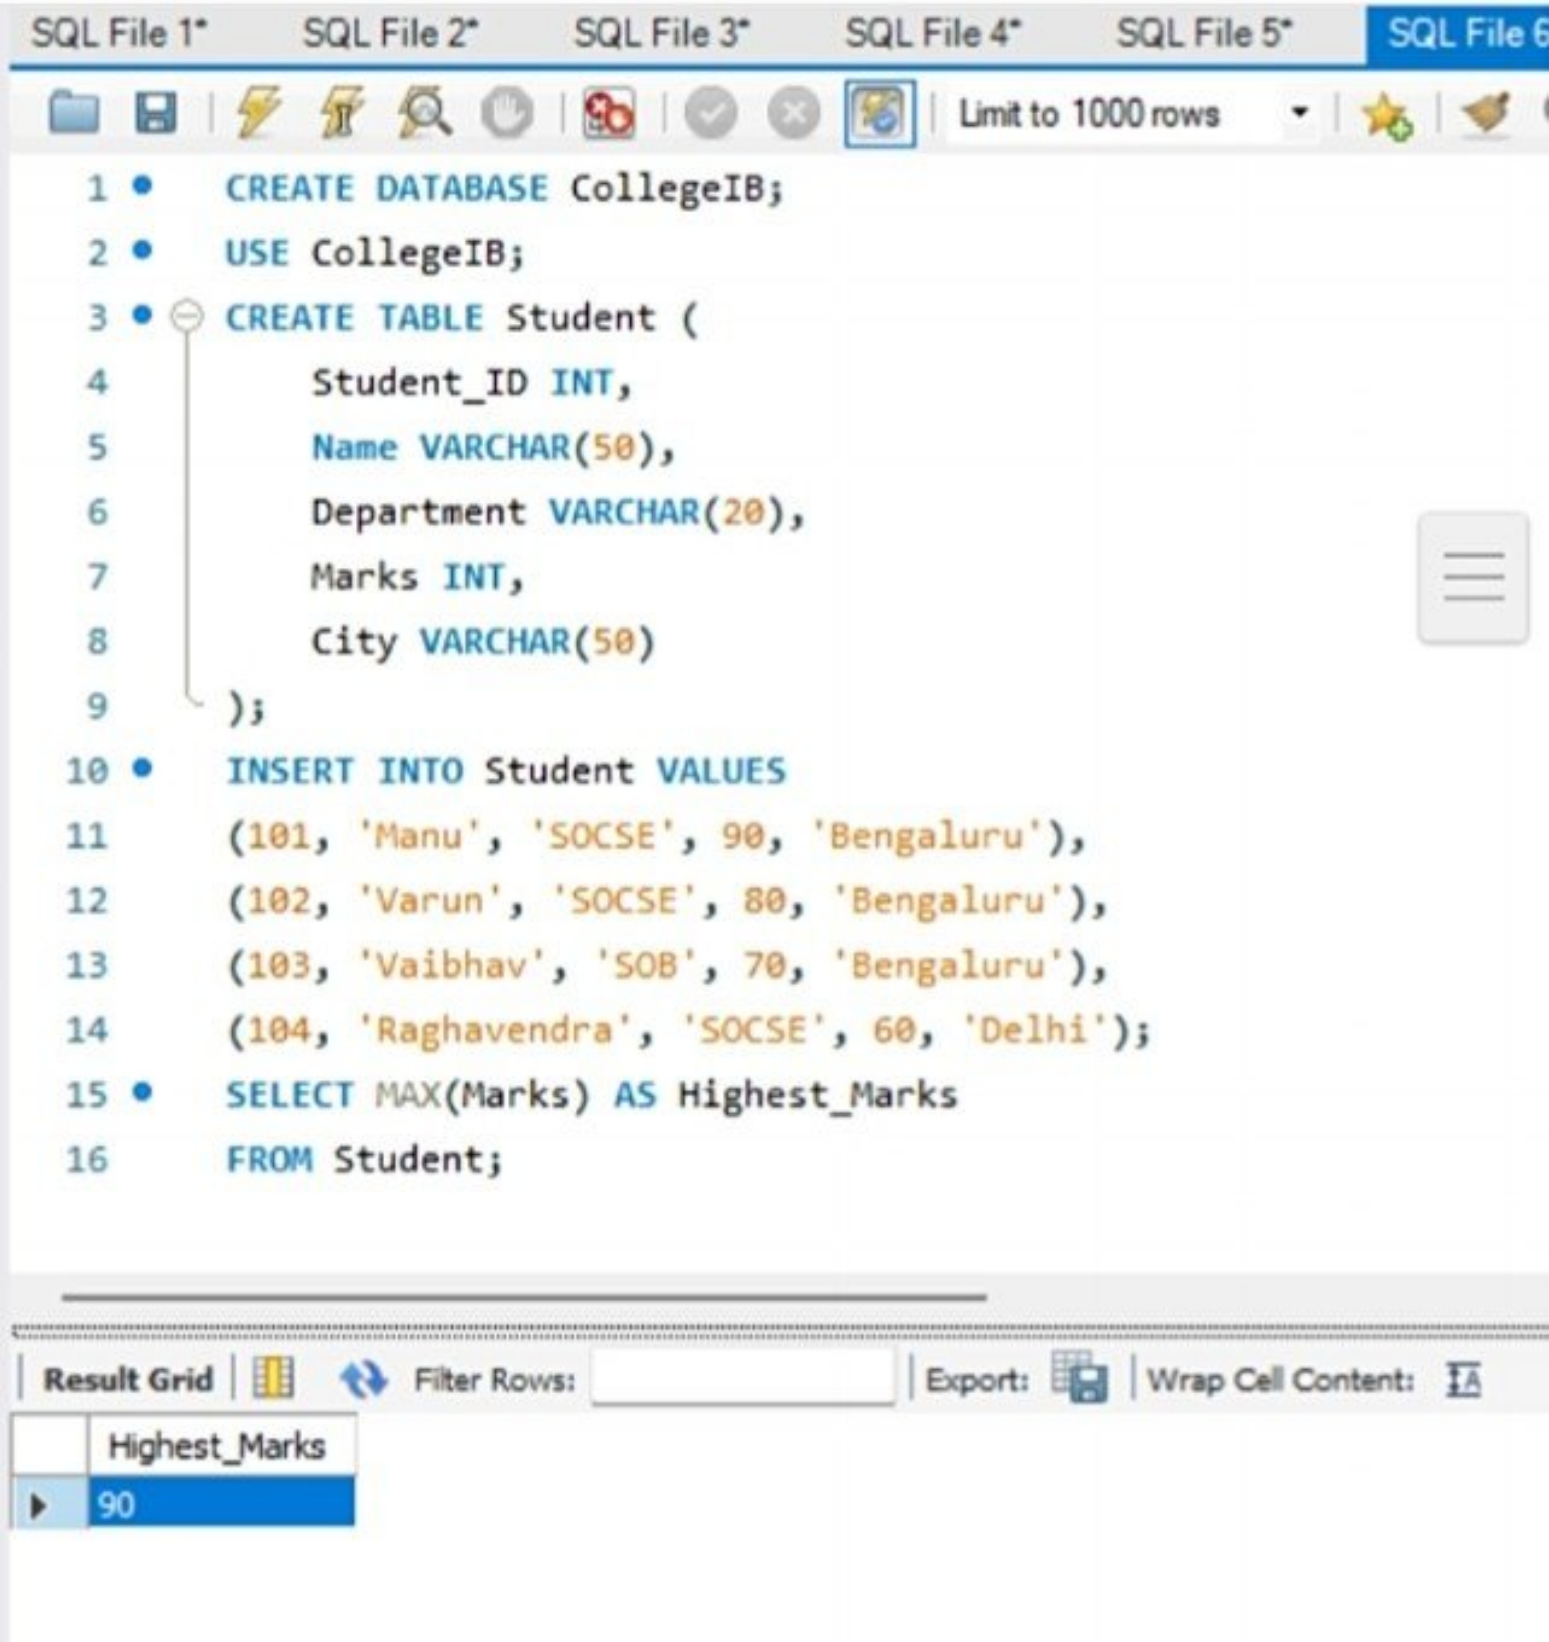
SQL File 1*
SQL File 2*
SQL File 3*
SQL File 4*
SQL File 5*
SQL File 6
Limit to 1000 rows
1 CREATE DATABASE CollegeIB;
2 USE CollegeIB;
3 CREATE TABLE Student (
4 Student_ID INT,
5 Name VARCHAR(50),
6 Department VARCHAR(20),
7 Marks INT,
8 City VARCHAR(50)
9);
10 INSERT INTO Student VALUES
11 (101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
12 (102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
13 (103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
14 (104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
15 SELECT MAX(Marks) AS Highest_Marks
16 FROM Student;
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
Highest_Marks
90

SQL File 1* SQL File 2* SQL File 3* SQL File 4* SQL File 5* SQL File 6*

Limit to 1000 rows

```sql
CREATE DATABASE CollegeJB;
USE CollegeJB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
SELECT AVG(Marks) AS Average_Marks
FROM Student;
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Average_Marks
75.0000

SQL File 1* SQL File 2* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SQL

Limit to 1000 rows

```sql
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
SELECT Name, Marks
FROM Student
WHERE Marks > (
    SELECT AVG(Marks)
    FROM Student
);
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Name	Marks
Manu	90
Varun	80


SQL File 1* SQL File 2* SQL File 3* SQL File 4* SQL File 5* SQL File 6* SC


Limit to 1000 rows

```sql
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
SELECT Name, Marks
FROM Student
WHERE Marks = (
    SELECT MAX(Marks)
    FROM Student
);
```

Result Grid | Filter Rows: | Export: | Wrap Cell Content:

Name	Marks
Manu	90

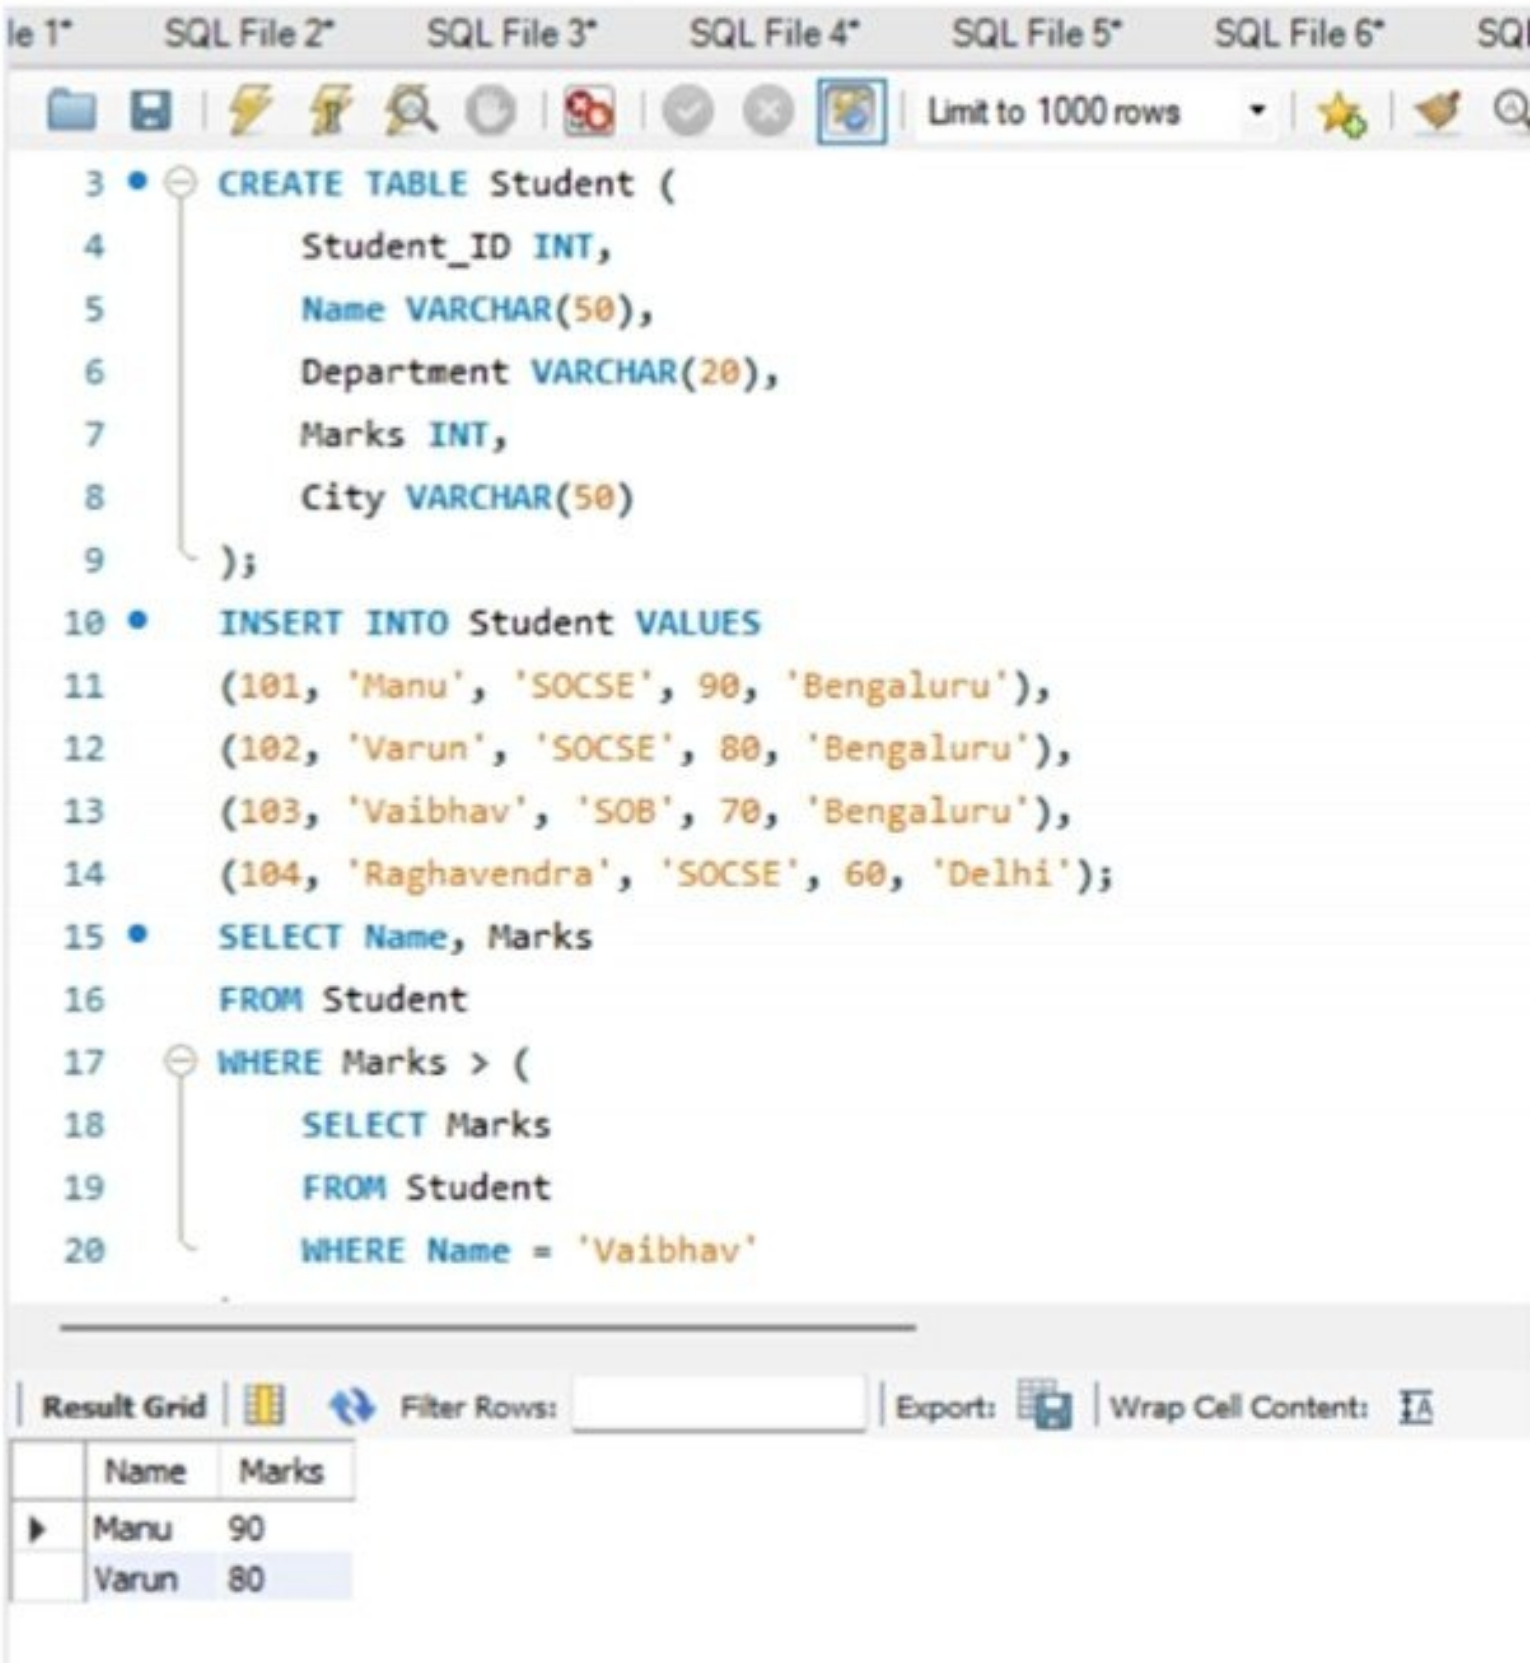
le 1*
SQL File 2*
SQL File 3*
SQL File 4*
SQL File 5*
SQL File 6*
Limit to 1000 rows
3 CREATE TABLE Student (
4 Student_ID INT,
5 Name VARCHAR(50),
6 Department VARCHAR(20),
7 Marks INT,
8 City VARCHAR(50)
9);
10 INSERT INTO Student VALUES
11 (101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
12 (102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
13 (103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
14 (104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
15 SELECT Name, Marks
16 FROM Student
17 WHERE Marks > (
18 SELECT Marks
19 FROM Student
20 WHERE Name = 'Vaibhav'
Result Grid
Filter Rows:
Export:
Wrap Cell Content:
Name
Marks
Manu
90
Varun
80

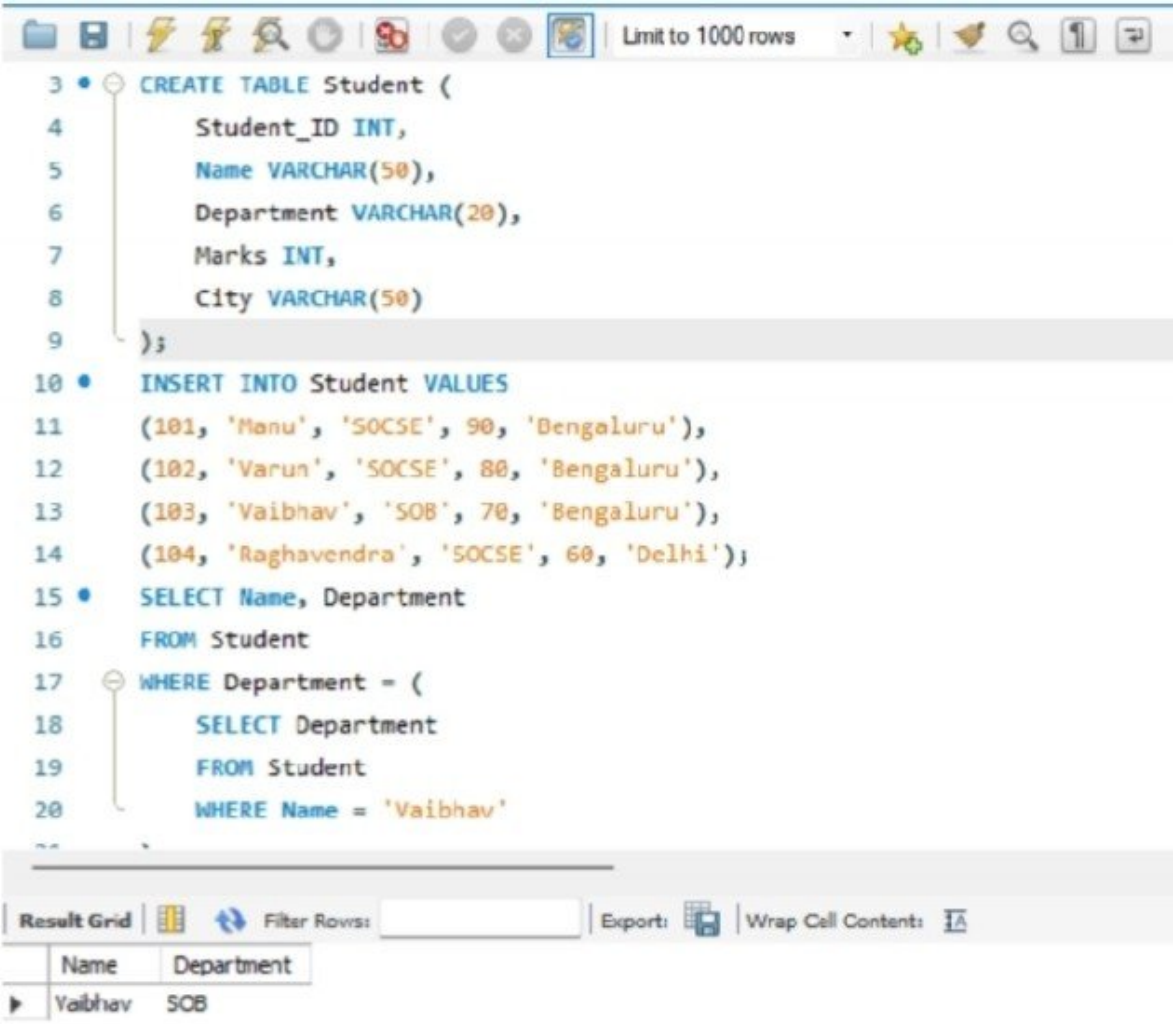


5. Students who scored above the average CSE marks

```
-> CREATE DATABASE CollegeOB;
USE CollegeOB;
CREATE TABLE Student (
   Student_ID INT,
   Name VARCHAR(50),
   Department VARCHAR(20),
   Marks INT,
   City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
```

```
SELECT Name, Marks
FROM Student
WHERE Department = 'SOCSE'
AND Marks > (
    SELECT AVG(Marks)
    FROM Student
    WHERE Department = 'SOCSE'
);
```

OUTPUT

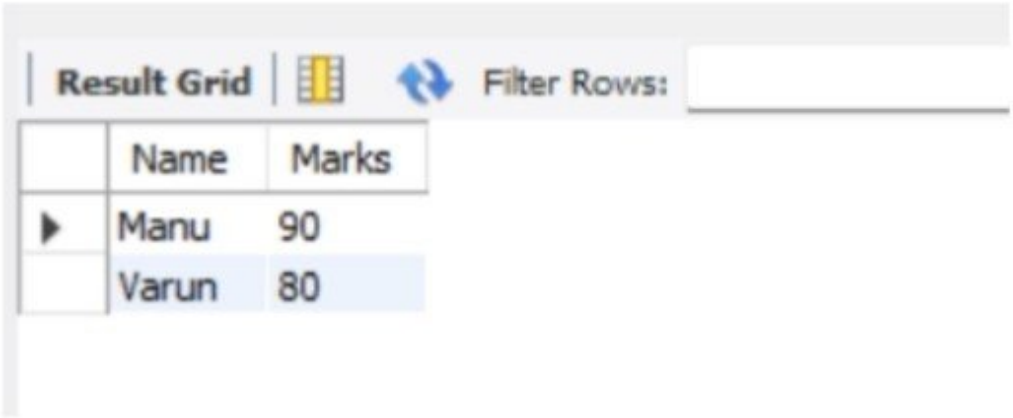

	Name	Marks
▶	Manu	90
	Varun	80


6. Students who belong to a department havin student from Delhi

⟶ CREATE DATABASE CollegePB;

```
USE CollegePB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
```

```
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
SELECT Name, Department
FROM Student
WHERE Department IN (
    SELECT Department
    FROM Student
    WHERE City = 'Delhi'
);
```

OUTPUT

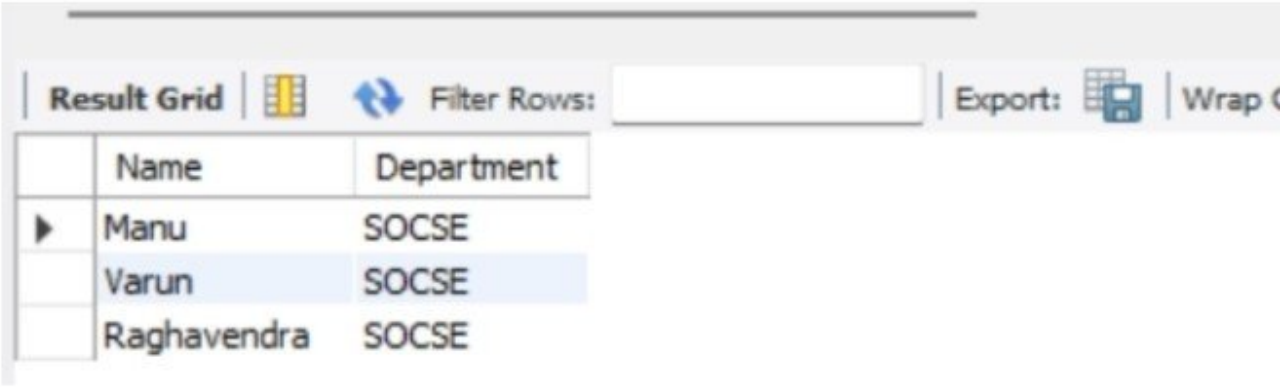


7. Students who scored higher than every SOB student

```
CREATE DATABASE CollegeQB;
USE CollegeQB;
CREATE TABLE Student (
    Student_ID INT,
    Name VARCHAR(50),
    Department VARCHAR(20),
    Marks INT,
    City VARCHAR(50)
);
INSERT INTO Student VALUES
(101, 'Manu', 'SOCSE', 90, 'Bengaluru'),
(102, 'Varun', 'SOCSE', 80, 'Bengaluru'),
(103, 'Vaibhav', 'SOB', 70, 'Bengaluru'),
(104, 'Raghavendra', 'SOCSE', 60, 'Delhi');
```

```
SELECT Name, Marks
FROM Student
WHERE Marks > ALL (
    SELECT Marks
    FROM Student
    WHERE Department = 'SOB'
);
```

OUTPUT

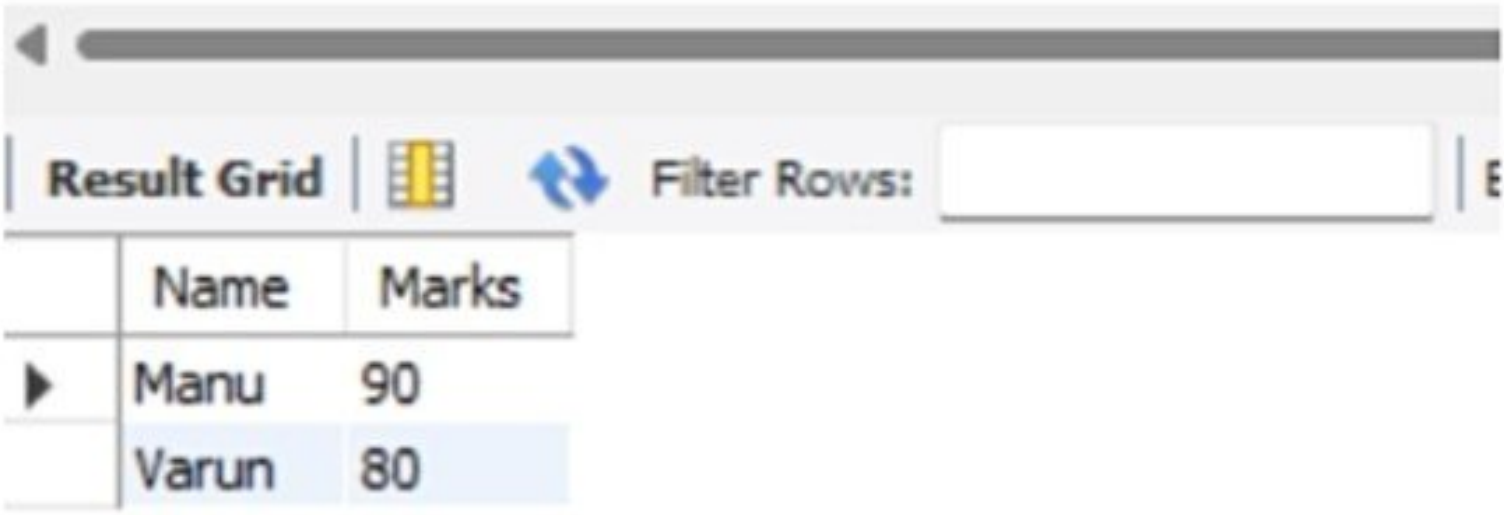

	Name	Marks
▶	Manu	90
	Varun	80