How to use LENS

CILens IDE provides the full situational awareness for everything that runs in Kubernetes. It's lowering the barrier of entry for people just getting started and radically improving productivity for people with more experience. this page is created to help how you can install and Add your project to Lens

🟦 Adding To Security Group

1. Create a Service Desk Request or Ask a DevOps Person to be added to "RES-CLD-AzureRM-AKSDevelopers" Group (This is only for Developers, not for DevOps team members)

> ℹ️ You Just need to be added once. and if you have been added before you are ready for Config

🟦 Kubelogin setup

1. Follow the link and download kubelogin [Releases · Azure/kubelogin (github.com)](https://github.com/Azure/kubelogin/releases) (ex: for windows use kubelogin-win-amd64.zip)
2. Extract folder and copy the kubelogin.exe to Workspace folder (ex: C:\Workspace\kubelogin)
3. Add the above path to path environment variable (you may need to restart your PC)
   a. Note: If that does not work, add the path under user variables not system variables

🟦 Kube Config Configuration

1. Follow the link Download Azure CLI if you don't have it https://aka.ms/installazurecliwindows and install it.
2. Open PowerShell and type "az login" it will open a browser page and you need to provide your details
3. for **nonprod1** Cluster
   Using the same Powershell window type
   `az account set --subscription 4cef4169-6e79-4afe-a286-dbb3a671e8e8`
   then type
   `az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod1aks`

4. for **nonprod2** Cluster

   Using the same Powershell window type

   `az account set --subscription 4cef4169-6e79-4afe-a286-dbb3a671e8e8`

   then type

   `az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod2aks`

5. for **nonprod3** Cluster

   Using the same Powershell window type

   `az account set --subscription 4cef4169-6e79-4afe-a286-dbb3a671e8e8`

   then type

   `az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod3aks`

6. for **nonprod4** Cluster

   Using the same Powershell window type

   `az account set --subscription ed8412b9-fed3-4074-b7e1-5b4427a078e1`

   then type

   `az aks get-credentials --resource-group devops-caas-test-rg01 --name nonprod4aks`

   if you have seen an error message in az aks check zscaler

   if Zscaler is enabled, azure cli won't work. please raise a service desk request with the error message you are getting zscaler to be disabled.

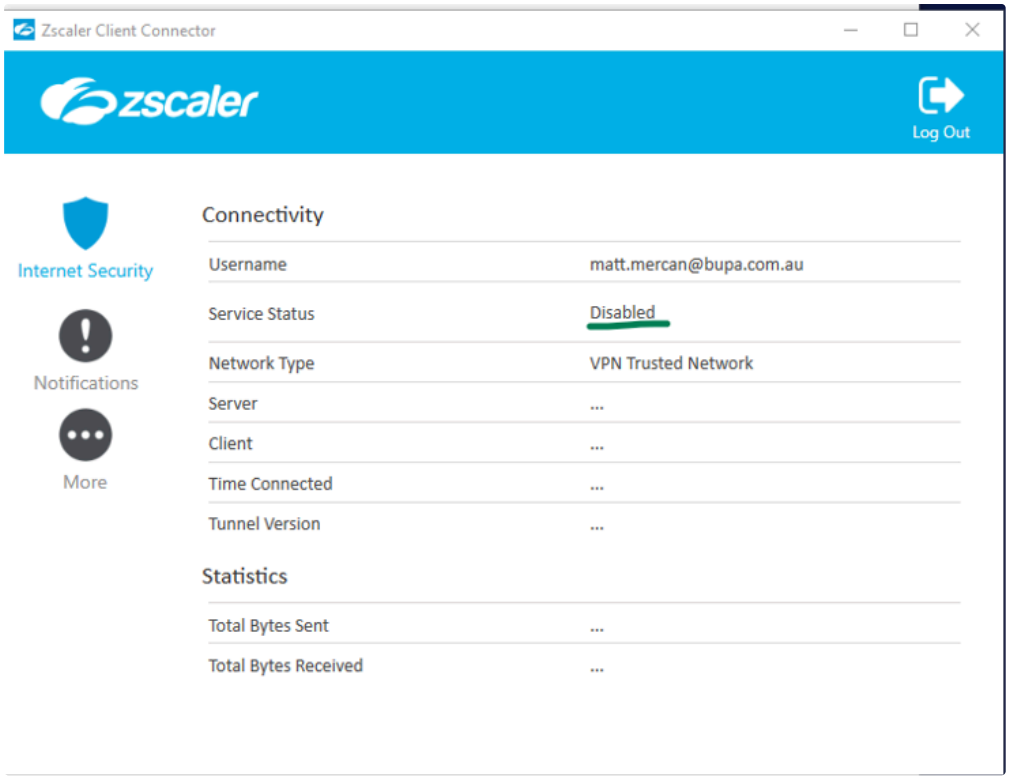

You have logged into Microsoft Azure!

You can close this window, or we will redirect you to the Azure CLI documentation in 1 minute.

Announcements

[Windows only] Azure CLI is collecting feedback on using the Web Account Manager (WAM) broker for the login experience.

You may opt-in to use WAM by running the following commands:

```
az config set core.allow_broker=true
az account clear
az login
```

Windows PowerShell

```
Windows PowerShell
Copyright (C) Microsoft Corporation. All rights reserved.

Try the new cross-platform PowerShell https://aka.ms/pscore6

PS C:\Users\spoojari> az login
A web browser has been opened at https://login.microsoftonline.com/organizations/oauth2/
the login in the web browser. If no web browser is available or if the web browser fails
ith `az login --use-device-code`.
The following tenants don't contain accessible subscriptions. Use 'az login --allow-no-s
el access.
02af5f5e-dd71-4056-8090-3e7b436a65db 'Bupa'
563beab8-2916-4d6b-82b3-e8120b6bc351 'Bupa Global Identity'
[
  {
    "cloudName": "AzureCloud",
    "homeTenantId": "fee9c112-179f-46e3-ab98-f8d58602cf19",
    "id": "50395cf5-8708-4751-92e4-9e6de7017396",
    "isDefault": true,
    "managedByTenants": [],
    "name": "BupaANZ-AzureVirtualDesktop-Prod",
    "state": "Enabled",
    "tenantId": "fee9c112-179f-46e3-ab98-f8d58602cf19",
    "user": {
      "name": "Santosh.Poojari@bupa.com.au",
      "type": "user"
    }
  },
  {
    "cloudName": "AzureCloud",
    "homeTenantId": "fee9c112-179f-46e3-ab98-f8d58602cf19",
    "id": "875f5086-7cf0-423f-80a9-1041a0a35b54",
    "isDefault": false,
    "managedByTenants": [
      {
```

```
PS C:\Users\mmercan> az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod1aks
A different object named clusterUser_bupaanz-mel-test-caas-vnet-rg_nonprod1aks already exists in your kubeconfig file.
Overwrite? (y/n): y
Merged "nonprod1aks" as current context in C:\Users\mmercan\.kube\config
PS C:\Users\mmercan>
```

if your application hosted on nonprod2aks, type
az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod2aks
np3 :- az aks get-credentials --resource-group bupaanz-mel-test-caas-vnet-rg --name nonprod3aks

np4: -
az account set --subscription ed8412b9-fed3-4074-b7e1-5b4427a078e1

az aks get-credentials --resource-group devops-caas-test-rg01 --name nonprod4aks

> now you have retrive kubernetes config. you can run kubectl or install Lens and access your resources.

🟦 Install Lens and Configure Cluster

1. First Visit Release v6.2.5 · MuhammedKalkan/OpenLens Click Download "OpenLens-6.2.5.exe
   " Lens Desktop (must be this version)
2. Copy Lens Setup 6.2.5-latest.exe file from Download Folder to Workspace folder
3. Install Lens
4. Click Catalog Button, Select Clusters from List and Check is there any Cluster Available

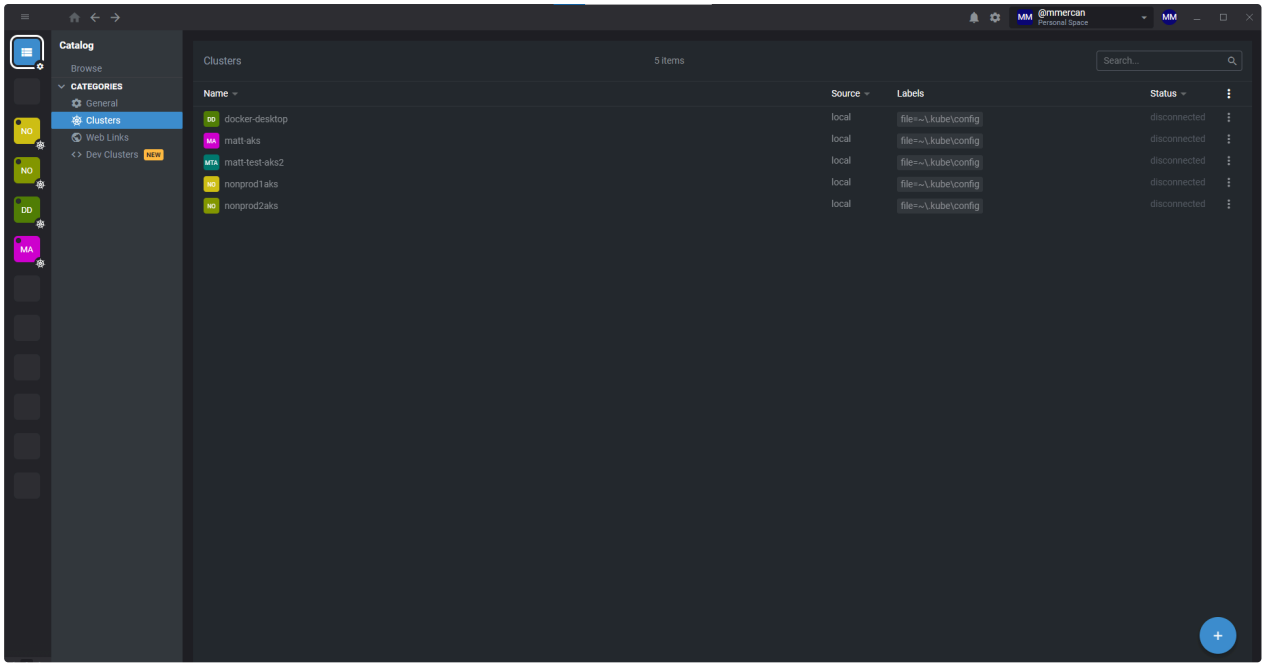

5. if Cluster List is Empty **hover** + (Plus) button at the bottom left of the app and select Sync Kubeconfig file(s)

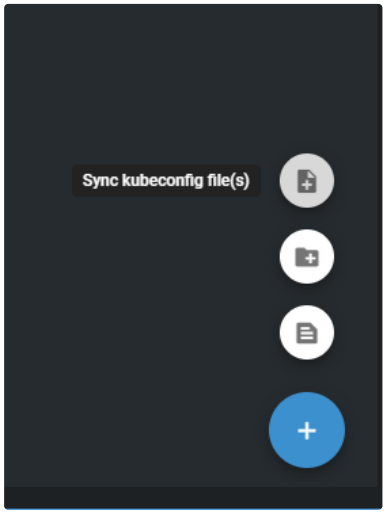

6. on File Browser path type `%USERPROFILE%\.kube` and select config file and select sync.

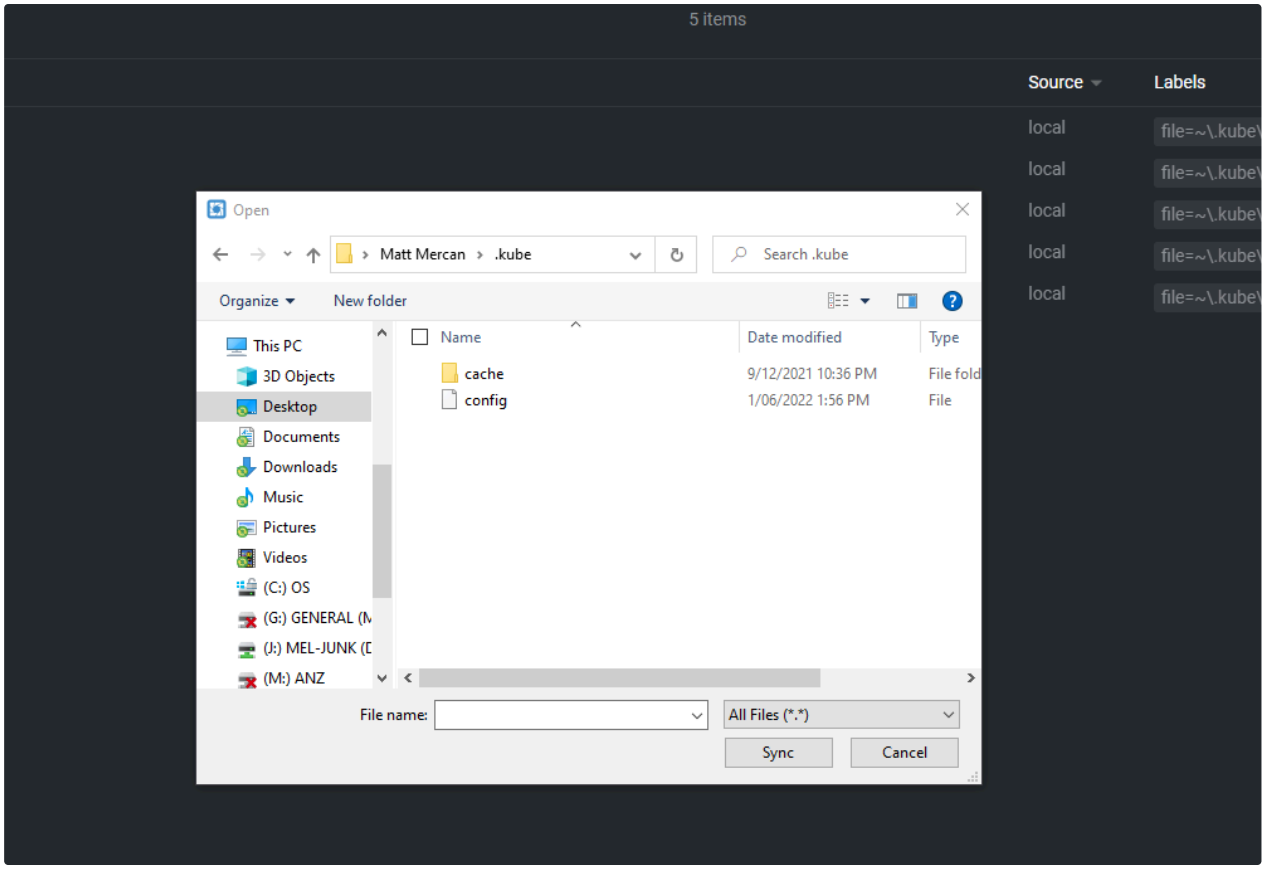

7. Add your Cluster to the Hotbar by clicking rhe attachment icon.

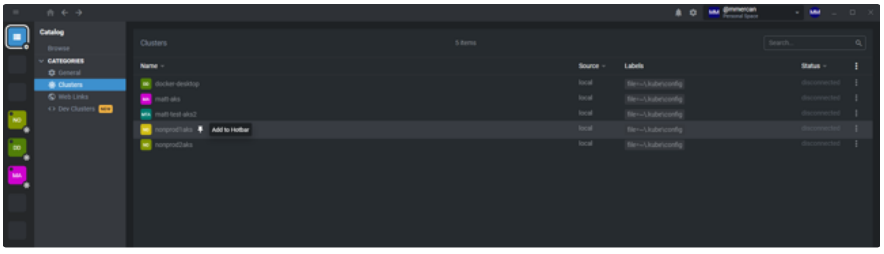

8. Login to Azure if you have been asked. Azure may want you to authenticate again. just copy the url from the page and also copy the code to authenticate.

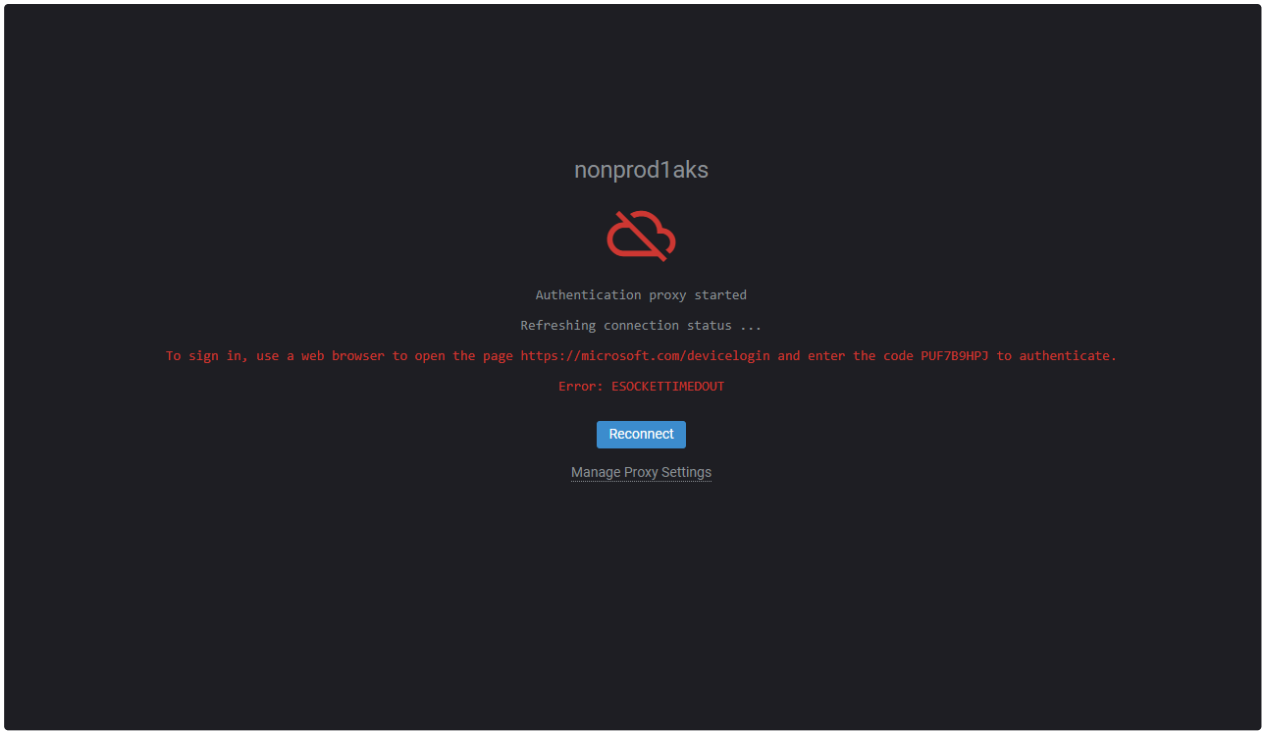

9.

📘 Add Namespaces to Lens Cluster

1. You will need to add namespaces your applications have been installed for this right click the Cluster from Hotbar
   Mybupa Cluster 4 click on small down arrow next to nonprod4aks

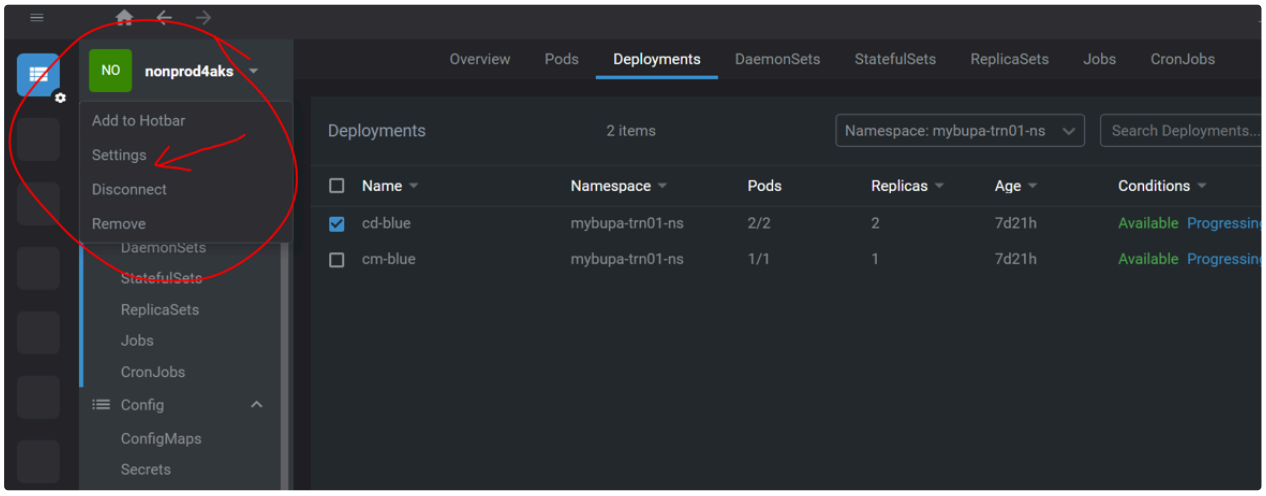

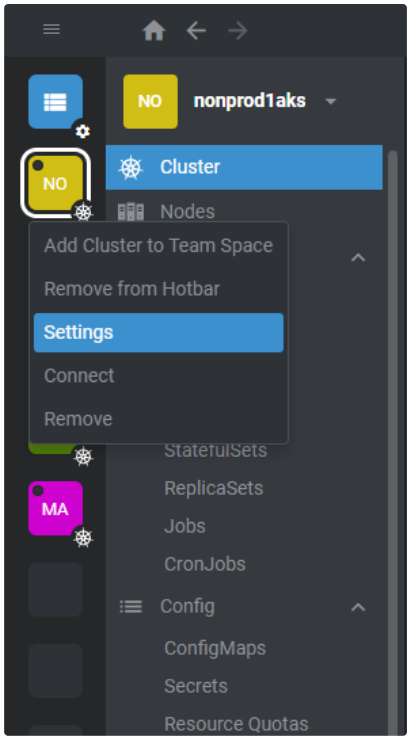

2. Goto Namespaces Tab Type namespaces you can access one by one and press enter after each of them when you finish adding them all click ESC to go back

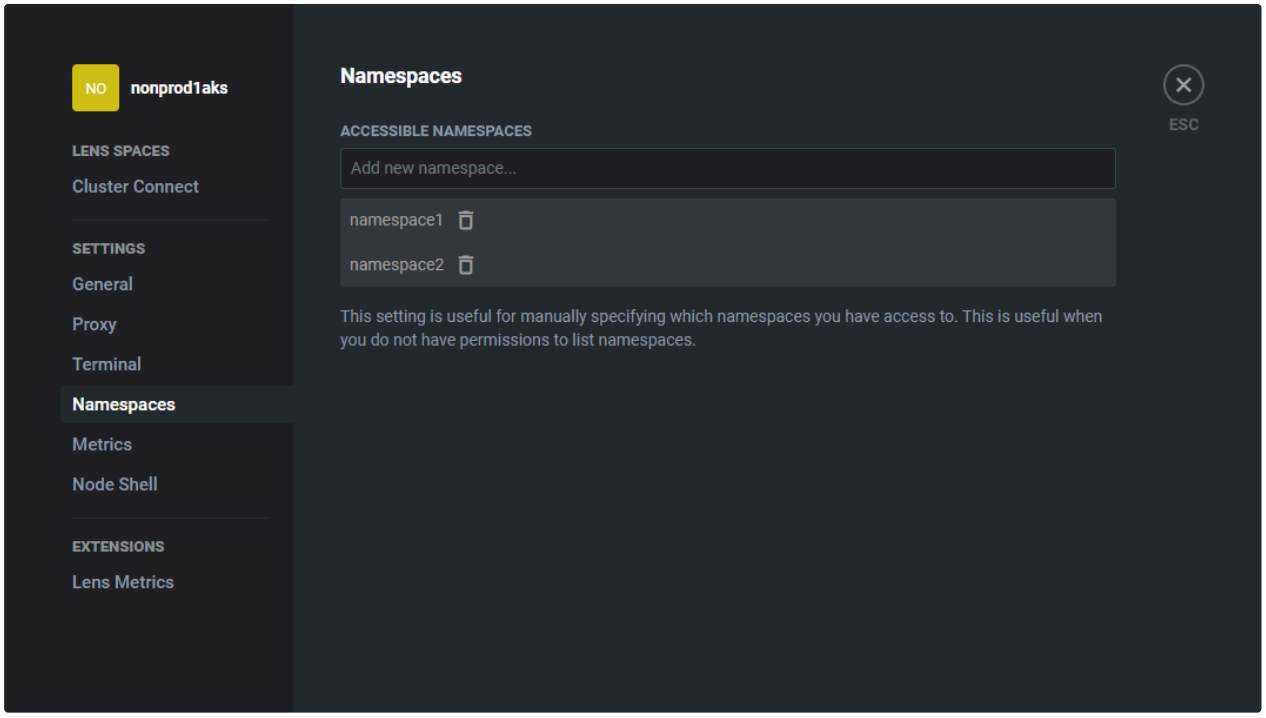

3. Select Cluster, then Select Workloads inside of Cluster Menu. then select namespace you want to work from dropdown menu on top left corner

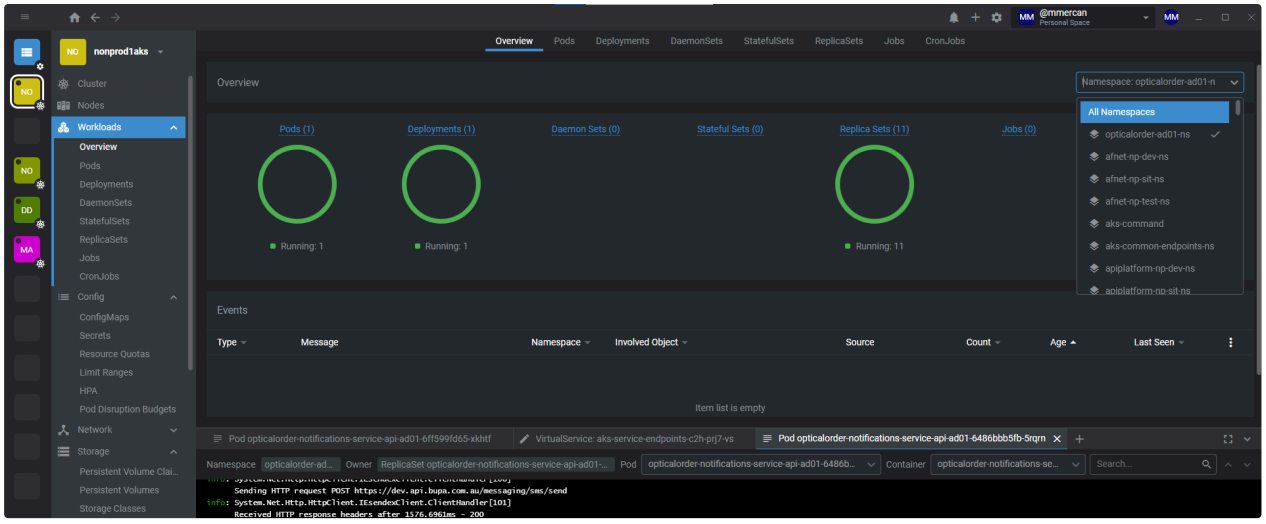

4. go to Pods click one of them form left menu click Logs to see Logs

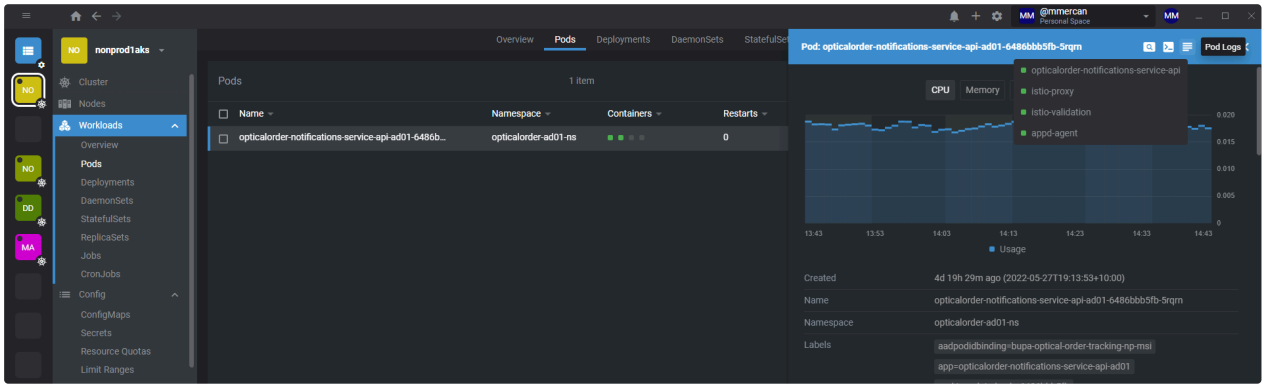

5. if you want to access to your application from your VDI or laptop, from Pods menu scroll down till containers section. select first container find Pods click **Forward...** this will open a window if you have used a specific port on Postman etc.. update the Random port to the port number you prefer and click Start

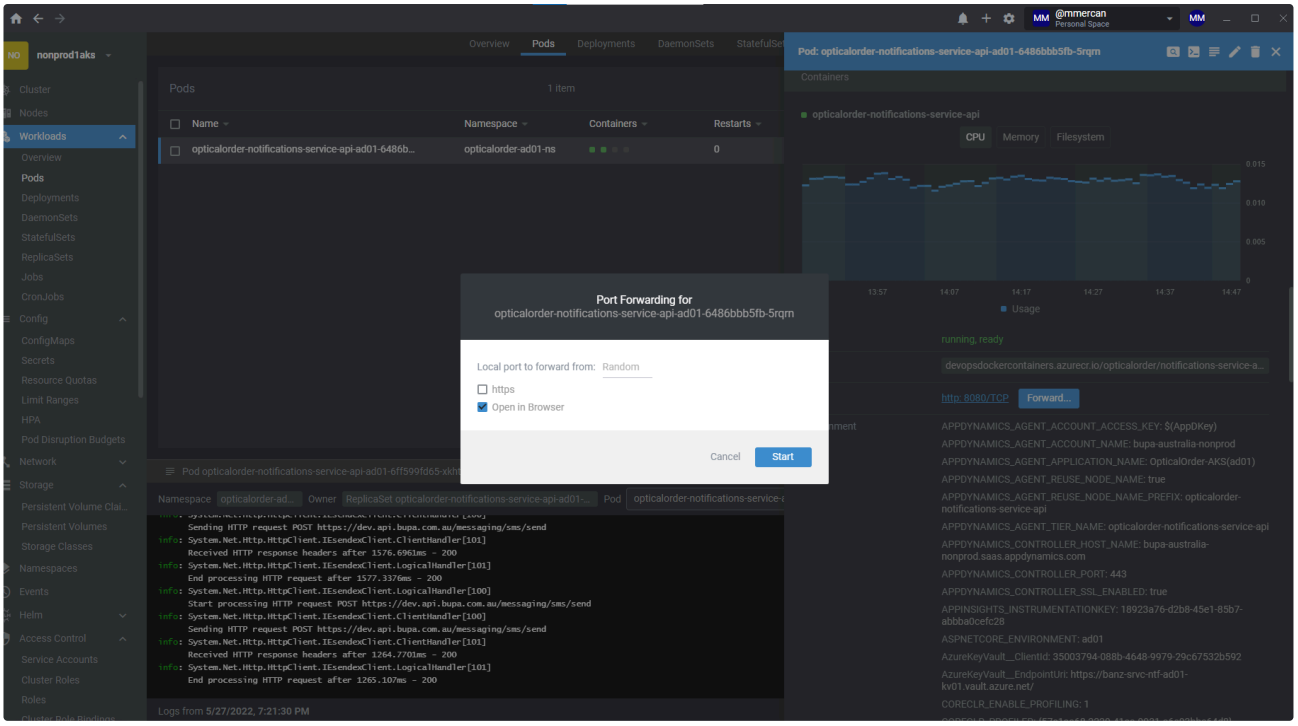

Adding Pod logs extension.

For those who use Openlens 6.3 or above you may not see the below menu to see the pod logs as below.



If you cannot see above menu you can install extension like below.

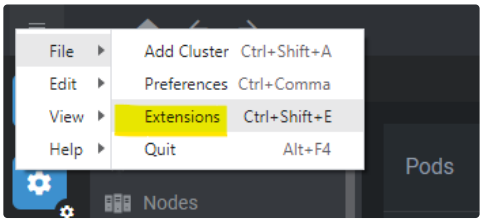

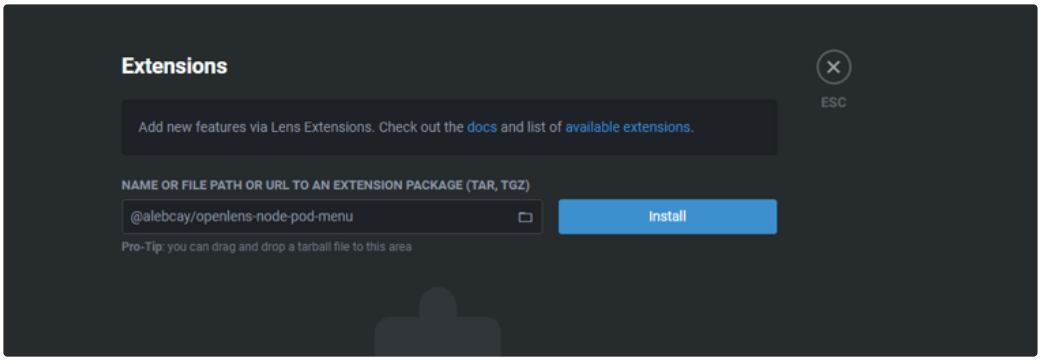

and add `@alebcay/openlens-node-pod-menu` and install / **enable**.

📋 Related articles

- How to use LENS
- Access issues