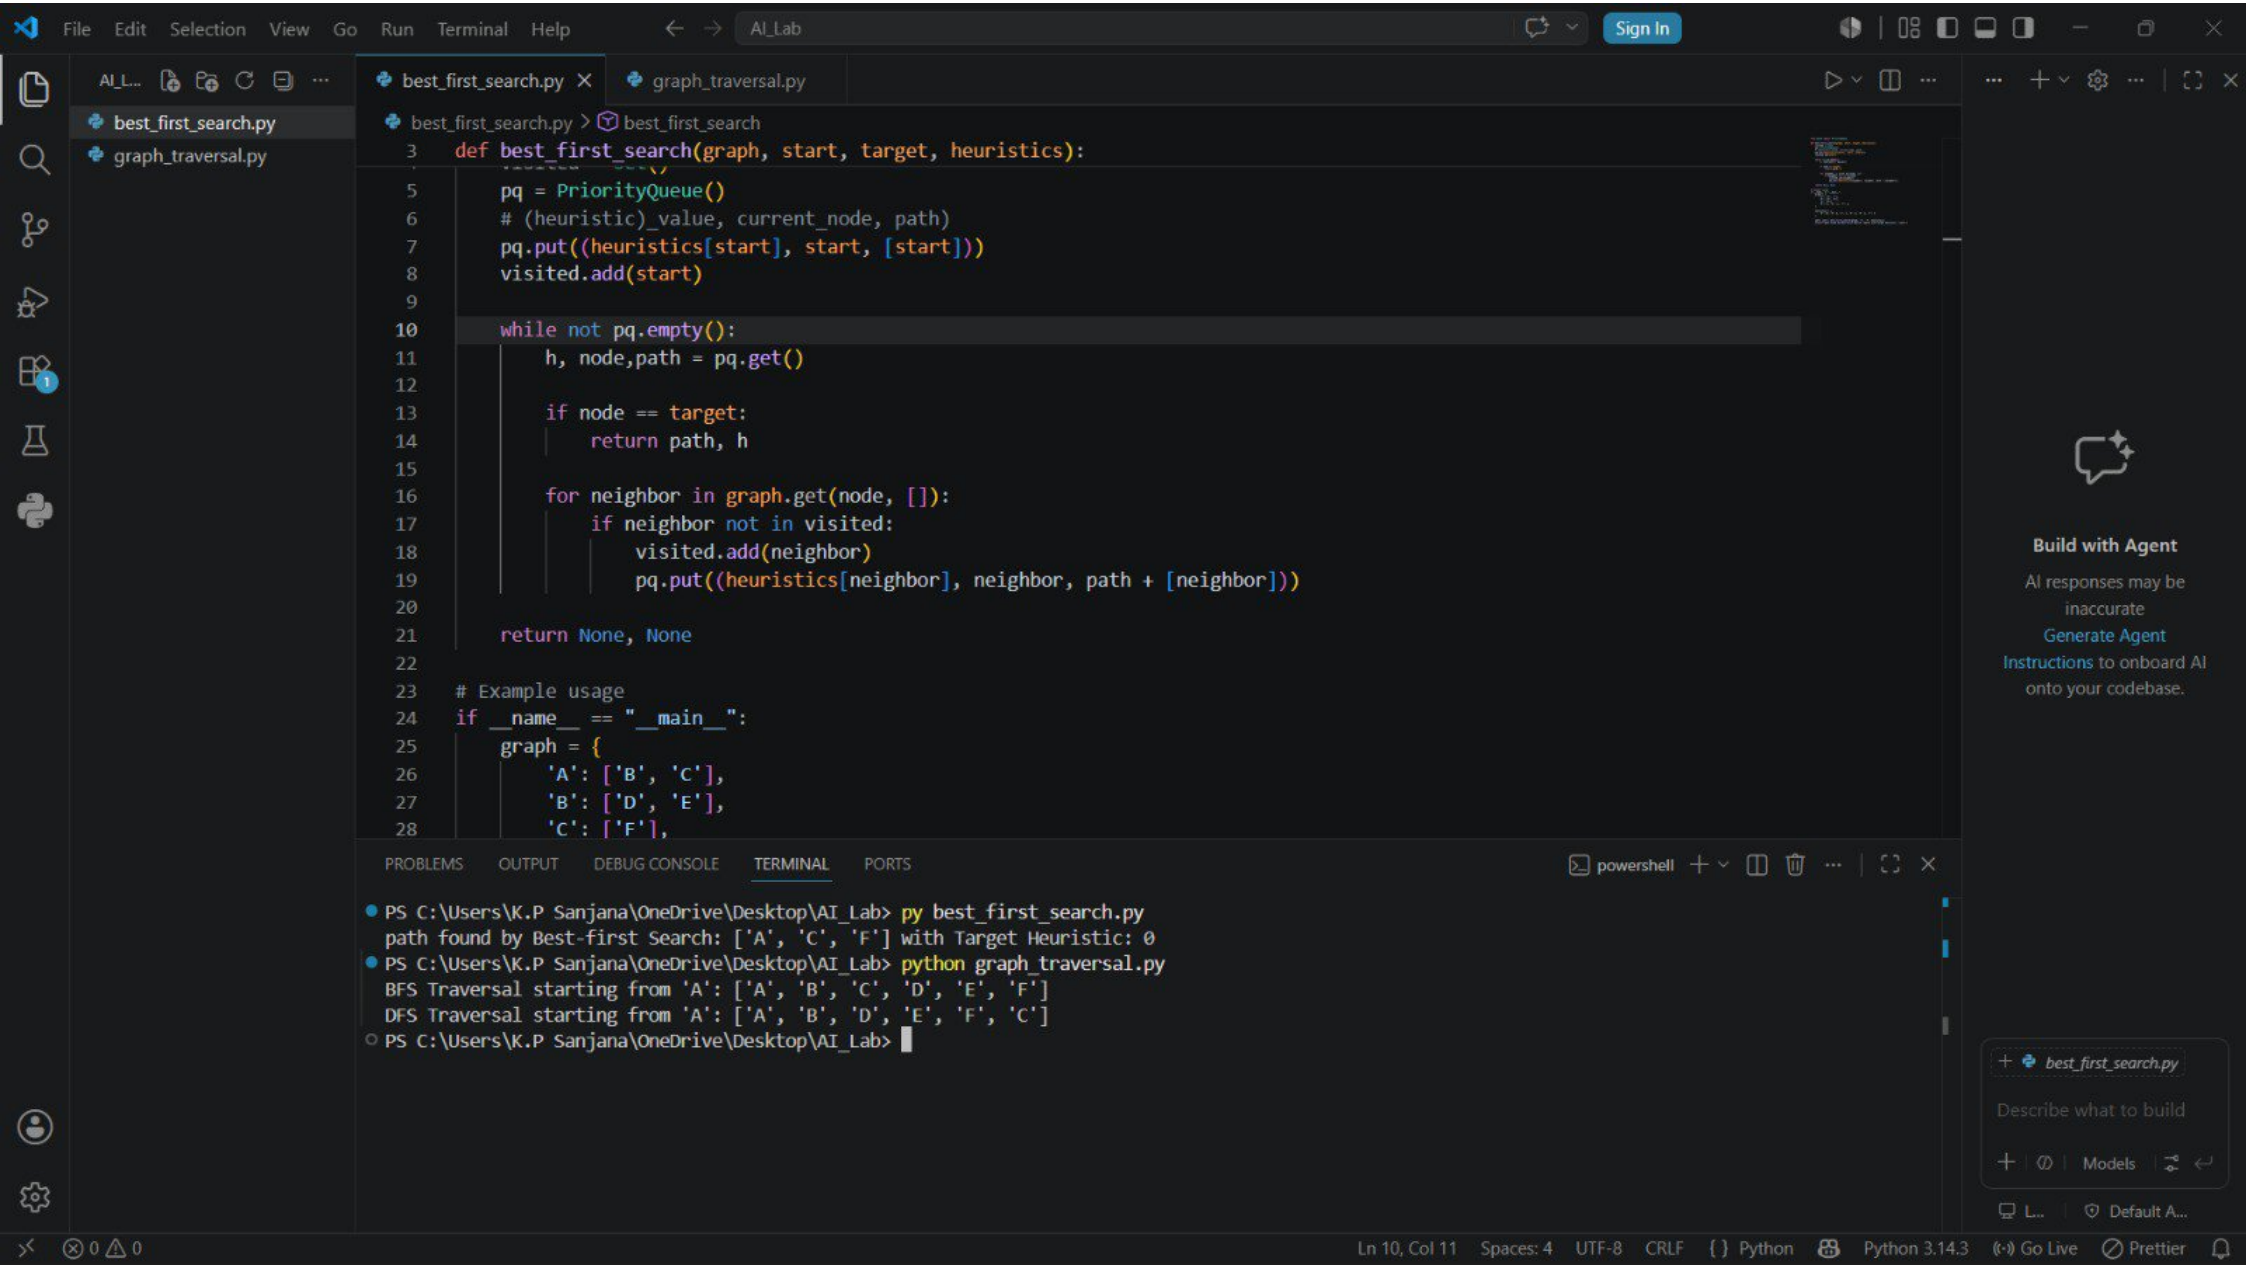
File Edit Selection View Go Run Terminal Help
AI_Lab
Sign In
best_first_search.py
graph_traversal.py
def best_first_search(graph, start, target, heuristics):
pq = PriorityQueue()
# (heuristic)_value, current_node, path)
pq.put((heuristics[start], start, [start]))
visited.add(start)
while not pq.empty():
h, node,path = pq.get()
if node == target:
return path, h
for neighbor in graph.get(node, []):
if neighbor not in visited:
visited.add(neighbor)
pq.put((heuristics[neighbor], neighbor, path + [neighbor]))
return None, None
# Example usage
if __name__ == "__main__":
graph = {
'A': ['B', 'C'],
'B': ['D', 'E'],
'C': ['F'],
PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS
powershell
PS C:\Users\K.P Sanjana\OneDrive\Desktop\AI_Lab> py best_first_search.py
path found by Best-first Search: ['A', 'C', 'F'] with Target Heuristic: 0
PS C:\Users\K.P Sanjana\OneDrive\Desktop\AI_Lab> python graph_traversal.py
BFS Traversal starting from 'A': ['A', 'B', 'C', 'D', 'E', 'F']
DFS Traversal starting from 'A': ['A', 'B', 'D', 'E', 'F', 'C']
PS C:\Users\K.P Sanjana\OneDrive\Desktop\AI_Lab>
Build with Agent
AI responses may be inaccurate
Generate Agent Instructions to onboard AI onto your codebase.
best_first_search.py
Describe what to build
Models
Ln 10, Col 11 Spaces: 4 UTF-8 CRLF { } Python Python 3.14.3 Go Live Prettier