

Instructor Notes:

Add instructor notes here.



Instructor Notes:

Slide discuss summary of the points to be covered

Lesson Objectives

Working with JAX - RS

- JAX - RS Annotations
- Creating JAX - RS web service
- Consuming RESTful service



Following contents would be covered:

3.1: What is REST

3.1.1 : SOAP and REST

3.2: Working with JAX - RS

3.3: JAX-RS annotations

3.4: Creating JAX - RS web service


3.5: Consuming RESTful service

Instructor Notes:

Slide shows the differentiation between a soap request and REST URI

3.1.1: SOAP and REST

SOAP and REST



- Consider a scenario where a web service is going to query a phonebook application for the details of a given user when the user's ID is known
- A SOAP message request looks like:

```

<?xml version="1.0"?>
<soap:Envelope
xmlns:soap="http://schemas.xmlsoap.org/soap/">

  <soap:Body xmlns:m="http://webserice.learning.cg.com/">
    <m:getUserDetails>
      <m:userId>12345</m:userId>
    </m:getUserDetails>
  </soap:Body>
</soap:Envelope>

```

- Consider a scenario where a web service is going to query a phonebook application for the details of a given user when the user's ID is known
- A REST request URI looks like:

<http://localhost/phonebook/UserDetails/12345>

As seen in above slide same scenario is represented in both forms SOAP and REST
REST turns out to be an easier implementation.

REST vs. SOAP is like mailing a letter:
with SOAP, you're using an envelope;
with REST, it's a postcard. Postcards are easier to handle (by the receiver), waste less paper (i.e., consume less bandwidth), and have a short content.

With REST, the semantics are specified entirely by the URI
With REST, the URI is the end
REST: oriented around nouns – Resources

Following examples can be considered:
<http://example.com/customer/123>
<http://example.com/order/555/customer>
{POST, GET, DELETE}
REST services are built around Resources

REST services are Stateless and use a Uniform Interface. Resources are manipulated through Representations. Messages are Self-Describing

Differences between SOAP and REST

- | SOAP | REST |
|--|--|
| 1. Is Simple Object Access Protocol | 1. REST is Representational State Transfer |
| 2. SOAP requires more bandwidth | 2. REST requires less bandwidth |
| 3. SOAP permits only XML | 3. REST permits different data formats like text, XML, JSON (Java script Object Notation) data formats |
| 4. SOAP is Transport layer independent (HTTP). It can be used over SMTP as well. | 4. REST requires use of HTTP |
| 5. SOAP is a standard to interact with Web services | 5. REST has small learning curve and uses URI to interact with Web service |

Instructor Notes:

Trainer can illustrate regarding JAX - RS.

3.2: JAX - RS Working with JAX - RS



JAX-RS is a Java programming language API designed to make it easy to develop applications that use the REST architecture

Moreover annotations are used to simplify the development of RESTful web services

JAX-RS annotations define resources and the actions that can be performed on those resources

Creating a RESTful Root Resource Class

- **Root Resource classes** are POJOs that are annotated with `@Path` or have at least one method annotated with `@Path`
- **Resource methods** are methods of a resource class annotated with a request method designator such as `@GET`, `@PUT`, `@POST`, and `@DELETE`

There are many implementations of JAX – RS

Apache CFX, an Open source Web service framework

Jersey , the reference implementation from Oracle. We would be using Jersey implementation for our REST web services

Jersey is used because it makes development of RESTful web services easier.

RESTful web services created under Jersey can be deployed to any application server.

Moreover JAX – RS is a part of Java EE and can be used with other Java EE technologies.

Instructor Notes:

Slide demonstrates a few JAX – RS annotations

Refer demo : JAX-RS-CRUD and notes page for the URI generated

3.3: JAX – RS Annotations

JAX – RS Annotations



These are the few annotations that can be used with REST

@Path

- The @Path annotation's value is a relative URI path indicating where the Java class will be hosted, for example, /helloworld.

@GET

- The Java method annotated with this request method designator will process HTTP GET requests.

@POST

- The Java method annotated with this request method designator will process HTTP POST requests.

@PUT

- The Java method annotated with this request method designator will process HTTP PUT requests.

The @Path annotation's value is a relative URI path indicating where the Java class will be hosted: for example, /helloworld. You can also embed variables in the URIs to make a URI path template. For example, you could ask for the name of a user and pass it to the application as a variable in the URI: /helloworld/{username}.

The @GET annotation is a request method designator and corresponds to the similarly named HTTP method. The Java method annotated with this request method designator will process HTTP GET requests. The behavior of a resource is determined by the HTTP method to which the resource is responding.

URI for GET request in JAX-RS-CRUD Demo shared (<http://localhost:9090/JAX-RS-CRUD/rest/countries>)

The @POST annotation is a request method designator and corresponds to the similarly named HTTP method. The Java method annotated with this request method designator will process HTTP POST requests. The behavior of a resource is determined by the HTTP method to which the resource is responding.

URI for POST request in JAX-RS-CRUD Demo shared (<http://localhost:9090/JAX-RS-CRUD/post.jsp>) (Here the user enters the details to create a country. The values of which are passed to the controller via @FormParam-discussed in next slide)

The @PUT annotation is a request method designator and corresponds to the similarly named HTTP method. The Java method annotated with this request method designator will process HTTP PUT requests. The behavior of a resource is determined by the HTTP method to which the resource is responding.

Instructor Notes:

Slide demonstrates a few JAX – RS annotations

3.3: JAX – RS Annotations

JAX – RS Annotations

**@DELETE**

- The Java method annotated with this request method designator will process HTTP DELETE requests

@FormParam

- To bind HTML form parameters value to a Java method

@Consumes

- The @Consumes annotation is used to specify the MIME media types of representations a resource can consume that were sent by the client

@Produces

- The @Produces annotation is used to specify the MIME media types of representations a resource can produce and send back to the client: for example, "text/plain" or application/json or application / xml

@PathParam

- The @PathParam annotation is a type of parameter that you can extract for use in your resource class

The @DELETE annotation is a request method designator and corresponds to the similarly named HTTP method. The Java method annotated with this request method designator will process HTTP DELETE requests. The behavior of a resource is determined by the HTTP method to which the resource is responding

URI for DELETE request in JAX-RS-CRUD Demo shared (<http://localhost:9090/JAX-RS-CRUD/rest/countries/delete>)

@FormParam: Used to bind HTML form parameters value to a Java method

With respect to the JAX-RS-CRUD demo shared - the values entered in post.jsp mentioned in previous slide are passed to controller method. Since we are using HTTP POST method the URI is not appended with parameters. Following is the URI (<http://localhost:9090/JAX-RS-CRUD/rest/countries>) to demonstrate that new country is added.

The @Consumes annotation is used to specify the MIME media types of representations a resource can consume that were sent by the client.

@Consumes(MediaType.APPLICATION_JSON) specifies that the controller method will need an input parameter of type object of type JSON

The @Produces annotation is used to specify the MIME media types of representations a resource can produce and send back to the client: for example, "text/plain".

In JAX-RS-CRUD demo shared - @Produces(MediaType.APPLICATION_JSON) specifies that the controller method will return an object of type JSON

The @PathParam annotation is a type of parameter that you can extract for use in your resource class. URI path parameters are extracted from the request URI, and the parameter names correspond to the URI path template variable names specified in the @Path class-level annotation

URI for GET request with Path parameter in JAX-RS-CRUD Demo shared (<http://localhost:9090/JAX-RS-CRUD/rest/countries/3>) (3 is the path parameter appended to the URI). Thus details with respect to country Id = 3 is fetched and displayed in browser.

Instructor Notes:

Slide will demonstrate how to create a resource class

3.4: Creating a JAX - RS service

Creating JAX - RS Service

Following code sample illustrates a simple example of a root resource class that uses JAX - RS annotations

```
import javax.ws.rs.GET;
import javax.ws.rs.Produces;
import javax.ws.rs.Path;

// The Java class will be hosted at the URI path "/helloworld"
@Path("/helloworld")
public class HelloWorldResource {

    // The Java method will process HTTP GET requests
    @GET
    // The Java method will produce content identified by the MIME Media
    // type "text/plain"
    @Produces("text/plain")
    public String getClichedMessage() {
        // Return some cliched textual content
        return "Hello World";
    }
}
```

The `@Path` annotation's value is a relative URI path. In the preceding example, the Java class will be hosted at the URI path `/helloworld`. This is an extremely simple use of the `@Path` annotation, with a static URI path.

Variables can be embedded in the URIs. **URI path templates** are URIs with variables embedded within the URI syntax.

The `@GET` annotation is a request method designator, along with `@POST`, `@PUT`, `@DELETE`, and `@HEAD`, defined by JAX-RS and corresponding to the similarly named HTTP methods. In the example, the annotated Java method will process HTTP GET requests. The behavior of a resource is determined by the HTTP method to which the resource is responding.

The `@Produces` annotation is used to specify the MIME media types a resource can produce and send back to the client. In this example, the Java method will produce representations identified by the MIME media type `"text/plain"`.

The `@Consumes` annotation is used to specify the MIME media types a resource can consume that were sent by the client.

The example could be modified to set the message returned by the `getClichedMessage` method, as shown in this code example:

```
@POST
@Consumes("text/plain")
public void postClichedMessage(String message)
{
    // Store the message
}
```

Instructor Notes:

Slide illustrates
regarding jersey
related
ServletContainer
mapping in web.xml

3.4: Creating a JAX - RS service Creating JAX - RS Service

Following mapping is needed in web.xml :

```
<servlet>
  <servlet-name>jersey-servlet</servlet-name>
  <servlet-class>com.sun.jersey.spi.container.servlet.ServletContainer</servlet-class>
  <init-param>
    <param-name>jersey.config.server.provider.packages</param-name>
    <param-value>com.cg.learning.controller</param-value>
  </init-param>

  <load-on-startup>1</load-on-startup>
</servlet>
<servlet-mapping>
  <servlet-name>jersey-servlet</servlet-name>
  <url-pattern>/rest/*</url-pattern>
</servlet-mapping>
```

From the above mapping all URL patterns will map through URLs with rest being a part of the URI.

An inbuilt servlet -> `com.sun.jersey.spi.container.servlet.ServletContainer` is a servlet (Filter) for deploying root resource classes.

Provides support for servlet-based and filter-based Web applications.

The above mapping will deploy Jersey and automatically register any root resource or provider classes present in the directory `"/WEB-INF/classes"` or jar files present in the directory `"/WEB-INF/lib"`

The init-param -> **`jersey.config.server.provider.packages`** defines one or more packages that contain application-specific resources and providers.

If the property is set, the specified packages will be scanned for JAX-RS root resources and providers.

Instructor Notes:

Slide illustrates
regarding @Path
annotation and how to
extract Path parameters

3.4: Creating a JAX - RS service

Creating JAX - RS Service

More on @Path annotation and URI Path Templates
Look at below @Path annotation:

```
@Path("/users/{username}")
```

In this kind of example, a user is prompted to type his or her name, and then a JAX-RS web service configured to respond to requests to this URI path template responds. For example, if the user types the user name "Galileo," the web service responds to the following URL:

```
http://example.com/users/Galileo
```

To obtain the value of the user name, the @PathParam annotation may be used on the method parameter of a request method, as shown in the following code example:

```
@Path("/users/{username}")
public class UserResource {

    @GET
    @Produces("text/xml")
    public String getUser(@PathParam("username") String userName) {
        ...
    }
}
```


The @Path annotation identifies the URI path template to which the resource responds and is specified at the class or method level of a resource.

The @Path annotation's value is a partial URI path template relative to the base URI of the server on which the resource is deployed, the context root of the application, and the URL pattern to which the JAX-RS runtime responds.

URI path templates are URIs with variables embedded within the URI syntax. These variables are substituted at runtime in order for a resource to respond to a request based on the substituted URI. Variables are denoted by braces ({ and }). For example, look at the following @Path annotation:
@Path("/users/{username}")

Instructor Notes:

Slide illustrates how an actual URI will be substituted.

3.4: Creating a JAX - RS service
Creating JAX - RS Service

URI Path Template	URI After Substitution
http://example.com/{name1}/{name2}/	http://example.com/james/gatz/
http://example.com/{question}/{question}/{question}	http://example.com/why/why/why/
http://example.com/maps/{location}	http://example.com/maps/Main Street
http://example.com/{name3}/home/	http://example.com/james/home/

Instructor Notes:

Trainer can specify that a web client (jsp / html) will be used as a web service consumer in the same project.

Also a different project could be created for a web service consumer

3.5: Consuming a JAX - RS service Consuming JAX - RS Service

Here we would need a web client to consume a resource

An jsp page can be created that can navigate to the specific URI.

- The dynamic web project is created by name JAX-RS-HelloApp and URI's are mapped through /rest/*

```
<%@ page language="java" contentType="text/html; charset=ISO-8859-1"
    pageEncoding="ISO-8859-1"%>
<%@taglib prefix="c" uri="http://java.sun.com/jsp/jstl/core"%>


<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=ISO-8859-1">
<title>Insert title here</title>
</head>
<body>
    <c:redirect url="http://localhost:9090/JAX-RS-HelloApp/rest/helloworld"></c:redirect>
    <br>
</body>
</html>
```

When above jsp is executed, REST Service will look for Root resource class with @Path mapping as "/helloworld" and on finding the mapping will execute that corresponding method and return result in MIME type specified.

(Refer slide number 8)

Instructor Notes:

Demo example on
Restful service

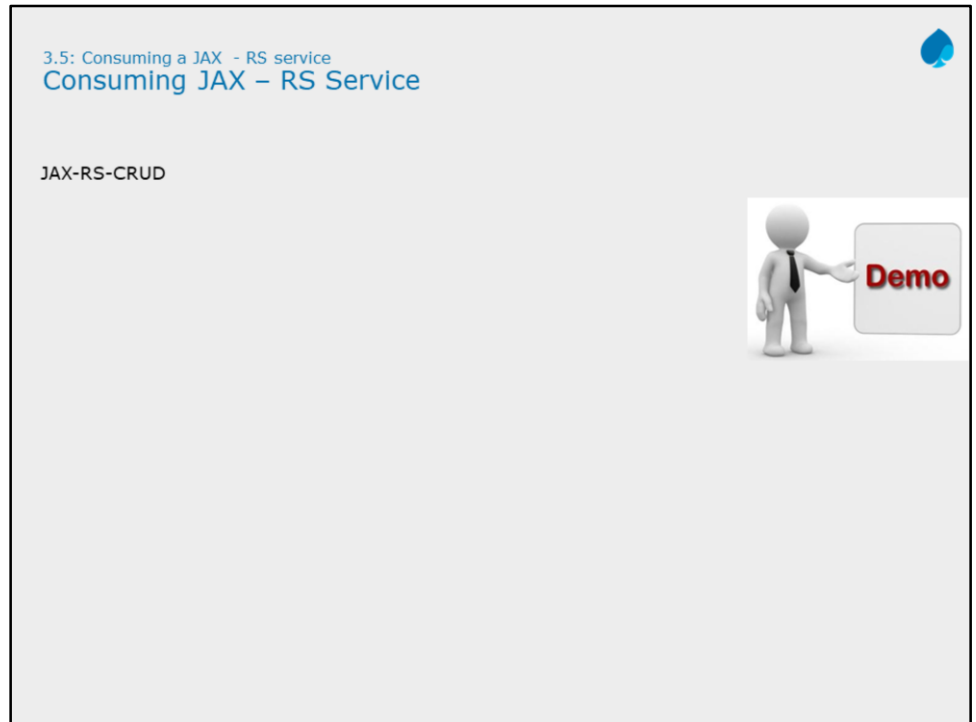

Add the notes here.


Instructor Notes:

Summary of the topics
being covered

Summary

So far we have learnt:

- What is REST architecture
- How REST is any easy alternative to create a web service
- REST annotations
- Creating a RESTful service
- Consuming a RESTful service



Summary

Add the notes here.

Instructor Notes:

Corresponding lab
assignment



Add the notes here.

Instructor Notes:

Question 1: Option 1,
Option 2

Question 2: True

Review Question

Question 1: Which of the following are true?

- Option 1 : Resource classes are POJOs that have at least one method annotated with @Path
- Option 2: Resource methods are methods of a resource class annotated with a request method designator such as @GET, @PUT, @POST, or @DELETE
- Option 3: @FormParam binds query parameters value to a Java method

Question 2: The @Path annotation's value is a relative URI path indicating where the Java class will be hosted?

- True
- False



Add the notes here.

Instructor Notes:

Question 3: @Produces

Review Question

Question 3: _____ specifies a media type a resource can generate.

- @PUT
- @POST
- @Produces
- @Consumes



Add the notes here.