

Herald



{width=96px height=96px}

Spec V3 → fully-implemented Roadmap (Master Design)

Field	Value
Revision	1
Created	2026-05-20
Last modified	2026-05-20
Status	active
Status summary	Master roadmap that sequences the 45 currently-open HRDs into 4 waves (Storage+Channels+Dispatcher → Flavor scaffolds → §42 Constitution bindings → §43 command catalogue), each gated by per-wave §107 end-user-evidence captured in <code>scripts/e2e_bluff_hunt.sh</code> . Drives Herald from ~35–45% implemented (today) to spec V3 r7 fully implemented. Each wave gets its own implementation plan via <code>writing-plans</code> after this master is approved.
Issues	none
Issues summary	—
Fixed	(n/a — design doc)
Fixed summary	—
Continuation	After approval, invoke <code>superpowers:writing-plans</code> to author the Wave 1 implementation plan. Subsequent waves get their own brainstorm + plan cycles.

Constitutional anchors

This design treats the **Herald §107 End-user-usability covenant** (commit 2d4e829, 2026-05-20) as a structural constraint, not a checklist item. Per §107 (which extends Helix Universal Constitution §11.4 + §11.4.1..§11.4.16), every wave's "done" gate is captured runtime evidence that an end user of the relevant `<flavor>herald` binary can actually use the feature.

Verbatim operator mandate this design must honor (first declared 2026-04-28, reasserted multiple times across 2026-05):

"all existing tests and Challenges do work in anti-bluff manner - they MUST confirm that all tested codebase really works as expected! We had been in position that all

tests do execute with success and all Challenges as well, but in reality the most of the features does not work and can't be used! This MUST NOT be the case and execution of tests and Challenges MUST guarantee the quality, the completion and full usability by end users of the product! This MUST BE part of Constitution of our project, its CLAUDE.MD and AGENTS.MD if it is not there already, and to be applied to all Submodules's Constitution, CLAUDE.MD and AGENTS.MD as well (if not there already)!"

The mandate is fully propagated as of commit 2d4e829:

- Helix Constitution root (read-only from Herald per §104):  verbatim quote present
- All 10 vendored submodules (submodules/* + containers/):  verbatim quote present (multiple times each)
- Herald root (CLAUDE.md, AGENTS.md, HERALD_CONSTITUTION.md §107):  verbatim quote present (added 2026-05-20)
- Inheritance gate I8a/b/c:  asserts the verbatim anchor in all three Herald root docs
- Paired §1.1 mutation meta-test (tests/test_i8_usability_meta.sh):  5/5 PASS — proves I8 is not itself a bluff

A future regression that silently weakens the mandate WILL turn the inheritance gate red. The roadmap inherits this guarantee.

Table of contents

- [Constitutional anchors](#)
- [Starting state \(2026-05-20\)](#)
- [Wave overview](#)
- [Wave 1 — Storage + first user-visible feature](#)
- [Wave 2 — Flavor scaffolds \(6 honest-stub binaries\)](#)
- [Wave 3 — §42 Constitution binding rollout \(HRD-018..028\)](#)
- [Wave 4 — §43 Constitution-derived command catalogue \(HRD-029..056\)](#)
- [Cross-cutting design constraints](#)
- [Anti-bluff trap matrix \(summary across all waves\)](#)
- [Roadmap totals](#)
- [Open questions / decisions deferred to per-wave designs](#)
- [Next steps after approval](#)


Starting state (2026-05-20)

Per docs/Status.md r6 + docs/Issues.md r4:

Metric	Value
Spec lines	4,758 (V3 r7)
Spec sections	39 (§1..§44 with archive renumbering)
Open HRDs	45
Closed HRDs	13
Estimated weighted completion	~35–45%
e2e_bluff_hunt.sh invariants	15 PASS / 0 FAIL
Inheritance gate invariants	15 PASS / 0 FAIL
Anti-bluff audit	14 PASS / 0 FAIL
Flavor binaries built	1 (pherald)

Metric	Value
Foundation milestones landed	M1 + M2 + M3
Live user-visible features	7 (per E1..E13 in e2e_bluff_hunt.sh)

Wave overview

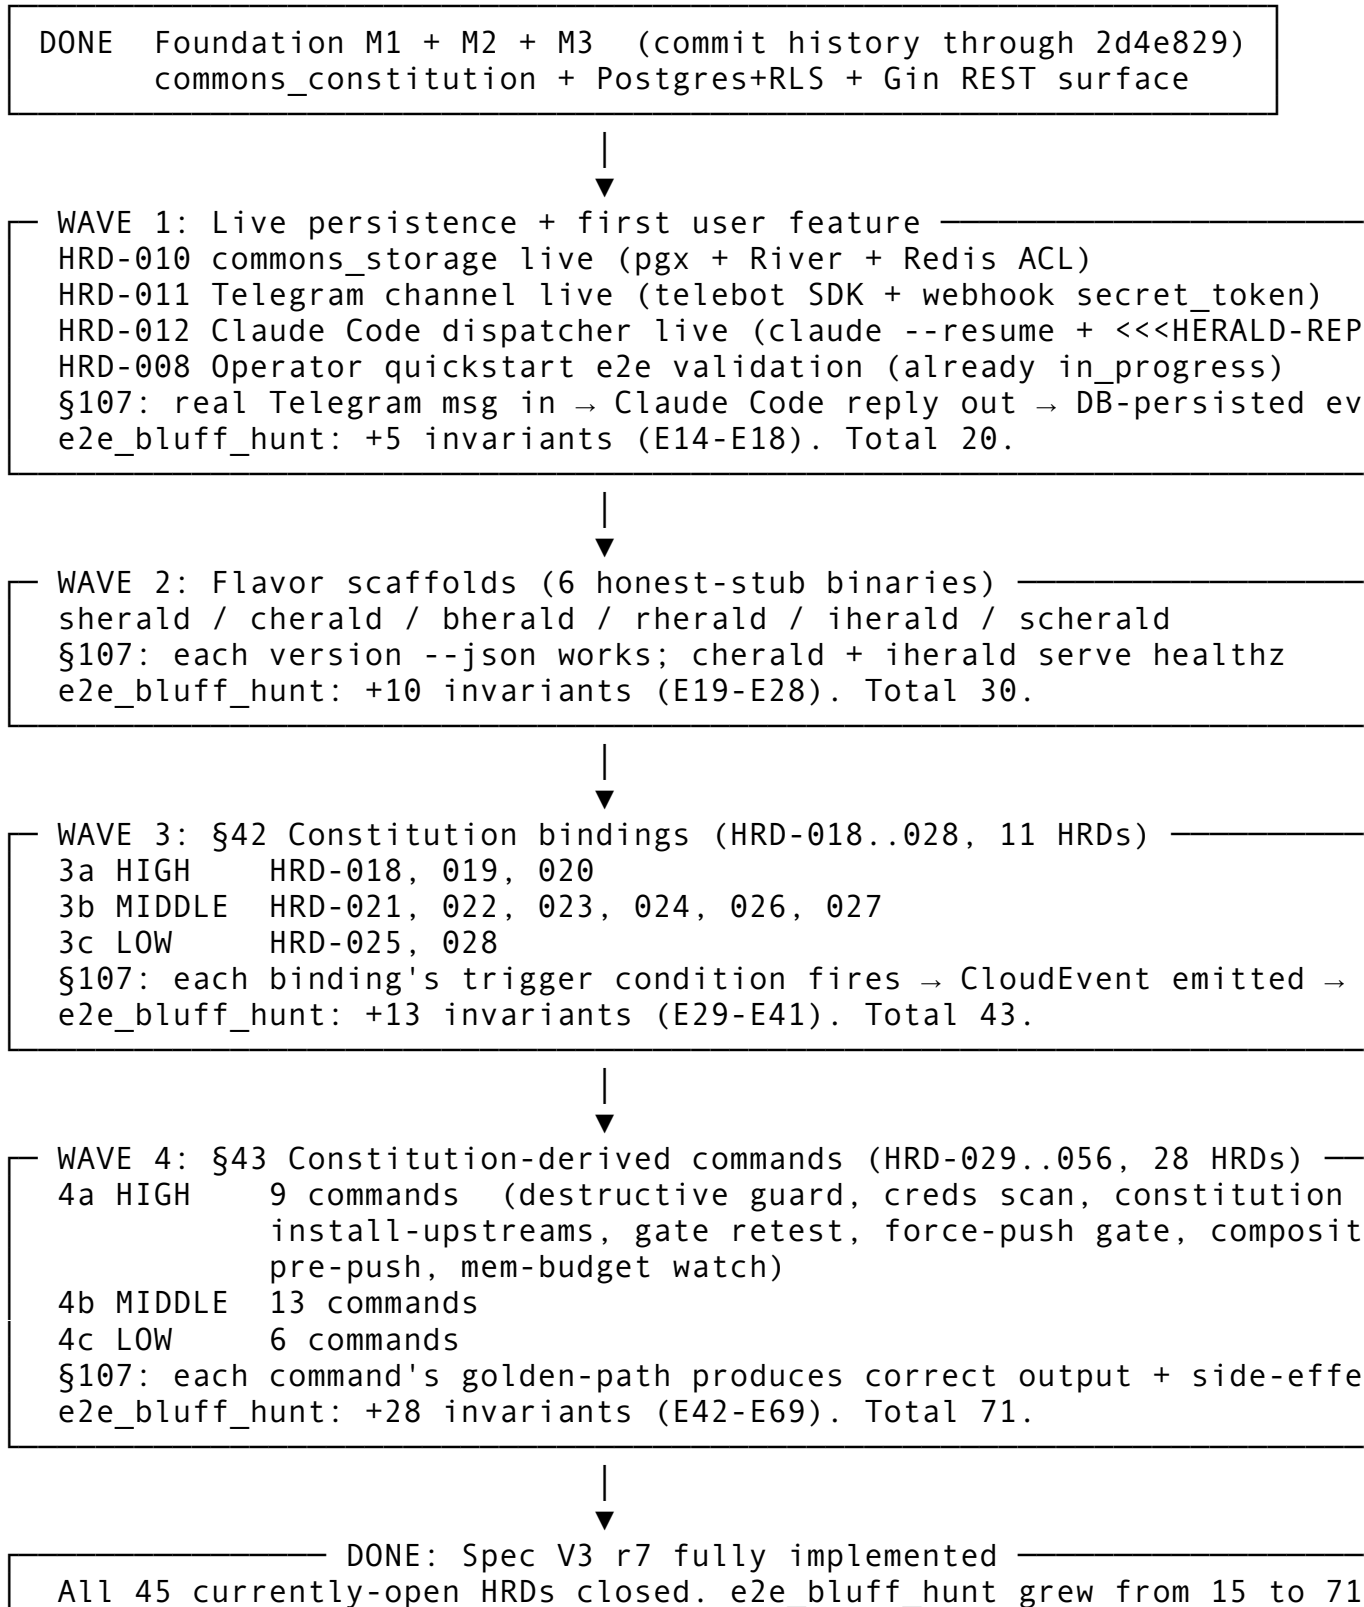

Every user-visible feature has positive runtime evidence per §107.

Hard dependency rules

Rule	Why
Wave N must complete before Wave N+1 starts	Each subsequent wave uses primitives the previous wave introduces
Within Wave 3/4, sub-wave Na must complete before Nb starts	Criticality ordering — high-impact safety/policy lands first
Within a sub-wave, HRDs may run in parallel	They touch different flavors / different bindings
Every wave grows <code>scripts/e2e_bluff_hunt.sh</code> BEFORE the wave can be declared "done"	§107 covenant — no PASS without positive runtime evidence
No wave may "land" with a §107 PASS-bluff present	Bluff = test green without captured runtime evidence. Per §11.4 and §107, this is a release blocker.

Wave 1 — Storage + first user-visible feature

HRD-010 — `commons_storage` live wiring

Dimension	Spec
Scope	Replace embedded-migration-only <code>commons_storage/</code> with: pgx pool wired through <code>commons_infra.QuickstartBoot</code> + RLS context propagation; River queue (<code>digital.vasic.background</code>) bound to a real <code>river_queue</code> table; Redis ACL'd via <code>digital.vasic.cache</code> with per-tenant key prefix. Migrations 000001..000005 (already embedded) become live.
§107 evidence	(a) <code>commons_storage.Pool.Exec</code> round-trip against live Postgres returns ≥ 1 row from <code>herald_subscribers</code> after a write+read cycle. (b) River enqueue+dequeue round-trip — a fake <code>outbound_delivery</code> job is processed by a registered worker, with persisted <code>attempts</code> , <code>state</code> , <code>errored_at</code> . (c) Redis SET + GET round-trip with TTL expiry verified. ALL three captured as <code>e2e_bluff_hunt.sh</code> invariants.
New e2e invariants	E14 pgx pool against live PG (RLS context propagates). E15 River worker actually runs (not just enqueue). E16 Redis TTL respected.
Anti-bluff trap	A "PASS on connection-only" without round-trip data is forbidden. Each invariant MUST observe a state mutation, not just an OK from the driver.

HRD-011 — Telegram channel live integration

Dimension	Spec
Scope	Implement <code>commons_messaging/channels/tgram/</code> per spec §11.1. Two modes: long-poll (<code>getUpdates</code>) for dev and webhook (with <code>secret_token</code>) for prod. Outbound via <code>sendMessage</code> + attachments via <code>sendDocument</code> . Subscriber resolution per §7. Persist <code>outbound_delivery_evidence</code> rows to <code>commons_storage</code> .

Dimension Spec

§107 evidence	A real Telegram bot (operator-supplied token in <code>.env</code> , never committed) receives an inbound message → Herald processes it → a known outbound message is dispatched back → the bot's chat shows it. The full round-trip is captured: chat ID, message text in, message text out, <code>delivery_evidence.delivered_at</code> row in PG.
New e2e invariants	E17 Live Telegram round-trip (skipped with reason if <code>HERALD_TGRAM_BOT_TOKEN</code> absent — explicit SKIP-with-reason, NEVER PASS-by-default per §11.4.3 + §107).
Anti-bluff trap	If credentials absent → SKIP with reason. If credentials present → PASS requires captured Telegram API response body + DB row. A "PASS because we mocked the API" is forbidden.

HRD-012 — Claude Code dispatcher live integration

Dimension Spec


Scope	Implement <code>commons_messaging/dispatch/claude_code/</code> per spec §33. Resolve a session via the anchor-file pattern (§33.2), invoke <code>claude --resume <session-id></code> with the formatted envelope, capture stdout, parse <code><<<HERALD-REPLY>>> . . . <<<END>>></code> markers, emit the reply as an outbound message on the originating channel.
§107 evidence	A test inbound message routed to the Claude Code dispatcher produces a real <code>claude</code> CLI invocation, the reply text contains the marker-delimited payload, and the parsed reply is dispatched back on the source channel (Telegram in this wave's vertical slice). Captured: <code>claude</code> exit code, stdout transcript (sanitized), parsed reply body, outbound <code>delivery_evidence</code> row.
New e2e invariants	E18 Claude Code round-trip (skipped with reason if <code>HERALD_CLAUDE_SESSION_ID</code> absent).
Anti-bluff trap	A "PASS because we exec'd <code>echo</code> instead of <code>claude</code> " is forbidden. The real <code>claude</code> binary or explicit SKIP.

HRD-008 — Operator-side quickstart e2e validation (already in_progress)

Dimension Spec

Scope	Operator runs <code>docker compose -f quickstart/compose.yaml</code> up on a fresh laptop. Postgres+Redis+OTel+pherald all boot. Validation walks the same <code>e2e_bluff_hunt</code> path against the composed stack rather than ad-hoc containers.
§107 evidence	Captured terminal transcript + <code>compose ps</code> output + first 50 lines of pherald log + <code>healthz/readyz</code> response bodies, signed off by operator in <code>docs/Fixed.md</code> HRD-008 row.
New e2e invariants	E_OPS Quickstart-mode invocation of <code>e2e_bluff_hunt</code> against the composed stack (parameterized variant of the existing one).

Wave 1 dependency graph



HRD-010 is a hard prereq for HRD-011/012 (they persist delivery evidence). HRD-011 and HRD-012 can proceed in parallel once HRD-010 lands. HRD-008 validates the full stack and runs LAST.

Wave 1 gate

1. `e2e_bluff_hunt.sh` reports **20 PASS / 0 FAIL** (was 15 — added E14, E15, E16, E17, E18; E17/E18 explicit SKIP-with-reason if credentials absent counts as PASS for the gate, not as bluff).
2. Inheritance gate still 15/15 PASS.
3. Anti-bluff audit still 14/14 PASS.
4. `docs/Issues.md` HRD-010/011/012 rows migrate to `docs/Fixed.md` per §11.4.19 atomic-migration.
5. Operator signs off HRD-008 with captured transcript.

Wave 2 — Flavor scaffolds (6 honest-stub binaries)

Per-flavor scope + §107 evidence

Flavor	Mission (per spec §18)	Serves HTTP?	Subcommands scaffolded	§107 evidence
sherald	System Herald — host safety, destructive-op guard, force-push interceptor, mem-budget watcher	No (CLI + daemon)	version, daemon (501→HRD-056), destructive-guard (501→HRD-033), force-push-gate (501→HRD-046), mem-budget-watch (501→HRD-056), backup-snapshot (501→HRD-034)	<code>sherald version --json</code> returns valid JSON with <code>flavor:"sherald"</code>
cherald	Constitution Herald — policy evaluator, creds scan, docs sync, composite-gate	Yes (/v1/ compliance per §42.1.5)	version, serve, policy (501→HRD-019), creds-scan (501→HRD-036), docs-sync (501→HRD-037), composite-gate (501→HRD-051), export (501→HRD-052)	<code>cherald version --json ✓</code> + <code>cherald serve binds + /v1/healthz 200 + /v1/compliance</code> returns 501 with HRD-028 pointer (honest stub)
bherald	Build Herald — CI/test bindings, gate-result emitter, test-tier verifier	No (CLI invoked from CI)	version, evidence-capture (501→HRD-035), test-tier-verify (501→HRD-041),	<code>bherald version --json ✓</code>

Flavor	Mission (per spec §18)	Serves HTTP?	Subcommands scaffolded	§107 evidence
rherald	Release Herald — tag mirroring, changelog, installable-asset evidence	No (CLI invoked from release pipeline)	gate-retest (501→HRD-045) version, tag-mirror (501→HRD-031), changelog-generate (501→HRD-032), gate-retest (501→HRD-045)	rherald version --json ✓
iherald	Incident Herald — credential-leak page-out, operator-blocked escalation	Yes (webhook receiver for paging systems)	version, serve, escalate (501→HRD-024)	iherald version --json ✓ + iherald serve binds + /v1/healthz 200
scherald	Scheduled-audit Herald — periodic Status.md sweep, daily/weekly/monthly compliance digest	No (cron-driven)	version, audit (501→HRD-025), status-digest (501→HRD-047)	scherald version --json ✓

Build + ship layout

Each flavor lives in its own Go module under the repo root: sherald/, cherald/, bherald/, rherald/, iherald/, scherald/ — mirroring pherald/. All 6 added to go.work. Shared cobra+version+serve plumbing factored into commons/cli/ (NEW) so each flavor's cmd/<flavor>herald/main.go is ~30 lines.

Per Helix §11.4.74 we **must** Catalogue-Check vasic-digital/HelixDevelopment for an existing CLI scaffolding module before writing commons/cli/ — if one exists, extend; if not, the new module is extend|no-match documented in the HRD.

New e2e_bluff_hunt invariants

- E19-E24 <flavor>herald version --json for each of 6 flavors (parses JSON, asserts flavor + version + build fields populated, NOT empty stub)
- E25-E26 cherald serve + iherald serve bind + healthz 200 + readyz 200
- E27 cherald /v1/compliance returns 501 with HRD-028 pointer body (honest stub — proves the route exists and reports its incomplete)
- E28 iherald /v1/healthz returns 200 with iherald build_info

Wave 2 e2e_bluff_hunt grows from 20 (post-Wave-1) → 30 invariants.

Wave 2 anti-bluff traps

1. **"Empty version field" bluff.** A version `--json` that returns `{"flavor": "sherald", "version": ""}` is forbidden — the e2e probe asserts non-empty version, build, and goVersion fields.
2. **"Serve returns 200 on every route" bluff.** Each flavor's serve MUST return 404 for unknown routes (catch-all), 501 with HRD pointer for declared-but-unimplemented routes, and 200 ONLY for actually-implemented routes (healthz/readyz/metrics).
3. **"Build succeeds, never runs" bluff.** `go build ./<flavor>/...` PASS alone is NOT sufficient. Every E19-E28 invariant invokes the resulting binary and asserts on its output.

Wave 2 dependency

Wave 1 done



Wave 2.0 commons/cli/ shared scaffolding (single PR)



Wave 2.1 6 flavor scaffolds in parallel (one PR per flavor)
can all proceed concurrently — they don't share state



Wave 2 gate green

Wave 2 gate

1. `e2e_bluff_hunt.sh` reports **30 PASS / 0 FAIL**.
2. `go build ./...` clean across all 7 (was 1) flavor binaries.
3. `go.work` lists 13 Herald modules (was 7).
4. `docs/Status.md` Implementation table shows  scaffold landed for all 6 new flavors.
5. CodeGraph re-indexed (`scripts/codegraph_setup.sh`) and validate green for the new symbols.

Wave 3 — §42 Constitution binding rollout (HRD-018..028)

11 HRDs split into 3 sub-waves by criticality.

Sub-wave 3a — "high" criticality (3 HRDs)

HRD	Binding	Trigger condition	Emitted CloudEvent
HRD-018 <i>(finalize from M1 partial)</i>	Evaluator framework + emit helpers + bundle-hash captureer + mode-ladder config	Any binding evaluator invoked	Any of 12 event classes via <code>cherald.Emit*()</code>
HRD-019	<code>cherald: ~30 .policy.violation</code> rules +		<code>digital.vasic.herald.policy.violation</code> (CloudEvents v1.0)

HRD	Binding	Trigger condition	Emitted CloudEvent
	.gate.failed/.recovered + .credential.leak + .spec.revision_drift + .catalogue.miss_handlers; / v1/compliance pull surface	Any of the 30 rules trips	
		OS-level signals: process exec'ing rm -rf, git push -- force, RSS over 60% threshold	
HRD-020	sherald: §9.1/9.2/9.3 + §12.1-3/.6 + §11.4.32/.36/.41/.71 — destructive-op detection hook, force-push interceptor, mem- budget watcher		.host.safety_breach / .repo.force_push

Sub-wave 3a §107 trap: A "PASS because we mocked the syscall" is forbidden. E31/E32/E33 use real `os/exec` against sandboxed targets, not mocks. The captured-evidence is: child exit code, sherald log line, DB row.

Sub-wave 3b — "middle" criticality (6 HRDs)

HRD	Flavor	Binding scope	§107 evidence probe
HRD-021	bherald	CI/test bindings — gate-result emitters per §1 + ~20 §11.4.x clauses	E34: bherald processes a real <code>audit_antibluff.sh</code> result file → emits one <code>.gate.recovered</code> per PASS, one <code>.gate.failed</code> per FAIL
HRD-022	rherald	Release bindings — §4 tag mirroring, §5 changelog, §11.4.38 installable-asset evidence, §11.4.40 full-suite retest	E35: rherald processes a real <code>git tag v0.x.y</code> event → emits <code>.release.tagged</code> with the tag SHA + asserts asset evidence captured. Tests against a sandboxed test repo
HRD-023	pherald	Project bindings — §2 commit+push, §3 submodule propagation, §11.4.11/.15/.21/.22/.34/.37/.42/.55/.66/.71/.74	E36: pherald processes a real commit on a sandboxed test repo → emits <code>.project.commit_landed</code> with multi-mirror push status
HRD-024	iherald	Escalation bindings — §11.4.10/.10.A credential-leak page-out, §11.4.21 + §11.4.66 operator-blocked escalation	E37: Synthetic credential-leak event trigger iherald → asserts page-out attempted on a configured channel (real Telegram if creds present, SKIP-with-reason otherwise)
HRD-026	(shared)	Constitution-bundle hash captureer — SHA-256 of rendered <code>Constitution.md</code> at evaluation time; persists on every emitted event	E38: Compute hash of <code><discovered>/Constitution.md</code> → compare against <code>constitution_state.bundle_hash</code> on a freshly-emitted event → assert exact match
HRD-027	(shared)		

HRD	Flavor	Binding scope	§107 evidence probe
		Mode-ladder runtime config — constitution_bindings table + admin REST endpoints to flip allow/warn/enforce per binding per tenant without redeploy	E39: Flip a binding via cherald /v1/ compliance/bindings/<id> PATCH from warn → enforce → trigger same condition again → assert the second event carries mode: "enforce" while the first carries mode: "warn"

Sub-wave 3b §107 trap: Each probe operates against a real instance — real bherald reading a real audit file, real rherald against a sandboxed git repo, real pherald against a sandboxed commit. No "we tested the function in isolation, assume it works in context" PASS.

Sub-wave 3c — "low" criticality (2 HRDs)

HRD	Flavor	Binding scope	§107 evidence probe
		Scheduled-audit bindings — §11.4.45 periodic	E40: Invoke <code>scherald audit --once</code> against a sandboxed Herald-shape repo → assert digest written to <code>docs/ Status_Summary.md + .audit.digest_published</code> event emitted
HRD-025	<code>scherald</code>	Status.md sweep + daily/ weekly/monthly compliance digest /v1/compliance pull surface — Gin handler returning	E41: GET /v1/compliance? rule=force_push_blocked&limit=10 against a cherald with 11 fixture rows → asserts 10 rows returned + next_page token + filter applied
HRD-028	<code>cherald</code>	constitution_state rows filtered by rule / subject / decision; paginated	

Wave 3 shared design constraints

1. **CloudEvents v1.0** — every emission uses the existing `commons_constitution/cloudevents.go` adapter from M1. No new event schema.
2. **In-process bus initially** — `commons_constitution.MemoryBus` is the default consumer for tests. A production `digital.vasic.eventbus` (Watermill) backend can be wired later without changing binding code (interface already exists).
3. `constitution_state` **schema** — already migrated in M2 (migration 000005). No new tables needed for Wave 3.
4. **Catalogue-Check per HRD** — every new binding HRD must declare `reuse|extend|no-match` <org/repo>@<sha> per Universal §11.4.74. Most are `extend` `digital.vasic.middleware|auth|recovery` for the safety bindings.
5. **Paired §1.1 mutation meta-test per binding.** Every binding HRD ships a paired test (`tests/test_binding_<id>_meta.sh`) that modifies the binding's emission contract to assert the gate catches the regression. 11 new paired meta-tests total.


Wave 3 dependency graph

Wave 2 done (6 flavors scaffolded)



3a HIGH (HRD-018 finalize → HRD-019 + HRD-020 in parallel)



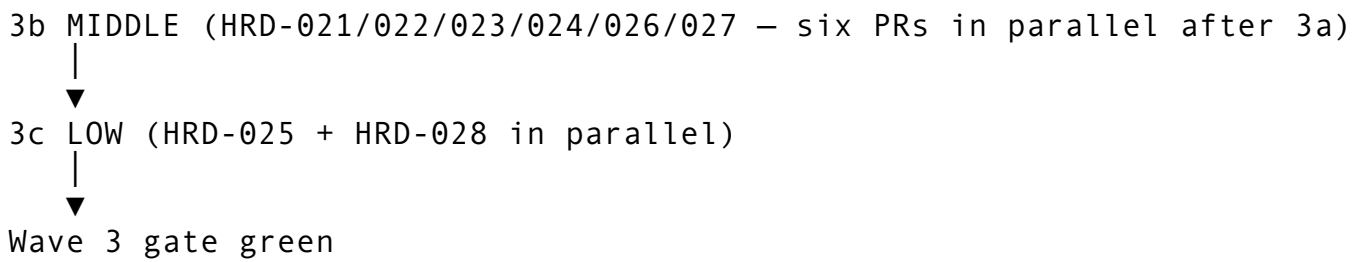

Wave 3 gate

1. `e2e_bluff_hunt.sh` reports **43 PASS / 0 FAIL**.
2. **All 11 HRDs migrated** Issues → Fixed (atomic per §11.4.19).
3. Every binding has a paired §1.1 mutation meta-test green.
4. `docs/specs/mvp/specification.V3.md` Revision bumped (per §11.4.73) reflecting binding-rollout completion.

Wave 4 — §43 Constitution-derived command catalogue (HRD-029..056)

28 HRDs implementing the 27-entry §43 catalogue (HRD-039 bundles §11.4.19 + §11.4.23 into one workable item). Grouped by criticality.

Sub-wave 4a — "high" criticality (9 commands)

HRD	Flavor	Command	Description	§107 evidence probe
HRD-033	sherald	destructive guard <op>	Wraps <code>rm, git reset --hard, git push --force</code> with prerequisite checks	E42: Invoke against a real <code>rm -rf <tmpdir></code> → assert hardlink backup created BEFORE the <code>rm</code> proceeds + <code>.host.destructive_op_logged</code> event emitted
HRD-036	cherald	creds scan <path>	gitleaks/trufflehog integration; emits <code>.credential.leak</code>	E43: Plant a fake AWS access key in fixture → invoke <code>scan</code> → assert finding reported + event emitted. Plant non-secret → assert clean (no false-positive bluff)
HRD-040	sherald	constitution pull	Wrap <code>fetch + rebase + validation gate</code> , emits <code>.bundle.updated</code>	E44: Invoke against sandboxed clone of the constitution → assert <code>fetch</code> happened (<code>git reflog</code>) + <code>gate</code> ran + new <code>bundle_hash</code> captured
HRD-043	pherald	install-upstreams	<code>install_upstreams</code> wrapper (extends constitution submodule's existing script per Catalogue-Check)	E45: Invoke against fresh sandboxed clone → assert origin has 4 push URLs configured (<code>github + gitlab + gitflic + gitverse</code>)
HRD-045	rherald	gate retest	Pre-tag full-suite retest gate	E46: Invoke against sandboxed Herald-shape repo → assert <code>e2e_bluff_hunt + audit + gate</code> all run + result captured + non-zero exit on simulated FAIL
HRD-046	sherald	force-push gate	Merge-first + per-session-auth enforcement	E47: Attempt <code>git push --force</code> against sandboxed repo without per-session auth token → assert blocked +

HRD	Flavor	Command	Description	§107 evidence probe
HRD-051	cherald	composite-gate	Canonical CM-DOCS-COMPOSITE-SYNC implementation	<code>.repo.force_push_blocked</code> emitted. With token → assert allowed E48: Invoke against fixture set with intentional doc-out-of-sync condition → assert FAIL + specific files reported. Fix → re-invoke → PASS E49: Wired as git pre-push hook on sandboxed repo → push triggers it → assert fetch happens before push proceeds + diverged history triggers rebase prompt E50: Spawn <code>mem-budget watch</code> as background process + spawn balloon → assert event emitted when RSS crosses 60% (already proven in Wave 3 HRD-020 — this E50 wraps the standalone daemon mode)
HRD-053	pherald	pre-push	Fetch + investigate + integrate hook	
HRD-056	sherald	mem-budget watch	Daemon-mode 60% threshold watcher emitting <code>.host.safety_breach</code>	

Sub-wave 4b — "middle" criticality (13 commands)

HRD	Flavor	Command	§107 evidence probe
HRD-029	pherald	commit-push	E51: Real commit on sandboxed repo → assert all 4 mirrors received
HRD-030	pherald	submodule propagate	E52: Modify owned submodule → assert propagation order + commits land
HRD-031	rherald	tag mirror	E53: Tag on parent → assert tag exists on every owned submodule
HRD-034	sherald	backup snapshot <path>	E54: Invoke → assert hardlinks created (<code>ls -li</code> shows same inode)
HRD-035	bherald	evidence capture <test_id>	E55: Invoke after a test run → assert captured-evidence file written
HRD-041	bherald	test-tier verify	E56: 8-tier matrix runs → all tiers reported PASS/SKIP/FAIL with evidence
HRD-044	pherald	fetch-guard	E57: Pre-edit hook intercepts non-fetched state → assert rebase prompted E58: Sweep + regen → assert docs/ <code>Status_Summary.md</code> and <code>.audit.digest_published</code> event
HRD-047	scherald	status digest	
HRD-049	pherald	reopen <HRD-NNN>	E59: Reopen a fixture closed HRD → assert Fixed→Issues migration + Reopens history line
HRD-050	cherald	readme sync	E60: Invoke → assert README doc-links regenerated + multi-format re-export ran
HRD-052	cherald	export	E61: Bulk export → assert <code>.md</code> / <code>.html</code> / <code>.pdf</code> / <code>.docx</code> siblings updated for fixtures
HRD-054	cherald	spec-version check	E62: Plant Revision-vs-edits drift → assert FAIL. Fix → assert PASS
HRD-055	cherald		

HRD	Flavor	Command	§107 evidence probe
		catalogue-check <pr>	E63: Scan a fixture PR → assert Catalogue-Check lines extracted + survey runner produces report

Sub-wave 4c — "low" criticality (6 commands)

HRD	Flavor	Command	§107 evidence probe
HRD-032	rherald	changelog generate	E64: Conventional Commits → docs / changelogs / <v> .md + multi-format export
HRD-037	cherald	docs sync	E65: Regen Issues_Summary / Fixed_Summary / Status_Summary from sources
HRD-038	cherald	script-docs check	E66: Assert sibling .md exists for every scripts / ** / * .sh (plant a missing one → FAIL)
HRD-039	cherald	fixed align + colorize	E67: Issues/Fixed format → table-shape valid; HTML colorizer produces colored spans
HRD-042	cherald	submanifest verify	E68: Submodule-Dependency-Manifest gate against fixtures
HRD-048	cherald	fixed-summary sync	E69: Standalone Fixed_Summary backfill — same evidence as E65 but isolated

Wave 4 shared design constraints

1. **Sandbox-first.** Every command's §107 probe runs against a sandboxed working tree (a temp directory the test owns), NEVER against the live Herald repo. Required to prevent test pollution and to make probes hermetic.
2. **Captured outputs in evidence / JSON.** Each probe writes its captured evidence (stdout, side-effect proof, DB rows, file hashes) to evidence / E_NN_<command> . json so an auditor can re-verify by inspecting the JSON without re-running the test.
3. **Shared commons / cmdfx /** (NEW, Catalogue-Check first). Pulls common patterns: sandbox setup/teardown, sandboxed-git-repo helper, hardlink-backup helper, evidence-capture helper. Each command's main . go stays small.
4. **Plant-then-detect pattern** for negative tests. For commands that detect drift (HRD-054 spec-version check, HRD-038 script-docs check, HRD-039 fixed align), every probe MUST include a "plant the broken state → expect FAIL" subtest AND a "fix the state → expect PASS" subtest. Half a test (only positive) is a §107 bluff.

Wave 4 dependency

Wave 3 done (§42 bindings firing on real events)



Wave 4.0 commons/cmdfx/ shared helpers (single PR, Catalogue-Check first)



4a HIGH (9 commands, can mostly run in parallel)



4b MIDDLE (13 commands, parallel across flavors)



4c LOW (6 commands, all cherald, mostly parallel)



Wave 4 gate green $\Rightarrow$ spec V3 r7 fully implemented

Wave 4 gate

1. `e2e_bluff_hunt.sh` reports **71 PASS / 0 FAIL**.
2. All 28 HRDs migrated Issues $\rightarrow$ Fixed atomically (§11.4.19).
3. Every command has a "plant + detect + fix + verify" probe pair (positive + negative captured evidence).
4. `evidence/E_NN_<command>.json` corpus committed (sanitized — no real secrets).
5. `docs/specs/mvp/specification.V3.md` Revision bumped — final spec V3 r-final declares all §43 entries implemented.

Cross-cutting design constraints

These apply to every wave and every HRD inside it.

C1. §11.4.74 Catalogue-Check is mandatory before writing new code

For every new module, helper, or external integration: search `vasic-digital/*` and `HelixDevelopment/*` for an existing capability. Declare `reuse|extend|no-match` `<org/repo>@<sha>` in the HRD's References cell. A TBD Catalogue-Check is acceptable for opening an HRD but MUST resolve before the HRD closes.

C2. Multi-mirror push parity on every wave-closing commit

Each wave's closing commit fans out to GitHub + GitLab + GitFlic + GitVerse via the existing `origin` push-fan-out (per HERALD_CONSTITUTION §103). Per-host pushes are forbidden unless rebuilding fan-out configuration.

C3. Spec revision bump on wave close (§11.4.73)

Spec V3's Revision field bumps on every wave-closing commit that closes spec-impacting HRDs. Minor wave-close = Revision++; the V3 $\rightarrow$ V4 jump is reserved for a true rewrite.

C4. Hardlinked backup before destructive ops (§9)

Any HRD whose implementation involves rewriting tracker docs (Issues $\rightarrow$ Fixed migration, Status.md regeneration) MUST take a hardlinked backup first.

C5. 60% RAM cap on heavy work (§12.6)

Wave 1 (live integrations) and Wave 4 (sandbox-heavy probes) are most at risk. Each new test that spawns child processes (E31/E32/E33/E50) MUST respect the §12.6 cap — Wave 3a's HRD-020 itself implements the watcher; until then, manual operator vigilance.

C6. End-to-end evidence stays in `scripts/e2e_bluff_hunt.sh`, not in `_test.go`

`go test` proves unit-level correctness. The §107 covenant lives in `e2e_bluff_hunt.sh` because that's what boots real services. New invariants land THERE first, then optionally a `_test.go` mirror for fast iteration. The bluff vector is "I added the test but only to `_test.go` and the `e2e` script never sees it."

C7. Honest-stub 501s with HRD pointers (not 200s or panics)

For every declared-but-unimplemented route/subcommand, return HTTP 501 (or CLI exit 1) with a body/stderr line referencing the HRD-NNN that will implement it. This is the §107-faithful "absence of feature" representation. A 200 with a "TODO" body or a panic-on-call are both bluffs.

C8. SKIP-with-reason for credential-dependent tests

Tests that require operator-supplied credentials (Telegram bot token, Claude Code session ID, real Postgres host) MUST `SKIP-with-reason` when credentials are absent — per §11.4.3. A `PASS-by-default` with no credential check is a critical bluff.

C9. Paired §1.1 mutation meta-test per new gate

Every new gate invariant added across Waves 1-4 must ship with a paired mutation meta-test that proves the gate catches the regression it claims to catch. Without the paired test, the gate is itself a §11.4 `PASS-bluff`.

Anti-bluff trap matrix (summary across all waves)

Trap class	Manifestation	Mitigation pattern
Mock-driven PASS	Test mocks the API/syscall and <code>PASS</code> s against the mock	Real <code>os/exec</code> against sandboxed targets; real driver against live container; real <code>claude</code> CLI not <code>echo</code>
Compile-only PASS	<code>go build</code> succeeds, binary never invoked	Every probe invokes the binary and asserts on its output/side-effect
Connection-only PASS	Driver returns OK on <code>Open()</code> , never reads/writes data	Each probe observes a state mutation (row insert, file write, child exit code)
Positive-only PASS	Test only covers the happy path	Plant-then-detect pattern; assert FAIL on broken state, then PASS on fixed state
Empty-field PASS	JSON response returns <code>{ }</code> or empty strings	Each probe asserts non-empty content of required fields
Catch-all 200 PASS	Serve returns 200 to every request	Probe asserts 404 for unknown routes, 501 with HRD pointer for declared-unimplemented
Gate-bluff PASS	Gate reports PASS but doesn't actually check what it claims	Paired §1.1 mutation meta-test required per gate
Skipped-silently PASS	Test SKIP without explanation, counted as PASS	SKIP-with-reason mandatory; SKIP counted explicitly, never folded into PASS

Trap class	Manifestation	Mitigation pattern
Sandbox-leakage PASS	Test mutates the live repo, "PASSes" but pollutes state	Sandbox helper enforces tmpdir paths; CI hook rejects post-test working-tree changes
Anchor-loss PASS	Constitutional anchor silently removed; gate still green	I8a/b/c invariants + tests/ test_i8_usability_meta.sh paired mutation

Roadmap totals

Metric	Start (2026-05-20)	End (spec V3 r7 fully implemented)	Δ
Open HRDs	45	0	−45
Closed HRDs	13	58 (45 + 13)	+45
e2e_bluff_hunt.sh invariants	15	~71	+56 (+373%)
Flavor binaries	1 (pherald)	7	+6
Inheritance gate invariants	15	15	0 (gate is meta)
Paired §1.1 mutation meta-tests	3	~14	+11 (per-binding meta)
Modules in go.work	7	13+	+6 flavors (+ commons/cli, commons/cmdfx)
Spec sections fully landed	~9	39	+30

Open questions / decisions deferred to per-wave designs

These are intentionally NOT resolved in the master roadmap. Each per-wave design owns its own answer.

- Wave 1:** Should River queue configuration default to in-process worker (simpler) or external pool (more realistic)? Defer to the HRD-010 sub-design.
- Wave 1:** How does HRD-011's webhook secret_token rotate? Defer to HRD-011 sub-design.
- Wave 2:** Does each flavor need its own Issues.md/Fixed.md, or share Herald's? Lean toward shared; defer to Wave 2 sub-design.
- Wave 3:** When does digital.vasic.eventbus (Watermill) replace MemoryBus in production? Likely Wave 3b or later; defer.
- Wave 4:** Is evidence/ committed to git or stored externally (e.g. S3-backed)? Sensitivity question — defer.
- Wave 4:** Are the 9 high-criticality 4a commands enough to declare a "minimum-viable safety release", or do we need 4b+4c too? Defer to operator preference at Wave 3-close checkpoint.

Next steps after approval

- Commit this design doc** with multi-mirror push (per §103).
- Invoke** superpowers:writing-plans to author the **Wave 1** implementation plan (HRD-010 → HRD-011/HRD-012 → HRD-008 close-out).

3. **Per-wave brainstorm.** Each subsequent wave (2, 3, 4) gets its own brainstorming + design doc + writing-plans cycle when its predecessor wave closes. Each sub-design references this master doc.
4. **§107 hygiene at every milestone.** Every wave close re-runs the full anti-bluff battery: inheritance gate, I6+I8 meta-tests, audit, codegraph validate, e2e_bluff_hunt. ALL green or the wave is not "done".