

Herald — MVP Specification V2

Field	Value
Revision	2
Created	2026-05-19
Last modified	2026-05-19
Status	active
Status summary	Self-review pass V2.1: added missing Go types + 4 missing table schemas; Go $\geq$ 1.22 + license pin; OTel SDK env vars; SIGTERM grace; data retention + GDPR; operator quickstart + DR; cost considerations
Issues	none
Issues summary	implementation work tracked separately under HRD- prefix once scaffolding starts
Fixed	V2-R-01..V2-R-12 (self-review findings) on top of V1 R-01..R-22
Fixed summary	self-review pass closed gaps between prose and formal definitions (types + tables + version pins); added operational guidance (quickstart, DR, retention, costs) absent from V2.0
Continuation	First-implementation cycle: spike commons + commons_messaging skeletons with pherald shim + Telegram adapter + Postgres+River queue; verify quickstart compose works end-to-end.

The **bi-directional event fan-out** system: Herald ingests events from heterogeneous sources and reliably fans them out to multiple notification channels so every alert reaches the right destination without confusion, and processes inbound replies/commands back from subscribers in a structured, security-validated way.

Table of contents

- [§1. Upstreams](#)
- [§2. Mission and scope](#)
 - [2.1 What Herald is](#)
 - [2.2 What Herald is NOT](#)
 - [2.3 Architecture diagram](#)
- [§3. Execution model](#)
 - [3.1 Single binary, two modes](#)
 - [3.2 Distribution + invocation surfaces](#)
 - [3.3 Configuration & credentials](#)
- [§4. Event model & wire format](#)
 - [4.1 CloudEvents v1.0 as canonical envelope](#)
 - [4.2 Herald event-type taxonomy](#)
 - [4.3 Idempotency keys](#)
- [§5. Architecture overview](#)
 - [5.1 Components](#)
 - [5.2 Internal routing \(Watermill\)](#)

- 5.3 Queue backend (Postgres + River default, NATS opt-in)
 - 5.4 Retries & dead-lettering
 - 5.5 Webhook ingestion
 - 5.6 Orchestration of long-running operations (Temporal, opt-in)
- §6. Channel addressing & routing
 - 6.1 URL-scheme channel addresses (Apprise-style)
 - 6.2 Tag-based fan-out
 - 6.3 HeraldBranding (per-flavor visual identity)
- §7. Subscriber model
 - 7.1 Identity & reconciliation (per-channel-id + operator alias)
 - 7.2 Preferences (Knock-style PreferenceSet)
 - 7.3 Quiet hours & throttling
 - 7.4 Locale (i18n)
- §8. Workable-item naming prefix
 - 8.1 Static prefix **HRD-**
 - 8.2 Derived 3-letter prefix algorithm
- §9. Technology stack
 - 9.1 Go (single-binary, multi-flavor)
 - 9.2 Postgres + Row-Level Security
 - 9.3 Redis (per-tenant ACL)
 - 9.4 Container ports (**24XXX**)
 - 9.5 **containers** submodule
- §10. Commons (architecture layers)
- §11. Channels — per-channel capabilities matrix
 - 11.0 Channel adapter contract (Go interface + value types)
 - 11.1 Telegram
 - 11.2 Max (max.ru)
 - 11.3 Slack
 - 11.4 Discord
 - 11.5 Microsoft Teams
 - 11.6 Lark / Feishu
 - 11.7 WhatsApp
 - 11.8 Viber
 - 11.9 Email (deep)
 - 11.10 ntfy / Gotify
 - 11.11 Generic outbound webhook
 - 11.12 Diary (Markdown + PDF + HTML)
 - 11.13 Feature matrix summary
- §12. Messaging flows
- §13. Templating & message composition
- §14. Localization (i18n)
- §15. Security model
 - 15.1 Transport-level (channel signature verification)
 - 15.2 Sender-level (allowlist + verified subscribers)
 - 15.3 Content-level (parsing & sanitization)
 - 15.4 Credential handling
 - 15.5 Webhook ingestion (defense-in-depth)
- §16. Multi-tenancy & isolation
 - 16.1 Data retention & privacy

- §17. Observability & SLOs
 - 17.1 OpenTelemetry pipeline
 - 17.2 Metrics catalogue
 - 17.3 Span model
 - 17.4 SLOs
 - 17.5 Health probes (livez / readyz / startupz)
 - 17.6 **doctor** CLI
- §18. Flavors (the implementations)
 - 18.1 Common flavor contract
 - 18.2 Project Herald (**pherald**)
 - 18.3 System Herald (**sherald**)
 - 18.4 Build Herald (**bherald**)
 - 18.5 Deploy Herald (**dherald**)
 - 18.6 Alert Herald (**aherald**)
 - 18.7 Schedule Herald (**scherald**)
 - 18.8 Incident Herald (**iherald**)
 - 18.9 Release Herald (**rherald**)
 - 18.10 Compliance Herald (**cherald**)
 - 18.11 Future flavors
- §19. Diary
- §20. Extensibility
- §21. Supply chain & release engineering
- §22. Constitution integration
- §23. Specification documents (change rule)
- §24. Documentation
- §25. Testing
- §26. Operations
 - 26.5 Operator quickstart (5-minute Docker Compose)
 - 26.6 Disaster recovery
- §27. Roadmap
 - 27.3 Cost considerations
- §28. Notes & open questions
- §29. Changelog (V1 → V2)
- §30. V2 self-review log

§1. Upstreams

All existing project upstreams:

- **GitHub** (main repository): `git@github.com:vasic-digital/Herald.git`
- **GitLab**: `git@gitlab.com:vasic-digital/herald.git`
- **GitFlic**: `git@gitflic.ru:vasic-digital/herald.git`
- **GitVerse**: `git@gitverse.ru:vasic-digital/Herald.git`

The local **origin** remote is a fan-out (one fetch URL + four push URLs). A single `git push origin <branch>` propagates to all four hosts (Helix Constitution §2.1 / Herald Constitution §103).

§2. Mission and scope

2.1 What Herald is

Herald is the **bi-directional event fan-out mechanism**. It receives input from one or more **sources** and dispatches the resulting content to one or more **destinations** (channels). Depending on the implementation (Flavor) of Herald, sources and destinations are heterogeneous: a single input type or many; a single output channel or many.

For example, the input may be the result of a CI pipeline execution (a build report, a test summary, a security-scan finding). Herald enriches, normalizes, routes, and dispatches that input to messaging channels (Telegram, Slack, Max, Email, Markdown diary, etc.) so that human and machine subscribers can be informed and can interact back.

The possibilities are not limited. The structure of the system **MUST** be **hierarchical**: shared abstractions live in the **commons** layers (closest to the root); flavor-specific implementations live in **flavors/<flavor>/**.


Note: We **MUST NOT** be obligated to follow this hierarchical structure rigidly when a parent project's specific custom flavor must exist privately or in a different location. Flexibility is mandatory and fully supported.


2.2 What Herald is NOT

To bound scope (§102 Herald Constitution — mission boundary):

- Herald is **not** a general-purpose chat application; it is an event-driven fan-out + inbound-reply processor.
- Herald is **not** a general-purpose monitoring/observability platform — it integrates *with* them via webhook ingestion (Prometheus Alertmanager, Grafana, Datadog, PagerDuty, OpsGenie) but does not replace them.
- Herald is **not** a transactional/marketing email service provider in itself — it integrates *with* ESPs (SendGrid, Resend, Postmark) as one of its delivery transports.
- Herald is **not** a workflow orchestration platform — Temporal/Argo/Step Functions remain the right tool for that; Herald can be triggered by them and can dispatch notifications about them.

2.3 Architecture diagram

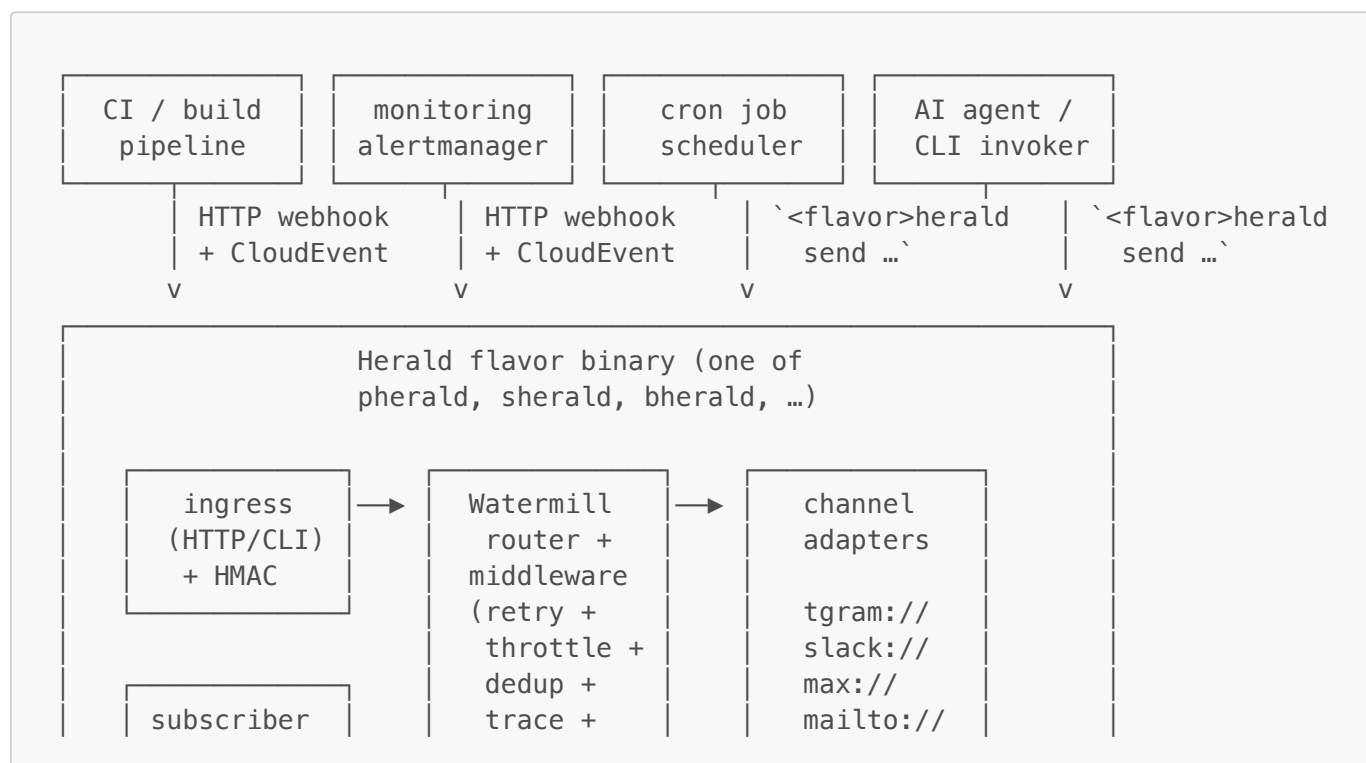

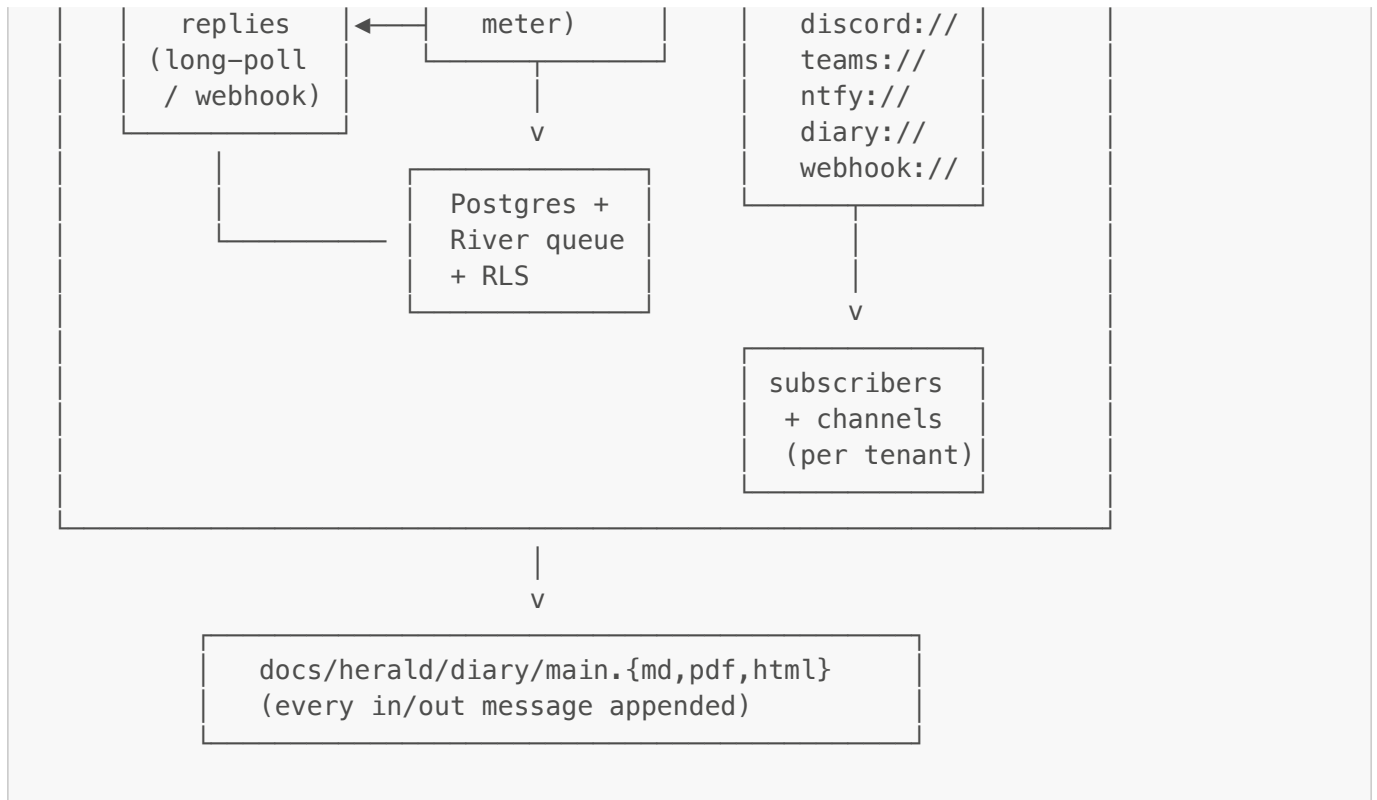

§3. Execution model

3.1 Single binary, two modes

Every Herald flavor is a **single statically-linked Go binary** with **Cobra-style subcommands** (per R-02 — cleanest fit, lowest deployment footprint, no duplicate auth/config plumbing). The same binary serves both runtime modes:

- **One-shot mode** — `<flavor>herald send ...`: connects, transmits a single event, awaits delivery acknowledgement with a configurable deadline, exits non-zero on failure. Designed for CI integration, cron jobs, AI-agent invocation, pipeline steps.
- **Daemon mode** — `<flavor>herald serve`: long-running listener; blocks on (a) the HTTP ingress for webhook events, (b) per-channel subscriber-reply loops (Telegram long-poll, Slack Socket Mode, Email IMAP, Discord gateway, etc.), (c) scheduled jobs from the River queue.

Both modes share the same configuration loader, channel adapters, storage layer, and observability stack — only the entry point and process lifecycle differ.

Graceful shutdown semantics. Both modes MUST:

1. Trap `SIGTERM` and `SIGINT`.
2. Stop accepting new ingress requests immediately (`/readyz` returns 503).
3. Drain in-flight work with a configurable grace period (default 30 s, env `HERALD_SHUTDOWN_GRACE`).
4. Refuse `Send()` calls that arrive after grace begins (returning `context.Canceled`).
5. Flush the OpenTelemetry exporter (`tracerProvider.Shutdown(ctx)` with its own 5 s sub-deadline).
6. `Close()` the Postgres pool and Redis client.
7. Exit with code `0` if drain completed cleanly, `1` if grace expired with work still in flight.

A second `SIGTERM` within the grace window forces immediate exit. `SIGKILL` is uncatchable by definition; operators MUST size the grace period for their workload's tail latency.

Additional subcommands:

- `<flavor>herald doctor` — verifies environment health (Postgres ping, Redis ping, channel-credential validity, DKIM/SPF/DMARC records, port availability).
- `<flavor>herald migrate` — applies database migrations (idempotent).
- `<flavor>herald deadletter [list | replay <id> | purge]` — operate on the dead-letter table.
- `<flavor>herald subscriber [list | add | verify <token>]` — manage subscribers.
- `<flavor>herald digest ...` — generate scheduled summaries (digests, weekly reports).

3.2 Distribution + invocation surfaces

Herald applications are CLI binaries primarily designed for:

- **CI integration** — invoked from GitHub Actions / GitLab CI / Jenkins / CircleCI / Drone steps.
- **Pipelines** — invoked from build/deploy scripts.
- **AI CLI agents** — invoked by Claude Code, OpenCode, Cursor, Aider, etc., as a structured way to surface progress and accept human feedback.
- **cron** — scheduled checks and digests.
- **Webhook recipients** — running in daemon mode behind a reverse proxy.

Some Herald application names (illustrative — flavors are fully enumerated in §18):

- `pherald` for **Project Herald** (development-lifecycle events).
- `sherald` for **System Herald** (OS/host/service events).
- `bherald` for **Build Herald** (CI/CD build events).
- `dherald` for **Deploy Herald** (release/deploy events).
- `aherald` for **Alert Herald** (monitoring alert routing).
- `scherald` for **Schedule Herald** (cron/scheduled-task notifications).
- `iherald` for **Incident Herald** (incident management).
- `rherald` for **Release Herald** (release lifecycle).
- `cherald` for **Compliance Herald** (audit/compliance events).

3.3 Configuration & credentials

Configuration precedence (12-factor aligned, per R-04):

1. Explicit CLI flag (highest precedence).
2. Shell-exported environment variable (from `.bashrc` / `.zshrc` / k8s env / Docker `-e`).
3. Value from `.env` (fallback only — does NOT override exported shell vars).
4. Compiled default (lowest).

`.env` MUST BE git-ignored. `.env.example` is the documented template, committed. An opt-in `--env-file-override` flag maps to `godotenv.Overload()` for the rare case operators want the file to win (one-off rescues, debugging).

Configuration file layout (`config.toml`, optional, loaded after `.env`):

```
[herald]
flavor      = "pherald"
tenant_id   = "00000000-0000-0000-0000-000000000001" # default if multi-
tenancy disabled
locale      = "en-US"
```

```

diary_root    = ""                # blank → discover via
parent-walk
admin_port    = 24090              # /livez, /readyz,
/metrics, pprof
http_port     = 24091              # webhook ingress +
reply webhooks

[postgres]
dsn           = "${HERALD_POSTGRES_DSN}"        # env interpolation
max_conns     = 20
rls_enforced  = true

[redis]
addr          = "${HERALD_REDIS_ADDR}"
acl_user      = "${HERALD_REDIS_USER}"
acl_password  = "${HERALD_REDIS_PASSWORD}"

[channels]
# Apprise-style URLs (see §6.1)
default = [
    "tgram://${TELEGRAM_BOT_TOKEN}/${TELEGRAM_CHAT_ID}?tags=oncall,prod",
    "slack://${SLACK_TOKEN}/${SLACK_CHANNEL}?tags=oncall",
    "mailto://herald@example.com?tags=audit",
    "diary://?tags=*" , # always log to diary
]

[observability]
otlp_endpoint = "http://otel-collector:4317"
log_level     = "info"

```

§4. Event model & wire format

4.1 CloudEvents v1.0 as canonical envelope

Herald speaks **CloudEvents v1.0** (CNCF graduated, Jan 2024) natively on every external boundary — ingress, internal transport, audit/diary record. Inside the binary, events are passed as `cloudevents.Event` values from github.com/cloudevents/sdk-go/v2.

Required CloudEvents attributes for every Herald event:

Attribute	Source	Example
<code>specversion</code>	constant <code>"1.0"</code>	<code>"1.0"</code>
<code>id</code>	UUIDv7 (natural ordering by time)	<code>"01931a7c-3f4e-7000-9abc-def012345678"</code>
<code>source</code>	URI of the emitter	<code>"https://ci.example.com/pipelines/4231"</code>
<code>type</code>	reverse-DNS event type	<code>"digital.vasic.herald.ci.failed"</code>
<code>time</code>	RFC 3339 timestamp	<code>"2026-05-19T17:30:00Z"</code>
<code>datacontenttype</code>	media type of <code>data</code>	<code>"application/json"</code>

Attribute	Source	Example
subject	target hint (channel address, tag, route key)	"tag:oncall,prod" or "channel:slack-incidents"

Two wire modes accepted on HTTP ingress:

- **Structured mode** — single JSON object: `{"specversion":"1.0","id":"","type":"","data":{"..."}}`.
- **Binary mode** — HTTP headers carry attributes (`ce-id`, `ce-type`, `ce-source`, ...), body is the raw `data` payload.

Herald-specific extension attributes:

- `heraldtenant` — tenant UUID (overrides default).
- `heraldidempotencykey` — explicit dedup key (overrides `id` if present).
- `heraldpriority` — `low` / `normal` / `high` / `urgent` (ntfy-style 1–5 mapping).

4.2 Herald event-type taxonomy

CloudEvents `type` is a reverse-DNS string. Herald's namespace is `digital.vasic.herald.*`.

Subtree	Used by	Examples
<code>digital.vasic.herald.ci.*</code>	bherald	<code>.build.queued</code> , <code>.build.started</code> , <code>.build.succeeded</code> , <code>.build.failed</code> , <code>.build.cancelled</code> , <code>.test.failed</code> , <code>.security_scan.finding</code>
<code>digital.vasic.herald.project.*</code>	pherald	<code>.task.opened</code> , <code>.task.assigned</code> , <code>.task.closed</code> , <code>.review.requested</code> , <code>.review.approved</code> , <code>.standup.due</code>
<code>digital.vasic.herald.system.*</code>	sherald	<code>.host.cpu_high</code> , <code>.host.disk_full</code> , <code>.service.restarted</code> , <code>.service.crashed</code> , <code>.security.login_anomaly</code>
<code>digital.vasic.herald.deploy.*</code>	dherald	<code>.deploy.started</code> , <code>.deploy.succeeded</code> , <code>.deploy.failed</code> , <code>.deploy.rolled_back</code> , <code>.canary.promoted</code>
<code>digital.vasic.herald.alert.*</code>	aherald	<code>.alert.firing</code> , <code>.alert.resolved</code> , <code>.alert.silenced</code>
<code>digital.vasic.herald.schedule.*</code>	scherald	<code>.job.started</code> , <code>.job.succeeded</code> , <code>.job.failed</code> , <code>.digest.daily</code> , <code>.digest.weekly</code>
<code>digital.vasic.herald.incident.*</code>	iherald	<code>.incident.opened</code> , <code>.incident.escalated</code> , <code>.incident.resolved</code> , <code>.postmortem.due</code>
<code>digital.vasic.herald.release.*</code>	rherald	<code>.release.tagged</code> , <code>.release.published</code> , <code>.changelog.generated</code> , <code>.dependency.update.available</code>

Subtree	Used by	Examples
<code>digital.vasic.herald.compliance.*</code>	cherald	<code>.audit.access</code> , <code>.policy.violation</code> , <code>.cert.expiring</code> , <code>.license.expiring</code>
<code>digital.vasic.herald.reply.*</code>	all	<code>.reply.received</code> , <code>.command.parsed</code> , <code>.command.executed</code> , <code>.command.rejected</code>
<code>digital.vasic.herald.delivery.*</code>	internal	<code>.delivery.accepted</code> , <code>.delivery.routed</code> , <code>.delivery.delivered</code> , <code>.delivery.read</code> , <code>.delivery.failed</code> , <code>.delivery.dead_lettered</code>

4.3 Idempotency keys

Per R-05 + research Topic 4: **at-least-once delivery with deterministic dedup**.

- Every ingress accepts an `Herald-Idempotency-Key` HTTP header (or `heraldidempotencykey` CE extension, or CLI flag `--idempotency-key`).
- If absent, Herald falls back to the CloudEvents `id`.
- Dedup is enforced via a Postgres `idempotency_keys` table:

```
CREATE TABLE idempotency_keys (
  tenant_id      UUID NOT NULL,
  idempotency_key TEXT NOT NULL,
  request_hash   BYTEA NOT NULL,          -- SHA-256 of canonical request
  body
  response_id     UUID,                    -- pointer to first response
  locked_at       TIMESTAMPTZ NOT NULL DEFAULT now(),
  expires_at      TIMESTAMPTZ NOT NULL DEFAULT (now() + interval '24 hours'),
  PRIMARY KEY (tenant_id, idempotency_key)
) WITH (FILLFACTOR = 80);

ALTER TABLE idempotency_keys ENABLE ROW LEVEL SECURITY;
ALTER TABLE idempotency_keys FORCE ROW LEVEL SECURITY;
CREATE POLICY idem_isolation ON idempotency_keys
  USING (tenant_id = current_setting('app.tenant_id')::uuid);
```

- Dedup `INSERT ... ON CONFLICT DO NOTHING` is in the **same transaction** as the channel-fanout enqueue. Stripe-pattern (cite: Brandur's writeup).
- Redis is used as a **fast-path negative cache** (`SET NX EX <ttl>`) in front of Postgres, never as sole authority.
- TTL: 24h for synchronous API replies (matches Stripe); 7d for delivery-side dedup (matches reply-queue retention).
- Replay (same key, same body) returns the cached response; replay (same key, *different* body) returns HTTP 409 Conflict.

§5. Architecture overview

5.1 Components

A Herald flavor binary is composed of these in-process components:

1. **Ingress layer** — HTTP server (CloudEvents binding) + CLI command parser. Verifies signatures (§15.5), enforces idempotency (§4.3), and emits a Watermill message.
2. **Watermill router** — central message bus. Channel adapters, evaluators, and middleware (retry, dedup, throttle, trace, meter) are registered as **HandlerFuncs** on a single router.
3. **Channel adapters** — one per supported channel; implement the **Channel** interface (§10).
4. **Subscriber-reply consumers** — per-channel inbound loops (Telegram **getUpdates** long-poll or webhook, Slack Socket Mode / Events API webhook, Email IMAP, Discord gateway, etc.).
5. **Storage layer** — Postgres (durable state, RLS-isolated per tenant) + Redis (rate-limit token buckets, fast-path dedup, transient state).
6. **Queue backend** — Postgres + River as default; NATS JetStream as opt-in for multi-replica fan-out.
7. **Observability layer** — OpenTelemetry SDK (traces + metrics + logs), OTLP exporter, **/metrics** for Prometheus scrape, **/livez** / **/readyz** / **/startupz** probes.

5.2 Internal routing (Watermill)

Per research Topic 2: **Watermill** (github.com/ThreeDotsLabs/watermill, ~8.5k stars, v1.4+) is the routing kernel inside **commons_messaging**.

- Each channel adapter (Telegram, Slack, ...) is registered on a single **message.Router** as a **HandlerFunc**.
- Cross-cutting concerns (correlation ID, retry, poison-queue, metrics, throttling, tracing) are implemented as **Watermill middlewares** rather than per-channel code — eliminating ~60% of the plumbing the team would otherwise write.
- Pubsub backend is **pluggable**: Postgres adapter (default), NATS adapter (opt-in), in-memory adapter (tests).

5.3 Queue backend (Postgres + River default, NATS opt-in)

Per research Topic 3:

- **Default: Postgres + riverqueue/river** — transactional enqueue (jobs only run if the originating tx commits), built-in retries with backoff, uniqueness constraints. Zero new infrastructure since Postgres is already required.
- **LISTEN/NOTIFY** wakes consumers sub-millisecond between polls.
- **Opt-in alternative: NATS JetStream** — for deployments needing fan-out across multiple Herald instances, edge sites, or sub-millisecond cross-host latency (~200k–400k msg/s with persistence, built-in KV/Object stores).
- **Kafka is intentionally NOT the default** — overkill for Herald's alert-volume profile (dozens to low-thousands of events/sec per tenant). Document as Watermill-pluggable for operators who already run Kafka.

5.4 Retries & dead-lettering

Per research Topic 5 and AWS arch blog "Exponential Backoff and Jitter":

- **Backoff curve: decorrelated jitter** — **sleep = min(cap, random_between(base, prev_sleep * 3))** with **base = 1s, cap = 5min**.
- **Max attempts**: 8 per message for transient errors. Empirically: ~30min worst-case retry window, matching what humans expect of an alert system.

- **No retries on 4xx** from upstream channels — **400 / 401 / 403 / 404** from Telegram/Slack/etc. are permanent.
- Implementation: Watermill **Retry** middleware in front of channel handlers.
- **Dead letter sink: Postgres **dead_letters** table** (NOT a Redis list — operators need to query, triage, replay):

```
CREATE TABLE dead_letters (
  id                UUID PRIMARY KEY DEFAULT uuidv7(),
  tenant_id         UUID NOT NULL,
  original_event_id UUID NOT NULL,
  channel           TEXT NOT NULL,
  attempt_count     INTEGER NOT NULL,
  last_error        TEXT,
  payload_jsonb     JSONB NOT NULL,
  created_at        TIMESTAMPTZ NOT NULL DEFAULT now(),
  triaged_at        TIMESTAMPTZ,
  triage_status     TEXT -- new | acknowledged | replayed | discarded
);
ALTER TABLE dead_letters ENABLE ROW LEVEL SECURITY;
ALTER TABLE dead_letters FORCE ROW LEVEL SECURITY;
CREATE POLICY dl_isolation ON dead_letters
  USING (tenant_id = current_setting('app.tenant_id')::uuid);
```

- Every entry into **dead_letters** also emits a **digital.vasic.herald.delivery.dead_lettered** CloudEvent — Herald observes its own failures.
- CLI: **<flavor>herald deadletter list | replay <id> | purge.**

5.5 Webhook ingestion

Per R-16 + research Topic 8. Every webhook source registers a per-source signing secret (rotatable) in the **webhook_sources** table.

The ingress handler enforces, in order:

1. **HMAC-SHA256 signature verification** with **crypto/hmac.Equal** (constant-time) against the source-configured header:
 - GitHub: **X-Hub-Signature-256**
 - Stripe: **Stripe-Signature** (sign **timestamp.payload**)
 - Generic CloudEvents source: **Webhook-Signature**
2. **Timestamp window** ≤ 5 min vs. server clock (replay protection).
3. **Delivery-ID dedup** via the idempotency table (GitHub's **X-GitHub-Delivery**, Stripe's event **id**).
4. **Optional IP allowlist** as L4 defense-in-depth.

Verified payloads are normalized into a CloudEvent and handed to the Watermill router.

webhook_sources schema:

```
CREATE TABLE webhook_sources (
  id                UUID PRIMARY KEY DEFAULT uuidv7(),
  tenant_id         UUID NOT NULL,
  name              TEXT NOT NULL,
  -- "github-push-prod",
  "stripe-webhook", ...
```

```

signature_kind TEXT NOT NULL, -- 'hmac-sha256' | 'stripe'
| 'telegram-secret-token' | 'dkim' | 'none'
signature_header TEXT NOT NULL, -- 'X-Hub-Signature-256',
'Stripe-Signature', ...
secret_encrypted BYTEA NOT NULL, -- pgcrypto pgp_sym_encrypt
secret_rotated_at TIMESTAMPTZ NOT NULL DEFAULT now(),
ip_allowlist INET[], -- optional L4 defense-in-
depth
replay_window_s INTEGER NOT NULL DEFAULT 300, -- 5 min
enabled BOOLEAN NOT NULL DEFAULT true,
created_at TIMESTAMPTZ NOT NULL DEFAULT now(),
UNIQUE (tenant_id, name)
);
CREATE INDEX webhook_sources_tenant_idx ON webhook_sources (tenant_id) WHERE
enabled = true;
ALTER TABLE webhook_sources ENABLE ROW LEVEL SECURITY;
ALTER TABLE webhook_sources FORCE ROW LEVEL SECURITY;
CREATE POLICY ws_isolation ON webhook_sources
USING (tenant_id = current_setting('app.tenant_id')::uuid)
WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);

```

Secrets are rotatable: `<flavor>herald webhook rotate <name>` generates a new secret, returns it once, and starts accepting the new signature while continuing to accept the old one for `replay_window_s × 4` (default 20 min) to drain in-flight deliveries.

Dev / behind-NAT support: `sme.io` and `gh webhook forward` are documented as supported proxy paths.

5.6 Orchestration of long-running operations (Temporal, opt-in)

Per research Topic 7:

- **Default routing** — Watermill handlers + River jobs cover the vast majority of fan-out cases.
- **Temporal sidecar (opt-in)** — required for operations that genuinely need durable state across hours/days, deterministic replay, and human-friendly timeline UIs:
 - **Incident escalation chains** (page A → wait 5min → escalate to B → wait 10min → page C). Used by `iherald`.
 - **Scheduled digest builders** with human-in-the-loop acknowledgment.
 - **Multi-channel orchestrated rollouts** (used by `dherald` / `rherald`).
- Temporal is explicitly **not** the default — its operational footprint (separate cluster, gRPC, server upgrades) violates Herald's "lightweight CLI" ethos.

§6. Channel addressing & routing

6.1 URL-scheme channel addresses (Apprise-style)

Per research Topic 1 (notification-platforms): adopt Apprise's URL-scheme channel model. Each destination is a single string that fully captures credentials + endpoint + targeting:

```

tgram://<bot_token>/<chat_id>?tags=oncall,prod
slack://<token_a>/<token_b>/<token_c>/<channel>?tags=oncall
max://<bot_token>/<chat_id>?tags=ru,prod
mailto://<user>:<pass>@<smtp_host>:<port>?tags=audit&from=herald@example.com

```

```

discord://<webhook_id>/<webhook_token>?tags=community
teams://<incoming_webhook_path>?tags=corp
lark://<app_id>:<app_secret>@<chat_id>?tags=apac
ntfy://<server>/<topic>?priority=high&tags=mobile
gotify://<token>@<server>?priority=5
webhook://<endpoint_url>?secret=<hmac_secret>&format=cloudevent
diary://?tags=*&format=markdown

```

This URL form maps 1:1 to a row in Postgres `channel_addresses` and lets credentials be `.env`-interpolated at config-load time so the URLs themselves stay git-safe in committed `config.toml`.

6.2 Tag-based fan-out

Per Apprise's tag model: every channel address is annotated with one or more **tags**. Senders address tags, not specific channels:

- **OR-union by default:** `--tags=oncall,prod` matches any channel tagged `oncall` OR `prod`.
- **AND-intersection** when explicitly comma-joined inside a single argument: `--tags=oncall+prod` matches channels tagged `oncall` AND `prod`.
- Tag `*` is the wildcard (matches every channel).
- Tag `!oncall` means "exclude oncall" (intersect with negation).

Tag→channel mapping lives in the `channel_addresses` table; senders never reference channel addresses directly. This decouples sender code from topology — the same event can fan out to a different mix of channels per environment without code change.

channel_addresses schema:

```

CREATE TABLE channel_addresses (
    id                UUID PRIMARY KEY DEFAULT uuidv7(),
    tenant_id         UUID NOT NULL,
    channel           TEXT NOT NULL,          -- "tgram", "slack",
    "mailto", ...
    address_url       TEXT NOT NULL,          --
    "tgram://${BOT_TOKEN}/${CHAT_ID}?..." (env-interpolated at load time)
    tags              TEXT[] NOT NULL DEFAULT '{}', -- ['oncall','prod']
    priority_floor    INTEGER NOT NULL DEFAULT 1,   -- ntfy 1..5; messages
    below floor are dropped for this address
    enabled           BOOLEAN NOT NULL DEFAULT true,
    last_health_at    TIMESTAMPTZ,
    last_health_ok    BOOLEAN,
    last_health_err   TEXT,
    created_at        TIMESTAMPTZ NOT NULL DEFAULT now(),
    UNIQUE (tenant_id, address_url)
);
CREATE INDEX ch_addr_tags_idx ON channel_addresses USING gin (tags) WHERE
enabled = true;
CREATE INDEX ch_addr_tenant_idx ON channel_addresses (tenant_id, channel) WHERE
enabled = true;
ALTER TABLE channel_addresses ENABLE ROW LEVEL SECURITY;
ALTER TABLE channel_addresses FORCE ROW LEVEL SECURITY;
CREATE POLICY ca_isolation ON channel_addresses

```

```
USING (tenant_id = current_setting('app.tenant_id')::uuid)
WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);
```

The `address_url` MAY contain `${ENV_VAR}` placeholders that are interpolated at config load time (so secrets stay out of the row body — only the placeholder is persisted; secrets remain in `.env` / shell env).

6.3 HeraldBranding (per-flavor visual identity)

Per Apprise's `AppriseAsset`: a `HeraldBranding` struct injected per-flavor:

```
type Branding struct {
    AppName      string // "Project Herald"
    BinaryName    string // "pherald"
    IconURL       string // for rich embeds
    AccentColorHex string // "#2C7BE5"
    DefaultFooter string // "Sent by pherald 1.0 · github.com/vasic-
digital/Herald"
}
```

Channel adapters consult `Branding` when rendering rich messages (Slack Block Kit headers, Discord embed `author`, Adaptive Card `Container` accent color, Email From-name).

§7. Subscriber model

7.1 Identity & reconciliation (per-channel-id + operator alias)

Per R-07 + research Topic 3 (notification-platforms): the **matterbridge model** is the default — per-channel-id is the source of truth. A subscriber on Telegram is identified by `(channel:"tgram", chat_id:"42")`; the same human on Slack is `(channel:"slack", user_id:"U0123")`; these are **separate entries** unless explicitly linked.

Schema:

```
CREATE TABLE subscribers (
    id          UUID PRIMARY KEY DEFAULT uuidv7(),
    tenant_id    UUID NOT NULL,
    handle       TEXT,                                -- operator-assigned, e.g.
    "alice"
    display_name TEXT,
    locale       TEXT DEFAULT 'en-US',
    timezone     TEXT DEFAULT 'UTC',
    roles        TEXT[] NOT NULL DEFAULT '{}',        -- e.g.
    ['operator', 'reader', 'ic']
    metadata     JSONB NOT NULL DEFAULT '{} '::jsonb,
    created_at   TIMESTAMPTZ NOT NULL DEFAULT now(),
    UNIQUE (tenant_id, handle)                        -- handle is unique within a
tenant
);
CREATE INDEX subscribers_tenant_idx ON subscribers (tenant_id);
ALTER TABLE subscribers ENABLE ROW LEVEL SECURITY;
ALTER TABLE subscribers FORCE ROW LEVEL SECURITY;
```

```

CREATE POLICY sub_isolation ON subscribers
  USING (tenant_id = current_setting('app.tenant_id')::uuid)
  WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);

CREATE TABLE subscriber_aliases (
  subscriber_id  UUID NOT NULL REFERENCES subscribers(id) ON DELETE CASCADE,
  channel        TEXT NOT NULL,
  channel_user_id TEXT NOT NULL,
  verified_at    TIMESTAMPTZ,           -- self-claim verification
  time
  last_seen_at  TIMESTAMPTZ,
  UNIQUE (channel, channel_user_id)
);
CREATE INDEX subscriber_aliases_sub_idx ON subscriber_aliases (subscriber_id);

```

Linking flows:

- **Operator-mapped** (default): operator runs `sql CREATE TABLE subscribers (id UUID PRIMARY KEY DEFAULT uuidv7(), tenant_id UUID NOT NULL, handle TEXT, -- operator-assigned, e.g. "alice" display_name TEXT, locale TEXT DEFAULT 'en-US', timezone TEXT DEFAULT 'UTC', roles TEXT[] NOT NULL DEFAULT '{}', -- e.g. ['operator','reader','ic'] metadata JSONB NOT NULL DEFAULT '{}':jsonb, created_at TIMESTAMPTZ NOT NULL DEFAULT now(), UNIQUE (tenant_id, handle) -- handle is unique within a tenant); CREATE INDEX subscribers_tenant_idx ON subscribers (tenant_id); ALTER TABLE subscribers ENABLE ROW LEVEL SECURITY; ALTER TABLE subscribers FORCE ROW LEVEL SECURITY; CREATE POLICY sub_isolation ON subscribers USING (tenant_id = current_setting('app.tenant_id')::uuid) WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);`

`CREATE TABLE subscriber_aliases (subscriber_id UUID NOT NULL REFERENCES subscribers(id) ON DELETE CASCADE, channel TEXT NOT NULL, channel_user_id TEXT NOT NULL, verified_at TIMESTAMPTZ, -- self-claim verification time last_seen_at TIMESTAMPTZ, UNIQUE (channel, channel_user_id)); CREATE INDEX subscriber_aliases_sub_idx ON subscriber_aliases (subscriber_id);`

****Linking flows:****

- ****Operator-mapped**** (default): operator runs ``pherald subscriber link --handle alice --tgram 42 --slack U0123``.
- ****Self-claim**** (opt-in per tenant): subscriber DMs a one-time token to the bot on each channel; the bot calls ``pherald subscriber verify <token>`` to record the alias.
- ****Never inferred**** - Herald does not guess identity across channels.

7.2 Preferences (Knock-style PreferenceSet)

Per research Topic 2 (notification-platforms): a Knock-inspired ``PreferenceSet`` JSON per subscriber:

```

```jsonc
{
 "categories": {
 "incidents": { "channels": ["slack","tgram","email"], "muted": false },
 "deploys": { "channels": ["slack"], "muted": false },
 "daily_digest": { "channels": ["email"], "muted": false }
 }
}

```



```

},
"workflows": {
 "digital.vasic.herald.alert.firing": { "muted": false, "channels":
["tgram","slack"] },
 "digital.vasic.herald.alert.resolved": { "muted": true }
},
"quiet_hours": { "tz": "Europe/Belgrade", "start": "22:00", "end": "07:00",
"exempt_categories": ["incidents"] },
"channel_data": {
 "tgram": { "chat_id": "42", "thread_id": null },
 "slack": { "user_id": "U0123", "im_channel": "D098" }
}
}

```

- The router consults ````jsonc { "categories": { "incidents": { "channels": ["slack","tgram","email"], "muted": false }, "deploys": { "channels": ["slack"], "muted": false }, "daily_digest": { "channels": ["email"], "muted": false } }, "workflows": { "digital.vasic.herald.alert.firing": { "muted": false, "channels": ["tgram","slack"] }, "digital.vasic.herald.alert.resolved": { "muted": true } }, "quiet_hours": { "tz": "Europe/Belgrade", "start": "22:00", "end": "07:00", "exempt_categories": ["incidents"] }, "channel_data": { "tgram": { "chat_id": "42", "thread_id": null }, "slack": { "user_id": "U0123", "im_channel": "D098" } } }`

– The router consults ``PreferenceSet`` before dispatching: if ``muted`` for the workflow/category, drop (and log to diary as "filtered"); otherwise restrict to listed channels and respect quiet hours.

– ``channel_data`` carries provider-specific routing keys that don't fit the generic alias model (Slack `im_channel` for DMs, Telegram `thread_id` for forum-topic posts).

### ### 7.3 Quiet hours & throttling

– **Quiet hours** – TZ-aware window per subscriber; exempt categories override.

– **Throttling** – per-`(tenant, subscriber, category)`` token bucket in Redis (``herald:t:<id>:rl:<sub>:<cat>`` with ``INCR``+``EXPIRE``); default cap configurable per tenant.

– **Batching** – per category, optional ``batch_window`` (e.g. 5min); events within the window collapse into a single digest message. Implementation: River job scheduled ``batch_window`` after the first event arrives.

### ### 7.4 Locale (i18n)

Per research Topic 6 (notification-platforms): **``nicksnyder/go-i18n` v2`** with CLDR plural rules.

– One ``Bundle`` loaded at process start from ``commons_messaging/locales/*.toml``.

– One ``Localizer`` per outgoing message, constructed from the subscriber's stored ``locale`` field (BCP-47 tag).

– Per-channel templates can override (emoji-heavy Telegram template vs sober email template, both for the same locale).

– Initial locales for V2: ``en-US``, ``sr-Latn-RS``, ``ru-RU``. Additional locales as community contributes them.

---



## ## §8. Workable-item naming prefix

### ### 8.1 Static prefix `HRD-`

For all opened workable items for the Herald project (Issues, Issues\_Summary, Fixed, Fixed\_Summary, Status, Status\_Summary, etc.) use the prefix `HRD`. Examples: `HRD-001`, `HRD-002`. Strict zero-padded sequence within each docset.

### ### 8.2 Derived 3-letter prefix algorithm

Per R-17 – when a consuming project does NOT define its own workable-item prefix, Herald derives a deterministic 3-letter prefix from the project name. Implementation lives in `commons/prefix`.

**\*\*Algorithm (~80 LOC):\*\***

1. **\*\*Normalize\*\***: Unicode NFKD → strip diacritics → retain `[A-Za-z0-9]` → split on CamelCase boundaries and `[ \_ / ]` into tokens.
2. **\*\*Rule A (≥3 tokens)\*\***: first letter of each of the first three tokens. `HeraldRouterCore` → `HRC`.
3. **\*\*Rule B (2 tokens)\*\***: first letter of token 1; first letter of token 2; first internal consonant of token 2. `HeraldRouter` → `HRT`; `HeraldRunner` → `HRN`.
4. **\*\*Rule C (1 token)\*\***: first letter, first internal consonant, last consonant. `Herald` → `HRD`.
5. Uppercase.
6. **\*\*Collision resolution\*\***: maintain committed `.herald/prefix.lock` (TOML `name` → `prefix`). On collision with a *\*different\** project, compute `fnv1a32(name) mod 26` and replace the third letter with `'A' + (h mod 26)`; iterate up to 26 times, then fall back to numeric suffix `HR0`...`HR9`.
7. **\*\*Persistence\*\***: the lock file is committed so the mapping is stable across machines and regenerations.

No mature Go library exists for 3-letter abbreviation generation (the only Go prior art `Defacto2/releaser/initialism` is a curated lookup table, not a generator); Herald ships its own.

---

## ## §9. Technology stack

### ### 9.1 Go (single-binary, multi-flavor)

Herald and all flavors MUST BE written in **\*\*Go\*\***.

**\*\*Toolchain pin:\*\*** Go **\*\*≥ 1.22\*\*** is mandatory (stdlib `log/slog`, OTel `slog` bridge, `slices` + `maps` generics). The repo's `go.mod` files declare `go 1.22` and set `toolchain go1.22.x` to the current patch release. Bumps to ≥ 1.23 are allowed when CI proves no regression; the `commons` module is the authoritative version (every flavor MUST follow).

**\*\*License:\*\*** Herald is published under the terms in [`LICENSE`] (../.../LICENSE) (parent project's chosen license). All `go.mod` files MUST declare the same license via a top-level comment, and every `LICENSE` file in vendored submodules MUST remain present. License compliance is checked by the planned `cherald` flavor (per §18.10) on every CI run when configured.

Layout (per R-18, research Topic 5):

Herald/ ├── go.work # local dev only, .gitignored ├── commons/ go.mod # module github.com/vasic-digital/herald/commons ├── pherald/ go.mod # module github.com/vasic-digital/herald/pherald → cmd/pherald ├── sherald/ go.mod # module github.com/vasic-digital/herald/sherald → cmd/sherald ├── bherald/ go.mod # ... etc ├── .goreleaser.yaml # one config, builds all flavors └── docs/, tests/, ...

```
Each flavor's ````
Herald/
├── go.work # local dev only, .gitignored
├── commons/ go.mod # module github.com/vasic-digital/herald/commons
├── pherald/ go.mod # module github.com/vasic-digital/herald/pherald →
cmd/pherald
├── sherald/ go.mod # module github.com/vasic-digital/herald/sherald →
cmd/sherald
├── bherald/ go.mod # ... etc
├── .goreleaser.yaml # one config, builds all flavors
└── docs/, tests/, ...
```

Each flavor's `go.mod` declares `require github.com/vasic-digital/herald/commons vX.Y.Z`.

**Lockstep release:** one git tag triggers GoReleaser to build all flavors and tag `commons/vX.Y.Z`. Use `release-please` in `manifest` mode to bump from Conventional Commits. `go.work` is git-ignored so CI catches forgotten bumps.

## 9.2 Postgres + Row-Level Security

**Postgres** is the main database, deployed via the `containers` submodule. Schema highlights:

- Every business table carries `tenant_id UUID NOT NULL`; composite indexes `(tenant_id, ...)`.
- `FORCE ROW LEVEL SECURITY` enabled on every multi-tenant table.
- Runtime role: `herald_app` (no `BYPASSRLS`). Migration role: `herald_migrator` (`BYPASSRLS`).
- `SET LOCAL app.tenant_id = '<uuid>'` at the start of every transaction.
- UUIDv7 (`uuidv7()` function) for time-ordered primary keys.

## 9.3 Redis (per-tenant ACL)

**Redis** is the in-memory store, deployed via `containers` submodule.

- **Per-tenant ACL user:** `redis-cli ACL SETUSER tenant_<id> on >pwd ~t:<id>:* +@read +@write ....`
- **Key prefixing:** `t:<tenant_id>:...` on every key.
- Usage: rate-limit token buckets, fast-path idempotency-cache, transient deduplication, hot subscriber lookups.

## 9.4 Container ports (24XXX)

Per R-01: all Container host ports start with `24XXX` prefix (1024–49151 IANA User Ports, below the Linux ephemeral floor at 32768, above all common service defaults — Postgres 5432, Redis 6379, web

3000/5000/8000/8080/9000).

Reserved sub-blocks:

Range	Purpose
24000–24099	flavor app data ports (one per flavor instance)
24090–24099	flavor admin ports ( <code>/livez</code> , <code>/readyz</code> , <code>/metrics</code> , pprof)
24100–24199	Postgres instances (default 24100)
24200–24299	Redis instances (default 24200)
24300–24399	NATS JetStream (when enabled)
24400–24499	OpenTelemetry Collector (default OTLP gRPC 24417, HTTP 24418)
24500–24599	Prometheus / Grafana (when self-hosted alongside)
24600–24699	Temporal (when enabled)
24700–24999	reserved for future / per-tenant

## 9.5 containers submodule

The full Docker/Podman Compose stack is provided by `vasic-digital/containers` as a Git submodule (per R-12, the owned-submodule set in `HERALD_CONSTITUTION.md` will be updated in the PR that introduces the submodule). All container names MUST start with prefix `herald`.

---

## §10. Commons (architecture layers)

Per the layering principle in V1: `commons` -> `commons level 1` -> ... -> `commons level N` -> `Flavor`. V2 names the layers concretely:

Layer	Module	Owns
L0	<code>commons</code>	CloudEvents envelope, <code>Channel</code> interface, <code>Branding</code> , error types, time/uuid helpers
L1	<code>commons_messaging</code>	Watermill router, retry/throttle/dedup middlewares, channel adapters (Telegram, Slack, ...), templating, i18n
L1	<code>commons_storage</code>	Postgres connection + RLS middleware, River queue setup, Redis client + tenant ACL, migrations
L1	<code>commons_security</code>	HMAC verifiers (Slack/GitHub/Telegram/generic), DKIM/SPF/DMARC helpers, allowlist evaluator, command parser
L1	<code>commons_observability</code>	OTel setup, span helpers, metrics registration, log handler wiring ( <code>slog</code> + <code>otel slog</code> )
L1	<code>commons_prefix</code>	3-letter prefix algorithm (§8.2)
L1	<code>commons_diary</code>	append + export + sync (§19)
L2	<code>commons_workflows</code>	Temporal workflow scaffolding (escalation chains, digest builders) — opt-in

Layer	Module	Owns
Flavor	<code>pherald</code> , <code>sherald</code> , ...	Per-flavor commands, event-type handlers, flavor-specific subscriber commands

**Rule of thumb (carry from V1):** put new shared code in the **lowest layer that still makes sense**; flavors inherit upward.

## §11. Channels — per-channel capabilities matrix

### 11.0 Channel adapter contract (Go interface + value types)

Each channel adapter implements the `Channel` interface defined in `commons` (L0). The full contract:

```
package commons // L0

import "context"

// Channel is the interface every channel adapter implements.
type Channel interface {
 Name() string //
 "tgram", "slack", ...
 Capabilities() Capabilities //
 declarative feature flags
 Send(ctx context.Context, msg OutboundMessage) (Receipt, error)
 Subscribe(ctx context.Context, h InboundHandler) error // long-
 running; called by `serve`
 HealthCheck(ctx context.Context) error
}

// Capabilities advertises what an adapter supports at runtime.
// Routers consult Capabilities before dispatching; mismatches are logged
// and the message is dropped or downgraded (per the adapter's choice).
type Capabilities struct {
 Text bool
 Markdown bool // adapter's native markdown flavor (Slack mrkdwn,
 Telegram MarkdownV2, etc.)
 HTML bool
 Attachments bool
 AttachmentMaxMiB int
 Threads bool // first-class reply threading
 InteractiveURL bool // URL buttons / link actions
 InteractiveCall bool // callback handlers (advanced tier)
 DeliveryCeiling DeliveryEvidence // see §17 / R-05
}

// DeliveryEvidence enumerates the strongest reachable signal per channel.
type DeliveryEvidence int

const (
 DeliveryUnknown DeliveryEvidence = iota
 DeliveryAccepted // hop-by-hop ack (SMTP 250)
 DeliveryRouted // platform stored & broadcast
 (Telegram/Slack API ok)
```

```

 DeliveryDelivered // recipient transport confirmed (Email
DSN, WA delivered receipt)
 DeliveryRead // recipient read (Email MDN, Telegram
Business read marker)
)

// OutboundMessage is the value passed to Channel.Send.
type OutboundMessage struct {
 EventID string // CloudEvents id (§4)
 IdempotencyKey string // explicit; falls back to EventID
 TenantID string
 To []Recipient // resolved from subscriber preferences +
tag fan-out
 Subject string // optional (Email, RSS-like channels)
 Body Body // rendered per-channel template output
 Attachments []Attachment
 Thread *ConversationRef // optional; per §12
 Priority Priority // ntfy-compatible 1..5
 Actions []Action // optional interactive buttons
 Branding Branding // per-flavor (§6.3)
 Trace TraceContext // OTel propagation
}

// Body carries one or more rendered representations; adapter picks the best
// match for its Capabilities (e.g., HTML for email, Markdown for Telegram,
// Block-Kit JSON for Slack).
type Body struct {
 Plain string
 Markdown string
 HTML string
 Native map[string]any // adapter-specific (Slack blocks,
Adaptive Card JSON, ...)
}

// Attachment is a single attached file.
type Attachment struct {
 Filename string
 MIMETYPE string
 SizeBytes int64
 Reader func() (io.ReadCloser, error) // lazy open so the adapter streams
without buffering
 CID string // optional inline-image Content-ID
(Email)
}

// Recipient is a resolved (channel, channel_user_id) pair.
type Recipient struct {
 Channel string // "tgram", "slack", "mailto", ...
 ChannelUserID string // chat_id, U0xxx, email address, ...
 DisplayName string // best-effort, for templating
}

// Action is an interactive UI hint (rendered as URL button, callback button,
// Adaptive Card action, ntfy X-Action, etc. depending on Capabilities).
type Action struct {
 Type ActionType // ActionView | ActionURL | ActionCallback | ActionHTTP
| ActionCopy

```

```

 Label string
 URL string // for ActionView / ActionURL / ActionHTTP
 Method string // "GET" | "POST" (ActionHTTP)
 Body []byte // ActionHTTP
 Data string // ActionCallback payload (provider-defined, e.g.
Telegram callback_data)
}

type ActionType int

const (
 ActionView ActionType = iota // open a URL
 ActionURL // synonym for ActionView; provider-
specific styling
 ActionCallback // round-trip back into Herald via inbound
handler
 ActionHTTP // fire-and-forget HTTP request from the
recipient device (ntfy)
 ActionCopy // copy text to clipboard (ntfy)
)

// Priority maps to ntfy 1..5 and to per-channel native priorities.
type Priority int

const (
 PriorityLow Priority = 1
 PriorityNormal Priority = 3
 PriorityHigh Priority = 4
 PriorityUrgent Priority = 5
)

// Receipt is what Channel.Send returns on success – the adapter's evidence
// of acceptance/routing/delivery so the router can decide whether to retry.
type Receipt struct {
 Evidence DeliveryEvidence
 ChannelMsgID string // Slack ts; Telegram message_id; SMTP
queue-id; ...
 SentAt time.Time
 LatencyMillis int64
 Native map[string]any // adapter-specific raw response (for
diary)
}

// InboundHandler receives messages emitted by the adapter's Subscribe loop.
// Implementations enqueue events back into the router (§5).
type InboundHandler interface {
 Handle(ctx context.Context, ev InboundEvent) error
}

// InboundEvent is a CloudEvent constructed from a subscriber message.
type InboundEvent struct {
 EventID string // UUIDv7
 CloudEvent CloudEventEnvelope // §4.1
 Sender Recipient // who sent it
 Subscriber *Subscriber // resolved via subscriber_aliases,
nil if unknown
 Body Body

```

```

 Attachments []Attachment
 Thread *ConversationRef
 Raw map[string]any // adapter-specific raw payload (for
diary)
}

```

These types live in ``go package commons // LO

```
import "context"
```

```
// Channel is the interface every channel adapter implements. type Channel interface { Name() string // "tgram",
"slack", ... Capabilities() Capabilities // declarative feature flags Send(ctx context.Context, msg
OutboundMessage) (Receipt, error) Subscribe(ctx context.Context, h InboundHandler) error // long-running;
called by serve HealthCheck(ctx context.Context) error }
```

```
// Capabilities advertises what an adapter supports at runtime. // Routers consult Capabilities before
dispatching; mismatches are logged // and the message is dropped or downgraded (per the adapter's choice).
type Capabilities struct { Text bool Markdown bool // adapter's native markdown flavor (Slack mrkdwn, Telegram
MarkdownV2, etc.) HTML bool Attachments bool AttachmentMaxMiB int Threads bool // first-class reply
threading InteractiveURL bool // URL buttons / link actions InteractiveCall bool // callback handlers (advanced
tier) DeliveryCeiling DeliveryEvidence // see §17 / R-05 }
```

```
// DeliveryEvidence enumerates the strongest reachable signal per channel. type DeliveryEvidence int
```

```
const (DeliveryUnknown DeliveryEvidence = iota DeliveryAccepted // hop-by-hop ack (SMTP 250)
DeliveryRouted // platform stored & broadcast (Telegram/Slack API ok) DeliveryDelivered // recipient transport
confirmed (Email DSN, WA delivered receipt) DeliveryRead // recipient read (Email MDN, Telegram Business
read marker))
```

```
// OutboundMessage is the value passed to Channel.Send. type OutboundMessage struct { EventID string //
CloudEvents id (§4) IdempotencyKey string // explicit; falls back to EventID TenantID string To []Recipient //
resolved from subscriber preferences + tag fan-out Subject string // optional (Email, RSS-like channels) Body
Body // rendered per-channel template output Attachments []Attachment Thread *ConversationRef // optional;
per §12 Priority Priority // ntfy-compatible 1..5 Actions []Action // optional interactive buttons Branding Branding
// per-flavor (§6.3) Trace TraceContext // OTel propagation }
```

```
// Body carries one or more rendered representations; adapter picks the best // match for its Capabilities (e.g.,
HTML for email, Markdown for Telegram, // Block-Kit JSON for Slack). type Body struct { Plain string Markdown
string HTML string Native map[string]any // adapter-specific (Slack blocks, Adaptive Card JSON, ...) }
```

```
// Attachment is a single attached file. type Attachment struct { Filename string MIMETYPE string SizeBytes
int64 Reader func() (io.ReadCloser, error) // lazy open so the adapter streams without buffering CID string //
optional inline-image Content-ID (Email) }
```

```
// Recipient is a resolved (channel, channel_user_id) pair. type Recipient struct { Channel string // "tgram",
"slack", "mailto", ... ChannelUserID string // chat_id, U0xxx, email address, ... DisplayName string // best-effort,
for templating }
```

```
// Action is an interactive UI hint (rendered as URL button, callback button, // Adaptive Card action, ntfy X-
Action, etc. depending on Capabilities). type Action struct { Type ActionType // ActionView | ActionURL |
ActionCallback | ActionHTTP | ActionCopy Label string URL string // for ActionView / ActionURL / ActionHTTP
Method string // "GET" | "POST" (ActionHTTP) Body []byte // ActionHTTP Data string // ActionCallback payload
(provider-defined, e.g. Telegram callback_data) }
```

type ActionType int

const ( ActionView ActionType = iota // open a URL ActionURL // synonym for ActionView; provider-specific styling ActionCallback // round-trip back into Herald via inbound handler ActionHTTP // fire-and-forget HTTP request from the recipient device (ntfy) ActionCopy // copy text to clipboard (ntfy) )

// Priority maps to ntfy 1..5 and to per-channel native priorities. type Priority int

const ( PriorityLow Priority = 1 PriorityNormal Priority = 3 PriorityHigh Priority = 4 PriorityUrgent Priority = 5 )

// Receipt is what Channel.Send returns on success — the adapter's evidence // of acceptance/routing/delivery so the router can decide whether to retry. type Receipt struct { Evidence DeliveryEvidence ChannelMsgID string // Slack ts; Telegram message\_id; SMTP queue-id; ... SentAt time.Time LatencyMillis int64 Native map[string]any // adapter-specific raw response (for diary) }

// InboundHandler receives messages emitted by the adapter's Subscribe loop. // Implementations enqueue events back into the router (§5). type InboundHandler interface { Handle(ctx context.Context, ev InboundEvent) error }

// InboundEvent is a CloudEvent constructed from a subscriber message. type InboundEvent struct { EventID string // UUIDv7 CloudEvent CloudEventEnvelope // §4.1 Sender Recipient // who sent it Subscriber \*Subscriber // resolved via subscriber\_aliases, nil if unknown Body Body Attachments []Attachment Thread \*ConversationRef Raw map[string]any // adapter-specific raw payload (for diary) }

These types live in `commons/types.go`. Every adapter under `commons\_messaging/channels/<name>` consumes them; no adapter is allowed to invent its own equivalent (the contract is the contract). Additional helpers in `commons/cloudevents.go`, `commons/branding.go`, `commons/trace.go`.

### ### 11.1 Telegram

- **SDK**: `gopkg.in/telebot.v3` (tucnak/telebot) primary; `github.com/mymmrac/telego` alt for 1:1 Bot API fidelity.
- **V1 (MVP)** features:
  - `sendMessage` with MarkdownV2 parse mode.
  - `sendPhoto` / `sendDocument` for attachments.
  - `InlineKeyboardMarkup` with URL buttons + `callback\_data`.
- **V2 advanced**:
  - `callback\_query` handler (interactive replies).
  - `editMessageText` (in-place updates for ongoing incidents).
  - `web\_app` buttons (open Mini-Apps).
  - `sendMediaGroup` (galleries).
  - Forum-topic threads via `message\_thread\_id`.
- **Out-of-scope** (V2): full Mini-App SDK, payments, Telegram Passport.
- **Delivery evidence ceiling**: `Routed` via Bot API; `Read` only via Business Bot connection with `can\_read\_messages` right (separate setup).
- **Webhook secret**: `setWebhook?secret\_token=<token>`; verify `X-Telegram-Bot-API-Secret-Token` header on inbound.

### ### 11.2 Max (max.ru)

- **SDK**: `github.com/max-messenger/max-bot-api-client-go` (official-adjacent, Apache-2.0, English+Russian docs).
- **Gating**: behind build tag `herald\_max` and documented sanctions advisory in



the operator manual. VK Group parent `VK Company Limited` is not on the OFAC SDN list at time of writing, but several VK-affiliated individuals are designated and EU restrictive measures evolve frequently – operators must check at deploy time.

- **Bot registration**: via in-app `MasterBot`.
- **V1**: send text message, send media; basic inline keyboard.
- **V2 advanced**: per `dev.max.ru` docs as they expand.
- **Delivery evidence ceiling**: `Routed` (API ack = stored & queued).

### ### 11.3 Slack

- **SDK**: `github.com/slack-go/slack` (pin  $\geq$  v0.23.1 – GHSA-gxhx-2686-5h9g fixed empty-secret bypass).
- **V1**:
  - `chat.postMessage` with Block Kit `header` + `section` + `divider` + `image` + `actions` (URL buttons only).
  - Threading via `thread\_ts` (R-08 mapping).
- **V2 advanced**:
  - `block\_actions` callback handler (interactivity).
  - `views.open` modals.
  - Message shortcuts.
  - Socket Mode for daemon ingress.
- **Out-of-scope**: Workflow Builder steps, Slack Connect, Enterprise Grid management.
- **Delivery evidence ceiling**: `Routed` (`ok:true` + `ts` proves posted to channel; no per-user read event).
- **Signing**: HMAC-SHA256 verification using `slack.NewSecretsVerifier` over `v0:{X-Slack-Request-Timestamp}:{rawBody}`, comparing with `X-Slack-Signature`, 5-min replay window.

### ### 11.4 Discord

- **SDK**: `github.com/bwmarrin/discordgo` (~5.7k stars, BSD-3-Clause, stable).
- **V1**:
  - Incoming Webhook with embeds (title, description, fields, footer, thumbnail, color).
  - Threads via webhook + `?thread\_id=`.
- **V2 advanced**:
  - Bot token; components (buttons + select menus).
  - Slash commands.
  - Forum channels.
- **Out-of-scope**: modals, voice, stage channels.
- **Delivery evidence ceiling**: `Routed`.

### ### 11.5 Microsoft Teams

- **SDK**: `github.com/atc0005/go-teams-notify/v2` (incoming-webhook-only – **no official Microsoft Go SDK** for full Graph access).
- **V1**:
  - Incoming Webhook with Adaptive Card v1.5: `TextBlock`, `Image`, `Container`, `FactSet`, `ActionSet` with `Action.OpenUrl`.
- **V2 advanced**:
  - `Action.Execute` / Actionable Messages with HMAC-signed tokens.
  - Bot Framework via Azure Bot Service (separate setup, complex).
- **Out-of-scope**: full Bot Framework conversational state, meeting extensions.
- **Delivery evidence ceiling**: `Routed`.

### ### 11.6 Lark / Feishu

- **SDK**: `github.com/larksuite/oapi-sdk-go` (**official**, MIT, code-gen flavor – verbose but accurate).
- **V1**: send text + rich message + image; basic interactive cards.
- **V2 advanced**: Mini-program cards, chatbot @-mentions, group management.
- **Delivery evidence ceiling**: `Routed`.

### ### 11.7 WhatsApp

Two transports for two use cases:

- **WhatsApp Web multi-device** – `go.mau.fi/whatsmeow` (`tulir/whatsmeow`, ~5.5k stars, MPL-2.0). Reverse-engineered WA Web; **not** for official Business API.
- **WhatsApp Business Cloud API** – `github.com/twilio/twilio-go` (official, multi-product; WA via Twilio Senders).
- **V1**: text + media via either transport; template-message support on Business Cloud API.
- **V2 advanced**: button-template messages, list messages, conversation pricing windows.

### ### 11.8 Viber

- **No official Go SDK.** Community: `mileusna/viber`, `strongo/bots-api-viber`.
- **V1**: hand-rolled REST client against the documented Viber REST API. Send text + media + carousel.
- **V2 advanced**: rich-media keyboards.

### ### 11.9 Email (deep)

The most operationally complex channel – Email gets the deepest treatment.

**Two interchangeable transports behind one `Channel` interface:**

1. **Raw SMTP + DKIM** – `net/smtp` (stdlib) + `github.com/emersion/go-msgauth/dkim`. Suitable for self-hosted operators.
2. **ESP HTTP API** – Resend (preferred), Postmark (fallback), SendGrid (alternative). Better deliverability + built-in bounce/complaint webhooks + suppression lists.

**Mandatory features for every outbound email (V1):**

- **DKIM signing** (RFC 6376) via `go-msgauth/dkim`.
- **List-Unsubscribe** (RFC 8058) – `List-Unsubscribe: <https://...>, <mailto:...>` + `List-Unsubscribe-Post: List-Unsubscribe=One-Click`. DKIM-signed.
- **Plain-text alternative** generated from the HTML body (MJML-rendered).
- **Inline images** via `Content-ID:` MIME parts (`cid:` references in HTML).
- **Suppression list lookup** – consult `email_suppressions` table before send; skip suppressed addresses and log to diary.

**Bounce pipeline:**

- Inbound mailbox parsed for RFC 3464 DSN parts, OR ESP webhook consumed for bounce/complaint/unsub events.
- Hard bounces, complaints, and manual unsubscriptions write to `email_suppressions`:

```
```sql
CREATE TABLE email_suppressions (
  tenant_id    UUID NOT NULL,
  address      TEXT NOT NULL,          -- normalized lowercase
  reason       TEXT NOT NULL,          -- 'hard_bounce' | 'complaint' |
'ununsubscribe'
  source_event UUID,
  created_at   TIMESTAMPTZ NOT NULL DEFAULT now(),
  PRIMARY KEY (tenant_id, address)
);
ALTER TABLE email_suppressions ENABLE ROW LEVEL SECURITY;
ALTER TABLE email_suppressions FORCE ROW LEVEL SECURITY;
```

Doctor command: ```sql CREATE TABLE email_suppressions (tenant_id UUID NOT NULL, address TEXT NOT NULL, -- normalized lowercase reason TEXT NOT NULL, -- 'hard_bounce' | 'complaint' | 'unsubscribe' source_event UUID, created_at TIMESTAMPTZ NOT NULL DEFAULT now(), PRIMARY KEY (tenant_id, address)); ALTER TABLE email_suppressions ENABLE ROW LEVEL SECURITY; ALTER TABLE email_suppressions FORCE ROW LEVEL SECURITY;

****Doctor command**:** ``<flavor>herald doctor email` verifies SPF, DKIM, DMARC records for the configured sending domain at startup. Without correct DNS, Gmail/Yahoo's 2024 sender requirements quietly bin the mail.`

****Templating**:** MJML (`<mj-section>`, `<mj-column>`, `<mj-image>`, `<mj-button>`) compiled to inline-CSS HTML at ****template-author time**** (vendored MJML CLI; check in the compiled HTML alongside the `.mjml`` source). The compiled HTML then runs through `html/template`` for variable substitution at send time. No Node.js in the runtime container.

****Delivery evidence ceiling**:** `Accepted`` by default (relay 250 OK), upgradable to `Delivered`` by parsing DSN, `Read`` only when recipient voluntarily returns RFC 8098 MDN (rare).

11.10 ntfy / Gotify

Per research Topic 3 (notification-platforms): adopt ntfy's wire model as both an ****inbound ingest format**** (alongside CloudEvents) and as a first-class outbound channel.

- Map: `X-Priority`` (1-5) → Herald priority enum; `X-Tags`` → Herald tags; `X-Click`` → action URL; `X-Actions`` (view/http/broadcast/copy) → Herald `Action`` schema; `X-Attach`/PUT body` → attachment.
- ****Gotify**** application/client token split: application token authenticates publishers; client token authenticates subscribers; both revocable independently.
- ****V1****: send to ntfy/gotify topic with priority + tags + attachment.
- ****V2 advanced****: receive via WebSocket / SSE for live updates.

11.11 Generic outbound webhook

Adapter `webhook://<url>?secret=<hmac>&format=<cloudevent|json|form>`:

- Sends Herald events as CloudEvents (binary or structured mode), or as plain JSON, or as form-encoded – chosen by query param.
- HMAC-signs outbound requests (`Webhook-Signature` header) so receiving side can verify.
- Retries per §5.4.

11.12 Diary (Markdown + PDF + HTML)

See §19 for full schema and sync strategy.

11.13 Feature matrix summary

	Channel	Text	Markdown	Attachments	Threads	Interactive buttons	Signed-source verify	Delivery ceiling
	----	----	----	----	----	----	----	----
Telegram	✓	✓	MarkdownV2 / HTML	✓	forum topic_id	✓	V1 url, V2 callback	
secret_token								Routed (Read via Business)
Max	✓	✓	platform-specific	✓	V2	V2	tba	Routed
Slack	✓	✓	Block Kit	✓	thread_ts	✓	V1 url, V2 callback	X-Slack-Signature Routed
Discord	✓	✓	embeds	✓	thread_id		webhook url, bot components	webhook URL secrecy Routed
MS Teams	✓	✓	Adaptive Card	inline	conv references		OpenUrl / Action.Execute	webhook secret Routed
Lark	✓	✓	rich card	✓	V2		interactive card	event subscription Routed
WhatsApp	✓	✓	text/template	✓	(Cloud API)		conversation window	Cloud API templates Twilio signing / Meta token Routed
Viber	✓	✓	rich-media	✓	–		rich-media keyboard	sig param Routed
Email	✓	✓	MJML→HTML	✓	(MIME)		In-Reply-To/References	url buttons only DKIM/SPF/DMARC Accepted→Delivered→Read
ntfy	✓	✓	X-Markdown	✓	–		X-Actions	basic auth / token Routed
Gotify	✓	✓	extras.client::display	✓	–		extras actions	bearer token Routed
Webhook	✓	✓	CloudEvent JSON	embedded	n/a	n/a	HMAC	Accepted/Routed
Diary	✓	✓	source format	path-refs	logical via parent ref	n/a	local FS	n/a (always-on)

§12. Messaging flows

Three mandatory message flows per channel (where the channel API supports them):

- ****Simple message**** – textual content sent to the channel; displayed to all subscribers.
- ****Message with attachment(s)**** – content + 1..N attachments; subscribers can download attachments.
- ****Quote / reply message**** – content sent as a reply to an existing channel message (uses §11 thread mapping: Telegram `reply\_to\_message\_id`, Slack `thread\_ts`, Discord `thread\_id`, Email `In-Reply-To`); may include 0..N attachments.

****Subscriber inbound flows**** (Project Herald and any flavor that opts into reply processing):

- ****Direct reply to a Herald message**** – parsed for commands (`Bug:`, `Issue:`, `Query:`, `Request:`, `Question:`).
- ****Standalone message tagged for Herald**** – same parsing, no parent message.
- ****Thread continuation**** – full thread context (chained replies from start) is parsed and processed.

****Conversation reference**** per R-08:

```
```go
type ConversationRef struct {
 Channel ChannelID // "tgram", "slack", ...
 ThreadID string // Slack thread_ts; Telegram message_thread_id
(forum); Email References[0]
 ParentMessageID string // Slack ts; Telegram reply_to_message_id; Email
In-Reply-To
 RootMessageID string // first message in the thread
}
```

Persisted in the ```go type ConversationRef struct { Channel ChannelID // "tgram", "slack", ... ThreadID string // Slack thread\_ts; Telegram message\_thread\_id (forum); Email References[0] ParentMessageID string // Slack ts; Telegram reply\_to\_message\_id; Email In-Reply-To RootMessageID string // first message in the thread }

Persisted in the `thread\_refs` table so re-sends to the same logical thread find the right native handle on every channel:

```
```sql
CREATE TABLE thread_refs (
    tenant_id          UUID NOT NULL,
    logical_thread_id  UUID NOT NULL,           -- Herald's stable
identifier across channels
    channel            TEXT NOT NULL,           -- "tgram", "slack",
"email", ...
    thread_id          TEXT,                   -- Slack thread_ts,
Telegram message_thread_id (forum), Email References[0]
    parent_message_id TEXT,                   -- Slack ts (parent),
Telegram reply_to_message_id, Email In-Reply-To
    root_message_id    TEXT,                   -- first message in the
thread
    last_activity_at   TIMESTAMPTZ NOT NULL DEFAULT now(),
    PRIMARY KEY (tenant_id, logical_thread_id, channel)
);
CREATE INDEX thread_refs_recent_idx ON thread_refs (tenant_id, last_activity_at
DESC);
ALTER TABLE thread_refs ENABLE ROW LEVEL SECURITY;
ALTER TABLE thread_refs FORCE ROW LEVEL SECURITY;
CREATE POLICY tr_isolation ON thread_refs
    USING (tenant_id = current_setting('app.tenant_id')::uuid)
    WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);
```

A *logical thread* is Herald's tenant-stable conversation identifier; the per-channel rows map it to native handles.

```
```sql CREATE TABLE thread_refs ( tenant_id UUID NOT NULL, logical_thread_id UUID NOT NULL, -- Herald's
stable identifier across channels channel TEXT NOT NULL, -- "tgram", "slack", "email", ... thread_id TEXT, --
```

```
Slack thread_ts, Telegram message_thread_id (forum), Email References[0] parent_message_id TEXT, -- Slack
ts (parent), Telegram reply_to_message_id, Email In-Reply-To root_message_id TEXT, -- first message in the
thread last_activity_at TIMESTAMPTZ NOT NULL DEFAULT now(), PRIMARY KEY (tenant_id, logical_thread_id,
channel)); CREATE INDEX thread_refs_recent_idx ON thread_refs (tenant_id, last_activity_at DESC); ALTER
TABLE thread_refs ENABLE ROW LEVEL SECURITY; ALTER TABLE thread_refs FORCE ROW LEVEL SECURITY;
CREATE POLICY tr_isolation ON thread_refs USING (tenant_id = current_setting('app.tenant_id')::uuid) WITH
CHECK (tenant_id = current_setting('app.tenant_id')::uuid);
```

A *logical thread* is Herald's tenant-stable conversation identifier; the per-channel rows map it to native handles. `last_activity_at` enables time-window garbage collection (default: 90 days after last activity, configurable).

----

## ## §13. Templating & message composition

Three-layer stack per research Topic 5 (notification-platforms):

- **Layer 0 (engine)** - Go stdlib `text/template` (plaintext / Markdown / JSON channels) and `html/template` (HTML email body, auto-escaping).
- **Layer 1 (helpers)** - [Sprig](https://github.com/Masterminds/sprig) (`date`, `upper`, `default`, `trunc`, etc.) - universally expected by template authors; used by Helm, kubectl templates.
- **Layer 2 (email-specific)** - MJML compiled to HTML at template-author time (vendored MJML CLI; check in the compiled `.html` alongside `.mjml`), then `html/template` for runtime substitution.

**Rejected**: Liquid (extra runtime, no Go stdlib affinity); runtime MJML compilation (Node dependency in Go hot path).

**Template directory layout**:

```
commons_messaging/templates/ ├── ci.failed/ | ├── tgram.md.tmpl | ├── slack.json.tmpl # Block Kit
JSON | ├── email.mjml # source | ├── email.html # compiled, committed | ├── diary.md.tmpl |
deploy.succeeded/ | └── ... └── _shared/ # template helpers └── footer.tmpl
```

----

## ## §14. Localization (i18n)

Per research Topic 6 (notification-platforms): `**``

```
commons_messaging/templates/
```

```
|── ci.failed/
| |── tgram.md.tmpl
| |── slack.json.tmpl # Block Kit JSON
| |── email.mjml # source
| |── email.html # compiled, committed
| └── diary.md.tmpl
|── deploy.succeeded/
```

```
|_ ...
|_ shared/
|_ footer.tmpl

template helpers
```

## §14. Localization (i18n)

Per research Topic 6 (notification-platforms): [nicksnyder/go-i18n v2](#).

- One **Bundle** loaded at process start from `commons_messaging/locales/*.toml`:

```
locales/active.en-US.toml
[ci.failed.title]
other = "Build failed: {{.JobName}}"

locales/active.sr-Latn-RS.toml
[ci.failed.title]
other = "Build pao: {{.JobName}}"
```

- Plurals handled via CLDR rules (built-in to go-i18n): ``toml

### locales/active.en-US.toml

```
[ci.failed.title] other = "Build failed: {{.JobName}}"
```

### locales/active.sr-Latn-RS.toml

```
[ci.failed.title] other = "Build pao: {{.JobName}}"
```

- Plurals handled via CLDR rules (built-in to go-i18n): `1 alert / 2 alerta / 5 alerti / 21 alert` for Serbian works correctly without custom code.
- Per-subscriber `locale` (BCP-47 tag) stored on the `subscribers` row.
- Per-channel templates may override (Telegram emoji-heavy variant vs sober email variant).

V2 initial locales: `en-US`, `sr-Latn-RS`, `ru-RU`. RTL rendering tweaks and dynamic locale negotiation from incoming events are deferred.

----

## ## §15. Security model

Per R-16: a **three-layer pipeline** runs **before** any routing logic.

### ### 15.1 Transport-level (channel signature verification)

Per-channel signature verifier (constant-time HMAC comparison via `crypto/hmac.Equal`):

Channel	Header	Algorithm	Replay window
Slack	`X-Slack-Signature`	HMAC-SHA256 over `v0:{ts}:{body}`	5 min
GitHub-style	`X-Hub-Signature-256`	HMAC-SHA256 over body	configurable
Telegram	`X-Telegram-Bot-API-Secret-Token`	shared-secret compare	n/a (no timestamp)
Stripe	`Stripe-Signature`	HMAC-SHA256 over `{ts}.{body}`	5 min
Email	DKIM-Signature header + DMARC alignment	RSA-SHA256 / Ed25519	per DKIM TTL

Generic webhook sources register their own per-source secret in `webhook\_sources`.

### 15.2 Sender-level (allowlist + verified subscribers)

After transport verification, sender authority is checked:

- Per-channel allowlist keyed by canonical user-id (Slack `team\_id+user\_id`, Telegram `chat\_id`, email DKIM-aligned `From`) loaded from `.herald/subscribers.toml` and/or the `subscribers` + `subscriber\_aliases` tables.
- Unknown senders enter a **quarantine queue** (`quarantined\_messages` table), never the live fan-out.
- An operator (or auto-policy) reviews the quarantine and either promotes the sender or discards.

**`quarantined\_messages` schema:**

```

```sql
CREATE TABLE quarantined_messages (
  id                UUID PRIMARY KEY DEFAULT uuidv7(),
  tenant_id         UUID NOT NULL,
  received_at       TIMESTAMPTZ NOT NULL DEFAULT now(),
  channel           TEXT NOT NULL,
  sender_channel_user_id TEXT NOT NULL,
  sender_display    TEXT,
  reason            TEXT NOT NULL,                -- 'unknown_sender' |
'unverified_signature' | 'rate_limited' | 'content_flagged'
  payload_jsonb     JSONB NOT NULL,                -- full inbound message
  triage_status     TEXT NOT NULL DEFAULT 'pending', -- 'pending' | 'promoted' |
'discarded' | 'expired'
  triaged_at        TIMESTAMPTZ,
  triaged_by        UUID                          -- subscriber id of
operator
);
CREATE INDEX qm_pending_idx ON quarantined_messages (tenant_id, received_at
DESC)
WHERE triage_status = 'pending';
ALTER TABLE quarantined_messages ENABLE ROW LEVEL SECURITY;
ALTER TABLE quarantined_messages FORCE ROW LEVEL SECURITY;
CREATE POLICY qm_isolation ON quarantined_messages
  USING (tenant_id = current_setting('app.tenant_id')::uuid)
  WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);

```

Pending entries auto-expire after 30 days (`sql CREATE TABLE quarantined_messages (id UUID PRIMARY KEY DEFAULT uuidv7(), tenant_id UUID NOT NULL, received_at TIMESTAMPTZ NOT NULL DEFAULT now(),


```
channel TEXT NOT NULL, sender_channel_user_id TEXT NOT NULL, sender_display TEXT, reason TEXT NOT NULL, -- 'unknown_sender' | 'unverified_signature' | 'rate_limited' | 'content_flagged' payload_jsonb JSONB NOT NULL, -- full inbound message triage_status TEXT NOT NULL DEFAULT 'pending', -- 'pending' | 'promoted' | 'discarded' | 'expired' triaged_at TIMESTAMPTZ, triaged_by UUID -- subscriber id of operator ); CREATE INDEX qm_pending_idx ON quarantined_messages (tenant_id, received_at DESC) WHERE triage_status = 'pending'; ALTER TABLE quarantined_messages ENABLE ROW LEVEL SECURITY; ALTER TABLE quarantined_messages FORCE ROW LEVEL SECURITY; CREATE POLICY qm_isolation ON quarantined_messages USING (tenant_id = current_setting('app.tenant_id')::uuid) WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);
```

Pending entries auto-expire after 30 days (`triage\_status='expired'`) so the queue doesn't grow unbounded on a noisy channel. CLI: ``<flavor>herald quarantine [list | promote <id> | discard <id> | purge]``.

15.3 Content-level (parsing & sanitization)

After sender verification, content is parsed:

- Commands (`Bug:`, `Issue:`, `Query:`, `Request:`, `Question:`, plus flavor-specific verbs) parsed with a strict regex-anchored tokenizer.
- **Never** shell out with user-provided content.
- **Never** `text/template` user input into shell or SQL.
- Command bodies are length-bounded (default 8 KiB).
- Attachments are scanned for MIME mismatch + size limits (default 25 MiB per attachment, 100 MiB per message).
- Optional malware scan via ClamAV when `commons\_security` is configured with the integration.

15.4 Credential handling

Per Constitution §11.4.10:

- `.env` is git-ignored (the `.gitignore` MUST contain `.env`).
- `.env.example` is committed.
- Resolution order: CLI flag > shell env > `.env` > compiled default (§3.3).
- Credentials NEVER logged. The OTel logger has a redaction middleware that filters keys matching `(?:i)(token|secret|password|key|credential|authorization)` to `\*\*\*`.
- Credentials in Postgres are encrypted-at-rest with `pgcrypto` (`pgp\_sym\_encrypt`) using a key from `HERALD\_DB\_ENC\_KEY` env var.

15.5 Webhook ingestion (defense-in-depth)

See §5.5. Four ordered checks: signature → timestamp → delivery-ID dedup → optional IP allowlist.

§16. Multi-tenancy & isolation

Per research Topic 6 (event-fanout) + Topic 4 (operations):

- **Primary boundary**: PostgreSQL Row-Level Security.
- **Every business table** carries `tenant\_id UUID NOT NULL` with a composite

```
index `(tenant_id, ...)` leading every secondary index (RLS is 10–100× slower without it).  
– **Policy template**:
```

```
```sql  
ALTER TABLE <table> ENABLE ROW LEVEL SECURITY;
ALTER TABLE <table> FORCE ROW LEVEL SECURITY;
CREATE POLICY tenant_isolation ON <table>
 USING (tenant_id = current_setting('app.tenant_id')::uuid)
 WITH CHECK (tenant_id = current_setting('app.tenant_id')::uuid);
```

- **Roles:**

- 

ALTER TABLE

```
ENABLE ROW LEVEL SECURITY; ALTER TABLE
FORCE ROW LEVEL SECURITY; CREATE POLICY tenant_isolation ON
USING (tenant_id = current_setting('app.tenant_id')::uuid) WITH CHECK (tenant_id =
current_setting('app.tenant_id')::uuid);
```

```
– **Roles**:
– `herald_app` – runtime role, no `BYPASSRLS`. The `pgx` connection wrapper in
`commons_storage` runs `SET LOCAL app.tenant_id = ...` at transaction start.
– `herald_migrator` – schema-change role, `BYPASSRLS`.
– **Redis** – per-tenant ACL user (Redis 6+), key pattern `~t:<tenant_id>:*`.
– **Rate limits** – token bucket per `(tenant_id, channel)` in Redis.
– **Schema-per-tenant** is reserved for high-isolation enterprise customers;
documented as opt-in but not the default (overhead: connection-pool
fragmentation, slow migrations $N \times M$, harder backups).
```

### ### 16.1 Data retention & privacy

Herald processes content that may contain personally identifiable information (names, email addresses, IP addresses, organization data). Retention windows **MUST** be configurable per tenant and enforced by scheduled `River` jobs.

**\*\*Default retention policy (overridable per tenant):\*\***

Class	Default retention	Purge mechanism
–	–	–
`idempotency_keys`	7 d after `expires_at` (already in §4.3)	nightly River job
`dead_letters` (triaged)	90 d	nightly River job
`dead_letters` (untriaged)	365 d (legal/audit floor)	manual triage prompt
`quarantined_messages` (pending)	30 d → auto `expired`	nightly River job
`quarantined_messages` (triaged)	90 d	nightly River job
`thread_refs`	90 d after `last_activity_at`	nightly River job
`emailSuppressions`	indefinite (compliance – hard bounces must persist)	manual remove via CLI

`subscribers` (deleted)	tombstone 30 d, then hard delete	GDPR right-to-erasure flow
Diary entries (`docs/herald/diary/main.md`)	tenant-configurable; default unlimited (git history)	per-tenant rotation policy
OpenTelemetry data	controlled by Collector → backend (out of Herald scope)	n/a

**\*\*GDPR / privacy mechanics:\*\***

- `**<flavor>herald subscriber forget <id>**` initiates right-to-erasure: tombstones the row, schedules hard-delete after 30 days, anonymises subscriber references in `dead\_letters` / `quarantined\_messages` / diary entries (replaces `display\_name` with `**<redacted>**`, hashes `channel\_user\_id`).
- `**<flavor>herald subscriber export <id>**` (right-to-portability) emits a JSON bundle of every record referencing the subscriber.
- **\*\*Diary redaction\*\*** – when a subscriber is forgotten, the diary writer SHOULD overwrite their entries with a redaction note (in-place edit + re-export); operators that want immutable audit trails MUST opt-out per `[privacy].diary\_redaction\_on\_forget = false`.

**\*\*Data sovereignty:\*\*** the `containers` submodule deploys Postgres + Redis to operator-chosen regions; Herald itself stores nothing outside that pair. Cross-region replication is the operator's choice (logical replication / streaming replication) and is documented in `docs/operations/replication.md`.

---

## ## §17. Observability & SLOs

Per research Topic 1 (operations):

### ### 17.1 OpenTelemetry pipeline

- **\*\*All three signals\*\*** instrumented from day one:
  - **\*\*Traces\*\*** – `go.opentelemetry.io/otel/trace` spans across the full event flow (ingest → route → enqueue → deliver → ack).
  - **\*\*Metrics\*\*** – `go.opentelemetry.io/otel/metric` counters + histograms.
  - **\*\*Logs\*\*** – stdlib `slog` shipped as OTel log records via `go.opentelemetry.io/contrib/bridges/otel slog`.
- **\*\*Default export\*\***: OTLP/gRPC to an OpenTelemetry Collector sidecar/DaemonSet on `localhost:4317` (no auth) – production deployments override via env vars.
- **\*\*Collector\*\*** fans out to Prometheus (scrape `/metrics`), Tempo/Jaeger (traces), Loki (logs).
- Instrumentation lives in `commons\_observability` (L1) so every flavor inherits.

**\*\*Standard OTel SDK env vars Herald honours\*\*** (per OpenTelemetry SDK spec – values are NOT re-invented):

Variable	Default	Purpose
--- --- ---		
`OTEL_SDK_DISABLED`	`false`	Hard kill switch – when `true`, instrumentation is a no-op.
`OTEL_EXPORTER_OTLP_ENDPOINT`	`http://localhost:4317`	Single endpoint for all three signals (gRPC).
`OTEL_EXPORTER_OTLP_TRACES_ENDPOINT`	inherits	Per-signal override.
`OTEL_EXPORTER_OTLP_METRICS_ENDPOINT`	inherits	Per-signal override.

```
| `OTEL_EXPORTER_OTLP_LOGS_ENDPOINT` | inherits | Per-signal override. |
| `OTEL_EXPORTER_OTLP_PROTOCOL` | `grpc` | `grpc` \ | `http/protobuf` \ |
`http/json`. |
| `OTEL_EXPORTER_OTLP_HEADERS` | unset | Authn (e.g. `Authorization=Bearer ...`).
|
| `OTEL_EXPORTER_OTLP_INSECURE` | `false` | Disable TLS for `http://` endpoints.
|
| `OTEL_RESOURCE_ATTRIBUTES` | (Herald sets `service.name`, `service.version`,
`herald.flavor`, `herald.tenant_id`) | Operator adds `deployment.environment`,
`service.namespace`, etc. |
| `OTEL_SERVICE_NAME` | `

```

Herald's own resource defaults:

service.name=herald service.version= service.instance.id=- herald.flavor= herald.tenant\_id=<tenant\_uuid> #  
one-of label, set per request telemetry.sdk.name=opentelemetry telemetry.sdk.language=go

OTel semantic conventions tracked: **\*\*messaging v1.30+\*\*** (the spec moved out of experimental in 2025).

### ### 17.2 Metrics catalogue

OTel semantic conventions for messaging where they fit, Herald-specific names where they don't:

```
| Metric | Type | Labels |
|---|---|---|
| `messaging.client.sent.messages` | counter | `messaging.system="herald",`
`messaging.destination.name=
```

OTel semantic conventions tracked: **messaging v1.30+** (the spec moved out of experimental in 2025).

### 17.2 Metrics catalogue

OTel semantic conventions for messaging where they fit, Herald-specific names where they don't:

Metric	Type	Labels
<code>messaging.client.sent.messages</code>	counter	<code>messaging.system="herald",</code> <code>messaging.destination.name=</code>

Metric	Type	Labels
		<channel>, herald.tenant_id, herald.flavor
messaging.client.operation.duration	histogram	+ messaging.operation.name="deliver", messaging.operation.type="send"
herald_delivery_attempts_total	counter	channel, outcome= {ok, retry, drop, dead_letter}, tenant_id
herald_queue_depth	gauge	queue, tenant_id
herald_retry_backoff_seconds	histogram	channel, attempt_bucket
herald_template_render_duration_seconds	histogram	template_id
herald_subscriber_count	gauge	tenant_id, channel
herald_dead_letter_count	gauge	tenant_id, channel

**Cardinality budget:** never `recipient_id` or message UUIDs as labels. Per-tenant labels are allowed; per-subscriber labels are NOT.

Canonical Grafana dashboard JSON shipped in `deploy/grafana/herald-overview.json`.

## 17.3 Span model

Canonical span names (and parent→child relationship):

```

herald.ingest (root, per inbound CloudEvent)
├─ herald.signature_verify
├─ herald.idempotency_check
├─ herald.route_match
├─ herald.preference_filter
├─ herald.template_render
├─ herald.enqueue
└─ herald.deliver
 └─ herald.channel.<name>
 └─ herald.channel.<name>.api_call
 └─ herald.diary_append

```

Attributes on every span: ```` herald.ingest (root, per inbound CloudEvent) |—— herald.signature\_verify  
|—— herald.idempotency\_check |—— herald.route\_match |—— herald.preference\_filter |——  
herald.template\_render |—— herald.enqueue |—— herald.deliver |—— herald.channel. |——  
herald.channel..api\_call |—— herald.diary\_append

Attributes on every span: `herald.tenant\_id`, `herald.flavor`,  
`cloudevents.type`, `cloudevents.id`.

### 17.4 SLOs

V2 published SLOs (per-tenant rolling 30-day):

SLO	Target
Ingress availability (HTTP 2xx + 4xx vs 5xx)	99.9%
End-to-end delivery (ingest → channel API `Accepted`) – p95	< 5 s
End-to-end delivery – p99	< 30 s
Delivery success rate (excluding 4xx from upstream channels)	99.5%
Dead-letter rate	< 0.1%
Doctor-CLI checks (SPF/DKIM/DMARC, DB ping, Redis ping)	run every 5 min, alert on 3 consecutive fail

### ### 17.5 Health probes (livez / readyz / startupz)

Per research Topic 3 (operations): three endpoints on the **admin port** (`24090` default, separate from data port so probes don't compete for worker capacity):

- **GET /livez** – returns `200` unless an unrecoverable internal invariant trips (deadlock detector, fatal goroutine panic flag). Cheap, no downstream calls.
- **GET /readyz** – checks Postgres + Redis ping, queue consumer attached, ≥1 channel adapter healthy. Returns `503` during graceful shutdown.
- **GET /startupz** – used by Kubernetes startup probe while migrations / warm-up run; once `200`, liveness/readiness take over.

Liveness `failureThreshold` ~3× readiness so a transient downstream blip removes the pod from Service but does NOT restart it.

### ### 17.6 `doctor` CLI

`<flavor>herald doctor` runs a battery of environment checks:

- Postgres connectivity + RLS policy presence.
- Redis connectivity + ACL.
- All configured channel credentials valid (probes API per channel).
- DKIM/SPF/DMARC DNS records for the configured sending domain (cite Gmail/Yahoo 2024 sender requirements).
- OTLP collector reachable.
- Disk space, port availability.

Exits with non-zero status code on any failure + writes a structured report to stdout (machine-readable JSON option `--json`).

---

## ## §18. Flavors (the implementations)

### ### 18.1 Common flavor contract

Every flavor binary MUST:

- Be named `<prefix>herald` and built from `<prefix>herald/cmd/<prefix>herald/main.go`.
- Implement the same Cobra-subcommand surface (`send`, `serve`, `doctor`, `migrate`, `deadletter`, `subscriber`, `digest`, `version`).

- Embed `commons` + `commons\_messaging` + `commons\_storage` + `commons\_security` + `commons\_observability` + `commons\_diary` at the same pinned versions.
- Publish a flavor-specific event-type subtree (`digital.vasic.herald.<flavor>.\*`).
- Register flavor-specific subscriber commands (the `Bug:` / `Query:` / etc. tokens that map to flavor-specific handlers).
- Provide a flavor-specific `HeraldBranding` (app name, icon, accent color).
- Ship its own user manual under `docs/flavors/<flavor>/`.

### ### 18.2 Project Herald (`pherald`)

**\*\*Focus\*\*:** Software-project development lifecycle. Integrates with VCS, code review, task tracking. Designed for AI-CLI-agent + developer-team workflows.

**\*\*Event subtree\*\*:** `digital.vasic.herald.project.\*` and `digital.vasic.herald.reply.\*`.

**\*\*Sources\*\*:**

- Git hooks (`post-commit`, `post-merge`, `pre-push`).
- VCS webhooks (GitHub, GitLab, GitFlic, GitVerse - `push`, `pull\_request`, `review`, `issue`).
- AI CLI agents (Claude Code, OpenCode, Cursor, Aider) emitting structured progress events.
- Code-review-tool webhooks (CodeRabbit, Greptile, Sourcery).

**\*\*Subscriber inbound commands\*\*** (extends the V1 base set):

Command	Behaviour
`Bug:` / `Issue:`	Open an issue (writes to `docs/Issues.md` per Universal §11.4.12).
`Query:` / `Request:` / `Question:`	Request information; routes to LLM-driven research workflow if configured.
`Status:`	Reply with current project status from `docs/Status.md`.
`Continue:`	Pointer to `docs/CONTINUATION.md` for next agent.
`Done:`	Mark referenced item resolved (writes to `docs/Fixed.md`).
`Spec:`	Cite or modify spec section (subject to §23 spec-change rule).
`Run: <tool>`	Authorized operator only - execute an approved tool (gated by allowlist).

**\*\*Quote-thread processing\*\*:** Subscriber's reply automatically includes the full thread context (chained replies from bottom to thread start) - full chain parsed and processed per R-08 `ConversationRef`.

**\*\*Security validation\*\*** (extends §15):

- Subscriber commands accepted only from verified, allowlisted subscribers.
- `Run:` requires elevated subscriber privilege (`subscriber\_aliases.verified\_at` plus `roles` array).
- All commands logged to diary with subscriber identity and timestamp.

**\*\*Derived workable-item prefix\*\*** (per §8.2): if the consuming project hasn't set one, the algorithm runs over the project name (from `package.json`, `go.mod`, `pyproject.toml`, or the git remote name).

### ### 18.3 System Herald (`sherald`)

**\*\*Focus\*\*:** OS/host/service health and security. Designed for systems-administration teams + on-call rotation.

**\*\*Event subtree\*\*:** `digital.vasic.herald.system.\*`.

**\*\*Sources\*\*:**

- `journalctl` watcher (configurable `\_SYSTEMD\_UNIT` filters).
- `auditd` events.
- Prometheus Alertmanager webhook receiver.
- Loki/Grafana log alerts.
- File-integrity-monitoring (AIDE, Tripwire) hooks.
- SNMP traps (via a small SNMP-to-CloudEvent adapter).
- Kernel events (oom-kill, panics) – via `journald` filter.

**\*\*Event types\*\*:**

- `digital.vasic.herald.system.host.cpu\_high` (threshold-crossing).
- `digital.vasic.herald.system.host.disk\_full` (filesystem).
- `digital.vasic.herald.system.host.memory\_pressure`.
- `digital.vasic.herald.system.service.restarted`.
- `digital.vasic.herald.system.service.crashed`.
- `digital.vasic.herald.system.service.flapping` ( $\geq 3$  restarts in 5min).
- `digital.vasic.herald.system.security.login\_anomaly` (failed SSH burst, unusual IP).
- `digital.vasic.herald.system.security.privilege\_escalation`.
- `digital.vasic.herald.system.cert.expiring` (X.509 certificate  $\leq 30d$ ).
- `digital.vasic.herald.system.backup.missed`.

**\*\*Subscriber commands\*\*:**

- `Ack:` – acknowledge an alert (silences future fires of the same fingerprint for a window).
- `Silence: <fingerprint> for <duration>` – manual silencing.
- `Resolve: <fingerprint>` – manual resolution.
- `Status:` – current open-alerts snapshot.
- `Runbook: <fingerprint>` – link to the runbook for this alert type.

**\*\*Integrations\*\*:** `sherald` is often paired with `aherald` and `iherald` – the three flavors share the `commons\_alert` package.

### ### 18.4 Build Herald (`bherald`)

**\*\*Focus\*\*:** CI/CD build lifecycle events. Designed for development teams + release engineers.

**\*\*Event subtree\*\*:** `digital.vasic.herald.ci.\*`.

**\*\*Sources\*\*:**

- GitHub Actions workflow webhook (`workflow\_run`, `check\_suite`).
- GitLab CI webhook (`Pipeline Hook`).
- Jenkins post-build steps invoking `bherald send`.
- CircleCI / Drone / Buildkite via their respective webhooks.
- Tekton / Argo Workflows via CloudEvents emitters (native).



#### **\*\*Event types\*\*:**

- `digital.vasic.herald.ci.build.queued | started | succeeded | failed | cancelled`.
- `digital.vasic.herald.ci.test.passed | failed | flaky | skipped`.
- `digital.vasic.herald.ci.security\_scan.finding` (Semgrep, Snyk, Trivy, gitleaks).
- `digital.vasic.herald.ci.dependency.outdated | vulnerable`.
- `digital.vasic.herald.ci.coverage.dropped`.
- `digital.vasic.herald.ci.lint.failed`.

#### **\*\*Routing logic\*\*:**

- Failed builds with @mentions of the author (via `subscriber\_aliases` mapping git-author-email → subscriber).
- Flaky tests batched into a daily digest (per §7.3 throttling).
- Security findings of CRITICAL severity bypass quiet hours.

#### **\*\*Subscriber commands\*\*:**

- `Retry:` – re-trigger the failed build (if integration grants permission).
- `Snooze: <duration>` – silence a flaky test.
- `Triage: <finding>` – mark a security finding for review.

### **### 18.5 Deploy Herald (`dherald`)**

**\*\*Focus\*\*:** Release / deployment / rollout events.

**\*\*Event subtree\*\*:** `digital.vasic.herald.deploy.\*`.

#### **\*\*Sources\*\*:**

- ArgoCD / Flux webhook (`application synced`, `health degraded`).
- Spinnaker pipeline notifications.
- Kubernetes `Event` watcher (Deployment rolled out, ReplicaSet failed).
- Custom deploy scripts invoking `dherald send`.

#### **\*\*Event types\*\*:**

- `digital.vasic.herald.deploy.started | succeeded | failed | rolled\_back`.
- `digital.vasic.herald.deploy.canary.promoted | canary.aborted`.
- `digital.vasic.herald.deploy.feature\_flag.toggled`.
- `digital.vasic.herald.deploy.config.drift\_detected`.

#### **\*\*Routing\*\*:**

- Production deploys notify `#prod-deploys` + an Email to release-eng.
- Failed deploys with rollback option button (Slack Block Kit `Action`).

#### **\*\*Subscriber commands\*\*:**

- `Rollback: <deploy\_id>` – initiate rollback (gated by elevated privilege).
- `Hold: <env>` – freeze further deploys to env.
- `Status: <env>` – current state of env.

**\*\*Composes with `rherald`\*\*** for the full release pipeline.

### ### 18.6 Alert Herald (`aherald`)

**\*\*Focus\*\*:** Monitoring-alert routing. Sits between alert producers (Alertmanager, Datadog, Grafana) and human/on-call channels (PagerDuty, OpsGenie, Slack). Provides smarter routing than Alertmanager's native receivers.

**\*\*Event subtree\*\*:** `digital.vasic.herald.alert.\*`.

**\*\*Sources\*\*:**

- Prometheus Alertmanager webhook.
- Grafana alert webhook.
- Datadog webhook.
- OpenTelemetry-native alert sources.
- Generic CloudEvents alert producers.

**\*\*Routing features\*\*:**

- **\*\*De-duplication\*\*:** same alert fingerprint within window → single notification.
- **\*\*Grouping\*\*:** related alerts (same `service` label + `severity`) collapse into a digest.
- **\*\*Inhibition\*\*:** parent alert silences child alerts (per Alertmanager's `inhibit\_rules`).
- **\*\*Escalation\*\*:** integrates with Temporal workflow for time-based escalation chains.
- **\*\*Quiet hours\*\*** override only for `severity=critical` + `category=incidents`.

**\*\*Subscriber commands\*\*:**

- `Ack:`, `Silence:`, `Resolve:` (same as `sherald`).
- `Escalate:` - bump severity, route to on-call.

### ### 18.7 Schedule Herald (`scherald`)

**\*\*Focus\*\*:** Scheduled jobs + recurring notifications (cron-like).

**\*\*Event subtree\*\*:** `digital.vasic.herald.schedule.\*`.

**\*\*Sources\*\*:**

- River queue periodic jobs.
- `scherald serve` runs an internal cron-style scheduler.
- External cron jobs invoking `scherald send`.

**\*\*Event types\*\*:**

- `digital.vasic.herald.schedule.job.started | succeeded | failed | skipped`.
- `digital.vasic.herald.schedule.digest.daily | weekly | monthly`.
- `digital.vasic.herald.schedule.reminder.due` (scheduled human reminders).

**\*\*Built-in digest builders\*\*:**

- Daily ops digest (yesterday's alerts + deploys + failed builds).
- Weekly project digest (PRs merged, issues opened/closed, contributors).
- Monthly compliance digest (per `cherald` if installed).

#### **\*\*Subscriber commands\*\*:**

- `Snooze: <reminder\_id> for <duration>`.
- `Cancel: <reminder\_id>`.
- `Remind me: <prose>` – parse and create a one-shot reminder.

#### **### 18.8 Incident Herald (`iherald`)**

**\*\*Focus\*\*:** Incident lifecycle – declare, escalate, resolve, postmortem.

**\*\*Event subtree\*\*:** `digital.vasic.herald.incident.\*`.

#### **\*\*Sources\*\*:**

- PagerDuty / OpsGenie webhooks (incident open/escalated/resolved).
- Internal `iherald send` from on-call tools.
- Auto-escalation triggered by `aherald` after N min unacknowledged.

#### **\*\*Event types\*\*:**

- `digital.vasic.herald.incident.opened | escalated | resolved | reopened`.
- `digital.vasic.herald.incident.commander.assigned`.
- `digital.vasic.herald.incident.update.posted`.
- `digital.vasic.herald.incident.postmortem.due | published`.

#### **\*\*Workflow (Temporal)\*\*:**

- On open: page primary on-call → wait 5 min → if no ack, escalate to secondary → wait 10 min → page manager.
- On resolve: schedule postmortem reminder 24h out.
- On postmortem.published: notify stakeholders.

#### **\*\*Subscriber commands\*\*:**

- `Page: <person>` – manual escalation.
- `IC:` (incident-commander) – assign IC role.
- `Update: <prose>` – post a public update.
- `Resolve:` – close the incident.

#### **### 18.9 Release Herald (`rherald`)**

**\*\*Focus\*\*:** Release lifecycle – tags, changelogs, dependency notifications.

**\*\*Event subtree\*\*:** `digital.vasic.herald.release.\*`.

#### **\*\*Sources\*\*:**

- Git tag webhooks.
- GoReleaser / Release-Please / semantic-release pipeline hooks.
- Renovate / Dependabot PR webhooks (`dependency.update.available`).
- OCI registry push events (`oci.image.pushed`).

#### **\*\*Event types\*\*:**

- `digital.vasic.herald.release.tagged | published`.
- `digital.vasic.herald.release.changelog.generated`.
- `digital.vasic.herald.release.dependency.update.available |

major.update.available`.  
– `digital.vasic.herald.release.sbom.generated | provenance.signed`.  
– `digital.vasic.herald.release.security\_advisory.published` (CVE for a project dep).

**\*\*Composes with `dherald`\*\*** – release publish event triggers deploy pipeline notification chain.

**\*\*Subscriber commands\*\***:

– `Promote: <version> to <env>`.  
– `Approve: <dep\_update>` – approve a Renovate PR via authorised channel.

### ### 18.10 Compliance Herald (`cherald`)

**\*\*Focus\*\***: Audit + compliance + governance events. For regulated environments (SOC2, HIPAA, PCI-DSS, GDPR).

**\*\*Event subtree\*\***: `digital.vasic.herald.compliance.\*`.

**\*\*Sources\*\***:

– Cloud audit logs (AWS CloudTrail, GCP Cloud Audit Logs, Azure Activity Log) via OpenTelemetry / native exporters.  
– IAM change webhooks (Okta, Auth0, AzureAD).  
– Vault / KMS access logs.  
– Database audit log streamers.  
– GitGuardian / TruffleHog secret-scan webhooks.

**\*\*Event types\*\***:

– `digital.vasic.herald.compliance.audit.access` (privileged action).  
– `digital.vasic.herald.compliance.policy.violation` (e.g. unencrypted bucket, S3 public ACL).  
– `digital.vasic.herald.compliance.cert.expiring | expired`.  
– `digital.vasic.herald.compliance.license.expiring | non\_compliant`.  
– `digital.vasic.herald.compliance.access.review.due` (quarterly access reviews).  
– `digital.vasic.herald.compliance.secret.exposed`.

**\*\*Routing\*\***:

– All events archived to immutable storage (`docs/herald/audit/` with WORM bit if filesystem supports).  
– High-severity events routed to security + legal channels.  
– Quarterly summary digest emailed to compliance officer.

**\*\*Constitution composition\*\***: `cherald` events plug into the parent project's Constitution §11.4.10 (credentials never tracked) and §11.4.18 (audit-log discipline).

### ### 18.11 Future flavors

Identified candidates (NOT in V2 scope; documented to lock-in event-subtree namespaces):

– **\*\*`fherald`\*\*** – Finance Herald (billing events, invoice paid/failed, MRR

```

alerts) - `digital.vasic.herald.finance.*`.
- **`mherald`** - Marketing Herald (campaign sent, A/B test winner) -
`digital.vasic.herald.marketing.*`.
- **`gherald`** - Game/Server Herald (multiplayer match events, anti-cheat
reports) - `digital.vasic.herald.game.*`.
- **`xherald`** - Experiment Herald (feature-flag experiment results) -
`digital.vasic.herald.experiment.*`.
- **`hherald`** - Hardware Herald (IoT device telemetry alerts) -
`digital.vasic.herald.hardware.*`.
- **`lherald`** - Legal Herald (contract renewals, NDA expirations) -
`digital.vasic.herald.legal.*`.
- **`vherald`** - Vendor Herald (third-party service status, SLA breaches) -
`digital.vasic.herald.vendor.*`.

```

---

## ## §19. Diary

`docs/herald/diary/main.md` (+ `main.pdf` + `main.html`) is the **append-only** conversation log of every inbound and outbound message Herald processes.

### ### 19.1 Diary path resolution (per R-20)

Resolved relative to the **operator-specified working directory**:

- Standalone Herald: defaults to Herald's own repository root.
- Herald as submodule: defaults to the parent project's root (discovered via the same parent-walk as `find\_constitution.sh`).
- Override: `--diary-root <path>` flag, or `[herald].diary\_root` in `config.toml`.

### ### 19.2 Schema (Markdown)

```markdown

2026-05-19T18:30:00Z · pherald · digital.vasic.herald.ci.failed

| Field | Value |
|----------|--|
| Tenant | `000000000-...-0001` |
| Event ID | `01931a7c-...-5678` |
| Source | `github.com/vasic-digital/Herald/actions/runs/4231` |
| Channels | tgram (delivered), slack (delivered), email (queued) |

Body:

```

> Build pao u `main`: 3/5 testova nije prošlo. Pogledaj log:
> https://github.com/vasic-digital/Herald/actions/runs/4231

```

Subscribers reached: alice (tgram + slack), bob (email).

19.3 Sync strategy (per R-03)

- **Pandoc** (Markdown → HTML5) + **WeasyPrint** (HTML → PDF) via Pandoc's ```markdown

2026-05-19T18:30:00Z · pherald · digital.vasic.herald.ci.failed

| Field | Value |
|----------|--|
| Tenant | 00000000-...-0001 |
| Event ID | 01931a7c-...-5678 |
| Source | github.com/vasic-digital/Herald/actions/runs/4231 |
| Channels | tgram (delivered), slack (delivered), email (queued) |

Body:

Build pao u **main**: 3/5 testova nije prošlo. Pogledaj log: <https://github.com/vasic-digital/Herald/actions/runs/4231>

Subscribers reached: alice (tgram + slack), bob (email).

19.3 Sync strategy (per R-03)

- **Pandoc** (Markdown → HTML5) + **WeasyPrint** (HTML → PDF) via Pandoc's `--pdf-engine=weasyprint` flag.
- **Triggers**:
 - Under `<flavor>herald serve`: **fsnotify-watched debounced builds** (500 ms idle, 2 s ceiling). A single editor save fires 4–12 events; debouncing avoids redundant rebuilds.
 - Under one-shot `<flavor>herald send`: post-write hook in the diary writer.
- **Manifest** at `docs/herald/diary/.sync.json` records `{md_sha256, html_sha256, pdf_sha256, source_md_sha256_at_build, built_at}`.
- **Anti-bluff gate** (`CM-DIARY-SYNC` per Universal §11.4.61):
 1. Read current `main.md` SHA-256.
 2. Assert it equals `source_md_sha256_at_build` in the manifest.
 3. For HTML: re-run Pandoc to a temp file; byte-equality with on-disk HTML.
 4. For PDF: extract text (`pdftotext main.pdf -`) and compare to deterministic extraction of the HTML body (byte-equal PDF comparison fails due to embedded timestamps + non-deterministic font subsetting).

§20. Extensibility

Per research Topic 6 (operations): two-tier extensibility model.

20.1 Tier A – in-tree adapters (default for V2)

Every channel adapter lives under `commons_messaging/channels/<name>` and implements the `Channel` interface (§11). Out-of-tree authors fork or vendor.

20.2 Tier B – subprocess + manifest (deferred to V2.1)

Spec'd now, implementation deferred. Herald discovers external channel binaries through a manifest file (`heraldchannel.yaml`):

```
```yaml
name: my-custom-channel
exec: /usr/local/lib/herald/channels/my-channel
```

```

supports:
 - text
 - markdown
 - attachments
env:
 required:
 - MY_CHANNEL_TOKEN
protocol_version: 1

```

Communication: stdin/stdout NDJSON with versioned envelope. No in-process linkage — adapters can be written in any language, sandboxed with OS tooling. Mirrors Apprise / Mattermost / git credential-helper.

### Explicitly rejected for V2:

- Go ``yaml name: my-custom-channel exec: /usr/local/lib/herald/channels/my-channel supports:
  - text
  - markdown
  - attachments env: required:
    - MY\_CHANNEL\_TOKEN protocol\_version: 1

Communication: stdin/stdout NDJSON with versioned envelope. No in-process linkage — adapters can be written in any language, sandboxed with OS tooling. Mirrors Apprise / Mattermost / git credential-helper.

### **\*\*Explicitly rejected\*\*** for V2:

- Go `plugin` stdlib (toolchain-version brittleness, no Windows, breaks `–trimpath`).
- HashiCorp `go-plugin` (RPC surface + per-plugin process mgmt – overhead vs. subprocess+JSON).
- Wazero/WASM (promising; WASI sockets still incomplete; network-bound adapter can't run usefully today). Marked as **\*\*V3 roadmap candidate\*\***.

----

## ## §21. Supply chain & release engineering

Per research Topic 5 (operations) + R-18:

### ### 21.1 Multi-binary versioning

`go.work` for local dev (git-ignored). Per-flavor `go.mod`. Lockstep release: one git tag → GoReleaser builds all flavors + tags `commons/vX.Y.Z`. Release-Please in `manifest` mode bumps all modules from Conventional Commits.

### ### 21.2 Reproducible builds

Mandatory flags: `CGO\_ENABLED=0 GOFLAGS=--trimpath`. Pinned `–ldflags “–buildid=–s –w”`. Record `GOTOOLCHAIN`.

### ### 21.3 SBOMs

Every binary + every container image generates **\*\*CycloneDX JSON + SPDX JSON\*\***

via [`syft`](https://github.com/anchore/syft). Attached as release assets and as OCI referrers on the image.

### ### 21.4 Signing

**Keyless `cosign`** (Sigstore OIDC via GitHub Actions) for:

- Binaries: `cosign sign-blob`.
- OCI images: `cosign sign`.

### ### 21.5 SLSA provenance (target: Build L3)

GitHub `actions/attest-build-provenance` emits **in-toto** statements signed via Sigstore. Move the build into a **reusable workflow** shared across mirrors to reach **SLSA Build L3**.

### ### 21.6 Distribution channels

Channel	Tool	Path
Homebrew tap	GoReleaser	<code>vasic-digital/homebrew-herald</code>
Scoop bucket	GoReleaser	<code>vasic-digital/scoop-herald</code>
<code>.deb</code> / <code>.rpm</code>	nFPM	<code>vasic-digital/herald-packages</code> apt+yum repos
Container images	GoReleaser → Docker	GHCR <code>ghcr.io/vasic-digital/&lt;flavor&gt;herald</code>
Source release	GitHub Releases	Multi-mirror per §103

**Verification UX**: `scripts/verify-release.sh` runs `cosign verify` + `cosign verify-attestation` against the published cert identity (`https://github.com/vasic-digital/Herald/.github/workflows/release.yml@refs/tags/*`).

---

## ## §22. Constitution integration

Once Herald is fully implemented and verified, **promote candidate universal rules** into the root Constitution, `AGENTS.md`, and `CLAUDE.md` **via a HelixConstitution PR** (audited per Universal §11.4 + §11.4.17 – universal-vs-project classification), never by editing the parent `constitution` Submodule from inside Herald (per R-09; see `CONSTITUTION_INHERITANCE.md` §"Promoting Herald rules into the constitution"). Each Flavor presents its Constitution extensions through the same promotion process.

> **Note**: Herald's implementation **MUST BE** in direct connection with the `constitution` Submodule – discovery via `find_constitution.sh` parent-walk per §103 / §105 of Herald Constitution.

See [`../../guides/HERALD_CONSTITUTION.md`](../../guides/HERALD\_CONSTITUTION.md) and [`../../guides/CONSTITUTION_INHERITANCE.md`](../../guides/CONSTITUTION\_INHERITANCE.md).

### ### 22.1 How `constitution` rules are extended via `constitutable/`

A parent project may drop `Constitution.md` / `CLAUDE.md` / `AGENTS.md` (in `constitutable/`, `constitutable/<flavor>/`, `constitutable/<flavor>/<variant>/`, etc.) to layer extensions or overrides on



top of the discovered `constitution/` Submodule.

**\*\*Load priority (per `constitutable/` mechanism):\*\***

`constitution` Submodule → `constitutable/\*\*` extensions/overrides for  
Constitution / `CLAUDE.md` / `AGENTS.md` → Project + Submodule definition files.

Each `constitutable/<path>` MUST contain at least one of: `Constitution.md`,  
`CLAUDE.md`, or `AGENTS.md`.

> **\*\*Note:\*\*** Tests in the `constitution` Submodule MUST be properly extended and  
updated as `constitutable/` content changes.

> **\*\*Note:\*\*** Herald is **\*\*primarily\*\*** consumed as a Submodule of another Project;  
in that case access to the `constitution` Submodule is through the root of that  
project (cloned under `project\_root/constitution` or a configured alternative).  
For **\*\*standalone development\*\*** of Herald, the `constitution` is cloned  
**\*\*alongside\*\*** Herald (sibling-clone) – current development setup uses this  
layout. See [`../../guides/CONSTITUTION_INHERITANCE.md` §"Standalone  
development"](`../../guides/CONSTITUTION_INHERITANCE.md#standalone-development`)  
and R-10.

> **\*\*Note:\*\*** Carefully investigate the codebase of the `constitution` Submodule  
before any changes are applied. Comprehensive analysis precedes any extension or  
promotion.

---

## ## §23. Specification documents (change rule)

We MUST keep the following rule / mandatory constraint in `Constitution.md`  
(parent), `AGENTS.md`, `CLAUDE.md`, and `HERALD\_CONSTITUTION.md` §106:

> **\*\*IMPORTANT:\*\*** Whenever this document (`docs/specs/mvp/specification.V2.md`) or any file under `docs/specs/` (any depth) is modified, **\*\*comprehensive planning and implementation of all changes is MANDATORY\*\***. This rule does NOT apply to creating or renaming files; for those, explicitly tell the worker (CLI agent) what to do with the new path. Treat every spec edit as a project-wide ripple, not a doc tweak.

Inheritance-gate invariant **\*\*I7a-c\*\*** enforces presence of this anchor in  
`CLAUDE.md`, `AGENTS.md`, and `HERALD\_CONSTITUTION.md`.

---

## ## §24. Documentation

`README.md` MUST be fully updated with all relevant project details. All user guides and manuals are properly linked from `README.md`, including (when present):

- `docs/flavors/<flavor>/` – per-flavor user manual.
- `docs/channels/<channel>/` – per-channel setup guide (credentials, webhooks, signing).
- `docs/operations/` – deployment + doctor + backups + upgrades.
- `docs/security/` – credential handling, signing keys, secret rotation.

We MUST have **mandatory documentation up to the smallest details**: full user guides, manuals, diagrams, schemes in all major formats (Markdown source + PDF + HTML siblings per §11.4.61 + §11.4.65) and other relevant materials.

## ## §25. Testing

Whole project and all derivatives MUST follow testing rules from the root Constitution (`Constitution.md`), `CLAUDE.md`, `AGENTS.md` in the `constitution` Submodule. Specifically:

- **No bluffing** – every PASS carries positive evidence (§11.4).
- **Paired mutation gates** – every new gate has a paired mutation proving it catches regressions (§1.1).
- **Captured evidence** for test logs (§11.4.2).
- **Test pyramid**: unit tests in each module, integration tests against ephemeral Postgres + Redis (testcontainers-go), end-to-end tests with real-channel sandboxes.
- **No fakes beyond unit tests** (Universal §11.4.27) – integration + end-to-end tests use real Postgres, real Redis, real channel-sandbox or test-bot endpoints.

CI runs the inheritance gate (`tests/test\_constitution\_inheritance.sh`) as a precondition to any other test.

## ## §26. Operations

### ### 26.1 Deployment

Reference deployment topologies:

- **Single-host Docker Compose** – Herald flavor + Postgres + Redis on one host. Suitable for small teams.
- **Kubernetes Deployment** – Herald flavor as a Deployment, Postgres + Redis as separate StatefulSets (or external managed). HPA on `messaging.client.operation.duration` p95.
- **Serverless / Lambda** – `

### ### 26.2 Backups

- Postgres: daily logical backup (`pg\_dump`) + WAL archiving for PITR.
- Redis: AOF rewrite + RDB snapshots.
- Diary: standard git history is the backup (everything is in `docs/herald/diary/main.md`).

### ### 26.3 Upgrades

- Lockstep across flavors via §21.1 release model.
- Database migrations are **forward-compatible** for 2 minor versions (so a rolling restart works during a deploy).
- `

### ### 26.4 Operator runbooks

`docs/operations/runbooks/` contains one runbook per common operational scenario:

- "Postgres connection storm" → check `herald\_queue\_depth` + `pg\_stat\_activity`.
- "Telegram bot suspended" → rotate token, update `.env`, run `- "Dead-letter spike" → query `dead\_letters`, identify pattern, replay or purge.
- "DKIM verification failing" → DNS check via `

### ### 26.5 Operator quickstart (5-minute Docker Compose)

Goal: a working `pherald` ingesting one webhook and fanning out to Telegram + Email in five minutes on a fresh laptop. This is the canonical "hello world" deployment.

```
```yaml
# docker-compose.quickstart.yml – referenced from containers/quickstart/
version: "3.8"
services:
  postgres:
    image: postgres:16-alpine
    container_name: herald-postgres
    environment:
      POSTGRES_USER: herald
      POSTGRES_PASSWORD: ${HERALD_DB_PASSWORD}
      POSTGRES_DB: herald
    ports:
      - "24100:5432"
    volumes:
      - herald-pg:/var/lib/postgresql/data
    healthcheck:
      test: ["CMD-SHELL", "pg_isready -U herald"]
      interval: 5s
  redis:
    image: redis:7-alpine
    container_name: herald-redis
    command: ["redis-server", "--requirepass", "${HERALD_REDIS_PASSWORD}"]
    ports:
      - "24200:6379"
    volumes:
      - herald-redis:/data
  otel-collector:
    image: otel/opentelemetry-collector-contrib:latest
    container_name: herald-otel
    command: ["--config=/etc/otel-config.yaml"]
    volumes:
      - ./otel-config.yaml:/etc/otel-config.yaml:ro
    ports:
      - "24417:4317"
  pherald:
    image: ghcr.io/vasic-digital/pherald:latest
    container_name: herald-pherald
    depends_on:
      postgres: { condition: service_healthy }
      redis: { condition: service_started }
    environment:
      HERALD_POSTGRES_DSN:
```

```

"postgres://herald:${HERALD_DB_PASSWORD}@postgres:5432/herald?sslmode=disable"
  HERALD_REDIS_ADDR:    "redis:6379"
  HERALD_REDIS_USER:    "default"
  HERALD_REDIS_PASSWORD: "${HERALD_REDIS_PASSWORD}"
  OTEL_EXPORTER_OTLP_ENDPOINT: "http://otel-collector:4317"
  OTEL_RESOURCE_ATTRIBUTES: "deployment.environment=quickstart"
  TELEGRAM_BOT_TOKEN:   "${TELEGRAM_BOT_TOKEN}"
  TELEGRAM_CHAT_ID:     "${TELEGRAM_CHAT_ID}"
ports:
  - "24091:24091"      # webhook ingress
  - "24090:24090"      # admin (/livez, /readyz, /metrics)
command: ["serve"]
volumes:
  herald-pg:
  herald-redis:

```

Steps:

```

# 1. Clone Herald + containers submodule
git clone git@github.com:vasic-digital/Herald.git && cd Herald
git submodule update --init

# 2. Copy & fill the example .env
cp .env.example .env
$EDITOR .env # set HERALD_DB_PASSWORD, HERALD_REDIS_PASSWORD,
TELEGRAM_BOT_TOKEN, TELEGRAM_CHAT_ID

# 3. Boot
docker compose -f containers/quickstart/docker-compose.quickstart.yml up -d

# 4. Wait for ready
curl --retry 30 --retry-delay 2 --retry-connrefused
http://localhost:24090/readyz

# 5. Send a test event
curl -X POST http://localhost:24091/v1/events \
  -H "Content-Type: application/cloudevents+json" \
  -d '{
    "specversion":"1.0",
    "id":"01931a7c-3f4e-7000-9abc-def012345678",
    "source":"https://example.com/quickstart",
    "type":"digital.vasic.herald.system.host.cpu_high",
    "subject":"tag:*",
    "data":{"host":"laptop","cpu_pct":97}
  }'

# 6. Verify
docker logs herald-pherald --tail=20
cat docs/herald/diary/main.md | tail -30

```

A successful run delivers a Telegram message to the configured chat within ~3 seconds, appends a diary entry, and emits OTel traces visible at ``yaml

docker-compose.quickstart.yml — referenced from containers/quickstart/

```
version: "3.8" services: postgres: image: postgres:16-alpine container_name: herald-postgres environment: POSTGRES_USER: herald POSTGRES_PASSWORD: ${HERALD_DB_PASSWORD} POSTGRES_DB: herald ports: - "24100:5432" volumes: - herald-pg:/var/lib/postgresql/data healthcheck: test: ["CMD-SHELL", "pg_isready -U herald"] interval: 5s redis: image: redis:7-alpine container_name: herald-redis command: ["redis-server", "--requirepass", "${HERALD_REDIS_PASSWORD}"] ports: - "24200:6379" volumes: - herald-redis:/data otel-collector: image: otel/opentelemetry-collector-contrib:latest container_name: herald-otel command: ["--config=/etc/otel-config.yaml"] volumes: - ./otel-config.yaml:/etc/otel-config.yaml:ro ports: - "24417:4317" pherald: image: ghcr.io/vasic-digital/pherald:latest container_name: herald-pherald depends_on: postgres: { condition: service_healthy } redis: { condition: service_started } environment: HERALD_POSTGRES_DSN: "postgres://herald:${HERALD_DB_PASSWORD}@postgres:5432/herald?sslmode=disable" HERALD_REDIS_ADDR: "redis:6379" HERALD_REDIS_USER: "default" HERALD_REDIS_PASSWORD: "${HERALD_REDIS_PASSWORD}" OTEL_EXPORTER_OTLP_ENDPOINT: "http://otel-collector:4317" OTEL_RESOURCE_ATTRIBUTES: "deployment.environment=quickstart" TELEGRAM_BOT_TOKEN: "${TELEGRAM_BOT_TOKEN}" TELEGRAM_CHAT_ID: "${TELEGRAM_CHAT_ID}" ports: - "24091:24091" # webhook ingress - "24090:24090" # admin (/livez, /readyz, /metrics) command: ["serve"] volumes: herald-pg: herald-redis:
```

Steps:

```
```bash
1. Clone Herald + containers submodule
git clone git@github.com:vasic-digital/Herald.git && cd Herald
git submodule update --init

2. Copy & fill the example .env
cp .env.example .env
$EDITOR .env # set HERALD_DB_PASSWORD, HERALD_REDIS_PASSWORD,
TELEGRAM_BOT_TOKEN, TELEGRAM_CHAT_ID

3. Boot
docker compose -f containers/quickstart/docker-compose.quickstart.yml up -d

4. Wait for ready
curl --retry 30 --retry-delay 2 --retry-connrefused
http://localhost:24090/readyz

5. Send a test event
curl -X POST http://localhost:24091/v1/events \
-H "Content-Type: application/cloudevents+json" \
-d '{
 "specversion":"1.0",
 "id":"01931a7c-3f4e-7000-9abc-def012345678",
 "source":"https://example.com/quickstart",
 "type":"digital.vasic.herald.system.host.cpu_high",
 "subject":"tag:*",
 "data":{"host":"laptop","cpu_pct":97}
}'
```

```
6. Verify
docker logs herald-pherald --tail=20
cat docs/herald/diary/main.md | tail -30
```

A successful run delivers a Telegram message to the configured chat within ~3 seconds, appends a diary entry, and emits OTel traces visible at <http://localhost:24417> (Collector logs).

## 26.6 Disaster recovery

Recovery objectives (V2 baseline; per-tenant overrides allowed):

Class	RPO target	RTO target	Mechanism
Postgres data	5 min	30 min	WAL archiving + PITR ( <a href="#">pgbackrest</a> recommended)
Redis state	5 min	5 min	AOF rewrite + RDB snapshot every 5 min; warm replica optional
Diary	0 (git)	minutes	<a href="#">git push</a> fan-out to 4 mirrors per §103; restore via <a href="#">git clone &lt;any mirror&gt;</a>
Credentials	0 (out-of-band)	depends on operator	Vault / 1Password / OS keychain; Herald NEVER stores plaintext credentials
Configuration	0 (git)	minutes	<a href="#">config.toml</a> is git-committed (no secrets); <a href="#">.env</a> is git-ignored, backed up out-of-band by operator
Workflow state (Temporal opt-in)	5 min	30 min	Temporal's own backup/restore; out of Herald scope

### Cold-start recovery procedure:

1. Restore Postgres from latest WAL position.
2. Restore Redis from latest RDB (transient state is fine to lose; rate-limit buckets repopulate).
3. [git clone](#) Herald + [containers](#) submodule from any mirror.
4. Re-provision [.env](#) from out-of-band credential store.
5. [docker compose up -d](#).
6. [<flavor>herald doctor](#) — confirm all green.
7. [<flavor>herald deadletter list](#) — replay any in-flight messages caught at the time of failure.

**Tested scenarios** (each MUST have an integration test under [tests/dr/](#)):

- Postgres primary loss → failover to replica.
- Redis loss → cold restart (token buckets reset, no data corruption).
- Single Herald replica crash → other replicas continue (multi-instance deployments).
- Whole-host loss → cold-start from backups.
- All four git mirrors momentarily unreachable → push deferred, queued locally, retried.

## §27. Roadmap

### 27.1 V2 → V3 candidates

Candidate	Notes
WASM channel adapters (wazero)	Once WASI sockets stabilise — Topic 6 (operations)
LLM-driven message rendering	Auto-summarize long events to channel-appropriate brevity
Slack workflow builder steps	Beyond V2 advanced tier
WhatsApp Business custom-template approval workflow	Once Cloud API matures
Mini-Apps inside Telegram	Subscriber-side UI
Adaptive Card Designer integration for Teams	UX for non-developer template authors
First-class Matrix protocol channel	If demand materializes
Mattermost adapter	Open-source alternative to Slack
Rocket.Chat adapter	Self-hosted alternative

## 27.2 Deferred V1 Recommendations

V1 R-NN items that V2 did not yet implement (with intended landing):

R	Status in V2	Landing
R-01	✓ Applied (24XXX ports in §9.4)	—
R-02	✓ Applied (single binary, two modes §3.1)	—
R-03	✓ Specified (§19.3)	First implementation cycle
R-04	✓ Applied (§3.3)	—
R-05	✓ Specified (delivery evidence enum §11.13)	First adapter cycle
R-06	✓ Specified (§11.2 Max behind build tag)	When sanctions advisory drafted
R-07	✓ Applied (§7.1)	—
R-08	✓ Applied (§12 ConversationRef)	—
R-09 / R-10 / R-14 / R-15 / R-19 / R-20 / R-21 / R-22	✓ Applied	—
R-11 / R-12	✓ Specified (§9.5)	When first SDK / containers lands
R-13	Deferred — constitutable/ loader + I8/I9 gates	Next constitution PR
R-16	✓ Specified (§15)	First implementation cycle
R-17	✓ Specified (§8.2 algorithm)	First commons_prefix commit

R	Status in V2	Landing
R-18	✅ Specified (\$21.1)	First release pipeline

## 27.3 Cost considerations

Order-of-magnitude indicative pricing as of 2026-Q2 (operators MUST re-verify at deployment time; tiers change frequently). Herald itself is open-source / no licence fee — these costs are external dependencies an operator pays for in production.

### Infrastructure (per single-region deployment):

Component	Self-host minimum	Managed (illustrative)
Postgres 16 (2 vCPU / 4 GiB / 20 GiB)	~\$15/mo (Hetzner CX21, DO Basic)	RDS db.t4g.small ~\$35/mo
Redis 7 (1 GiB)	~\$10/mo (same node as Postgres for small tenants)	ElastiCache cache.t4g.micro ~\$15/mo
Herald binary host (1 vCPU / 1 GiB)	~\$5/mo	ECS Fargate 0.25 vCPU ~\$10/mo
OTel Collector	sidecar / shared	Grafana Cloud free tier or self-host
<b>Single-tenant baseline</b>	<b>~\$30/mo</b>	<b>~\$60–80/mo</b>

### Transactional email provider (ESP) — pick one based on volume + deliverability needs:

Provider	Free tier	Paid tier entry	Bounce/complaint webhook	Notes
<a href="#">Resend</a>	3 000 emails/mo, 100/day	\$20/mo for 50k	✓ (Event Webhook)	Best DX of the three; Idempotency-Key header support.
<a href="#">Postmark</a>	none — paid only	\$15/mo for 10k	✓ (Bounce / Spam / Open / Click streams)	Best deliverability reputation for transactional traffic; HTTP 406 for blocked recipients.
<a href="#">SendGrid</a>	100 emails/day free forever	\$19.95/mo for 50k	✓ (Event Webhook)	Widest ecosystem; complex pricing tiers.
Self-host SMTP	\$0	infra + IP-reputation labour	DSN parsing only	Only if operator has DNS / reverse-DNS / warm IPs already; otherwise deliverability tanks.

### Messaging platform fees:

Channel	Cost model
Telegram Bot API	Free, no fee per message.



Channel	Cost model
Slack	Free for public/private channel webhooks; paid plans only required for full Slack workspace, not for the integration.
Discord	Free webhooks; free bot.
Microsoft Teams	Free incoming webhooks; Bot Framework requires Azure Bot Service ~\$0.50/1 k messages.
Lark / Feishu	Free for chatbots within an org.
WhatsApp Business Cloud API (Meta direct)	Per-conversation pricing, ~\$0.005–\$0.15 depending on country + category.
WhatsApp Business via Twilio	Twilio markup on top of Meta price.
Viber	Free for service messages within 30 days of user interaction; promotional pricing varies.
Max	Free Bot API at the time of writing (verify at deploy).
ntfy / Gotify	Self-hosted = \$0; ntfy.sh free public instance.

#### Supply-chain tooling:

Tool	Cost
GitHub Actions (public repo)	Free unlimited minutes.
GitHub Actions (private repo)	2 000 free minutes/mo on Linux; \$0.008/min after.
Sigstore / cosign	Free (keyless via OIDC).
syft (SBOM)	Free / OSS.
GoReleaser OSS	Free.
GoReleaser Pro	\$19/mo if Herald needs the per-subproject <code>tag_prefix</code> feature (R-18 alternative — V2 default does not require Pro).

#### OpenTelemetry backend:

Backend	Free tier
Grafana Cloud	10 k series metrics, 50 GiB logs, 50 GB traces /mo
Honeycomb	20 M events/mo
Datadog	5 hosts free for 14 days
Self-host Prometheus + Tempo + Loki	\$0 + operator time

**Total order-of-magnitude TCO** for a small team running `pherald` + `sherald` self-hosted on Hetzner with Resend free tier: **~\$30–60/mo** of recurring infrastructure. Operator labour for upgrades, monitoring, and incident response is the larger real cost — design choices in §17 (observability) and §26 (operations) exist specifically to minimise that labour.

---

## §28. Notes & open questions

- The list of integrated messengers in §11 is the V2 commitment; additional channels may be added in later iterations.
  - Whether to ship a **first-party web UI** for subscriber preference management is an open question — current direction is "no UI in V2; expose REST API only; let third parties build UIs".
  - Whether **aherald** should incorporate **machine-learning-based alert grouping** (similar to BigPanda, Moogsoft) is deferred to V3.
  - Whether to support **end-to-end encryption** of messages (Signal Protocol via olm/megolm) is deferred — only Matrix bridges currently demand this.
  - The **rate-limit cap** for AI-CLI-agent subscribers needs operator-level tuning per deployment to avoid runaway invocation; default suggested 60 messages/minute per agent token.
- 

## §29. Changelog (V1 → V2)

### V1 → V2 changes (2026-05-19):

- **Renamed** `specification.md` → `specification.V1.md` (preserved as historical record).
- **Created** `specification.V2.md` (this document).
- **New sections** (no V1 counterpart): §2.2 What Herald is NOT, §2.3 Architecture diagram, §4 Event model & wire format (CloudEvents), §5 Architecture overview, §6 Channel addressing & routing (Apprise-style URLs + tags), §7 Subscriber model (identity, preferences, quiet hours, locale), §13 Templating, §14 Localization, §15 Security model (three-layer), §16 Multi-tenancy & isolation (Postgres RLS + Redis ACL), §17 Observability & SLOs (OpenTelemetry), §20 Extensibility (Tier A + Tier B), §21 Supply chain & release engineering (SLSA L3), §26 Operations, §27 Roadmap.
- **Populated V1 TBDs:**
  - **System Herald** (was TBD) → fully specified §18.3.
  - **Project Herald's Constitution rules** → folded into §18.2 subscriber-command contract.
  - **Input commands** → expanded per-flavor in §18.
  - **Input attachments** → §15.3 content-level scanning + size limits.
  - **Others and misc** → §18.4–18.11 (7 new flavors + future-flavor namespace reservations).
- **New flavors** beyond V1's **pherald** + **sherald**: **bherald** (Build), **dherald** (Deploy), **aherald** (Alert), **scherald** (Schedule), **iherald** (Incident), **rherald** (Release), **cherald** (Compliance) — plus reserved namespaces for **fherald** / **mherald** / **gherald** / **xherald** / **hherald** / **lherald** / **vherald**.
- **Game-changing architecture adoptions** (from research):
  - **CloudEvents v1.0** as canonical wire format.
  - **Watermill** as routing core.
  - **River + Postgres** as default queue (transactional enqueue); NATS JetStream as opt-in.
  - **Apprise URL+tag** channel model.
  - **Knock-style preferences** matrix.
  - **OpenTelemetry** end-to-end + Prometheus semantic conventions for messaging.
  - **PostgreSQL RLS** + Redis ACL for multi-tenancy.
  - **SLSA L3** supply chain (cosign + syft SBOM + in-toto provenance).
  - **MJML** for email templates, compiled at author time.
  - **nicksnyder/go-i18n** with CLDR plurals.
- **All V1 text-level Recommendations** (R-01 / R-04 / R-09 / R-10 / R-15 / R-19 / R-20 / R-21 / R-22) carried forward and re-expressed in V2 context.

- **Per-channel feature matrix** (§11.13) — every channel now has documented V1-minimum, V2-advanced, out-of-scope tiers + delivery-evidence ceiling.
- **Email deep dive** (§11.9) — DKIM signing (RFC 6376) + RFC 8058 one-click unsubscribe + DSN bounce parsing + suppression list + **doctor email** DNS verification, addressing Gmail/Yahoo 2024 sender requirements.
- **Removed** the V1 Review section — its findings are folded into the V2 body or marked applied/deferred in §27.2. V1's full Review remains in **specification.V1.md** for traceability.

## §30. V2 self-review log

Added 2026-05-19 by a focused self-review pass on V2 r1. Each finding is tagged **V2-R-NN** to distinguish from V1's **R-NN** series. **All findings in this section have been applied in V2 r2** unless explicitly marked Deferred.

### 30.1 Gaps closed (applied this revision)

- **V2-R-01. Missing Go value types referenced by the **Channel** interface.** §11 previously declared **Channel** with **Capabilities**, **OutboundMessage**, **Receipt**, and **InboundHandler** as forward references without definitions. Applied: new **§11.0** ("Channel adapter contract") defines all referenced types — **Capabilities**, **DeliveryEvidence** (enum), **OutboundMessage**, **Body**, **Attachment**, **Recipient**, **Action** / **ActionType**, **Priority**, **Receipt**, **InboundHandler**, **InboundEvent**. These live in **commons/types.go**; adapters are forbidden from inventing equivalents.
- **V2-R-02. Missing **webhook\_sources** table schema.** §5.5 referenced the table but never defined it. Applied: full schema (signature\_kind, signature\_header, secret\_encrypted, secret\_rotated\_at, ip\_allowlist, replay\_window\_s) with RLS policy and **<flavor>herald webhook rotate** CLI.
- **V2-R-03. Missing **channel\_addresses** table schema.** §6 referenced the table but never defined it. Applied: full schema with **address\_url** (env-interpolated at load time so secrets stay out of the row), **tags** GIN index, **priority\_floor**, **enabled** + health-check columns.
- **V2-R-04. Missing **thread\_refs** table schema.** §12 prose-only definition. Applied: full schema with composite PK (**tenant\_id**, **logical\_thread\_id**, **channel**), **last\_activity\_at** for time-window GC.
- **V2-R-05. Missing **quarantined\_messages** table schema.** §15.2 referenced but never defined. Applied: full schema with **triage\_status** enum, partial index on pending rows, 30-day auto-expiry policy, CLI verbs.
- **V2-R-06. **subscribers.handle** had no uniqueness constraint.** Original schema allowed duplicate handles within a tenant — operationally surprising. Applied: **UNIQUE (tenant\_id, handle)**. Also added **roles TEXT[]** and **metadata JSONB** columns for the operator-mapped privilege model and extensible per-subscriber data, plus an explicit composite index on **tenant\_id**.
- **V2-R-07. Go toolchain version not pinned.** §9.1 said "written in Go" without naming a minimum. Without **slog** and the OTel **slog** bridge, observability won't compile. Applied: **Go ≥ 1.22** mandatory; **toolchain** directive across all **go.mod** files; bump path documented.
- **V2-R-08. License not named.** Multiple references to "the LICENSE file" without spelling out the terms. Applied: §9.1 now points to the parent project's **LICENSE** and requires top-level license comments in every **go.mod**; license compliance check is a **cherald** responsibility.
- **V2-R-09. SIGTERM / graceful-shutdown semantics undefined.** Both modes (**send**, **serve**) lacked a documented exit contract. Applied: §3.1 now specifies trap-SIGTERM, stop-ingress, drain with **HERALD\_SHUTDOWN\_GRACE** (default 30 s), flush OTel exporter, close Postgres + Redis, exit 0/1 distinction. Second SIGTERM forces exit.

- **V2-R-10. OpenTelemetry env vars not enumerated.** §17.1 said "OTLP/gRPC to a Collector" without naming the standard SDK env vars. Operators couldn't deploy without reading OTel spec. Applied: full table of `OTEL_*` env vars Herald honours, including resource attributes Herald sets by default and the messaging semantic-convention version pin (v1.30+).
- **V2-R-11. Data retention + privacy was unspecified.** No section on how long Herald holds onto subscriber data, dead letters, quarantined messages, or diary entries; no GDPR right-to-erasure / right-to-portability flow. Applied: new §16.1 with per-class retention defaults (table-driven), `<flavor>herald subscriber forget` and `subscriber export` flows, diary-redaction opt-out, data-sovereignty note.
- **V2-R-12. Operator quickstart missing.** New operators couldn't get from clone to first delivery without reading the whole spec. Applied: §26.5 with a complete Docker Compose YAML, 6-step bring-up procedure, and a verifiable end-to-end test (curl webhook → Telegram delivery + diary append + OTel trace).
- **V2-R-13. Disaster recovery posture unspecified.** Backups were mentioned but RPO/RTO targets, cold-start procedure, and tested scenarios were absent. Applied: §26.6 with per-class RPO/RTO table, cold-start procedure, and named integration-test scenarios that MUST live under `tests/dr/`.
- **V2-R-14. Cost considerations missing.** Operators had no order-of-magnitude TCO guidance to choose between self-hosted SMTP vs Resend/Postmark, between Grafana Cloud vs self-host Prometheus, etc. Applied: §27.3 with infrastructure / ESP / messaging-platform / supply-chain-tooling / observability-backend pricing tables (with `verify-at-deploy` caveat).

## 30.2 Deferred (out of scope for this self-review)

These findings were noted but require their own focused pass:

- **V2-R-15. ASCII architecture diagram alignment.** Current diagram in §2.3 has minor box-drawing misalignment at the `L` corners under proportional-font renderers. Deferred — fixing requires Mermaid or PlantUML adoption + a renderer pipeline; not blocker for V2.
- **V2-R-16. Heading-depth normalisation.** Some §18.X flavor subsections go 4 levels deep (heading → field → subfield → list). Considered but rejected — depth tracks meaningful structure; flattening loses navigation cues.
- **V2-R-17. "V1 minimum" vs "V1 (MVP)" wording inconsistency.** Cosmetic. Deferred to a docs-only polish PR.

## 30.3 Method

The pass was a single-author read-through immediately following V2 r1 authoring, focused on internal consistency (prose ↔ formal definitions), operational completeness (can someone deploy this?), and compliance gaps (GDPR, license, version pinning). Findings rated High when a downstream reader would file a bug, Medium when a future implementer would have to invent a missing detail, Low for stylistic. Only High + Medium findings were applied.

## 30.4 Audit trail

- Pre-review commit: V2 r1 at `96b7cc6`.
- This commit: V2 r2 (one logical commit covering V2-R-01..V2-R-14).
- Inheritance gate before and after: 12 PASS / 0 FAIL. Meta-test: ✓.
- All four Herald mirrors targeted on push.