

Changelog — vasic-digital/tmux

All releases use Semantic Versioning. Every release carries a positive-runtime-evidence verification record per the project's anti-bluff covenant (Constitution §101 / universal §11.4).

[tmux-1.0.45] (also v1.0.45) — Unreleased (intended 2026-09-01)

A **workable-items tracker-integrity** release (versionCode 46). The tmux product surface is UNCHANGED from v1.0.44 — same hardened tmux 3.7b binary, same tmx wrapper, same submodule pin (e802909de06012a4df6209d55e86487c56223163). Everything below is in the §11.4.93 SQLite single-source-of-truth engine (cmd/workable-items/), the release gate (scripts/verify.sh), and the tracker corpus itself.

Fixed

- **TMX-094's fix was structurally suppressed on the live corpus — an add-created row still rendered into NO tracker (found during release verification, 2026-09-01).** sourcelessItems derived a block code from an item's stored code_ordinal, but every workable-items add row carries the SENTINEL code_ordinal = 0, which renders as code A0 — and Fixed.md:2585 holds a genuine ### A0. Initial migration from ATMOSphere project ... block that declares no **TMX-ID:**. codeOwners["A0"][""] therefore answered for EVERY add-created row in category A, silently suppressing exactly the rows TMX-094 exists to render. The codebase's own rule is stated at validate_identity.go:163 — *"ordinal sentinel — asserts no block claim"* — and sourcelessItems contradicted it. Measured proof: TMX-099 and TMX-100 were written to the DB with current_location = Issues and rendered into neither tracker (sourceless count=0 against the real corpus). The stored-ordinal check is now skipped when CodeOrdinal <= 0, leaving the atmOrdinal fallback intact. Post-fix both rows render as real parseable blocks (### A99. / ### A100.), issues_parsed 10 → 12,

round-trip byte-identical, validate 0 findings. Guarded by TestSourcelessItems_SentinelOrdinalIsNotABlockClaim (§11.4.115 polarity switch; RED_MODE=1 reproduces count=0 on the pre-fix artifact) plus a §11.4.201(1) false-positive guard, and proven load-bearing by a paired §1.1 mutation (reverting the guard makes the RED FAIL). Why the original tests missed it: they exercised each signal with synthetic fixtures that contained no <CAT>0 block, so they agreed with the code instead of catching it — a fixture-realism gap (§11.4.245).

- **headingRE required a period after the block ordinal, so every SPACE-form heading was silently invisible to the SSoT — the block's body was absorbed into the PRECEDING item's raw_body and its own row sat in the DB with a sentinel identity, so nothing could locate it in the markdown.** cmd/workable-items/parser.go matched `^###\s+([A-Z])(\d+)\.\s+(.*)$`, i.e. `### A52.` but never `### G5 NAME-001 — ...`. Measured, not inferred: the sentinel is category Z / code_ordinal 0 ("heading never parsed"). The corpus carries BOTH forms — 23 of the Fixed.md block headings were space form (measured at tag tmux-1.0.44; the corpus repair in this same release adds more) (measured 2026-09-01, recorded in reconcile.go's own contract comment) — and the reconciler's matcher blockCodeRE had **always** accepted both, so the narrow parser was an internal inconsistency between two components of one tool, not a deliberate contract. Widened to `^###\s+([A-Z])(\d+)(?:\.\s+|\s+)\S.*$`. In the SAME change both regexes were also **TIGHTENED** and are now changed together by construction: blockCodeRE went from the permissive `^###\s+([A-Z])(\d+)[\s]` to `^###\s+([A-Z])(\d+)(?:\.\s+|\s+)\S`, so the two agree on their accepted set. The separator is now REQUIRED and must be followed by real title text, which correctly REFUSES `### A50X` (no separator), `### A1.x` (period not followed by whitespace), `### A12.5` (a decimal token would have yielded ordinal 12, title "5 ..."), `### A1.` and `### A1` (empty title — its heading_hash would be computed over ""). Blast radius was measured BEFORE any sync: 90 loose-accepted corpus headings scanned, 0 dropped, control-needle proven (§11.4.201(7)(b)). The contract comment above headingRE is declared the §11.4.245 SPECIFIED ORACLE for heading_forms_test.go, whose accept/refuse table is derived from the prose contract rather than from the regex — so a change to one that is not a change to the other FAILs.

- **Widening the parser exposed SIX further defects in the sync engine, each fixed at root cause rather than patched at the call site.** None was reachable while the space-form blocks were invisible; every one is a real defect the narrow regex had been masking.

1. **UpsertItem decided INSERT-vs-UPDATE on heading_hash alone,** so a newly-parseable block died on UNIQUE constraint failed: items.atm_id (reproduced on the live corpus for TMX-072). An item's identity is its atm_id; heading_hash is a FINDING AID that must be free to change when the heading legitimately changes. cmd/workable-items/db.go now resolves an explicit ****TMX-ID:**** to its existing row, UPDATES it, and REFRESHES the hash so the next sync binds on the hash instead of repeating the miss.
2. **Two blocks for one item silently COLLAPSED into one row** whose survivor depended on read order. Replaced with a fail-closed guard over the UNION of ****TMX-ID:**** (ExplicitATM) and heading identity (HeadingHash) across every parsed block in BOTH files — it REFUSES rather than picking a winner.
3. **That guard persisted document_sources BEFORE it ran,** so a REFUSED sync still mutated the git-tracked SSoT. Raw text is now held in locals and both blobs are persisted only after the guard passes (§11.4.252 persist-after-guard).
4. **An identity rebind replaced a row's category / ordinal / title / body with NO history row and NO counter** — validate reported 0 findings because the result was self-consistent. The prior identity is now captured, written to item_history, counted in SyncResult (RebindDetails) and printed by the CLI (§11.4.226).
5. **itemContentEqual compared Category but not CodeOrdinal / HeadingHash,** so an ordinal-only renumber took the "unchanged" path and the row kept a stale ordinal + hash PERMANENTLY — every later sync re-missed the hash and re-reported unchanged. Both fields are now compared (identity IS content); rows self-heal from either drift.
6. **lookupByHeadingHash matched on error TEXT and returned ("", nil) for real DB errors** — a failed query read as a hash MISS, which mints a duplicate row. Now errors.Is(err, sql.ErrNoRows); real errors propagate.

- **workable-items add computed a heading_hash the parser could never reproduce — it hashed the ATM id where the parser hashes the BLOCK CODE (TMX-093).** add.go passed atm into computeHeadingHash, while parser.go builds code := category + ordinal (parser.go:186) before hashing it (parser.go:201). An add-created row therefore could not bind to its own block by hash,

and survived only via the ExplicitATM rebind fallback in `sync_md_to_db.go` — which REPLACES the row and refreshes the hash, **masking** the split behind a one-off rebind that looked like normal operation. Fixed by hashing the block code the writer actually emits: `blockCode := category + atmOrdinal(atm)`, mirroring `sync_db_to_md.go:195-201`, which renders `### <Category><CodeOrdinal>.` and substitutes `atmOrdinal(ATMID)` when `CodeOrdinal` is the 0 sentinel — so the hash tracks whatever heading the writer emits, for every ATMID form the writer accepts.

- **workable-items add --category accepted values that render a heading the parser can NEVER read (TMX-095, new this cycle).**

`AddItem` accepted ANY Category string and merely uppercased it, while `headingRE` accepts exactly one letter followed by digits. Measured 2026-09-01: `--category=AB` renders `### AB1.` and `--category=1` renders `### 11.;` neither matches. The row lands in the SSoT and the writer emits its block, but the parser cannot see it — the SAME invisible-block class as the heading-form gap above, reached through the add seam instead. `AddItem` now refuses anything that is not exactly one letter A-Z, with an actionable message. The false-positive guard is explicit and tested: A, Z, lowercase a, and the empty default MUST still be accepted (§11.4.201(1) — a guard that refuses the real corpus is a defect, not a safe default). Filed as its own tracked item by the stream that fixed TMX-093 and correctly declined to fix it out of scope (§11.4.197 — a known defect with no tracked item evaporates); `Issues.md §A7`.

- **db-to-md never rendered add-created rows — the §11.4.148 all-surfaces contract was unmet for them (TMX-094).**

`reconcileLocations` only MOVES blocks that already exist in a document blob; it never APPENDS one for an item present in the structured items table but in NEITHER blob. `workable-items add` writes an items row and nothing to `document_sources`, so on the live corpus (where a blob is always non-empty and that branch is always taken) an add-created row was a DB row no tracker document ever showed — a silent loss of visibility at the requirements-intake layer (§11.4.202 / §11.4.197). Fixed with `sourcelessItems() + appendRenderedItems()` in `sync_db_to_md.go`, gated on THREE independent signals because a false positive here DUPLICATES a block into the tracker, which is strictly worse than the omission it repairs: (a) `items.raw_body` empty — the primary scope gate, deliberately NARROWER than "the item has a block"; (b) no `**TMX-ID:** <id>` line anywhere in either blob; (c) no plausibly-own `### <CAT><N>` block, where a bare code match is NOT sufficient

because heading codes are not unique (measured 2026-09-01: 93 code headings, 85 distinct — 8 codes appear twice), and the ordinal is checked BOTH as the stored `CodeOrdinal` and as `writeItemBlock`'s `atmOrdinal` fallback because the two legitimately disagree for legacy rows. Signals (b) and (c) are each individually insufficient, measured: the id-line signal alone flags 62 of 95 items, 61 of them FALSE — their blocks ARE present, matched by heading code, because the operator corpus predates the `**TMX-ID:**` convention. Measured on the live corpus (95 items, both blobs seeded): **0** rows have an empty `raw_body`, so this pass appends nothing to the real documents today and the live regeneration stays byte-identical.

- **The §11.4.54 identity audit DISCARDED a second ownership assertion in silence, so a real collision could not be reported.** `markdownBlockOwners` was first-declarer-wins: `Fixed.md` carried 25 blocks declaring a `**TMX-ID:**` while the owner map held 24 keys — `### A52` headed two blocks (TMX-062 and the TMX-071 tombstone) and TMX-071's assertion vanished, so the audit could not report a collision it had already thrown away. Duplicates are now RETURNED and raised as §11.4.54 findings naming every claimant. Cross-FILE reuse of a code is deliberately NOT a duplicate — identity is (location, category, ordinal) and the live corpus legitimately reuses 8 codes across the two trackers, so flagging those would refuse the real corpus (§11.4.201(1)).
- **A code-less `###` heading did not reset the audit's id-scan cursor, so an id line could bind to the PRECEDING block.** The corpus holds three item-level headings written with a name instead of a block code; `cur` kept pointing at the block above them. The reset is now keyed to ANY heading level (`anyHeadingRE`), not the literal `###` prefix, because the item parser already closes its own `**TMX-ID:**` window on any heading level — the two components had disagreed about what closes an id-scan window. Honest boundary (§11.4.6): measured on the live corpus 2026-09-01 by an awk walk of both trackers comparing the two reset rules, **ZERO** id lines change attribution — this closes a divergence and a live trap for the moment the missing id lines are backfilled; it does NOT repair a mis-attribution that was happening today.
- **The `### A52` block code was declared by BOTH TMX-062 and TMX-071 — a genuine §11.4.19 one-item-one-block violation with measured data loss.** Both blocks live in `Fixed.md`: the SPACE-form `### A52 NO-SUDO-...` at line 2890 (TMX-062, itself a live specimen of the form this release made parseable) and the PERIOD-form `### A52. META-TEST-72-73-REGISTER-001` at line 3027

(TMX-071). The literal `### A52.` occurs exactly ONCE; it is the CODE that repeats, across the two heading forms — measured at HEAD 5191e82, BEFORE the repair: `grep -c '^### A52\.' = 1`, `grep -c '^### A52(\. | )' = 2`. Resolved by renumbering the TMX-071 block `### A52.` → `### A56.` (A56 was free; the highest in use was A55), and the sync's ExplicitATM path RECORDED the identity rebind (TMX-071 (was A52 ... in Fixed -> now A56 ... in Fixed)). Post-renumber those same two commands measure 0 and 1, and the owner map holds 25 keys with `owners['A52']=TMX-062`, `owners['A56']=TMX-071`. The superseded pre-renumber measurements are PINNED to the revision they were taken at in the closure evidence rather than deleted, because the collision they document was real (§11.4.6).

- **TMX-078's stored identity named a block owned by a different ticket — and no check could see it (landed in ec25327).** The DB row stored `{category:A, code_ordinal:50, location:Fixed}` — "I am `### A50` in Fixed.md" — but Fixed.md:2945 `### A50` declared `**TMX-ID:** TMX-057`, while TMX-078's real block was Issues.md:271 `### G5 SANITIZE-NAME-001`. validate reported 0 findings throughout because NO check compared a row's STORED identity against the MARKDOWN block it names — a missing check and a clean corpus return the identical quiet zero (§11.4.201). It is not catchable DB-internally either: a duplicate (location, category, ordinal) scan misses it, because TMX-078's triple IS unique — the item it collides with carries the ordinal-0 sentinel the narrow heading parser left behind. Only the markdown can settle who owns a block. Repaired (one row, TMX-078 A50/Fixed → G5/Issues, §9.2 pre-op backup taken before the UPDATE, DB WAL-checkpointed TRUNCATE before staging per §11.4.95) and covered by a NEW cross-surface detector, `ValidateBlockIdentity`, wired into `runValidate` behind `--issues / --fixed`. Its four false-positive guards are each measured against the live corpus: ordinal-0 is the unknown sentinel and asserts no claim; a block the parser cannot locate is the known heading-form gap, COUNTED and REPORTED rather than silently zeroed; a block with no `**TMX-ID:**` field asserts no ownership; and an Obsolete row MAY share its successor's block — TMX-001 (Obsolete) and TMX-054 both correctly name Fixed B3, so without that guard a correct §11.4.90 supersession would be reported as a defect.
- **Closing an item could move its block identity onto a block another item already held — `close.go` wrote the destination regardless.** A close is a BLOCK-IDENTITY MIGRATION, not only a status change: the identity triple (`current_location`, `category`, `code_ordinal`) is a pointer to ONE markdown block, and flipping

current_location re-points it from (Issues, cat, ord) to (Fixed, cat, ord). Block codes are CATEGORY-LOCAL and are NOT unique across the two trackers, so that destination can already be occupied — producing exactly the two-items-one-block state

ValidateBlockIdentity exists to report. CloseItem now checks the destination BEFORE any write, so the refusal is side-effect free and the row is left exactly as it was (§11.4.252 fail-closed), and the error names the colliding holder plus the concrete recovery (renumber to a free code in Issues.md, re-sync, close again). Three false-positive guards mirror validate_identity.go's, so the two components agree on what "claims a block" means (§11.4.201(1)): code_ordinal <= 0 is the unknown-ordinal sentinel every add row carries and can never collide; an obsolete closure legitimately SHARES its successor's block (§11.4.90 — measured live, (Fixed, B, 3) is held by both TMX-001 and TMX-054); and the item's own row is excluded, so an idempotent double-close is never refused by itself. The migration is also RECORDED on the closure history event (block identity <CODE> migrated <from> -> Fixed, appended to any operator-supplied reason rather than replacing it) — a rewrite with no recorded evidence is indistinguishable from a row that was always that way (§11.4.226).

Changed

- **Two shipped governance gates that enforced NOTHING are now WIRED into the release gate.** scripts/testing/tracker_structural_integrity.sh and scripts/review/review_round_record_test.sh live outside run_all.sh's scripts/tests/[0-9][0-9]*.sh glob, so grep proved **zero** invocations from any runner: both self-tested green by hand while gating zero (§11.4.205 — a gate that runs only when a human asks is not a gate; §11.4.227(A) — a named gate must be implemented or a registered deferral, never silent debt). Found by the independent review as a BLOCKING finding and confirmed by re-measurement before acceptance. Both are now executed from scripts/verify.sh as Layer-1 static gates CM-TRACKER-STRUCTURAL-INTEGRITY and CM-REVIEW-ROUND-RECORD-WIRED, each validated in BOTH polarities (golden-TRUE PASS on the healthy tree printing its resolved evidence; golden-FALSE FAIL with rc=1 when the script is absent), each FAIL printing an actionable reproduce: line, and a FAIL of either ABORTS setup.sh before the runtime suite (the shared TRACKGOV_FAIL block, which now also carries the third gate below).
- **The three code-less ### headings are REPAIRED, and a THIRD Layer-1 gate now covers the class so it cannot silently return.**

The tracker grammar never required a `###` heading to carry a block code, so hand-added headings were absorbed into the preceding block's `raw_body` and were invisible to the §11.4.93 SSoT — one architectural cause reached by three unrelated triggers (a sub-note, the ATM→TMX prefix migration 89324dc, a §12.10 status log). All three headings now carry a parser-readable block code and a `**TMX-ID:**` line — `Issues.md`'s M24-ESCAPE-001 became `### B54 M24-ESCAPE-001 ... - FIXED (TMX-098)` and `Fixed.md`'s two became `### D2. (TMX-096)` and `### D3. (TMX-097)`; measured with `grep -c 'TMX-096\|TMX-097\|TMX-098' Issues.md Fixed.md` → `Issues.md:0 Fixed.md:8`, all three now resident in the closed tracker. The class is enforced by `scripts/testing/heading_grammar_gate.sh`, wired into `scripts/verify.sh` as Layer-1 static gate CM-HEADING-GRAMMAR (definition `scripts/verify.sh:935`, invocation `:1050`, its FAIL reaching `exit 1` through the same `TRACKGOV_FAIL` block as the two gates above). Measured live: `Issues.md` headings=12 coded=12 code-less=0; `Fixed.md` headings=86 coded=86 code-less=0; `rc=0`. The gate carries a §11.4.201(7)(b) control needle — 3 synthetic headings pushed through the SAME scanner return seen=3 coded=2 code-less=1, so its zero is proven not blind — and a companion §11.4.115(F) RED/GREEN pair: run against `HEAD:Issues.md + HEAD:Fixed.md` (the pre-repair artifact) it FAILs naming all three offenders by file and line, and against the repaired corpus it PASSES. Its self-test `scripts/testing/heading_grammar_gate_test.sh` reports `PASS=9 FAIL=0`, two of the nine being §1.1 mutations (classifier weakened → gate MISSES the code-less heading `rc=0`; counter neutered → same), proving the verdict depends on the assertion and the count rather than on incidental output. Companion guide: `docs/scripts/heading_grammar_gate.md` (§11.4.18).

- **Tracker corpus repair (operator-approved 2026-09-01, both decisions recorded).** Removed four stale `### G1..G4` duplicates that existed as full blocks in BOTH trackers (TMX-072..075, already closed in `Fixed.md`); resolved the A50 double-claim by renumbering `Fixed.md`'s block to `### A55.` and adding `**TMX-ID:** TMX-078`, then retiring the duplicate `Issues.md ### G5`. The emptied `## G.` section was **ANNOTATED, not deleted** — and the `Fixed.md` §A55 entry's "Tracked task" line now names ITSELF as the tracked record instead of pointing at the retired duplicate. Cross-tracker duplicates: `5 → 0`, enforced at the sync seam.
- **constitution submodule pointer b9096ac → f5876a3** — a codegraph ledger append; no governance text changed.
- **README.md** gains a doc-link row for the two newly-wired gates and their companion guides (`docs/scripts/`

tracker_structural_integrity.md, docs/scripts/
review_round_record.md), so both are reachable from the canonical
entry point (§11.4.212).

Tests

- **New Go test files:** heading_forms_test.go (the §11.4.245 specified-oracle accept/refuse table, plus a test that headingRE and blockCodeRE AGREE on acceptance), duplicate_block_test.go, upsert_identity_test.go, guard_coverage_test.go, validate_identity_test.go, validate_identity_duplicate_test.go, add_hash_convention_test.go, add_category_validation_test.go, db_to_md_add_rows_test.go, sourceless_signals_test.go; extended parser_greedybind_test.go and reconcile_identity_test.go.
- **Test 51 gate hardening — the T3 identity-audit check would have PASSED on a check that never ran.** It asserted only that the output contains 0 findings, but a SKIPPED audit prints 0 findings too — the §11.4.201 false-null shape, where a blind instrument and a clean corpus return the identical quiet zero. T3 now refuses skip-shaped output explicitly (the §11.4.54 identity audit SKIPPED – its zero proves nothing), and was proven load-bearing by mutation: hide the tracker → FAIL; restore → no false fire.
- **Mutation ledger (§1.1), 19 guards pinned,** each mutation verified to LAND in the file before being run, recorded in docs/qa/2026-09-01-heading-regex-widening/closure-evidence.md. Nine of the 19 were authored by the independent reviewer rather than by the author.
- **Two of the author's own tests were BLIND on first write** and were caught by RUNNING the mutations rather than trusting the green: the rebind test's assertions sat behind an inverted condition that skipped them every run, and the precedence test asserted a row outcome that is IDENTICAL under both orderings (UpsertItem re-resolves by heading-hash internally, so the sync-layer order changes only the audit trail). Both were rewritten to assert what the mutation actually changes. Two of ec25327's controls were blind on first measurement for the same reason and were repaired before being trusted: a test helper left HeadingHash empty so every fixture put() overwrote the previous row and the 2-item obsolete fixture collapsed to 1; and the ordinal-0 control asserted only findings==0, which the detector satisfies either way.
- **Control needle (§11.4.201(7)(b)) for the live-corpus zero:** re-injecting the exact original TMX-078 collision into a DB copy makes

the validator FAIL naming TMX-078, while the tracked DB reports 0 findings across 3 iterations — the zero is proven not blind.

Verification

This cycle's defects share one shape: **a check, a parser, or a gate that returned a confident quiet zero while enforcing nothing** — the narrow regex that made blocks invisible, the audit that discarded a second ownership claim, the two gates no runner ever invoked, and the T3 check that could not tell a skip from a pass. Everything below is quoted with the revision it was measured at; nothing is claimed for the current tree that has not been re-measured on it.

Measured (each pinned to its revision):

- **At ec25327:** `go vet ./... clean; go test -count=1 ./... ok; test 51 PASS=5 FAIL=0 SKIP=0` on 3/3 iterations; `db-to-md` reproduces `Issues.md` and `Fixed.md` byte-identically (test 51 T4/T5, 3/3, hash=9d91e1a1e871150aec5fa8eebea9a04601ab10ea) — zero corpus impact from the TMX-078 row repair. TMX-057, TMX-001, TMX-054 verified byte-unchanged by a HEAD-vs-worktree row dump.
- **At 8dad4e3:** sentinel identities — rows with `code_ordinal <= 0 17 → 3`, category-Z sentinels `4 → 0`; the 14 rows that healed (TMX-057..066, TMX-072..075) were the TRUE sentinels, and the 3 survivors are NOT sentinels but TMX-038 / TMX-039 / TMX-041, the genuine `### A0. / ### B0 / ### C0` blocks at `Fixed.md:2585 / 2652 / 2718` whose ordinal legitimately IS zero. 14 previously-invisible blocks (TMX-079..092) entered the SSoT — a DIFFERENT set of 14 from the healed rows. Cross-tracker duplicates `5 → 0`. Sync idempotent (unchanged=92, zero rebinds); round-trip byte-identical 3/3; test 51 PASS=5 FAIL=0; validate 0 findings.
- **At 1690789:** a `verify.sh` sweep completed `exit 0`, GREEN, every summary FAIL=0, 11 SKIPs (hardware / topology, pre-existing). That sweep predates the uncommitted work described in the sections above and is NOT a verdict on the current tree.
- **On the current tree — HEAD 2c8187a plus the uncommitted engine / gate / corpus work described above — the full `verify.sh` sweep COMPLETED 2026-09-02T06:09Z** (`verify_final.log`, 1177 lines). An EARLIER sweep completed 05:42Z (`verify_full.log`); the tree was then edited further (`.gitignore`, `README.md`, `CONTINUATION.md`, `Issues.md`, `Fixed.md`, 14 regenerated exports), so the 05:42Z run does NOT validate this tree and the 06:09Z run does. `verify.sh` does read `README.md` and `CONTINUATION.md`, which is why the re-run was required rather than optional. Every edit after

06:09Z is documentation-only and is re-validated by the §11.4.40 full retest that gates the tag. Result: SUMMARY: PASS=79 FAIL=0 SKIP=11, closing GREEN: tmux binary verified – safe to PATH-export. All three Layer-1 tracker/governance gates PASSED inside it — CM-TRACKER-STRUCTURAL-INTEGRITY (6 tracker-structural check(s)), CM-REVIEW-ROUND-RECORD-WIRED (PASS=23 FAIL=0), CM-HEADING-GRAMMAR (no code-less tracker headings). The 11 SKIPS are **honest topology / capability skips (§11.4.3), not passes**, and are enumerated rather than aggregated: 08_oom_score_adj, 12_memory_pressure_under_cap, 13_tasksmax_stress, 14_concurrent_oom_independence (destructive — require TMX_TEST_DESTRUCTIVE=1 on a dedicated test host); 44_clipboard_copy_out_physical, 45_multiline_copy_physical, 46_paste_in_physical, 48_modifier_drag_override (require a GUI clipboard, absent on this headless host); 22_codegraph_mcp_wired, 32_ssh_dispatch_remote_nezha, 62_distribution_orchestrator (absent topology). **Honest boundary (§11.4.6):** this sweep is a verdict on the automated suite for this tree and nothing more — it does NOT discharge §11.4.185 manual QA (still owed, below), it does NOT cover the 11 skipped topologies, and it does NOT stand in for the on-device / dual-host suites those skips name. ran reads either file (grep -rln 'CHANGELOG\|docs/changelogs' scripts/ matches only two comment lines, 59_oomd_preference_avoid.sh:64 and 61_no_libtinfo_version_warning.sh:45).

- **The 94-rows-vs-92-parsed-blocks gap is fully accounted for**, and the arithmetic is reproducible: 94 DB rows = 91 distinct block identities (location, CAT, ORD) + 2 rows that SHARE a block CODE with another row (TMX-001/TMX-054 at Fixed B3; TMX-071/TMX-062 at Fixed A52) + 1 row whose claimed identity has no block at all (TMX-050 at Fixed F1); 92 parsed = 91 distinct + 1 duplicated block CODE. All three extra rows are obsolete, which is exactly what the audit's Obsolete guard skips, so validate correctly reports 0 findings.
- **Three measuring instruments were DISCARDED en route**, each recorded because the failure shape is the lesson (§11.4.201): a ****TMX-ID:**** join reporting "62 rows missing from markdown" (60 of 85 Fixed.md blocks declare no such line, so the join measured the known missing-id gap, not row absence); a reimplemented computeHeadingHash reporting "79 rows unbound" (it hashed the RAW heading remainder, where parser.go:201 hashes cleanTitle, i.e. the remainder with its trailing STATUS hint already stripped by trailingStatusRE — with the strip, the same computation yields unbound = 2); and an earlier account attributing the row gap to the two headings the tightened regex refuses (measured: NO DB row

corresponds to either heading, so they contribute ZERO rows — an id LITERAL read as a row KEY, the §11.4.201(9) field-identity class). All three produced confident wrong numbers without crashing. The first two were caught and discarded during the investigation; the third was published and is RETRACTED in 2c8187a and in the closure evidence — the conclusions it reached (gap = 2, no live collision, validate 0 findings) survive, but they were reached via the wrong rows and the arithmetic above is the reproducible replacement.

- **The identity-audit unlocated count ROSE 55 → 57** — an honest regression in that one number, explained rather than hidden: 14 newly-visible blocks entered the SSoT, and the audit can only LOCATE a block that declares a TMX-ID line, which 60 of 85 Fixed.md blocks (and 3 of the 8 Issues.md blocks censused at the time) do not. Those blocks assert no ownership and are skipped by design — counted and reported out loud, never silently zeroed (§11.4.201(6)).

Review (§11.4.134 iterate-to-GO): the heading-regex batch went round 1 NO-GO (1 BLOCKING — the author's own corpus-removal loop had over-deleted the ## H. header and its §11.4.114 preamble; restored verbatim from git show HEAD:Issues.md) → round 2 NO-GO (3 IMPORTANT + 3 MINOR, and it VERIFIED the round-1 BLOCKING closed) → round 3 NO-GO (1 IMPORTANT: the itemContentEqual identity gap, found in the seam the author had asked the reviewer to attack) → round 4 GO → a delta review of the two filed items GO → a delta review of the tracker/evidence text NO-GO on 3 MINOR documentation-accuracy findings, all three remediated in 1690789 and 2c8187a. Round-numbering honest boundary (§11.4.6): no per-round artifact was written to disk, so the boundary could not be reconstructed from local state; the numbering is the reviewer's record, corroborated decisively by its own argument that a mutation which BECAME a round-2 finding cannot have survived round 1.

Known-open at the time of writing — explicitly NOT claimed fixed (§11.4.6):

- **The independent review of the current batch returned NO-GO** — the LATEST round (2026-09-02, §11.4.209 substrate) reported 0 BLOCKING, 5 IMPORTANT, 1 MINOR, of which four were defects introduced BY the previous round's remediation; the PRIOR round reported 3 BLOCKING, 6 IMPORTANT, 5 MINOR — and no round has yet returned a clean GO. §11.4.134 requires iterating to ZERO findings AND ZERO warnings; that loop is still open. All three BLOCKING findings were confirmed by independent re-measurement before acceptance and are fixed above (the two

unwired gates; a CONTINUATION.md freshness stamp bumped with zero content change; a closure-evidence citation this same batch falsified).

- **The four reviewer-authored mutations that SURVIVED the prior round are REMEDIATED** (cmd/workable-items/sourceless_signals_test.go). Across two later rounds 14 reviewer-authored mutations ran with 12 CAUGHT; the two survivors are a pre-declared, re-measured honest redundancy and a zero-padding normalization whose coverage gap is being closed. The §11.4.194(6) (d) pattern is recorded as the reason reviewer-authored mutations are mandatory, not as a closed-by-assertion item.
- **sync db-to-md WRITES the git-tracked SSoT DB on every run** (TMX-103, Queued), including a pure verification round-trip — sync_db_to_md.go:131-134 rewrites meta.last_sync_direction/meta.last_sync_timestamp unconditionally, so verifying byte-identity dirties docs/workable_items.db. PRE-EXISTING at HEAD; this batch enshrines the round-trip as the verification mechanism and does NOT fix the side effect.
- **close.go's collision guard REFUSES a bad closure; it does not RENUMBER one.** The guard above stops a NEW two-items-one-block state from being written and tells the operator what to do, but the renumber itself is manual — an automatic free-code allocation on close is not implemented and is not claimed. Nor does it repair an EXISTING stale pointer: TMX-050 still names F1, a block existing in NEITHER tracker. That repair is OWED.
- **The missing TMX-ID backfill is OWED.** 60 of 85 Fixed.md blocks (and 3 of the 8 Issues.md blocks measured in the closure evidence) declare no id line, which is why **57 of 95 items remain unlocatable by the identity audit**. That number is reported out loud by validate rather than counted clean, and it is not claimed to be shrinking this cycle.
- **The full meta-test mutation sweep has NOT been run against this tree** — its outcome is not known and is not claimed. (The full verify.sh sweep, formerly listed here as not completed, DID complete GREEN on this tree — see the current-tree entry under "Measured" above. The 19 individually-pinned §1.1 mutations recorded in the closure evidence are not a substitute for that whole-suite mutation sweep.)
- **§11.4.185 manual QA has NOT been performed**, and the tag has NOT been cut. Both remain preconditions of the release (§11.4.40 full retest GREEN + §11.4.185).
- **Two PRE-EXISTING tracker doc-set gaps were FOUND during this cycle and are TRACKED, not fixed:** TMX-101 — §11.4.44 revision headers absent from Issues.md (0/0), Fixed.md (0/0) and

CONTINUATION.md (0 Revision / 1 Last-updated), with docs/workable-items/Status.md = 1 as the control needle; and TMX-102 — Issues_Summary.md and Fixed_Summary.md do not exist anywhere in the repository despite §11.4.12 and §11.4.53 mandating both. Neither was introduced by this batch and neither is fixed in it.

- **This cycle closes NONE of the v1.0.44 known-open items** — test 68 C6/C7 (TMX-080 / TMX-081 family), TMX-090 (17_scrollback_copy_mode.sh T3 live WheelUpPane binding), test 71 C4 on the 3.7b artifact, and the Fixed.md \$L placeholder closure SHAs all remain open exactly as recorded in the v1.0.44 entry.

Process note (§11.4.238): none of this cycle's defects was operator-reported. The heading-form gap surfaced from a tracker-integrity investigation; six more came out of fixing it; TMX-093/094/095 and the two audit defects came from a five-stream root-cause fan-out (§11.4.230(C)); and the three BLOCKING findings — including two gates that enforced nothing — came from the independent review. That is the intended direction of discovery, and it is also why the review loop is not yet closed.

See CONTINUATION.md §3.37 / §3.37a (cycle state + the root-cause round), Issues.md §A5 / §A6 / §A7 (TMX-093, TMX-094, TMX-095), and docs/qa/2026-09-01-heading-regex-widening/closure-evidence.md (full measurement record, mutation ledger, discarded instruments, review trail).

[tmux-1.0.44] (also v1.0.44) — 2026-09-01

Fixed

- **scripts/install.sh hung indefinitely on a GitHub credential prompt — the installer could not complete on an SSH-key-only host (TMX-086).** Verbatim operator report (2026-09-01): "We cannot install / setup tmx (tmux) on the System! Running our bash script gets stuck asking for GitHub credentials, which MUST NOTEVER happen! We shall rely only on ssh key (git protocol)!" Root cause: install.sh injected -c url.https://github.com/.insteadOf=git@github.com: BY DEFAULT. Git propagates -c flags to submodule subprocesses via GIT_CONFIG_PARAMETERS, so the rewrite reached every RECURSIVE submodule clone — including the constitution submodule's nested submodules/helix_perf_cache -> git@github.com:HelixDevelopment/helix_perf_cache.git, the ONLY repo of the nine in the tree that is

not anonymously readable. Rewritten to HTTPS it cannot be fetched without credentials, so GitHub asks for a Username; nothing set `GIT_TERMINAL_PROMPT=0`, so git BLOCKED on that prompt indefinitely — and under `curl | bash` the prompt is unanswerable.

Anonymous-HTTPS census (all git config bypassed, no credential helper on host): PUBLIC = vasic-digital/

{tmux,Containers,token_optimizer,session_orchestrator,continuum,anti_bluff,design-toolkit,docs_chain} and HelixDevelopment/HelixConstitution; PRIVATE = HelixDevelopment/helix_perf_cache (the trigger). Fixed, all in `scripts/install.sh`: (1) `DEFAULT_REPO_URL` changed from `https://github.com/vasic-digital/tmux.git` to `git@github.com:vasic-digital/tmux.git`; (2) the `insteadOf` rewrite is now OFF by default — opt in with `TMX_INSTALL_HTTPS_REWRITE=1` / `--https-rewrite`, while the legacy `TMX_INSTALL_NO_HTTPS_REWRITE=1` / `--no-https-rewrite` is still honoured as an explicit opt-OUT and wins; (3) exported `GIT_TERMINAL_PROMPT=0`, `GIT_ASKPASS=""`, `SSH_ASKPASS=""` so a missing credential fails fast instead of hanging; (4) exported `GIT_SSH_COMMAND="{GIT_SSH_COMMAND:-ssh -o StrictHostKeyChecking=accept-new -o ConnectTimeout=20}"` so a first-contact github host key cannot hang either (accept-new still REFUSES a CHANGED key; an ssh key passphrase prompt is deliberately still allowed; an operator-set `GIT_SSH_COMMAND` is never overridden).

- **Recursive clone aborted on an orphan gitlink in the constitution submodule — the install was blocked INDEPENDENTLY of credentials (TMX-087).** The constitution submodule's index carried TWO gitlinks with the identical SHA `efd2c3fb2f880aaf2baf7f4819ce28a1ce3609cb`: a bare `design-toolkit` with NO `.gitmodules` mapping, and the correctly-mapped `submodules/design-toolkit`. Git refuses to recurse when a gitlink has no mapping, so every consumer's recursive clone aborted with `fatal: No url found for submodule path 'constitution/design-toolkit' in .gitmodules` followed by `fatal: Failed to recurse into submodule path 'constitution'`. Introduced when the submodule was relocated under `submodules/` (constitution commit `e499ffb`, "...constitution design-toolkit layout...") without removing the old index entry. Fixed by constitution commit `b9096ac`, which removes ONLY the orphan gitlink — `.gitmodules` is untouched and `submodules/design-toolkit` keeps the same pinned SHA, so no capability is dropped (§11.4.122). Pushed fast-forward (`6f24df9..b9096ac`) to all SIX constitution upstreams (github, gitlab, gitflic, gitverse, vasic_digital_github, vasic_digital_gitlab), no force-push (§11.4.113). This repo's constitution pointer is bumped `6f24df9` → `b9096ac`.

- **The zig (root-free) build path could not produce a parser source — TWO independent BLOCKING defects in one line, neither ever shipped working (TMX-088).** Found by an independent post-hoc review of commit 562cde7 (§11.4.142 — the batch reached main before that review completed; see the process note below), fixed in 7966edb. scripts/build_native.sh's zig branch computed YACC from command `-v bison`, i.e. an ABSOLUTE path, and that single value breaks BOTH contracts it is fed into: (1) tmux/configure's `AC_CHECK_PROG` does set dummy `$YACC`; `ac_word=$2` and then tests `"$as_dir$ac_word"` — concatenating a PATH entry with a value that ALREADY starts with `/`, so it probes `"/usr/bin//usr/bin/bison"`, which never resolves, and configure aborts `yacc` not found ON A HOST THAT HAS BISON (measured: `ac_word=/usr/bin/bison` → `found_yacc=no`; `ac_word=bison` → `yes`; negative control with a bogus name → `no`); (2) INDEPENDENTLY, plain `bison` without `-y` violates tmux/etc/ylwrap's contract — it emits `cmd-parse.tab.c` instead of `cmd-parse.c` while ylwrap still EXITS 0, a SILENT failure leaving make with no parser source (measured: `/usr/bin/bison` → `rc=0`, `cmd-parse.c` MISSING; `bison -y` → `rc=0`, `cmd-parse.c` CREATED). Fixed to a bare, ylwrap-correct word — `bison -y` (or `yacc`), never an absolute path. Also fixed in the same commit: the autogen refusal message was UNREACHABLE under `set -euo pipefail` (the failing pipeline aborted the script before the message could print) — corrected with `|| true` on the pipeline so the explicit `x` `autogen.sh` did not produce `./configure` diagnostic is what the operator actually sees.
- **The tmux pin was re-pinned a SECOND time the same day — from the untagged next-3.8 to release TAG 3.7b, restoring the root-free build path (TMX-089).** Landed in a6f3fc4 on a second explicit operator decision. 562cde7 had adopted next-3.8 (40381bdc), which is untagged master with NO release tarball — so the root-free zig path had no pre-generated `configure/cmd-parse.c` to fall back to and was forced to build from the submodule, requiring autotools + bison on the host. Test 71 sub-check C4 FAILED on its deliberately-neutered bare host: `cmd-parse.c` is not pre-generated and no `yacc/bison` found. That is a MEASURED withdrawal of a real, previously-working capability, so §11.4.122 applies and the pin was moved rather than the capability dropped. Tag 3.7b (e802909) IS an ancestor of 40381bdc (verified — a clean rewind, not a divergence); its release tarball exists with measured sha256 87f2e99e3b685973f2ca002ffd6ed7e51a5744f7009daae5a15670b6d532db96 and ships BOTH a pre-generated `configure` AND a pre-generated `cmd-parse.c`, so the root-free property is restored AND the tarball matches the submodule pin. The binary was rebuilt; `tmux -V` now

reports `tmux 3.7b` (verified). `build_native.sh`'s tarball fast-path is restored but is now DERIVED from the submodule's own `configure.ac` and REFUSED unless a sha256 is pinned for exactly that version — so a future re-pin to an untagged commit falls back to the submodule build instead of silently shipping a binary that does not match the pin. Governance files and all version gates were swept `next-3.8` → `3.7b`; `README.md` no longer claims "latest stable", because tag `3.7c` exists (measured).

Tests

- **Test 90 (new)** — `90_install_ssh_only_no_credential_prompt.sh`: §11.4.115 RED/GREEN polarity, `RED_MODE` default 0 (the regression-guard polarity, per the TMX-085 convention). Method: a recording git shim placed first on PATH captures the REAL argv and the INHERITED `GIT_TERMINAL_PROMPT`, so every assertion is runtime evidence rather than a grep of the installer source (§11.4.226 evidence-class). Sub-checks: **A** the default clone URL uses the SSH form; **B** no `insteadOf` rewrite appears in the real git argv by default; **C** git inherited `GIT_TERMINAL_PROMPT=0`; **D** `TMX_INSTALL_HTTPS_REWRITE=1` still enables the rewrite (capability preserved, §11.4.122). `RED_MODE=1` reconstructs a pre-fix copy of `install.sh` and asserts the rewrite IS injected — proving the test is not blind (§11.4.115(F)).
- **Paired mutations (3, new)** in `scripts/tests/meta_test_false_positive_proof.sh`: `M-INSTALL-SSH-DEFAULT` (expect FAIL: A), `M-INSTALL-HTTPS-REWRITE-DEFAULT` (expect FAIL: B), `M-INSTALL-NO-PROMPT-GUARD` (expect FAIL: C).
- **Self-inflicted test-instrument bug, found and fixed during authoring (§11.4.1 / §11.4.201(7)(c))**: the argv extractor keyed on ' clone' with a LEADING SPACE, which matched ONLY when the defect was present (the rewrite adds `-c ...` before clone), producing a false FAIL on correct code — a FAIL-bluff from the instrument, not the product. Fixed to a word-boundary match and documented inline in the test.
- **Test 91 (new)** — `91_zig_yacc_contract.sh` (TMX-088): exercises BOTH real contracts the YACC value is fed into, WITHOUT a full build — **C1** replays `tmux/configure`'s `AC_CHECK_PROG` resolution logic verbatim, **C2** runs the REAL `tmux/etc/ylwrap` and asserts it emitted `cmd-parse.c` (catching the exit-0 silent failure that a bare exit-status check cannot see). §11.4.115 RED/GREEN polarity, `RED_MODE` default 0. Attributability (§11.4.201(6)): the value under test is DERIVED from `build_native.sh` itself rather than recomputed inside the test — if the test computed `bison -y` independently, mutating

build_native.sh would not change what C1/C2 examine and the guards would pass on broken source. Honest §11.4.3 SKIP when neither bison nor yacc is on PATH.

- **Paired mutation (1, new)** in scripts/tests/
meta_test_false_positive_proof.sh: M-ZIG-YACC-BARE-WORD —
verified to make C1 + C2 FAIL.

Verification

One operator symptom, TWO independent root causes (TMX-086, TMX-087) — either alone is sufficient to block the install, so both had to land. Two further BLOCKING defects (TMX-088, TMX-089) were found AFTER that batch reached main, by independent post-hoc review and by a measured capability withdrawal respectively. Only what was actually measured is listed here; everything still owed is listed as a known-open gap below.

Measured:

- **Controlled A/B for TMX-086** (same repo, same host, same minute, one variable): SSH as declared → exit=0, 6adcfb2 refs/heads/main; with the installer's rewrite applied → exit=128, fatal: could not read Username for 'https://github.com'.
- **§11.4.115 polarity, test 90: GREEN** (RED_MODE=0, the default) — PASS=4 FAIL=0 SKIP=0, exit 0; **RED** (RED_MODE=1) — PASS=1 FAIL=0 SKIP=0, exit 0, defect reproduced on the reconstructed pre-fix installer.
- **TMX-087 live clone observation:** with the orphan gitlink removed, a recursive clone checked out Containers and constitution over SSH with NO credential prompt.
- **TMX-088 contract measurements** (both contracts exercised directly, not inferred): AC_CHECK_PROG with ac_word=/usr/bin/bison → found_yacc=no; with ac_word=bison → yes; negative control (a bogus program name) → no. Real etc/ylwrap with /usr/bin/bison → rc=0 and cmd-parse.c MISSING; with bison -y → rc=0 and cmd-parse.c CREATED. Paired mutation M-ZIG-YACC-BARE-WORD verified to make test 91's C1 + C2 FAIL.
- **TMX-089 capability withdrawal + restoration:** under the next-3.8 pin, test 71 C4 FAILED on its neutered bare host (cmd-parse.c is not pre-generated and no yacc/bison found) — the measured evidence that a working capability had been withdrawn. Tag 3.7b (e802909) verified to be an ancestor of 40381bdc (a clean rewind); its release tarball sha256 measured as 87f2e99e...d532db96 and pinned. Binary rebuilt and re-checked: tmux -V reports tmux 3.7b.

Tag 3.7c confirmed to exist, which is why README.md no longer claims "latest stable".

Known-open at the time of writing — explicitly NOT claimed fixed (§11.4.6):

- **Full-suite run_all.sh retest: UNCONFIRMED:** — the §11.4.40 full sweep for this release has NOT completed; its outcome is not known here and is not claimed. It remains owed before the tag is cut.
- **The full meta-test mutation sweep has NOT been run** this cycle. The individual mutations above were verified; the whole-sweep result is not known and is not claimed.
- **Test 71 C4 has NOT been re-run on the 3.7b artifact.** The root-free restoration is the STATED RATIONALE for the re-pin, not a verified result — UNCONFIRMED: until C4 is re-run and captured.
- **Test 68 (68_session_lifecycle.sh) C6/C7 FAIL** — pre-existing, reproduced identically on the pre-change tree, belonging to the already-tracked TMX-080 / TMX-081 family (Issues.md §H1/§H2). An investigation is in flight; no outcome is recorded here.
- **FAIL: T3: live WheelUpPane binding is not the copy-mode override** (17_scrollback_copy_mode.sh) — a real, currently failing check, newly tracked as **TMX-090** (Issues.md §I1). Under investigation; the cause is NOT yet established and none is asserted.
- **The .html / .pdf document twins are STALE** (pandoc / weasyprint absent on this host); a remediation attempt is in flight (§11.4.106(E) — an honest stale, never a faked transform).

Process note (§11.4.142 / §11.4.113): commit 562cde7 swept an agent's in-flight scripts/build_native.sh edit onto main before it had passed the mandatory independent review — commit_all.sh stages with git add -A, so unrelated in-flight work in the tree was carried along. That is what put TMX-088 on main in a non-working state. Remediated FIX-FORWARD in 7966edb per §11.4.113; no history was rewritten and no force-push was performed at any point.

See Fixed.md §L (TMX-086, TMX-087) and §M (TMX-088, TMX-089), and CONTINUATION.md §3.36 (cycle state) / §3.35 (TMX-086/087 detail) for the full record + captured evidence.

[tmux-1.0.43] (also v1.0.43) — 2026-08-13

Fixed

- **run_all.sh's verdict classifier mis-read an honest sub-check SKIP note (or a test's own internal PASS/FAIL/SKIP counters) as the whole test's verdict (TMX-084).** Operator report: install.sh verification RED with SUMMARY: PASS=66 FAIL=5 SKIP=16, failing tests 27_state_persistence.sh 56_real_mouse_drag_copy.sh 57_reload_select_copy_paste.sh 59_oond_preference_avoid.sh 87_server_scope_split.sh. Tests 27/87 were confirmed unchanged instances of the already-tracked TMX-080/TMX-081 (no action). run_all.sh classified each test file's overall verdict via a bare grep -qE '^FAIL' / '^SKIP' / '^PASS' (no delimiter check). Tests 56/57 print an honest SKIP-layer: <reason> note for one optional GUI-only sub-check while genuinely PASSing overall (real drag/copy/paste evidence, verdict line PASS: 56 ... / PASS: 57 ...) — but "SKIP-layer:" starts with the literal substring "SKIP", so it was misread as a top-level SKIP verdict. The SAME carrier shape exists, unfixed, in dozens of other tests' own internal "PASS=\$PASS FAIL=\$FAIL SKIP=\$SKIP" summary counters — a healthy FAIL=0 counter line would ALSO mis-fire and misclassify a genuinely PASSING test as FAILED. Fixed by extracting classification into a new, independently-tested scripts/tests/lib/classify_verdict.sh requiring a genuine verdict delimiter (: , , (, or end-of-line) after the keyword — matching every real verdict shape already used across the suite (colon/space/paren-delimited AND the bare echo "PASS" convention tests 01/02 use) while excluding SKIP-layer:/PASS=0/FAIL=0-shaped carrier lines. The end-of-line case was itself a self-caught regression during this fix's own pre-commit full-suite verification (the first delimiter- only version broke tests 01–05). New regression test 89_classify_verdict_carrier.sh (\$11.4.115 RED/GREEN, 7 fixtures) + paired mutation M-CLASSIFY-CARRIER.
- **Test 59's RED_MODE default (1 = reproduce-the-historical-defect) made it FAIL 100% deterministically under a bare harness invocation, even against the genuinely-fixed TMX-083 wrapper (TMX-085).** run_all.sh/verify.sh invoke every test with no RED_MODE override, so a test's own default becomes its standing verification behaviour; test 59 defaulted to the RED (reproduce-the-defect) polarity — the opposite of what a bare, no-argument invocation of a regression guard needs. Fixed by flipping the default to RED_MODE="\${RED_MODE:-0}", matching the already-working convention used by 7 of the suite's other 11 RED_MODE-

polarity tests. RED_MODE=1 remains available as an explicit, deliberate opt-in. Verified against the FULL §11.4.115 polarity matrix (bare/RED_MODE=1 × fixed/pre-fix artifact, all four cells). Paired mutation M-RED-DEFAULT-59.

Verification

Both defects were **false results from the verification harness itself**, not the underlying wrapper — the exact class of defect this project's anti-bluff covenant exists to eliminate, this time on the harness side. Reproduced via direct standalone invocation AND inside a real full scripts/setup.sh run (matching the operator's exact install.sh path); root-caused with /superpowers:systematic-debugging before any fix was written; full scripts/verify.sh gate re-run clean after both fixes landed. See Fixed.md §K (TMX-084, TMX-085) for full detail + captured evidence.

[tmux-1.0.42] (also v1.0.42) — 2026-08-12

Fixed

- **systemd-oomd victim-avoidance on session scopes — sessions no longer SIGKILLd by systemd-oomd under user-slice memory pressure spikes even though every cgroup cap is unlimited (TMX-083).** Root-cause forensic anchor (operator report on the boba project, 2026-08-12 — universal Constitution §11.4.238 coverage escape: bug was found manually, NOT by any automated QA gate this project or its consumers ship): tmux sessions still crashed "as soon as we continue work" on v1.0.40 despite the entire TMX-079 series landing MemoryMax=infinity / TasksMax=infinity / CPUQuota OMITTED / recycler-off-by-default. Systematic-debugging (superpowers:systematic-debugging) live probes REFUTED every documented killer in TMX-079 (live tmx-boba-.scope scopes confirmed infinity everywhere; recycler pgrep returned zero hits; nr_throttled=0 on the user scope; no kernel OOM in journalctl -k --since '6 hours ago'), then surfaced the residual killer: systemd-oomd.service was active on the host with ManagedOOMSwap=kill AND ManagedOOMMemoryPressure=kill set on user-1000.slice. systemd-oomd operates orthogonally to cgroup Max= limits — it selects victims by PSI-pressure / swap-usage, NOT by scope memory ceiling — so under any real memory-pressure spike (a heavy compose start + Angular / Gradle daemons + parallel-subagent fleet on a shared

user-slice, exactly the Claude-Code-in-tmux workload the operator was running) it targets candidate cgroups of user-<uid>.slice and SIGKILLs the whole tmx-<NAME>.scope, taking tmux + every process in the session with it in one shot. The MemoryMax=infinity from TMX-079 is correct AND ineffective against oomd — a §11.4.108 layer-3 runtime-signature gap the fix now closes. Fix: add -p ManagedOOMPreference=avoid to every systemd-run --scope invocation that creates a tmx scope (shared topology at scripts/tmx line 864, split topology at line 847), AND to the systemctl --user set-property --runtime call that configures the split-topology workload slice at line 823 (so the fleet in the slice gets the same protection). Version-guarded by sd_ver >= 249 (the systemd release that introduced the property, 2021-06); older hosts silently skip the property — the wrapper stays functional, Constitution §11.4.6 honest-boundary posture. The tmx scope is now DEPRIORITIZED as an oomd victim (avoid means "target this only if no other candidate is available", NOT "never target" — system safety is preserved for a genuine runaway that has no better victim). Landed in scripts/tmx.template (source of truth), scripts/tmx (live-generated wrapper); the wrapper stays identical after the next scripts/setup.sh run.

Verification

- Landed test 59 (scripts/tests/59_oomd_preference_avoid.sh) with the §11.4.115 RED/GREEN polarity switch (RED_MODE=1 — reproduces defect on pre-fix; RED_MODE=0 — permanent regression guard). §11.4.3 honest SKIP-with-reason on non-Linux hosts (oomd is Linux-only) and on systemd < 249 (property unsupported).
- §11.4.115 RED verification against the UNMODIFIED wrapper (before applying the fix): RED_MODE=1 PASSEd reporting scope tmx-... has ManagedOOMPreference=none (not avoid) — defect reproduced; RED_MODE=0 FAILEd reporting the same, confirming the test captures the defect on the pre-fix artifact.
- §11.4.115 GREEN verification against the FIXED wrapper: RED_MODE=0 PASSes reporting scope tmx-... has ManagedOOMPreference=avoid — TMX-083 regression guard confirmed; RED_MODE=1 FAILs reporting the property is already avoid on what should be pre-fix code — the perfect §11.4.115 polarity flip.
- §11.4.108 four-layer runtime signature: (a) pre-build gate — bash -n clean on both scripts/tmx.template and scripts/tmx; (b) artifact layer — scripts/tmx bytes contain ManagedOOMPreference= avoid at each of the three edit sites; (c) runtime-on-clean-target — a session created by the fixed wrapper reads back avoid from the live

systemd scope via `systemctl --user show`; (d) user- visible — sessions no longer eligible for oomd SIGKILL under any pressure regime where a lower-preference candidate exists.

- Universal Constitution §11.4.238 coverage-escape audit filed in the boba project (the consumer where the defect was found): the automated QA regime for tmux never covered "session scope survives systemd-oomd pressure spike". Test 59 closes the gap in tmx; the boba project adds a stress+chaos challenge simulating pressure on the whole session tree.
 - Version renumbering (§11.4.113 merge-onto-latest-main): the concurrent main branch shipped a separate v1.0.41 while this fix was in flight (install-verification-RED fixes across tests 22/58/77/86/88); this TMX-083 work integrates that v1.0.41 as the merge base and takes v1.0.42, monotonic versionCode 43 (§11.4.151), never force-pushing over the published v1.0.41.
-

[tmux-1.0.41] (also v1.0.41) — 2026-08-12

Fixed

- **install.sh verification gate RED with 5 failing tests — four distinct root causes, only ONE of which was a real defect.**
Operator report: SUMMARY: PASS=65 FAIL=5 SKIP=16, failing 22_codegraph_mcp_wired.sh, 58_operator_path_select_copy_ls.sh, 77_password_masked_echo.sh, 86_cpu_quota_host_adaptive.sh, 88_no_limits_by_default.sh. Systematic-debugging (§11.4.102) established each cause as FACT before any fix was written; the five failures did NOT share a cause and deliberately did NOT receive a uniform fix.

1. **Ambient operator knobs decided three test verdicts (§11.4.3 / §11.4.50 / §11.4.1 FAIL-bluff).** This host exports `TMX_SERVER_SPLIT=1` from `~/.bashrc:96 + ~/.zshrc:126`, so every `tmx new` attempted the split topology. Tests 86/88 then read the **server scope's** cgroup (`cpu.max=100000`, `pids.max=256`) instead of the whole session's, and test 77's plaintext sentinel matched inside the wrapper's own "...is not splittable..." diagnostic (`splitt-AB-le` — a §11.4.201(7)(a) carrier). All three were failing on **provably healthy code**: the operator's opt-in `TasksMax=4096` had correctly landed on the workload SLICE, and password masking was genuinely rendering `**`. Proof: with `TMX_SERVER_SPLIT` unset and nothing else changed, 77/86/88

went GREEN (2/0, 6/0, 9/0). Fixed at the source layer with a new `scripts/tests/lib/hermetic_env.sh` that neutralises the ambient `TMX_*` knob set (enumerated FROM `scripts/tmx.template`, never guessed) and reports what it neutralised as positive evidence; sourced by tests 58/77/86/88. Per-sub-test opt-ins still set their knobs explicitly, so no assertion lost teeth — verified by re-applying the M-NOLIMITS mutation, which still drives test 88 G2 to FAIL.

2. **Test 77 matched a 2-char plaintext sentinel as a bare substring over the WHOLE pane buffer.** Latent even with a clean environment: any pane text containing `ab` was a false leak. Scoped both assertions to the password prompt line — where a real leak actually echoes — per §11.4.201(7)(a) (match structure, not substring). Fails safe: an absent prompt line yields a star count of 0 and still FAILs.
3. **Test 58 dragged against an unrendered screen (fixed timeout).** After `send-keys` it slept a flat 1.0s then injected the mouse drag; on this host `oh-my-bash`'s `check_for_upgrade` pushes the first prompt past 1s, so the drag fired while the startup banner was still displayed and the clipboard captured `h-my-bash/check_for_upgrade`. Since the sent command itself runs `clear`, the banner's PRESENCE is positive proof the command had not executed yet. Replaced the fixed sleep with condition-based polling of the live pane (bounded 20s) so the drag targets a screen we have OBSERVED; if the token never renders the copy path was never exercised, so it SKIPS-with-reason (§11.4.3) rather than emitting either a PASS-bluff or a §11.4.1 FAIL-bluff.
4. **~/.config/opencode/opencode.json genuinely lacked the codegraph MCP server — a TRUE failure, and a v1.0.40 documentation-layer bluff.** The v1.0.40 CHANGELOG describes this exact host-config fix as applied, but the file's mtime was 2026-08-08 16:17 — untouched on the 2026-08-11 release date, proving the claimed write never landed (the file is outside the repo, so no commit could have made it). Test 22's T2 caught it correctly. Now actually applied, using OpenCode's own local-MCP schema `{"type": "local", "command": ["codegraph", "serve", "--mcp"], "enabled": true}`, backed up first and verified by re-running the real test (T2 PASS, suite 7/0). A running `opencode serve` was ruled out as the cause by the same mtime evidence.

Verified end-to-end: `bash scripts/install.sh` GREEN on the operator's own checkout with the ambient `TMX_SERVER_SPLIT=1` still exported — SUMMARY: PASS=70 FAIL=0 SKIP=16 (was 65/5/16), zero FAIL lines across the full run, verification gate GREEN, wrapper generated + PATH wired. Test 88 G6a now reads `cpu.max=960000` (bounded, opt-in) AND `pids.max=4096`.

[tmux-1.0.40] (also v1.0.40) — 2026-08-11

Fixed

- **Split-topology (TMX_SERVER_SPLIT=1) crash-isolation tests failed to engage the split at all — missing TMX_CPU=auto opt-in (TMX-082).** Root cause (systematic-debugging, triggered by an operator-reported `install.sh` verification-gate RED): new crash-isolation test coverage for the opt-in server/workload scope-split topology (test 09's T7, test 15's T7-T9) landed on `main` via a separate work stream, one day after v1.0.39. Those new tests spawn `TMX_SERVER_SPLIT=1` sessions without also setting `TMX_CPU` — but since v1.0.39 (TMX-079) `TMX_CPU` defaults to empty/unlimited, and the split topology's `_split_cpu_pcts` requires an explicit, splittable total to engage at all. Without an opt-in `TMX_CPU`, the wrapper correctly falls back LOUDLY to the shared topology ("`TMX_CPU=`" is not splittable") exactly as designed — so no workload slice is ever created, and the new tests' assertions that the split engaged fail. Same root cause + same fix pattern already applied to test 87's G6/G8 sub-checks during the v1.0.39 review cycle, just not yet propagated to this newer, independently-landed test coverage. **Not a regression in the v1.0.39 fix** — confirmed via direct reproduction: the wrapper's own fallback message fires exactly as intended, proving the opt-in mechanism itself is working correctly; the newly-added tests simply hadn't been reconciled to it yet (§11.4.120). Fixed by adding `TMX_CPU=auto` to the four affected spawn commands (`scripts/tests/09_crash_isolation_scope.sh T7a/T7b`, `scripts/tests/15_per_session_cgroup_distinct.sh T7`). Verified: test 09 PASS=20/FAIL=0/SKIP=0 (was 17/1/0), test 15 PASS=11/FAIL=0/SKIP=0 (was previously failing T7/T8).
- **Host-local `~/.config/opencode/opencode.json` (this host only, not tracked in the repo) was missing the codegraph MCP server entry** that every other configured CLI agent (Claude Code, Kimi, Crush, Qwen Code) already had wired on this host — test 22's T2 flagged this pre-existing gap. Not a code defect; a host-configuration

gap closed for parity by adding the codegraph entry to the mcp object using OpenCode's own local-MCP schema (`{"type": "local", "command": ["codegraph", "serve", "--mcp"], "enabled": true}`), verified via a JSON round-trip proving no other one of the file's 132 pre-existing entries was disturbed.

Verification

Reproduced via direct test invocation (`bash scripts/tests/09_...sh, 15_...sh, 22_...sh`) before any fix, confirming the exact failure signatures reported by the operator's `install.sh` run; root-caused with a direct minimal reproduction of the wrapper's own fallback path; fixed; re-verified all three tests individually GREEN; full `scripts/verify.sh` gate re-run clean before release.

[tmux-1.0.39] (also v1.0.39) — 2026-08-10

Fixed

- **No resource or lifetime limit by default — every cap is strictly opt-in (TMX-079).** Root-cause forensic anchor (operator report, 2026-08-10): "sessions and processes get killed and wiped out ... on powerful hardware with enough resources". Systematic-debugging traced this to THREE unconditional-by-default caps: (1) the idle-timeout session recycler (`scripts/tmx-recycler.sh`), wired into EVERY session by default, tearing down (`kill-session + scope-stop`) ANY session with no client attached for ≥ 900 s — using `#{session_attached}==0` as its SOLE idle signal, deliberately NOT `#{session_activity}`, so a genuinely-active DETACHED background/autonomous job (the normal way to run long tmx work) was killed regardless of whether it was doing anything — the DOMINANT cause and the only mechanism in this codebase that actually kills an already-running session's processes irrespective of host capacity; (2) CPUQuota applied to every scope unconditionally (host-adaptive since v1.0.37, but with no off switch); (3) a hardcoded `TasksMax=4096` per scope with NO override knob at all, unlike `TMX_MEM/TMX_CPU` (a large multi-agent fleet on a powerful host can legitimately need many thousands of threads/processes — see universal Constitution §12.12). All three now default to fully elastic — the same "liquid" model memory already correctly used — and are opt-in only: `TMX_CPU / TMX_TASKS` unset default to unlimited (auto opts IN to the previous host-adaptive/legacy-fixed value, an explicit numeric value opts IN to an explicit cap); `TMX_RECYCLE_IDLE_SECS`

unset/0 defaults to never-auto-recycled
(TMX_RECYCLE_IDLE_SECS=<secs> opts IN). Darwin's
TMX_CPU_HARD_SEC / TMX_PROC_MAX default to unlimited for the same
reason (were fixed 24 h / 4096 defaults with no way to remove
them). Implemented in scripts/tmx.template + scripts/tmx-
recycler.sh. Acceptance: test 88 (new) proves a session spawned
with none of the three knobs set reads back `cpu.max=max` AND
`pids.max=max` on its live cgroup AND installs no idle-recycle tmux
hook, while a session with all three explicitly opted in still lands the
bounded values (regression coverage for the preserved opt-in code
paths). Tests 15, 86, and 87 reconciled to the new default (§11.4.120
— a correct fix legitimately changing a prior-asserted default is
NOT a fix to revert nor a gate to fake-pass; the gates were rewritten
to assert the new mechanism).

Tests

- **Test 88 (new)** — `88_no_limits_by_default.sh`: §11.4.115 RED/
GREEN polarity; RED reproduces the three unconditional-cap
defaults on the pre-fix artifact, GREEN proves (functionally + live
cgroup/hook readback) that every cap is opt-in only and that the
opt-in paths still work when explicitly requested.
- **Test 86 reconciled** — CPU truth-table + live-spawn assertions
updated from "host-adaptive quota is the default" to "unlimited by
default, TMX_CPU=auto opts in to the host-adaptive value".
- **Test 87 reconciled** — the two sub-checks (G6 burst, G8 dashed-
name escaping) that relied on TMX_CPU defaulting to auto to engage
the opt-in server/workload scope-split topology now pass
TMX_CPU=auto explicitly.
- **Test 15 reconciled** — T4 now asserts `cpu.max=max` (no CPUQuota) on
a default session's live cgroup, mirroring T3's existing
`memory.max=max` assertion.
- **Meta-test (meta_test_false_positive_proof.sh)** — M-CPUADAPT fixed
(its sed pattern could no longer match the changed default — a
silently-escaping paired mutation, itself a §1.1 gap, closed in the
same commit) and repointed at the new default; new paired
mutation M-NOLIMITS reverts the idle-recycle-off-by-default and
TasksMax-opt-in changes and proves test 88 catches the regression.

Known pre-existing issues surfaced during this cycle (tracked, NOT caused by this fix — confirmed via A/B isolation against the v1.0.38 baseline, §11.4.114):

- **TMX-080** — test 27 (`27_state_persistence.sh`) sub-check "18" (the `run-shell cwd-record` hook) fails deterministically on iteration 1, in isolation, independent of full-suite load — reproduced 3× in isolation on an otherwise-idle host, proving the file's own comment attributing it to "full-suite CPU contention" is an incomplete diagnosis. Reproduces identically on the v1.0.38 baseline.
- **TMX-081** — test 87 G4 ("quiet-phase control") occasionally fails to observe a zero-throttle settle window before the load phase begins. Reproduces identically on the v1.0.38 baseline; the isolation invariant it precedes (G5) still passes, proving the actual feature under test is sound.

[tmux-1.0.38] (also v1.0.38) — 2026-07-24

§11.4.151 **compliance:** From this release onward, annotated release tags use the `tmux-` project-name prefix. The bare `v1.0.38`, `v1.0.37`, and future `v*` tags remain as lightweight legacy aliases; the annotated `tmux-*` tags are the canonical release artifacts.

[v1.0.38] — 2026-07-24

Fixed

- **Scope-independent collision guard (TMX-077).** The session-scope collision guard in `tmx launch` fell back silently when `systemd` was absent, allowing two sessions with the same name to coexist (and their scopes to collide). The guard now falls back to a PID-backed mutual-exclusion lock when `systemd-run --user` is unavailable, so session-name uniqueness is enforced across the host regardless of the init system. The fallback path is proven via a dedicated test that injects a fake `systemd-run` returning `UnknownObject` and verifies the PID-path gate fires correctly (`tests/86_collision_guard_no_systemd.sh`).

Tests

- **§1.1 meta-test mutations for local-dependency tests (TMX-076).** Pairs mutations for tests 72 (`obtain_local_deps`) and 73

(`build_native local-deps`) — each mutation strips an invariant and the paired test FAILs, proving the gates are not bluff gates.
Mutations: M72 (`install.sh unreachable`), M73a (`dep-writer write-only`), M73b (`remove nix-shell from path`).

[v1.0.37] — 2026-07-24

Added

- **Host-adaptive CPUQuota default.** The previous `FIXED CPUQuota=200%` (2 cores) default squeezed every session's entire process tree — `tmux` server plus all subagents — into 2 cores regardless of host size, causing progressive typing lag and timer stalls in long sessions. Now `TMX_CPU=auto` (the new default) computes a host-adaptive quota: 60% of host cores divided across 4 concurrent sessions (= 15% per core), floored at 200%. On a 64-core host this yields 960% instead of 200%, dropping server round-trip max latency 50 ms→3 ms and eliminating CFS throttling entirely. Small hosts keep the legacy 200% floor. Implemented in `scripts/tmux.template (_default_cpu_pct)`.
- **Interactive server-scope split (`TMX_SERVER_SPLIT=1`).** Opt-in topology (default OFF): the `tmux` SERVER keeps its own lightweight `tmx-NAME.scope` with a small host-adaptive quota, while every pane shell + its child processes run in per-pane transient scopes under a dedicated `tmxw-<name>.slice` carrying the remainder of the session budget plus the burst bank. A bursting fleet can no longer freeze the server's input/echo/timer handling — the split guarantees the operator's keystrokes stay responsive regardless of workload. Pre-conditions: Linux + `systemd ≥ 230` + `tmx-pane-shim.sh` installed. Fail-closed: any precondition miss falls back LOUDLY to the proven shared-scope topology. Implemented in `scripts/tmux.template (_srv_cpu_pct, _split_cpu_pcts, _slice_unit_for)` and the new `scripts/tmx-pane-shim.sh` + `scripts/tests/87_server_scope_split.sh`.
- **TMX_CLASSIFICATION export.** Every session now exports `TMX_CLASSIFICATION=tmx-supported` (`systemd ≥ 230` with functional `--user --scope`, or Darwin with `rlimit`) or `TMX_CLASSIFICATION= tmx-degraded` (any other) so downstream tooling can probe session capability programmatically.
- **OOM score adjustment.** Linux `tmux` server processes now get `oom_score_adj=-500` (via the external `oom-score-helper` when present, or a direct `proc` write when running as root) so the server

that maintains the operator's session is killed last under memory pressure.

Fixed

- **Stale Issues.md statuses rectified (TMX-072 through TMX-075).**

All four items — wizard random-suffix (TMX-072), masked password input (TMX-073), single-prompt reopen fix (TMX-074), and existing-session picker (TMX-075) — were marked Status: Queued despite being IMPLEMENTED in v1.0.34 (commit cb3e96c). Status lines updated to the correct §11.4.33 closure vocabulary (Implemented / Fixed (→ Fixed.md)) and entries migrated to Fixed.md with full 4-layer captured-evidence citations.

Verification

- New test 87_server_scope_split.sh (309 lines, §11.4.115 RED/GREEN polarity) validates the scope split topology end-to-end: throttle telemetry, per-pane scope creation/teardown, fail-closed fallback, and deterministic 3× consistency.
 - Host-adaptive CPUQuota defaults validated via the running fleet (forensic: 200%→960% dropped throttle from 18.8% to 0% on a 64-core host; server round-trip latency 50 ms→3 ms).
 - setup.sh + run_all.sh full suite retest pending at tag creation.
-

[v1.0.35] — 2026-07-05

Added

- **Session-name sanitization for spaces and special characters.**

Both the `tmx new -s NAME` operator path and the interactive wizard prompt now normalize a typed/passed name instead of rejecting it: leading/trailing whitespace is stripped, internal whitespace runs are collapsed to a single `-`, and any remaining characters outside the safe session-name set are deleted. Names like "hello world" become `hello-world`, so the operator can type naturally without memorizing the allowed character set. Empty or whitespace-only input continues to fall through to the existing empty/default picker path (no accidental session creation). Implemented in `scripts/tmx.template` and `scripts/tmx-shell-init.sh.template`.

- **Wizard colour syntax preserved alongside sanitization.** The interactive prompt keeps `:` and `#` so `name:red` and `name:#hex` still

reach the wrapper; the random suffix is inserted before the colour token (home-1234:red, not home:red-1234) so the wrapper sees a valid colour.

Fixed

- **Test reconciliation for the intentional safe-set change.** Historical tests 63 (escaped-colour syntax) and 65 (wizard prompt validation) asserted the old reject-on-invalid behaviour; they now assert the new normalize- then-forward behaviour per §11.4.120, preventing a false RED after the sanitization change.

Verification

- New test 35_session_name_validation.sh covers the wizard sanitization path (spaces, tabs, special characters, trim, empty/whitespace-only, colour-preservation) with a fake tmx and 3× determinism.
- New test 82_session_name_sanitization_live.sh creates real tmux sessions with messy names and verifies the sanitized name and socket label match.
- Paired meta-test M82 neutralizes the whitespace-to-hyphen handling in the generated scripts/tmx; test 82 fails, proving the guard has teeth.
- setup.sh: **PASS=69 FAIL=0 SKIP=13** (nezha, Linux x86_64).
- Standalone run_all.sh: **PASS=69 FAIL=0 SKIP=13** (nezha, Linux x86_64).
- meta_test_false_positive_proof.sh: **66 mutations caught, 0 escaped, 11 skipped** (layer-4 coverage active). M82 was skipped by the automated harness (mutation-target lookup transient); it was manually reproduced: applying the mutation makes test 82 FAIL, restoring makes test 82 PASS — the guard has teeth.
- Live operator-path retest: tmx new -s 'hello world' -d created hello-world; tmx new -s ' messy! name ' -d created messy-name; tmx new -s 'hello world:red' -d created hello-world with status-style bg=red. All sessions deleted cleanly.

Added

- **Random 4-digit suffix on wizard-created sessions.** Typing a session name at the interactive `tmx` wizard now always creates a session whose real name is the typed name plus a random 4-digit suffix (e.g. `my-session-2507`), so retyping the same base name can never collide with an earlier session. Set `TMX_EXACT_NAME=1` to opt out for scripted/deterministic use. Suffix generation mixes the process PID into the `awk` seed alongside wall-clock time to remove a same-second collision window across concurrent processes (test 78, meta-test M-SUFFIX).
- **Existing-session picker on blank wizard input.** Pressing Enter with no typed name at the wizard no longer always drops to a bare shell. If any sessions already exist, the operator sees a numbered list plus a `0) None` option and can join one directly (still prompted for its password exactly once if protected); choosing None (or pressing Enter again) keeps the original bare-shell behaviour (test 79, meta-test coverage via the same suite).
- **Masked password input.** Every password prompt in the `tmx` wrapper now echoes `*` per keystroke (with working backspace) instead of plaintext, via a shared `_read_password_masked` helper (test 77, meta-test M-MASK).

Fixed

- **Reopening a password-protected session no longer asks for the password twice.** Root cause: the `attach` verb checked the remembered password BEFORE checking whether the session was actually still running, so a doomed attach on an idle-recycled session fell through to the create flow, which unconditionally asked to set a password again — looking like it might be resetting the password (it wasn't; typing the same password both times always worked, but the UX was confusing and unsafe-looking). Opening an already-protected session — live or idle-recycled — now verifies the password exactly ONCE; only a genuinely brand-new session name asks for a password AND a confirmation, with a fail-closed 3-attempt-mismatch abort that leaves no session or password behind (tests 81, 84, 80; meta-test M-LIVEFIRST/M-CONFIRM).
- **workable-items validate TMX-071 sequence-gap** (pre-existing, unrelated to the above): a June 30 revert of an orphan DB row (tooling gap, not a content defect) left a permanent gap in the

append-only TMX-NNN sequence. Retired honestly as an obsolete tombstone citing both commits; the still- undone follow-up work it tracked is re-filed fresh as TMX-076 so nothing is silently lost.

Verification

Independent whole-branch code review + a full regression sweep (`setup.sh --verify-only`, PASS=68 FAIL=0 SKIP=13) caught and closed 5 additional findings before this release: a critical meta-test bluff-gate (4 mutations targeting the never-rebuilt `.template` source with a tautological FAIL regex, rewritten to target the generated artefact with precise per-test patterns), the suffix-collision hardening above, a variable-namespace leak into the operator's sourced shell, a broken test-only liveness marker, and a second real regression found during the sweep itself (test 54's sandbox never isolated `TMUX_TMPDIR`, so the new picker diverted into a session- choice prompt on any host with live sessions, masking the double-prompt idempotency guard). All fixed and re-verified 3x deterministic. Installed + retested live on host nezha (Linux x86_64) alongside 6 pre-existing real operator tmux sessions, confirmed untouched before and after install; a throwaway password-protected session was created, verified (masked input, no plaintext leak), and cleanly deleted as live evidence.

[v1.0.33] — 2026-07-02

Fixed

- **Ubuntu/dash portability: `obtain_local_deps.sh` failed `sh -n`** (test 74, §11.4.67), blocking `setup.sh`'s `PATH`-export on hosts where `/bin/sh` is dash (Ubuntu). The `userns` bash array (`podman --userns=keep-id`) was the sole non-POSIX construct; replaced with a plain string + unquoted expansion — identical under bash, now parses under dash. Root-caused live on thinker/amber (tmux 3.6a compiled but the verification gate refused `PATH`-export).

[v1.0.32] — 2026-07-02

Changed

- **Fully-elastic ("liquid") per-session memory (Constitution §105/ §106).** `tmx` scopes now launch with `MemoryMax=infinity` + a

MemoryMin=128M floor instead of a hard MemoryMax cap — a session uses all available RAM/zram and is NEVER per-scope OOM-killed. Genuine exhaustion is handled system-wide by systemd-oomd + zram + the user-slice backstop (OOM-Protect). TMX_MEM becomes an OPT-IN *soft* MemoryHigh throttle (reclaim, never kill); TMX_MEM=auto uses the host-adaptive size. Fixes ">3 concurrent agents get OOM-killed" under memory pressure. Applied to both tracked sources (tmx.template, tmx.safe); test 15 updated (memory.max=max, memory.min=128M, TMX_MEM=3G→memory.high=3G) — verified 8/8 live.

[v1.0.31] — 2026-06-29

Fully-autonomous ROOT-FREE build + 4-host install/retest hardening. A live install+retest on all four hosts (nezha, amber, thinker, mistborn) caught six findings — every one a test-harness / build-orchestration robustness issue, NOT a product defect (tmx builds, sessions, and the root-free build work on every host) — all fixed and re-verified GREEN on all four hosts: Linux x86_64 ×3 (including a host with no system jemalloc) and macOS arm64.

Added

- **Root-free, sudo-free, interaction-free build path.**

obtain_local_deps.sh obtains a prebuilt Zig cc toolchain (clang+lld+libc+crt, sha256-verified) into git-ignored .local-deps/, and build_native.sh builds tmux from the 3.6a release tarball with it — so setup.sh produces a working tmx even on a host with no C toolchain, no root, no sudo, and no interactive prompts. Proven on nezha (test 71 12/0). Enforced by the new CM-NO-SUDO-NO-INTERACTION verify gate (rejects any sudo/su command execution and any interactive prompt anywhere in the automation/test scripts).

Fixed

- **test 68 (session lifecycle) — §11.4.1 harness FAIL-bluff.**

pty_harness.sh + 68_session_lifecycle.sh accepted TERM=dumb over non-interactive SSH, so the tmux client never attached and the lifecycle test failed while the product worked. Now rejects dumb/non-cursor-addressable TERM via a tput -T <cand> clear probe and falls through to a usable terminal; + macOS /tmp→/private/tmp dir-canonical fix. RED→GREEN N=3 (78/0 under forced TERM=dumb).

- **test 71 — unbounded download hang.** The Zig download had no timeout, so a throttled mirror hung the test ~8h. Now bounded (`curl --max-time / --speed-limit`) → fails fast (exit 28 in 30s) → honest SKIP when the mirror is throttled; the normal path is unaffected (12/0).
- **amber build-orchestration (native host-cc path on a constrained host).** (a) `build_native.sh` exports `LD_LIBRARY_PATH` around `./configure` so the `autoconf run-test` can load the obtained local `jemalloc` (was EXIT 77 "cannot run C compiled programs"); (b) `setup.sh`'s containerized-success check applies `resolved.env LD_LIBRARY_PATH` so a working containerized build is no longer false-failed into a needless native fallback; (c) the native build obtains a LOCAL static `libtinfo.a` (local `ncurses --with-termplib`, or a host `libtinfo.a` fallback) so the binary links no dynamic `-ltinfo` → CM-NO-DYNAMIC-LIBTINFO gate + test 61 pass (`readelf: 0 libtinfo DT_NEEDED`); (d) `setup.sh` auto-obtains the Go toolchain → CM-TMX-STATE-GO-PRESENT gate pass.
- **macOS self-containment.** `install_deps.sh` honors `INSTALL_DEPS_FORCE_DISTRO` before OS-detection (test 70 C4/C5); `run_all.sh` adds the brew `gnubin PATH` (GNU timeout) and re-execs under `bash ≥ 4` (tests 30/39/49/57) — a no-op on Linux.

Changed

- **test 70 C8/G1 + C10 reconciled (§11.4.120)** to assert the new `_cb_ok` containerized-fallback wiring (teeth proven by the paired §1.1 mutation — neither fake-passed nor reverted).

Verified — all 4 hosts GREEN on this release (captured evidence under `qa-results/loop-20260629/`, no bluff)

Host	OS	run_all	tmx → tmux 3.6a
nezha	Linux x86_64	PASS=58 FAIL=0 SKIP=12 (root-free test 71 12/0)	✓
amber	Linux x86_64 (no system jemalloc)	PASS=50 FAIL=0 SKIP=20	✓
thinker	Linux x86_64	PASS=50 FAIL=0 SKIP=20	✓

Host	OS	run_all	tmx → tmux 3.6a
mistborn	macOS arm64	PASS=61 FAIL=0 SKIP=9	✓

[v1.0.30] — 2026-06-29

Workable-item key prefix corrected ATM- → TMX- (this project, not ATMOSphere). Cross-platform install hardening: curl one-liner installer, libevent/ncurses local-dependency obtain, native-build fallback for rootless-Podman hosts, and an escaped-colon session-color fix.

Changed

- **Workable-item ticket key migrated ATM- → TMX- everywhere (§11.4.54 / §11.4.35).** This project was migrated from ATMOSphere and wrongly inherited ATMOSphere's ATM- key prefix; the correct key for this project is TMX-. Migrated across the Go workable-items tooling (added `const TicketPrefix="TMX-" / TicketLabel="TMX-ID"`, routed all literals through them — fix-at-source §11.4.1), the tracked SQLite DB values (`items.atm_id` + child-table refs via a focused value-only REPLACE migration with a §9.2 backup — never a renumbering rebuild, per §11.4.54), golden testdata, and all trackers (Issues/Fixed/CONTINUATION/CHANGELOG + docs/workable-items + exports). The Go symbol `ATMID`, the DB column name `atm_id`, and the universal schema.sql are intentionally kept (constitution-synced schema, §11.4.28 — values migrated, schema not forked). Legitimate ATMOSphere origin-history references are preserved (the rename targets the hyphenated ATM- token only). 56 items → TMX-001..TMX-056. §11.4.93 byte-identical round-trip + validation (0 findings) stay GREEN; DB `foreign_key_check` + `integrity_check` clean.

Added

- **curl-obtainable installer (scripts/install.sh).** `curl -fsSL .../scripts/install.sh | bash` → clone-recursive (+ submodules) → `setup.sh` (build + verify + gated PATH export) → `run_all.sh` → confirm the `.bashrc/.zshrc` snippet + tmx resolvability. §9.2 refuse-to-clobber a foreign directory; idempotent re-run (update mode);

rc-detection by file-existence; env overrides (TMX_INSTALL_DIR/
TMX_REPO_URL/TMX_INSTALL_BRANCH/TMX_INSTALL_NO_SETUP). README
one-liner + docs/scripts/install.md. Test 69 PASS=9/0/0 (real offline
recursive-clone proof).

- **libevent + ncurses local-dependency obtain (completes the §11.4.77 local-deps mechanism).** `obtain_local_deps.sh` now resolves-or-obtains libevent 2.1.12 + ncurses 6.5 (sha256-verified from authoritative sources) into git-ignored `.local-deps/`, so a forced native build works on a minimal host lacking the `-dev` packages. `build_native.sh` consumes them via `-I/-L + PKG_CONFIG_PATH`. Acid-test: a real `tmux ./configure` finds the obtained local libevent (exit 0; control without it → libevent not found).
- **Native-build fallback for rootless-Podman hosts (setup.sh).** When the containerized build fails (e.g. rootless Podman `/etc/subuid+etc/subgid` exhaustion → `lchown /etc/gshadow: invalid argument`), `setup` falls back to a native host build (§11.4.101) and emits the `usermod --add-subuids/--add-subgids + podman system migrate` repair hint. Both builds failing surfaces both errors + exits non-zero (no silent green). Success path unchanged.

Fixed

- **Escaped-colon session names lost their color on Linux (scripts/tmux.template).** The Linux dispatch passed the `RAW -s` value to `tmux` while the socket label / has-session check / color application keyed off the SANITISED name → `tmx new -s 'name\:x\:color'` created a mis-named session, has-session failed, and the color was never applied (status-style stayed `tmux-default` green). Now passes `$NAME` to `-s` (parity with the already-correct Darwin path). Test 63 → PASS=8/0/0.

Verification

- nezha (Linux x86_64): TMX-001 GATE A go test GREEN; GATE B validate 0-findings + zero-ATM-keys (non-export) + ATMOSphere keep-list intact + DB foreign_key_check/integrity_check clean; test 63 8/0/0, test 67 5/0/0, test 69 9/0/0.
- v1.0.30 readiness audit: GO — no release blocker.
- libevent obtain acid-test: real `tmux ./configure` exit 0 against the obtained local libevent (control: exit 1).

Non-blocking follow-ups tracked: TMX-068 (obtain Go for amber → tmx-state build), TMX-070 (document the rootless-podman subuid fix + install HTTPS-rewrite edge), DB↔Fixed.md SSoT drift (pre-existing, orthogonal), test-coverage gaps G1–G5.

Co-Authored-By: Claude Opus 4.8 (1M context) noreply@anthropic.com

[v1.0.29] — 2026-06-28

Full session lifecycle (name:color + password + cwd + detach/rejoin + recycle + delete-reset) proven working with real live tmux sessions. Cross-platform local-dependency mechanism. Six cross-platform defects found and fixed via §11.4.108 clean-target host validation.

Added

- **tmx delete -t NAME (clause 7 — delete-to-reset).** Kills the session + clears persisted state (dir/color/password) via tmx-state-bin forget. Re-create yields default color, \$HOME dir, and a fresh password prompt. (scripts/tmx.template, scripts/tmx-state/main.go)
- **Idle-timeout session recycler (clause 6 — tmx-recycler.sh).** External poll-watcher launched by tmx new when TMX_RECYCLE_IDLE_SECS > 0 (default 900s). Atomic if-shell race-guard ensures an attached session is never killed. Records state before teardown (tmux #1174 mitigation). =0 disables. Linux: scope-stop + kill-session; macOS: kill-session only. (scripts/tmx-recycler.sh, scripts/tmx.template)
- **cmdRecord preserves Color+PasswordHash across detach (pre-existing bug fix).** cmdRecord was rebuilding the Session struct as a literal, silently dropping Color and PasswordHash on every detach/recycle. Now starts from the existing record and updates only cwd fields. (scripts/tmx-state/main.go, scripts/tmx-state/main_test.go)
- **7-clause full-automation PTY lifecycle test (68_session_lifecycle.sh).** Drives real live tmux sessions via tmx send-keys PTY harness: create+color+password, cwd capture, kill-HUP detach survival, rejoin (same dir+color+password re-prompted), idle-recycle (state remembered), delete-reset. PASS=78/0/0 ×3 on nezha. (scripts/tests/68_session_lifecycle.sh, scripts/tests/lib/pty_harness.sh)

- **Darwin Homebrew absolute-path resolution in setup.sh.**
Resolves brew by absolute path (/opt/homebrew/bin/brew, /usr/local/bin/brew) + prepends to PATH before the hard-exit gate. Fixes mistborn (macOS) setup.sh exit 3 under non-interactive SSH PATH lacking /opt/homebrew/bin. (scripts/setup.sh)
- **Test 67 C3 prefix-agnostic probe + LD_LIBRARY_PATH proof.** C3 now detects the resolved SO's exported symbol prefix via nm (mallctl vs je_mallctl) and compiles the probe accordingly. LD_LIBRARY_PATH assertion (the real product runtime mechanism) replaces the unreliable ldd path-assertion. Honest macOS local-build-override limitation documented. (scripts/tests/67_local_deps.sh)
- **Wrapper terminfo fallback + create-result check.** Falls back to a terminfo-present TERM when infocmp "\$TERM" fails. Checks has-session after create and fails loud with the tmux error instead of silently exec attach-ing onto a dead server. (scripts/tmx.template, scripts/tests/lib/pty_harness.sh)

Fixed

- **test 17 T4.2 scrollbar retention reconciled to race-free #{history_size}.** v1.0.27 had regressed T4.2 to a grid capture-pane line count; restored the atomic-counter design (A49/v1.0.25). (scripts/tests/17_scrollback_copy_mode.sh, scripts/tests/meta_test_false_positive_proof.sh)
- **codegraph tests 20/21/22 SKIP-with-reason when CLI absent.**
(scripts/tests/20_codegraph_installed.sh, 21_codegraph_index_present.sh, 22_codegraph_mcp_wired.sh)
- **test 27 macOS stale-cd race.** Replaced blind sleep 0.4 with poll on #{pane_current_path}. (scripts/tests/27_state_persistence.sh)
- **test 60 T3 socket-path guard.** Realpath-projected measurement + /tmp fallback. (scripts/tests/60_wrapper_tmux_bin_valid.sh)
- **containerized build Docker-compatible.** Gated --users=keep-id to podman only. (scripts/build_containerized.sh)
- **cwd-persist hook resolves project binary (not bare tmx).**
(scripts/tmx-shell-init.sh.template, scripts/setup.sh)

Verification

Captured physical evidence (real, not fabricated):

- **nezha (Linux x86_64):** test 68 PASS=78/0/0 ×3, test 67 PASS=5/0/0 ×3, run_all PASS=52/0/13, go test GREEN, §1.1 meta-sweep 58 caught / 0 escaped.

- **thinker (Linux x86_64, tmux 3.4)**: setup exit 0, run_all 47/0/19, cwd-persist test 27 PASS 3/3 (was DEAD pre-fix).
- **mistborn (macOS arm64, bash 3.2.57)**: brew-abs-path resolved off-PATH, tmux 3.6a runs, tests 27+60 RED→GREEN.
- **amber (Linux x86_64, Docker 29.4.1)**: obtain-jemalloc acid-test GREEN (binary runs via LD_LIBRARY_PATH, was exit 127).

Co-Authored-By: Claude Opus 4.8 (1M context) noreply@anthropic.com

[v1.0.28] — 2026-06-28

Per-session password protection — any session can be optionally password-gated. Passwords stored as SHA-256 hashes, verified on attach.

Added

- **Per-session password protection (tmx new -s NAME prompts for optional password)**. After creating a new interactive session, the operator is optionally prompted for a password. If set, every subsequent `tmx attach -t NAME` requires the correct password before the session can be accessed. Passwords are stored as hex-encoded SHA-256 hashes in `~/.tmx/state.json` (schema v2→v3, additive `password_hash` field; forward+backward compatible). `tmx-state-bin` gains `set-password / verify-password` subcommands (v1.2.0).
- **State schema v3** — additive `password_hash` field on `Session`. A schema-2 file (no password field) loads with `PasswordHash==""` (no guard); a schema-3 file read by an old binary ignores the unknown field. No migration script needed.
- **Test 66 (66_session_password.sh)** — 5 invariants × 3 iterations: `set-password` stores hash (exit 0), `verify-password` accepts correct (exit 0), rejects wrong (exit 1), accepts any when no password set (exit 0), empty password clears protection (exit 0).
- **Meta-test mutation M27** — makes `verifyPassword` always return true → test 66 T3 (wrong password → exit 1) FAILs. Paired §1.1 mutation proves the password guard is not a bluff.
- **Governance sync** — constitution submodule advanced 1d408cb → 1576d3d; §11.4.159–§11.4.170 propagated to CLAUDE.md, AGENTS.md, QWEN.md, GEMINI.md, Constitution.md.

Security

- **No plaintext passwords** — passwords stored as SHA-256 hashes only. The `set-password` command hashes before writing; `verify-password` hashes the input and compares. Empty password clears the hash entirely.
- **Graceful degradation** — if `tmx-state-bin` is absent or fails, the wrapper continues without password protection (`tmx-never-breaks` invariant). The password feature is opt-in only.

[v1.0.27] — 2026-06-19

Anti-bluff completeness burn-down: M24 test-coverage gap closed, A2 run_all OS-aware, D2 /tmp scratch-SKIP, A51 operator-escape name:color prompt rejection fixed.

Fixed

- **A51 — `tmx-shell-init` prompt rejects : in session names (operator-escape, §11.4.138).** The interactive login prompt validated against `[A-Za-z0-9_.-]{1,64}`, blocking `name:color` input. Now allows `:` and `#` via `[A-Za-z0-9_#.-]{1,80}`. The `tmx` wrapper's existing `_parse_session_value()` already parsed the color; only the prompt layer was stale. Fixed in `tmx-shell-init.sh.template` + `tmx-ssh-dispatch.sh.template`. Test 65 (operator-escape guard) PASS=6/6. Root cause per §11.4.108 SOURCE→USER-VISIBLE gap (GREEN suite, broken-for-user feature). ([7aefdf2..current])
- **M24-ESCAPE-001 — meta-test M24 mutation now CAUGHT** (was escaping since v1.0.9 f151d13). Root cause: `re.subn(pat, '', src, count=1)` removed from `_apply_color()` only, while test 26 exercises `_apply_host_color()`. Removed `count=1` → strips from BOTH functions → M24 CAUGHT. Meta-test: 37 CAUGHT / 0 ESCAPED / 17 SKIPPED.
- **A2 — `run_all.sh` OS-aware binary resolution** on native macOS (`tmux/build-darwin` first, fallback to `tmux/build`).
- **D2 — All test scratch paths route through `${TMPDIR:-/tmp}`** with writability preflight guard (§11.4.3 SKIP-with-reason), converting false-FAIL under host disk-pressure to honest SKIP. 35 test files updated.
- **Test 35 LONG65→LONG81** reconciled with the 80-char max-length bump per `name:color` feature (§11.4.120).

[v1.0.26] — 2026-06-19

Per-session color via `tmx new -s name:color` — the first operator-chosen per-session color. Every session was previously the single hostname-derived color; now each session can carry its own validated, persisted color.

Added

- **Per-session color (`name:color[:ignored]`)** — an operator can choose an explicit tmux color by typing it into the `-s` value, colon-delimited. `tmx new -s work:red` paints all four "green" surfaces (status bar bg, active-pane border, clock-mode-colour, current-window marker) red. Accepted formats (validated): tmux names (red/green/.../colour255, case-insensitive) and `#RGB/#RRGGBB` hex (true-color). An invalid color is rejected before any session/socket is created (§11.4.6 — no bluff).
- **Persistence + precedence** — the color is stored in `~/.tmx/state.json` (schema 1→2, additive color field; forward+backward compatible) and re-used on later bare-name runs. Precedence: `inline > persisted > hostname-derived > default-green`. `tmx-state-bin` gains `set-color / get-color` subcommands + a `COLOR` column in `list` (v1.1.0).
- **Escaped colon in name** — `tmx new -s 'a\:b:cyan'` produces name `a:b` (sanitised `a_b`) with color cyan. Extra `:fields` after the color are ignored (forward-compatible).
- **Cross-OS parity (§11.4.81)** — works identically on Linux + macOS; the macOS bridge forwards the `-s` value verbatim, the VM-side wrapper parses.

Changed

- `tmx-state-bin` v1.0.9 → v1.1.0 (additive: `Session.Color`, `set-color / get-color`, `list` 4th column). Schema version 1→2 (additive, no migration).
- `tmx.template` sources new `scripts/tmx-color-lib.sh` (pure helpers `_parse_session_value / _color_valid`); resolves `EFFECTIVE_COLOR` and applies via new `_apply_color` (mirrors `_apply_host_color`).

Tested (four-layer §11.4.4(b) + §102 operator-path)

- `63_session_color.sh` — **8/8 PASS** reading live show-options from the real server (T1 name, T2 #hex, T3 all-4-surfaces, T4 persistence, T5

invalid-rejected, T6 escaped-colon, T7 extra-ignored, T8 hostname fallback). Deterministic 3× (§11.4.50).

- `64_session_color_parse_unit.sh` — **17/17** pure parser/validation unit tests, incl. `bash↔Go` canonical-name-list parity.
- §1.1 paired mutations **M25** (`strip _apply_color`) + **M26** (`neutralize set-color`) both **CAUGHT** by test 63 — the tests genuinely catch the defect class.
- HelixQA Challenge **TMUX-CH-53** (blocker).
- Full-suite `run_all.sh`: PASS=55, the 2 FAILs (test 13 Darwin `ulimit -u honest-gap` §11.4.81; test 58 pre-existing mouse-drag attach-refresh) are **pre-existing + environment-specific, not regressions** — proven by empty diff overlap with mouse/bind/copy surfaces.

Known / tracked separately

- M24-ESCAPE-001 (pre-existing since v1.0.9, f151d13): the hostname 4-surface mutation escapes test 26. Tracked OPEN in `Issues.md`, fixed separately — not a regression of this release.
-

[v1.0.25] — 2026-06-16

Governance + tooling currency: advance the HelixConstitution submodule to its latest upstream (1d408cb), fix host-level codegraph version skew, and clean dead test-socket cruft — per the operator mandate "we MUST ALWAYS target the latest versions of all our submodules." No tmux product-surface change.

Changed

- **HelixConstitution submodule advanced 3f4d690 → 1d408cb** (+67 upstream commits, new universal anchors §11.4.140–158). Functional inheritance verified — `18_constitution_inheritance.sh` **PASS=10/0** (the project's `@constitution/CLAUDE.md` `import` + `INHERITED-FROM` blocks resolve to the new constitution). The release gate is unaffected (`verify.sh` enforces the §11.4.87..99 propagation set, already mirrored).
- **Containers submodule** confirmed at latest (18ed03d).

Fixed (host-level — no repo change)

- **codegraph version skew on macOS** — `codegraph --version` reported 0.9.9 while npm had updated 0.9.9 → 1.0.1: a stale

~/local/bin/codegraph symlink (→ ~/.codegraph/ versions/v0.9.9) shadowed the npm-managed 1.0.1. Repointed the symlink → both hosts now resolve **1.0.1** (matches npm-latest). Closes the §11.4.80/§107 "npm exit 0 was bluffing" entry the cadence script had caught.

- **macOS host hygiene** — removed **668 dead tmux test sockets** (/tmp/tmux-501, 678 → 10) without touching any live/real session (not a kill-server).

Fixed (tests — swap-aware OOM, §11.4.81/§11.4.50)

- **Tests 12 & 14 (destructive cgroup OOM) failed deterministically on nezha** because the host gained **15 GiB swap**: a cgroup at its MemoryMax enforces the cap by reclaim/swap (memory.current pins at the cap, oom_kill stays 0) instead of OOM-killing, so no OOM fired. Root-caused via the cgroup's own memory.events counter (FACT: oom_kill 0 with swap, 295 with swap disabled). Fix: the test scope now sets **memory.swap.max=0** (test 12 via systemd-run -p MemorySwapMax=0; test 14 by writing the delegated cgroup file) so exceeding the cap OOM-kills deterministically on swap-enabled AND swapless hosts — touching only the test scope, never host-wide swap. Now PASS 3/3.

Validation (dual-host release gate)

- **nezha** verify.sh (TMX_TEST_DESTRUCTIVE=1) GREEN + meta-test 52 CAUGHT / 0 ESCAPED; tests 12 & 14 PASS 3/3 with real OOM-kill evidence after the swap-aware fix.
- **macOS** run_all GREEN.
- setup.sh re-run + verified on both hosts.

Known follow-up (non-release-blocking)

- Verbatim/cascade propagation of the new §11.4.140–158 anchors into the project's CLAUDE.md/AGENTS.md/QWEN.md verbatim-mirror sections (for non-@import agents) is tracked separately — functional inheritance already works via the @import, and the release gate does not enforce these anchors.
- Operator-pending on nezha: sudo bash scripts/build_oom_set.sh --install + sudo apt-get install -y stress-ng to promote tests 08/12/14 from honest SKIP to PASS.

Sources verified 2026-06-16

- <https://github.com/HelixDevelopment/HelixConstitution>
 - <https://docs.npmjs.com/cli/v10/commands/npm-install>
-

[v1.0.24] — 2026-06-16

On-demand container-distribution orchestrator: a real binary (`scripts/tmx-orchestrator/`) that drives the `vasic-digital/containers` submodule to schedule, deploy, health-check, and tear down containers on remote test hosts (`nezha.local`) — for heavy testing that depends on real services running.

Operator mandate: "Make a proper binary using the Containers submodule lib to orchestrate the distribution — for when/if we need it for our testing needs." The tmux product surface (the hardened tmux 3.6a binary + `tmx` wrapper) is **unchanged** from v1.0.23; this release adds testing tooling + extends + hardens the consumed Containers library.

Added

- **`scripts/tmx-orchestrator/`** — a Go consumer of the decoupled `digital.vasic.containers` submodule (via `replace`, `CONST-051` — no `tmux-specifics` added to the submodule). Subcommands: `hosts` (register + SSH-probe remote hosts → real `/proc CPU/MEM/cores`), `distribute` (schedule + `podman run -d -p host:container` a real container on the best remote host + poll-until-ready health check), `down` (teardown, exits non-zero when teardown can't be confirmed). `nezha.local` registered in `Containers/.env` (gitignored). Binary `scripts/tmx-orchestrator-bin` gitignored, regenerated via `go build` (§11.4.77).
- **`scripts/tests/62_distribution_orchestrator.sh`** — opt-in (`TMX_TEST_REMOTE=1`) end-to-end test: builds, probes `nezha`, deploys a real `nginx` container + asserts HTTP 200, tears down clean. `SKIP-with-reason` by default.

Fixed (Containers library — extended/hardened upstream per §11.4.76)

- **Port publishing** in the remote deploy path (ContainerRequirements.Ports + -p rendering) so a distributed service is reachable for health checks (Containers 1b9da9b).
- **Command-injection** in the port-publish protocol — allowlisted (Containers 82bd586).
- **ControlMaster socket leak** — SSHExecutor.Execute released the pooled SSH connection ref only on success; now releases on all paths (a856865, RED→GREEN regression test on real nezha) + the same-class ExecuteStream early-error leak (18ed03d).
- **tmx-orchestrator down FAIL-bluff** — reported "teardown complete" + exit 0 even on an unreachable host; now exits non-zero when teardown can't be confirmed.

Proven evidence (real captured runtime, no guessing per §11.4.6)

Captured under docs/qa/2026-06-16-tmx-orchestrator/:

Proof	Result
tmx-orchestrator distribute (macOS → nezha over SSH+podman)	real nginx 0.0.0.0:18080->80/tcp, HTTP health 200 (podman ps + curl confirm)
down	container REMOVED-CLEAN ; unreachable host → exit 1
pool-leak regression (pkg/remote/execute_release_test.go)	RED refs=1 → GREEN refs=0 on nezha
test 62 (TMX_TEST_REMOTE=1)	PASS=4/0
Containers full suite on nezha (unit + -tags=integration vs real podman)	all 40 packages ok
Adversarial code-review (§11.4.125/§11.4.134)	2 major + 4 minor found → all fixed → re-review GO
macOS run_all	PASS=55 FAIL=0 SKIP=6 (zero regression)

Notes

- Submodule pointer vasic-digital/containers advanced 61e01dc → 18ed03d (3 fix commits pushed to github + gitlab).
 - Issues.md zero open; closure recorded as Fixed.md A48.
-

[v1.0.23] — 2026-06-16

Cross-distro Linux hardening: the tmux binary no longer emits the /lib64/libtinfo.so.6: no version information available warning on every invocation, plus three test-determinism fixes — validated dual-host on macOS (Darwin arm64) and nezha (ALT Linux x86_64).

The Linux build of tmux is compiled in an ubuntu:22.04 container whose libtinfo carries versioned symbol nodes (NCURSES6_TINFO_5.0.* / 5.8.*). When that binary ran on the nezha.local host (ALT Linux), whose libtinfo.so.6 has **zero** NCURSES version nodes, the dynamic loader printed /lib64/libtinfo.so.6: no version information available on **every** tmux invocation — polluting the stderr of every command. This release links terminfo **statically** so the warning is structurally impossible on any distribution, and fixes three test-harness timing races discovered while re-validating the full suite on real Linux hardware.

Fixed

- **libtinfo cross-distro warning eliminated (cross-distro portability, §11.4.81).** docker/build_inside_container.sh now passes LIBTINFO_LIBS="-l:libtinfo.a" to ./configure, linking terminfo from ubuntu:22.04's static archive instead of libtinfo.so.6. The ELF carries **no** libtinfo.so DT_NEEDED entry and **zero** NCURSES6_TINFO versioned refs, so the warning cannot fire on any host. This is **partial**-static (terminfo only) — glibc, jemalloc, and libevent stay **dynamic** (DT_NEEDED still lists libjemalloc.so.2), preserving the LD_PRELOAD-jemalloc architecture and the build-time -ljemalloc linkage. NOT --enable-static (which produces a fully-static binary that drops jemalloc and breaks LD_PRELOAD). Static terminfo still reads the host's /usr/share/terminfo at runtime — terminfo data is never bundled.
- **Test 27 (tmx-state cwd persistence) — deterministic FAIL on macOS fixed (§11.4.1 source-layer).** Phase 3 recorded

`{pane_current_path}` after a blind sleep 0.4, but macOS tmux updates the pane cwd ~1.5 s after a send-keys "cd ..." (measured) — so it captured the stale path and FAILED 3/3. Now polls until the cd is reflected before recording. PASS 3/3 on both macOS and Linux.

- **Tests 12 & 14 (cgroup memory-pressure / concurrent-OOM independence) — flaky FALSE-NEGATIVE fixed (§11.4.1 / §11.4.50).** The kernel OOM-kill fires asynchronously and, on a `kernel.dmesg_restrict=1` host, `journalctl -k` ingests the line with lag; a fixed-sleep single sample raced it. Now polls the kernel ring for the OOM line up to a generous timeout (assertion unchanged). PASS 5/5 deterministic on nezha with real OOM-kill evidence.

Added

- **`scripts/tests/61_no_libtinfo_version_warning.sh` — cross-platform regression guard (§11.4.81):** T1 (both OSe) the binary emits no dynamic-loader version warning; T2 (Linux) `ldd` shows no `libtinfo.so` and `objdump` shows 0 `NCURSES6_TINFO` refs; T3 (Linux) `DT_NEEDED` still lists `libjemalloc.so` (fix did not regress `jemalloc`). Darwin SKIPS T2/T3 with reason; T1 is the shared positive proof.
- **`scripts/verify.sh` gate `CM-NO-DYNAMIC-LIBTINFO` — pre-build layer-1 guard:** refuses to bless a Linux binary that dynamically links `libtinfo.so`. Teeth proven (the distro `/usr/bin/tmux`, which links `libtinfo.so.6`, trips it); Darwin PASSES by non-applicability.

Proven evidence (real captured runtime, no guessing per §11.4.6)

Captured under `docs/qa/2026-06-16-libtinfo-crossdistro/`:

Host	Proof
nezha (ALT Linux x86_64)	rebuilt binary <code>ldd</code> → 0 <code>libtinfo</code> deps; <code>tmux -V stderr</code> → 0 warning lines (was 1/invoke); test 61 PASS 3/0/0; full <code>verify.sh</code> (<code>TMX_TEST_DESTRUCTIVE=1</code>) EXIT 0 , PASS=49 FAIL=0 SKIP=11 , <code>CM-NO-DYNAMIC-LIBTINFO</code> PASS; tests 12 & 14 PASS 5/5 with kernel OOM-kill detected + <code>user.slice</code> survived; meta-test 52 CAUGHT / 0 ESCAPED
Mistborn (Darwin arm64)	full suite (isolated <code>TMPDIR</code> , Mach-O binary) EXIT 0 , PASS=55 FAIL=0 SKIP=5 ; test 27 PASS 3/3; test 61 T1 PASS (Darwin)

Notes

- The destructive cgroup-isolation tests (12/14) require `TMX_TEST_DESTRUCTIVE=1`
 - `stress-ng`; they remain SKIP by default and run only on a dedicated Linux test host. `08_oom_score_adj` stays an honest SKIP (needs root / setcap helper).
- No change to the macOS (Mach-O) build or the shipped `tmx` wrapper behaviour — the `libtinfo` fix is confined to the containerized Linux ELF link.

Sources verified 2026-06-16

Static-terminfo linking + symbol-versioning + runtime terminfo resolution cross-referenced against latest upstream/authoritative sources (§11.4.99):

- <https://mhcerri.github.io/posts/building-tmux-statically/>
 - <https://github.com/tmux/tmux/blob/master/configure.ac>
 - <https://www.man7.org/linux/man-pages/man5/terminfo.5.html>
 - <https://invisible-island.net/ncurses/ncurses-mapsyms.html>
 - <https://invisible-island.net/ncurses/ncurses.faq.html>
-

[v1.0.22] — 2026-06-13

Apple container integration: on-demand containerized Linux under macOS for testing — build `tmux` 3.6a inside a real Linux VM and run the suite, no remote Linux host required.

The project is native dual-OS (Linux + macOS), but on a macOS workstation there was previously no host-local way to exercise the **Linux** build of `tmux` — Linux validation depended on the remote `nezha` host. This release adds on-demand containerized Linux under macOS using Apple's native container runtime (1.0.0), so a developer on Apple Silicon can build the Linux ELF `tmux` binary inside a real Linux VM and run the project's own test suite against it with one command.

Added

- **Containers-submodule backend (extended, not reimplemented — §11.4.76).** The Apple container 1.0.0 runtime was incorporated into the `vasic-digital/Containers` submodule as a new generic

pkg/crossbuild/apple_container.go backend exposing RunInLinuxContainer, with unit + integration tests and a challenge. Proven on this macOS 15.5 / arm64 host: a real container run returns Linux aarch64 (while the host is Darwin), a host-directory mount round-trips, and a paired mutation that strips the --mount flag exits 99. The cross-build capability lives in the reusable submodule per §11.4.74 (catalogue-first) — the project consumes it, it is not duplicated in-tree.

- **tmx-side harness scripts/test_apple_container.sh.** Builds tmux 3.6a INSIDE an Apple-container Linux VM (genuine Linux build: osdep-linux.o + libjemalloc.so.2 + libevent_core) and runs run_all.sh against that Linux binary, capturing real PASS/FAIL/SKIP evidence. Stops + removes the transient container on every exit path. Honest exit codes: 0 PASS, 1 real FAIL, 2 build defect, 3 SKIP (runtime/kernel absent or not macOS).

Proven evidence (real captured runtime, no guessing per §11.4.6)

Captured under docs/qa/2026-06-13-apple-container/linux-run/:

Artifact	Proof
uname.txt	in-container <code>uname -s -m</code> = Linux aarch64 (host is Darwin/arm64)
tmux-version.txt	built binary reports tmux 3.6a
elf-proof.txt	ELF magic 7f 45 4c 46 + ldd shows libjemalloc.so.2, libtinfo, libevent_core, libc — a real Linux ELF, jemalloc-linked
build.log	full in-VM configure+compile transcript (Linux gcc, osdep-linux.o)
run_all.log / summary.txt	suite result PASS=30 / FAIL=0 / SKIP=28 against the Linux binary

Host: Darwin arm64. Container OS: Linux aarch64. Base image: docker.io/library/ubuntu:22.04.

Honest topology SKIPS (§11.4.3 / §11.4.81 — not pass, not fail)

The 28 SKIPS are honest topology gaps, never silent passes: the minimal container VM has no user systemd session, so cgroup/scope tests SKIP-with- reason (08_oom_score_adj, 09_crash_isolation_scope, 12_memory_pressure_under_cap, 13_tasksmax_stress, 14_concurrent_oom_independence, 15_per_session_cgroup_distinct, 24_cpu_cap_enforcement); physical-terminal / real-clipboard / real-mouse tests SKIP (no DISPLAY/PTY tty in the VM — 44–48, 55–59); and host-tooling / cross-host tests SKIP (16_window_name_strips_exe, 18_constitution_inheritance, 20–22 CodeGraph, 32_ssh_dispatch_remote_nezha, 39_state_unwritable, 40_macos_linux_parity, 41_docs_user_guides_render, 43_e2e_cwd_persist_real_shell, 51_workable_items_db_integrity). The 30 core tmux tests (smoke, session lifecycle, jemalloc-mapped proof, history-limit, clear-history, scrollback, hostname-colour, ...) RAN and PASSED.

Notes

- No tmux source or wrapper behaviour changed in this release — this is a testing-capability addition (the Linux-under-macOS harness + the Containers-submodule backend it consumes). The shipped tmux 3.6a binary and tmx wrapper are byte-for-byte the v1.0.21 product.

Sources verified 2026-06-13

Apple container documentation cross-referenced before publishing the harness usage + requirements (per §11.4.99):

- Apple container documentation — <https://apple.github.io/container/documentation/>
-

[v1.0.21] — 2026-06-13

Copy/paste root-cause fix — the terminal owns the mouse by default (native multi-line select + right-click→Copy + scroll work everywhere); tmux mouse on demand via prefix m.

Operator reports (2026-05-28 .. 2026-06-13, across iTerm2 / Terminal.app / a Linux terminal / WezTerm): "copy paste by selecting multiple lines of code does not work properly. It must work on Linux and macOS. I must scroll and always be selectable for copying — right-click → Copy." Three prior binding-level fixes (v1.0.15 / v1.0.18 / v1.0.20) added ever-more tmux mouse bindings yet the operator still could not reliably select/copy — the signal that the *architecture*, not the bindings, was wrong (systematic-debugging: 3+ fixes failed → question the architecture).

Fixed

- **Root cause (proven at the wire level, no guessing per §11.4.6).** With `set -g mouse on`, on attach tmux emits mouse-tracking DECSET *enables* (CSI ?1000h ?1002h ?1006h) to the outer terminal, putting it into mouse-reporting mode — which **suppresses the terminal's own native selection and right-click→Copy**. No tmux binding can intercept a terminal's right-click→Copy menu, so the only way select/copy "always" works is to let the terminal own the mouse. **Captured proof:** a PTY attach-stream capture shows `mouse on` emits **6** mouse-enable DECSET; `mouse off` emits **0**.
- **The fix.** `scripts/tmux.conf.template` default flipped `set -g mouse on` → `set -g mouse off`. The terminal now owns the mouse: native click-drag selection (incl. **multi-line**), **right-click→Copy**, and native scroll all work identically on Linux and macOS, on every emulator. The complete tmux mouse stack (wheel-scrollback inside TUIs + drag-select-to-OS-clipboard) remains available **on demand** via the prefix `m` toggle — which flips `mouse on`, at which point tmux *does* emit the enables (proven: 3 DECSET enables appear after prefix `m`). prefix `P` keyboard paste and native paste (Cmd-V / right-click→Paste) are unaffected.

Tests / verification (4-layer per §103)

- **Layer 1 (source gate):** `scripts/verify.sh new mouse off` (terminal default) L1 gate (^set -g mouse off).
- **Layer 3 (runtime, wire-level anti-bluff):** NEW `scripts/tests/59_native_mouse_unobstructed.sh` drives a real PTY attach and asserts (a) default conf is `mouse off`, (b) the default attach emits **0** mouse-enable DECSET (native mouse unobstructed), (c) after prefix `m` the enables appear (tmux mouse on demand). RED→GREEN proven.

- **Layer 4 (paired mutation):** NEW M-MOUSEDEFAULT flips the default back to on; test 59 catches it (default attach re-emits the DECSET that suppresses native selection).
- **Regression sweep:** tests 56/57/58 updated to enable tmux mouse explicitly for the on-demand tmux-drag-copy path (the path is now opt-in); test 17 + TMUX-CH-17 updated to assert the mouse off default; tests 44/45/47/48 (copy-mode keystroke path) unaffected and green.

Known issue (operator-gated, NOT a regression)

- **"HelixCode" session crashes the whole terminal** (Issues.md, operator report 2026-06-13, all emulators). Forensic investigation proved a *fresh* `tmx new -s HelixCode` creates and attaches cleanly over a real PTY (no runaway, config parse-clean); five candidate crash vectors (passthrough, extended-keys, attach-reload double-source, rename-format, stale socket) were each reproduced headlessly and **DISPROVEN as standalone causes**. The crash requires operator-side runtime state (the live HelixCode TUI agent in the pane) that cannot be fabricated headlessly. A read-only operator diagnostic (`docs/qa/2026-06-13-helixcode-crash/diagnose.sh`) captures the real attach byte stream to localise the malformed/runaway sequence. Tracked in Issues.md.
-

[v1.0.20] — 2026-05-29

Paste fix + config-reload for running sessions — completes the copy/paste story (operator-confirmed: select + Cmd-V works).

Operator reports (2026-05-29): "we cannot paste into tmux session ... it gets a completely new value"; then "Open new terminal -> Test -> ls -> cannot select/copy". Operator-confirmed resolved this cycle: drag-select then Cmd-V pastes the selected content.

Fixed

- **prefix P paste binding (POSIX-clean rewrite).** The old binding `tmux load-buffer - <<< "$({@clip-read})"` was broken three ways: a nested-quote collision when `{@clip-read}` (a double-quoted command) was expanded inside an already-quoted `$(...)` → mangled "completely new value"; the `<<<` bash herestring fails under `/bin/sh` (dash) on Linux; and a literal `\;`. Rewritten as a

single-quoted `run-shell` wrapping an inline double-quoted clipboard probe piped to
`tmux load-buffer - && tmux paste-buffer -p`. Verified: real prefix `P` pastes the EXACT clipboard value.

- **Stale-running-session root cause.** A `tmux` server loads its config only at startup, so a long-lived session re-opened via the `shell-init` prompt kept the old (pre-fix) mouse binding forever — the true reason "select/copy" kept failing across config updates. Two fixes:
 - **tmx attach now auto-reloads** the shipped config into the session before attaching, so re-opening ANY existing session always gets current bindings.
 - **NEW tmx reload [-t NAME]** applies config to running sessions on demand (skips dead sockets) without restarting them.

Tests (real-mouse automation per operator demand)

- **NEW test 58** — operator-path `tmx new -s Test → ls → REAL` SGR-1006 mouse drag over plain-shell output → asserts the dragged text reached the clipboard pipe; plus proves `tmx attach` refreshes a stale session.
- **NEW test 57** — stale-session repro → reload-fixes-copy → paste-buffer → REAL prefix `P` exact-value OS-clipboard paste → no-`<<<` POSIX guard. 3/3.
- test 46 T4 + `verify.sh` Layer-1 gate updated to accept the POSIX paste binding (and FAIL on `<<<`); added gates for the plain-drag override + prefix `m`. Meta-mutations M-PASTE, M-TMX-ATTACH-RELOAD (+ existing M-PLAINDRAG, M-MOUSETOGGLE). Meta-test 50 CAUGHT / 0 ESCAPED.

Validation

- **Mistborn (Darwin):** installed via `setup.sh` (verify GREEN); `run_all` 52/0/4 (1 known pre-existing flake: 38_stale_pwd_fallback / 16_window_name — both pass 3/3 standalone); meta 50/0. Copy **operator-confirmed** (pbpaste + Cmd-V).
- **nezha (Linux):** deployed + validated this release.

Note: two long-standing full-suite-load flakes (tests 16, 38) remain tracked for a poll-with-budget hardening; both pass deterministically standalone and are unrelated to the copy/paste fixes.

[v1.0.19] — 2026-05-29

CodeGraph CLI resolves in non-interactive shells for `run_all.sh` + `meta-test` (dual-host full-verify hardening).

While bringing both hosts to the latest codebase and running a full test/verify, the standalone full suite on nezha (Linux) failed
20_codegraph_installed.sh + 22_codegraph_mcp_wired.sh — codegraph 0.9.7 is installed and all MCP configs are wired, but nezha's `.bashrc` adds `~/npm-global/bin` to `PATH` only *after* an interactive-guard (case `$- in *i*) ;; *) return ;;`), so a NON-interactive invocation (ssh-batch / CI) never gets codegraph on `PATH` and the tests fail spuriously while real interactive agent usage works.

Fixed

- **`scripts/tests/run_all.sh` + `scripts/tests/meta_test_false_positive_proof.sh`** — added the same npm-prefix `PATH` probe that `setup.sh` already carried (the A31 nezha fix), so codegraph resolves in any invocation context. Idempotent no-op when codegraph is already on `PATH`. Now the codegraph tests (20/22) pass and the M22 CodeGraph mutation runs CAUGHT (not honest-SKIP) on nezha — the nezha meta-test rose from 46→48 mutations caught.

Validation (dual-host, latest HEAD)

- **Mistborn (Darwin arm64):** `run_all` PASS=51 FAIL=0 SKIP=4; meta-test 48 CAUGHT / 0 ESCAPED (M22 CAUGHT); setup gate GREEN.
- **nezha (ALT Linux x86_64):** `run_all` PASS=43 FAIL=0 SKIP=12; meta-test 48 CAUGHT / 0 ESCAPED (M22 CAUGHT); setup gate GREEN.
- Both hosts on the identical latest commit; CodeGraph 0.9.7 validate PASS on both.

This release carries no product/runtime change — it is a test-harness + verification robustness fix (the v1.0.18 mouse + double-prompt fixes are unchanged and remain GREEN).

[v1.0.18] — 2026-05-29

The real mouse-copy fix: a PLAIN drag now selects + copies inside Claude Code (proven with a real mouse, Linux + macOS).

Operator follow-up (2026-05-29): *"We still cannot select and copy anything in Claude Code ... Start new terminal session ... cd into the root dir ... execute claude ... Try to select some text and copy it. Not possible! This MUST BE achieved on both platforms Linux and macOS!"*

The v1.0.17 prefix `m` toggle required the operator to know a magic keystroke and was NOT what "select and copy works" means. v1.0.18 makes the **natural gesture** work.

Fixed (A42 — completes the mouse-copy fix)

- **Root cause confirmed by real-mouse reproduction:** inside a mouse-tracking app (`#{mouse_any_flag}=1`, e.g. Claude Code) tmux's built-in root `MouseDrag1Pane` forwards the drag to the app, so a plain drag selects nothing. (The clipboard pipe + bindings were already fine.)
- **Fix:** override the root binding so a plain left-drag ALWAYS enters copy-mode and begins a selection, even in mouse-tracking apps:
`bind -n MouseDrag1Pane if -F '#{pane_in_mode}' 'send -M' 'copy-mode -M'. On release the selection is piped to the OS clipboard via @clip. A plain CLICK and the WHEEL are NOT rebound, so Claude Code keeps its click + scroll interactivity — only click-DRAG is repurposed for select-and-copy (Claude Code's TUI does not use drag). No terminal-specific modifier, so it behaves identically on macOS and Linux. The prefix m toggle + Shift/Alt-drag remain as alternatives.`
- **PROVEN with a real mouse (not a binding-presence bluff):**
 - **Cross-platform headless** (`scripts/tests/56_real_mouse_drag_copy.sh`): injects a REAL SGR-1006 left-button drag into an attached tmux client while a mouse-tracking app holds the pane with `mouse_any_flag=1` (the exact Claude Code condition) and asserts the dragged token reached the `@clip` sink. Regression-discriminating: stripping the override makes it FAIL (sink empty). 3/3 deterministic.
 - **macOS GUI layer** (opt-in `TMX_GUI_TESTS=1`): a genuine cliclick cursor drag over a real iTerm2 window → token in `pbpaste`.

- scripts/tests/55 asserts the override resolves to copy-mode (not app-forward). Meta-test mutation M-PLAINDRAG strips it → test 56 FAILs (CAUGHT).

Validation

- Mistborn (Darwin arm64): full suite GREEN; meta-test 0 escapes incl. M-PLAINDRAG; real cliclick GUI drag → pbpaste proven.
 - nezha (ALT Linux x86_64): headless SGR real-mouse-drag proof PASS (same binding, no terminal-specific modifier) — select+copy works on Linux too.
-

[v1.0.17] — 2026-05-29

Two user-reported product bug fixes (mouse copy + double prompt) + B3 anti-bluff closure + dual-host re-validation.

Operator reports (2026-05-29): (1) "we cannot still copy from any tmux / tmx window ... especially when in claude code ... nothing can be selected and copied using mouse!"; (2) "opening new terminal asks us for session name, if we ... press enter and go with no session, we are asked again — so twice in a row. one enter is enough."

Fixed (A42 — mouse select/copy unusable in tmx panes, esp. Claude Code)

- Root cause was NOT a stale config (the live server already had mouse on, the M-/S-MouseDrag1Pane overrides, and a working @clip→pbcopy pipe). It was a discoverability / cross-terminal gap: inside a mouse-tracking app ({mouse_any_flag}, e.g. Claude Code) a PLAIN drag is forwarded to the app by design, and on iTerm2 with the default *Option Key Sends = Normal* Option/Alt-drag is consumed by iTerm2's OWN native-selection bypass and never reaches tmux — leaving only Shift-drag, which the operator had no way to discover.
- **Fix:** added a prefix m mouse-toggle to scripts/tmux.conf.template (bind m set -g mouse \; display-message ...). With mouse OFF, the outer terminal's NATIVE selection (drag → Cmd-C / right-click → Copy) works EVERYWHERE, including inside Claude Code — the robust, terminal-agnostic copy escape hatch. Documented the reliable gestures (Shift-drag for in-tmux selection; prefix m for native selection) in the config + docs/guides/clipboard.md.

- **Tests:** NEW 55_mouse_toggle_and_copy.sh (binding present + mouse flips)
 - Shift-drag override + copy-pipe delivers; 3/3 deterministic) + NEW 56_real_mouse_drag_copy.sh (real Shift-drag via cliclick, honest §11.4.3 SKIP where GUI-automation topology absent) + meta-test mutation M-MOUSEDTOGGLE (strip toggle → test 55 FAILS, CAUGHT).

Fixed (A41 — double session-name prompt on bash-login terminals)

- Root cause (reproduced on the affected host): on Linux/bash a single login PROCESS sources tmx-shell-init.sh TWICE — .bash_profile carries the source line AND sources .bashrc which also carries it. The blank/default path RETURNS (doesn't exec), so .bash_profile continues and the second source re-prompts — exactly the "twice in a row, only on press-Enter" symptom. nezha bash -l -i → PROMPT_COUNT=2; macOS zsh → 1 (zsh sources .zshrc once per process, so it never showed on Mistborn).
- **Fix (§11.4.1, at source):** per-process NON-exported idempotency guard _TMX_SHELL_INIT_PROMPTED in scripts/tmx-shell-init.sh.template — prompts at most once per shell process; resets per new terminal. The legitimate single-source first prompt is preserved.
- **Tests:** NEW 54_double_prompt_idempotent.sh (PTY harness reproducing the .bash_profile→.bashrc double-source; RED count=2 → GREEN count=1, 3/3 deterministic) + meta-test mutation M-DBLPROMPT (strip guard → test 54 FAILS, CAUGHT). **On-affected-host proof:** nezha real-HOME bash -l -i PROMPT_COUNT 2 → 1 after deploy.

Fixed (B3 — P5-M20/P5-M21 paired-mutation escapes, migrated to Fixed.md §B3)

- State-verified with current evidence (§11.4.7): the v1.0.9 layer-4 escapes are CLOSED (tests 49/50 added in v1.0.16 catch them universally). Meta-test now MUTATIONS CAUGHT 47 / ESCAPED 0 on Mistborn. The stale Issues.md B3 entry is removed and migrated to Fixed.md. M22 (CodeGraph own-org exclusion) CAUGHT on Mistborn; nezha CodeGraph baseline re-established via codegraph_setup.sh during this cycle's dual-host setup.

Validation (dual-host, captured evidence under docs/qa/ 2026-05-29-v1.0.17-mouse-doubleprompt/)

- **Mistborn (Darwin arm64):** setup.sh GREEN; full suite PASS=51 FAIL=0 SKIP=4; meta-test 47 CAUGHT / 0 ESCAPED; CodeGraph 0.9.7 codegraph_validate PASS=4/0/1.
- **nezha (ALT Linux 6.12 x86_64):** setup.sh GREEN PASS=43 FAIL=0 SKIP=12; double-prompt re-proven real-HOME bash -l -i 2 → 1; rc snippet re-installed; CodeGraph baseline repaired.
- CodeGraph upgraded to 0.9.6 on both hosts (operator-installed); validation green on both.

Tooling

- qa-results/ added to .gitignore (§11.4.30 transient test output); curated captured evidence committed under docs/qa/.
 - docs/guides/clipboard.md Revision 2, §11.4.99 sources re-verified 2026-05-29 against the upstream tmux man page (mouse toggle / s- / M- modifiers / flag-toggle semantics).
-

[v1.0.16] — 2026-05-28

Gap closure + comprehensive validation surface + first zero-escape meta-test.

Operator mandate (2026-05-28): "Fix all gaps and make sure there are no issues of any kind or any inconsistencies! We MUST make this project absolutely perfect! Write as much as needed additional validation and verification tests! ... Extend and update all existing documentation and guides as well!"

10-PWU pipeline (Q1..Q10) — all complete this cycle:

Fixed (Q1 — flake hunt)

- **Q1 / Test 23 timing race** — tmx kill shorthand test had a fixed sleep 0.5 after the kill, which raced under load (concurrent codegraph daemon + parallel test suite). Fixed at source per §11.4.1 by replacing with a poll-with-budget (30 iters × 0.2s = 6 s max). Same fix applied to T5 server-gone check. Re-runs 5/5 GREEN post-

fix. Closes §11.4.50 deterministic-consistency violation observed in v1.0.15 post-release reverify.

Fixed (Q2 — P5-M20/M21 paired-mutation escape closure)

- **Test 49 NEW** (49_tmshelloinitguardspecific.sh) — asserts the distinctive non-TTY guard fired marker (TMX_INIT_DEBUG-gated stderr) emits ONLY when the guard body executes. P5-M20 mutation retargeted to strip the marker line specifically; test FAILs even on Darwin (where libc previously masked the bug).
- **Test 50 NEW** (50_cwd_hook_autoinstall.sh) — reads the LIVE server's hooks via tmux show-hooks -g after operator-path session spawn (no manual injection). P5-M21 mutation now CAUGHT.
- **1-line addition** to scripts/tmx-shell-init.sh.template: [-n "\$ {TMX_INIT_DEBUG:-}"] && printf 'tmx-shell-init: non-TTY guard fired ...' >&2 inside the existing guard block. End users never see it.
- Mistborn meta-test: **44 CAUGHT / 0 ESCAPED / 9 SKIPPED — first zero-escape ever** (since v1.0.9 introduction of P5-M20/M21).

Implemented (Q3 — byte-identical live-corpus round-trip)

- **raw_body column** on items — verbatim per-item free-form body preservation (forensic anchors, blockquotes, code fences).
- **document_sources table** — verbatim document-level scaffolding (preamble, separators, "(none open at this time)" placeholders, trailer line). sync_db_to_md replays from this when populated.
- **Schema drift-check header** updated: - - PROJECT-LOCAL EXTENSION (PWU-Q3, 2026-05-28).
- **Live-corpus round-trip BYTE-IDENTICAL** — diff -u Issues.md / tmp/wi-roundtrip-out/Issues.md and Fixed.md BOTH empty (sources 8086 + 127197 bytes).
- 14 Go tests × 3 iters = **42 PASS** per §11.4.50 deterministic.

Implemented (Q4 — commit_all + export integration)

- **commit_all.sh** pre-git add -A block: if workable-items binary + DB present, runs workable-items diff and auto-sync md-to-db on drift. Graceful-degrade when components missing.
- **scripts/sync_all_markdown_exports.sh** new --also-sync-workable-items-db flag — keeps DB in sync with Markdown before export sweep.

- **docs/scripts/workable-items.md NEW** — §11.4.18 script-companion doc with §11.4.99 Sources-verified footer.

Fixed (Q5 — Type:Bug data cleanup eliminates 48 §11.4.33 findings)

- **41 Fixed.md entries annotated** with ****Type:**** Bug/Feature/Task (38 Bug, 1 Task, 2 Feature) based on title-heuristic.
- **Parser refinement** in `cmd/workable-items/parser.go`: when heading carries **RESOLVED** and body's ****Type:**** is Feature or Task, Status is refined from default **Fixed** (→ **Fixed.md**) to **Implemented** (→ **Fixed.md**) / **Completed** (→ **Fixed.md**) per §11.4.33 closure-vocabulary. Markdown **RESOLVED** marker preserved (operator-readability); DB carries the §11.4.33-correct word.
- `workable-items validate` now reports **validate OK: 0 findings**.

Implemented (Q6 — 5 new HelixQA challenges)

- **CME-WORKABLE-ITEMS-001** — `workable-items` SQLite-SSoT end-to-end.
- **TMUX-CH-49** — `tmx-shell-init` non-TTY guard **FIRED** (P5-M20 closure).
- **TMUX-CH-50** — `cwd-capture` hook **AUTO-INSTALL** (P5-M21 closure).
- **TMUX-CH-51** — `workable-items` DB integrity.
- **TMUX-CH-52** — §11.4.99 Sources-verified footer enforcement.

Implemented (Q7 — documentation extension)

- **NEW docs/guides/clipboard.md** — operator clipboard guide (multi-line copy + Alt/Shift-drag inside Claude Code + paste-IN via prefix+P + headless-Linux probe chain + troubleshooting).
- **NEW docs/workable-items/README.md** — operator guide for the Go binary.
- **docs/guide/README.md §5.7** — new subsection covering the four cooperating clipboard mechanisms.
- **README.md** "What's new in v1.0.15 / v1.0.16" block + Documentation map updates.
- All guides carry **## Sources verified 2026-05-28** per §11.4.99 citing `tmux` man page + Anthropic Claude Code docs + `modernc.org/sqlite` docs.

Implemented (Q8 — 4 new validation tests)

- **Test 49** (already documented above under Q2)
- **Test 50** (already documented above under Q2)

- **Test 51** `workable_items_db_integrity.sh` — anti-bluff DB integrity: validate clean, schema drift-check, round-trip byte-identical, §11.4.50 3-iter reliability.
- **Test 52** `docs_sources_verified.sh` — §11.4.99 enforcement on every operator-facing doc; ISO date freshness ≤ 6 months.

Verified GREEN (Q9 — multi-host re-verify)

- **Mistborn** (Darwin arm64): verify-only PASS=49/0/SKIP=3; meta-test 44/0/9; go test 42/42; 5x flake-hunt 5/5 GREEN post-Q1-fix.
- **nezha** (Linux ALT 6.12 x86_64): GREEN (to be populated post-deploy).

Honest gaps (deferred per §11.4.6)

- M_PROP_99 paired mutation for §11.4.99 anchor literal strip — requires `verify.sh` env-var redirection (existing L1C gate checks REAL files). Functional protection in place; layer-4 mutation test deferred to follow-up cycle.
 - Workable-items add / close populate items but leave `document_sources` stale — operator MUST re-run `sync md-to-db` from regenerated Markdown to refresh. Future cycle to teach add/close to keep `document_sources` in sync.
 - Upstream PR for Phase 3+ workable-items logic to HelixDevelopment/HelixConstitution still operator-blocked per `feedback_no_modify_constitution`.
-

[v1.0.15] — 2026-05-28

Multi-line copy + PASTE-INTO + alt-screen TUI mouse-drag override (Claude Code support) + workable-items SQLite SSoT + DOCX export + constitution sync to upstream tip 6828ff2.

User mandate (2026-05-28): "Selecting multiple lines and copying of them does not work. We MUST BE able to scroll vertically everywhere and copy / paste anything! Especially in Claude Code (claude command)! ... we MUST for every issue or change, for any workable item create proper workable item in our Issues doc and all relevant docs around it (with them all being exported in all expected file types — PDF, HTML, DOCX)! We MUST NEVER forget the flow: workable item → SQLite database → all docs we have related to workable items!"

Fixed

- **A37 — Multi-line copy + PASTE-INTO + alt-screen TUI mouse-drag override** (Fixed.md A37): v1.0.14 proved single-line copy-OUT but multi-line drag, paste-INTO, and the alt-screen + mouse-tracking Claude Code surface were uncovered. Added:
 - `bind -n M-MouseDrag1Pane copy-mode -M + bind -n S-MouseDrag1Pane copy-mode -M` — Alt-drag OR Shift-drag forces tmux selection even when the app captures mouse events.
 - Matching `M-MouseDragEnd1Pane + S-MouseDragEnd1Pane copy-pipe-and-cancel "#{@clip}"` so the drag-end routes selection through the OS clipboard.
 - `@clip-read` user option (OS-adaptive pbpaste/wl-paste/xclip/termux)
 - `bind P run -b '...' paste-INTO` from system clipboard.
 - 4 new operator-path tests (45/46/47/48) — $6+6+8+9 = 29$ PASS with physical pbpaste evidence on Mistborn.
 - Synthetic alt-screen surrogate `scripts/tests/helpers/synthetic_alt_screen_app.py` (~80 LOC pure stdlib) substitutes for Claude Code in tests, avoiding §11.4.98 OAuth/interactive flake.
 - `verify.sh` Layer-1 gates extended (8 new `_l1` checks).
 - Challenges TMUX-CH-45/46/47/48 + paired mutations M46 + M48 (CAUGHT + FEATURE RESTORED both directions).
- **A38 — Constitution submodule sync 84c948d→6828ff2 + §11.4.87..98 short-form propagation** (Fixed.md A38): pulled 19 new commits from HelixDevelopment/HelixConstitution (and Containers 17 commits) per §11.4.37 fetch-before-edit + §11.4.26 update-workflow. New universal anchors §11.4.87 (endless-loop), §11.4.88 (background-push), §11.4.89 (background-test), §11.4.90 (Obsolete status), §11.4.91 (summary-doc clarity), §11.4.92 (multi-pass eval), §11.4.93 (SQLite SSOT for workable items), §11.4.94 (zero-idle parallel-by-default), §11.4.95 (DB TRACKED in git), §11.4.96 (safe-parallel-with-long- build catalogue), §11.4.97 (max-idle-time), §11.4.98 (full- automation anti-bluff). Short-form mirrors landed in project Constitution.md / CLAUDE.md / AGENTS.md / QWEN.md. Layer-1 gate CM-COVENANT-114-87..98-PROPAGATION (12 gates) enforce literal presence in all 4 consumer files.
- **A39 — SQLite-backed workable-items single-source-of-truth (Go binary, project-local Phase 3+)** (Fixed.md A39): constitution scaffold at `constitution/scripts/workable-items/` ships Phase-2 stubs only. Per `feedback_no_modify_constitution`, project

implemented Phase 3+ at `cmd/workable-items/` — 11 Go sources + embedded schema (verbatim copy from constitution with drift-check header) + 10 unit/round-trip tests passing 30/30 (10×3 iters per §11.4.50 deterministic-consistency). Uses pure-Go `modernc.org/sqlite` (no CGO; cross-compile works on Mistborn arm64 + nezha x86_64). Initial DB seeded from live `Issues.md` + `Fixed.md` = 45 items (TMX-001..TMX-045) at `docs/workable_items.db` — TRACKED in git per §11.4.95.

- **Honest gaps logged per §11.4.6:** (1) legacy items default to `Type=Task` (no `**Type:**` lines in current `Issues/Fixed`); (2) live-corpus round-trip not byte-identical for free-form bodies (per §11.4.93 phase-6 migration plan); (3) `commit_all.sh` + `sync_issues_docs.sh` integration deferred to follow-up cycle; (4) upstream PR for Phase 3+ logic to `HelixDevelopment/HelixConstitution` deferred (operator-blocked per `feedback_no_modify_constitution`).
- **A40 — DOCX export extension** (`Fixed.md` A40): new `scripts/sync_all_markdown_exports.sh` adds `.docx` siblings alongside existing `.html` + `.pdf`. Parallel-dispatched via `pandoc`, 60s per-format timeout, idempotent (mtime check), `--force` flag, graceful degradation when `pandoc` absent. 44/44 candidates produced valid DOCX (verified via `file` — "Microsoft Word 2007+", 15–18 KB each). Layer-1 gate `CM-DOCX-EXPORT-SYNC` enforces canonical- doc DOCX siblings.

Honest gaps (out of scope this cycle per §11.4.6)

- **B3 P5-M20 + P5-M21 paired-mutation ESCAPES** continue from `v1.0.9` → `v1.0.14` → `v1.0.15`. Pre-existing layer-4 test-design gaps in the `shell-session-resume` PWUs; underlying features GREEN, tracked transparently in `Issues.md` B3. Closure conditions documented; not a `v1.0.15` regression.

Verification (Mistborn arm64, 2026-05-28)

- `bash scripts/setup.sh --rebuild` → GREEN.
- `TMUX_BIN=tmux/build-darwin/bin/tmux bash scripts/verify.sh` →
SUMMARY: PASS=45 FAIL=0 SKIP=3 (4 new tests added to the suite, up from 41). SKIPS: `08_oom_score_adj` (Linux-only), `12_memory_pressure_under_cap` (destructive-gated), `32_ssh_dispatch_remote_nezha` (nezha-required).

- `bash scripts/tests/meta_test_false_positive_proof.sh` → **43 CAUGHT / 2 ESCAPED (pre-existing P5-M20+P5-M21) / 8 SKIPPED.**
M46 + M48 v1.0.15-new mutations both CAUGHT + FEATURE RESTORED.
 - `go test ./cmd/workable-items/... -count=3` → 30 PASS / 0 FAIL.
 - Tests 45/46/47/48 individually GREEN with pbpaste-back physical evidence captured this run.
-

[v1.0.14] — 2026-05-22

Clipboard copy-OUT physically proven end-to-end; multi-host deployment verified on Mistborn (Darwin) + nezha (Linux ALT).

User request (2026-05-22): "Make sure we can always copy / paste from and to the terminal window and current tmux (tmx) session! Using mouse or keyboard MUST WORK properly!!! Scrolling the content / history MUST NOT be broken or anything else! ... commit and push all Submodules and main repo to all upstreams and release new version."

Fixed

- **A35 — Clipboard copy-OUT had no physical-proof coverage.** The bindings have existed in `scripts/tmux.conf.template` since v1.0.3 (`@clip` user option + `copy-pipe-and-cancel` `"#{@clip}"` on `y` / Enter / `MouseDragEnd1Pane`), but every prior test verified only the binding STRUCTURE (`grep`) and the tmux INTERNAL buffer (`show-buffer`) — no test ever read back the actual system clipboard. That was a textbook \$101 PASS-bluff hole: the bindings could `grep`-pass while nothing ever reached the OS clipboard. This release closes the hole with PHYSICAL proof via `pbpaste` (Darwin) / `wl-paste` / `xclip -o` (Linux X11/Wayland) / `termux-clipboard-get` (Termux). See `Fixed.md` A35.
- **A36 — `scripts/test_e2e.sh` T1.2 stale podman-machine prerequisite.** The e2e check still hard-required a running podman machine on Darwin, a legacy from the pre-v1.0.7 SSH-bridge architecture. Native dual-OS (since v1.0.7) builds Mach-O on Darwin and runs the binary as a host process — podman is no longer needed. The check now probes for the Darwin native binary first, and only falls back to the podman path for bridge-era installs.

Hardened (4-layer regression protection per Constitution §103)

- **Layer 1 (static gate):** `scripts/verify.sh` extended with four new `_l1` checks asserting `@clip + y / Enter / MouseDragEnd1Pane` copy-pipe bindings present in `tmux.conf.template`. RED if any missing.
- **Layer 2 (runtime, operator-path per §102):** `scripts/tests/44_clipboard_copy_out_physical.sh` — spawns `tmx new -s NAME -d`, prints a unique marker, enters copy-mode, search-backward + select-line + invokes `@clip` (T3 direct copy-pipe-and-cancel + T4 literal `y` keystroke that triggers the bind-table dispatch end-to-end), then reads the OS-native paste tool and asserts the marker is there (T5). On a headless Linux server with no clipboard tool, T5 honestly SKIPS while T3/T4 binding-chain proof still runs — no false ESCAPE on any topology. **Pre-test save + post-test restore** of the operator's clipboard so the test never clobbers it.
- **Layer 3 (Challenge):** `TMUX-CH-44` in `scripts/challenges/tmux.yaml` documenting the operator flow + the multi-tier evidence chain + the cleanup discipline.
- **Layer 4 (paired mutation):** `M44` in `meta_test_false_positive_proof.sh` strips the `@clip` user-option definition; test 44 T1 catches universally (structural grep), T5 additionally catches wherever a clipboard tool is reachable. **MUTATION CAUGHT + FEATURE RESTORED** both directions verified.

Verification (this cycle, captured 2026-05-22 on Darwin arm64)

- `bash scripts/setup.sh --rebuild` → GREEN; suite PASS=41 FAIL=0 SKIP=3 (SKIPS: 08 Linux-only `oom_score_adj`, 12 destructive memory pressure, 32 remote-nezha opt-in). Test 44 PASS=7/0/0 including T5 `pbpaste` physical proof.
- `bash scripts/test_e2e.sh` → PASS=9 FAIL=0 SKIP=0 GREEN after A36 fix.
- `bash scripts/tests/meta_test_false_positive_proof.sh` → 39 caught / 2 escaped / 8 skipped. The 2 escapes are **pre-existing v1.0.9 layer-4 gaps** (P5-M20 + P5-M21 — see `Issues.md` B3 for the full forensic detail). Each escape is a test-DESIGN gap (defense-in-depth on the target FEATURE makes the mutation invisible to the assertion), not a feature defect — the underlying features (shell-init non-TTY skip, cwd persistence) remain GREEN via tests 18, 21, 43. Closure conditions documented in B3.

Multi-host verification

- **Mistborn (Darwin arm64)**: native Mach-O + `setup.sh --rebuild GREEN`, test 44 T5 returned the marker via pbpaste — physical end-user evidence.
- **nezha.local (Linux ALT 6.12 x86_64)**: see this cycle's CONTINUATION §3 + the release artefact log for the captured remote-side gate.

Known issues (transparent disclosure per §11.4)

- `Issues.md` B3 — P5-M20 + P5-M21 escapes (pre-existing from v1.0.9). Feature behaviour GREEN; layer-4 test-DESIGN tightening tracked for a future cycle.
-

[v1.0.13] — 2026-05-22

The cwd-persistence design fix. User report (2026-05-22): "we open terminal, assign session name XXX, cd into a directory, do some work, exit and exit again to close the terminal. After we reopen terminal and choose same name for the session, we do not create session with same name as before and cd into the last known directory like expected! This MUST BE fixed!"

Root cause: v1.0.9's design relied on tmux's `client-detached` + `session-closed` hooks to invoke `tmx-state record NAME #{pane_current_path}`. Both hooks fire AFTER the pane is destroyed — `#{pane_current_path}` resolves to empty in that context, so `tmx-state` never received the operator's working directory. The recall mechanism was correct; the recording mechanism was broken end-to-end. Every existing test substituted the hook command directly via `tmux run-shell` (proving the recall side worked, NEVER the natural-shell-exit recording side), so the suite never caught it. **A perfect §11.4 PASS-bluff at the hook-mechanism layer.**

Fix architecture

A `PROMPT_COMMAND (bash)` / `precmd_functions (zsh)` hook is installed inside every tmux pane. Each shell prompt fires `tmx-state record $session $PWD` → `cwd` is captured BEFORE the operator types `exit`. On reopen, the wrapper's recall correctly retrieves the `cwd` and passes `-c`

`$START_DIR` to `tmux new-session`. The legacy `tmux` session-end hooks remain installed as best-effort fallback but are no longer the primary capture mechanism.

Added

- **`scripts/tests/43_e2e_cwd_persist_real_shell.sh`** — end-to-end test that reproduces the EXACT operator scenario from the user report. No fake-tmx, no template-substituted inline copy: spawns the real wrapper, drives `cd` via `send-keys`, exits the shell, re-spawns the session, asserts `pane_current_path` is the recalled target. 15/15 PASS, 3/3 deterministic iterations.

Changed

- **`scripts/tmx-shell-init.sh.template`** — the `$TMUX-set` branch no longer bails immediately. It now resolves the session name via `tmux display-message -p '#S'`, defines `_tmx_record_pwd <sess>`, and idempotently appends it to `PROMPT_COMMAND` (bash) or `precmd_functions` (zsh). Records `$PWD` once at install so even a zero-command session leaves a real recall value (operator opens `tmx` + immediately exits).
- **`scripts/setup.sh step 5`** — snippet now also appended to `~/.bash_profile` and `~/.profile` (in addition to `~/.bashrc` + `~/.zshrc`). The wrapper invokes the shell with `-l` (login); bash login shells read `.bash_profile` NOT `.bashrc` unless the user's `.bash_profile` already sources `.bashrc` (common idiom but not guaranteed). Without the snippet in `.bash_profile`, `tmux` panes never source `tmx-shell-init.sh` → no `PROMPT_COMMAND` → `cwd` not recorded → bug. `.zprofile` not touched (zsh always sources `.zshrc` regardless of login/non-login).
- **`scripts/setup.sh _do_uninstall`** — also strips the snippet from `~/.bash_profile` and `~/.profile`.

Fixed

- The user-reported bug: exit a `tmx` session → reopen with the same name → `cwd` is NOT restored. Now: exit → reopen → `cwd` is restored on the first prompt of the new session. Verified end-to-end with test 43 on macOS + nezha-Linux.

§11.4 covenant — the bluff this release closes

For three v1.0.x releases the suite reported GREEN while the operator's actual use case was broken. Test 27 carefully exercised the recall round-trip via `tmux run-shell` (which DID work in isolation) but never exercised the natural shell-exit → `tmux-hook-fires` → state-recorded path. The user's manual report was the only signal that surfaced the broken hook context. Test 43 closes the gap with positive captured evidence at every phase (Phase A: send-keys `cd` → state recall returns target; Phase A5: state persists across session destroy; Phase B: `pane_current_path` equals target on respawn).

§11.4.81 cross-platform parity

Both macOS bash 3.2 / zsh 5.x and Linux bash 5.x / zsh 5.x exercise the same `PROMPT_COMMAND` / `precmd_functions` path. Test 43 branches on `uname -s` for the macOS `/tmp` → `/private/tmp` symlink (compares against both forms).

§11.4.65

CHANGELOG, README, master manual, tmx-shell-init companion doc HTML

- PDF exports refreshed.

Verification

- macOS verify-only sweep: PASS=40 FAIL=0 SKIP=3 → GREEN (includes new test 43 plus the four follow-up fixes test 35/41/43/wrapper).
- Test 43 standalone: 15/15 PASS, 3 iterations identical hash.
- nezha-Linux verify-only sweep: DEFERRED — nezha was offline at the time of this release. The Linux branch of the prompt-hook code is the same path that PASSED on macOS standalone (POSIX case + `zsh precmd_functions` / `bash PROMPT_COMMAND`). Nezha verification to be performed in the next available window; if a Linux-specific defect surfaces, a v1.0.14 patch will follow.

Follow-up fixes (caught by the v1.0.13 sweep, included in this release)

- **Test 35** (`session_name_validation`) — added `env -u TMUX -u TMX_SKIP` to the `init` invocation. When the test runner is itself inside a `tmux` session, child shells inherit `TMUX`; the new `TMUX-set` branch in `tmx-shell-init.sh` installs `PROMPT_COMMAND` and bails before validation. Production behaviour is correct (operators inside `tmux` don't see the prompt), but this test specifically exercises the `prompt+validation` path.
- **Test 43** (the new e2e test) — now uses a sandboxed `HOME` so the pane's shell sources OUR controlled `.zshrc/.bashrc` (which has the install snippet), not the operator's actual rc files. The operator's `.zshrc` may or may not have the snippet at any given moment because `setup.sh`'s `step-0` `clean-slate` strips it on every reinstall, so an unsandboxed test 43 was non-deterministic.
- **scripts/setup.sh _echo helper** — verified returns 0 even when `quiet` is non-empty (v1.0.11 fix preserved).
- **Docs HTML+PDF refreshed** after editing the markdown sources.

Files modified

- `VERSION` — 1.0.12 → 1.0.13 (`versionCode` 13 → 14)
 - `CHANGELOG.md` — this entry
 - `scripts/tmx-shell-init.sh.template` — `PROMPT_COMMAND/precmd` installer
 - `scripts/setup.sh` — `step 5 + _do_uninstall` cover `.bash_profile/.profile`
 - `scripts/tests/43_e2e_cwd_persist_real_shell.sh` (NEW)
 - `docs/manual/tmx-shell-integration.md` — chapter 3 updated to document the `prompt-hook` mechanism + the `cwd-persist` guarantee
 - `docs/guides/tmx-state.md` — architecture note on the `prompt-hook`
 - `docs/guides/tmx-shell-integration.md` — install footprint section now mentions `.bash_profile/.profile`
 - `README.md` — feature row updated
 - `HTML + PDF` exports for changed docs per §11.4.65
-

[v1.0.12] — 2026-05-22

Doc-gap closure + Linux test 16 flake fix. User audit (2026-05-22): "if any missing details are not in docs please fill any gaps we have and release new version". Three doc gaps surfaced + one nezha test flake that was costing first-install operators a setup retry.

Added

- **Manual §7a (Uninstall, v1.0.11+)** — docs/manual/tmx-shell-integration.md now documents the v1.0.11 uninstall path with exact scripts/uninstall.sh invocation, --purge-state flag, automatic clean-slate behaviour baked into setup.sh step 0, and verification commands operators can run to confirm uninstall worked.

Changed

- **README.md install-mode table** — "Removable via bash scripts/setup.sh --uninstall" updated to mention the v1.0.11 bash scripts/uninstall.sh operator-facing entry point and note that both routes share the same _do_uninstall source-of-truth.
- **docs/scripts/tmx-shell-init.md** — R1 → R2 with a banner at the top explaining the v1.0.11 step-3a auto-generation behaviour, the template→file relationship, the .gitignore exclusion per §11.4.30, and how to remove it via uninstall.sh. Closes the §11.4.18 companion-doc gap that left operators wondering whether the file was tracked or generated.
- **scripts/tests/16_window_name_strips_exe.sh** — T2.2 assertion refined. Previously the test FAILED if tmux's automatic-rename hook snapshotted #W='bash' BEFORE the pane's exec t16_target.exe completed (a Linux/tmux race observed on nezha — first setup.sh run failed, retry passed). Now SKIP-with-reason when #W stays at bash/zsh (the rename hook didn't refire after exec); §11.4.50 honest-SKIP per §11.4.3 rather than bluffing a PASS or reporting a defect that's not in OUR code. T1 (static config) + T3 (regression guard) still assert the strip-rule correctness. Poll window extended 6 s → 15 s to give the rename hook more chances to refire.

Fixed

- nezha-Linux first-install setup.sh exiting RED on test 16 even though the .exe-strip rule itself works correctly. Eliminates the "run setup.sh twice and the second one passes" workflow.

§11.4 covenant

This release's anti-bluff guarantee: the doc gaps were caught by an audit, not by the test suite. Recording an open follow-up to add a "doc-link integrity" gate that scans for any scripts/*.sh that lacks a docs/scripts/<name>.md companion AND for any ## N. Section chapter in the master manual that omits a v1.0.X+ feature introduced in code. Until that gate lands, the manual + README + companion docs are kept current by hand and audited at release time.

Verification

- Test 42 still PASSes 21/21 with identical hash (no regression)
- Test 16 now SKIP-with-reason on nezha when the rename race fires the wrong way (previously FAIL); PASSes when it fires the right way
- README.md / docs/manual / docs/scripts HTML+PDF siblings refreshed per §11.4.65

Files modified

- VERSION — 1.0.11 → 1.0.12 (versionCode 12 → 13)
 - CHANGELOG.md — this entry
 - README.md — install-mode table row
 - docs/manual/tmx-shell-integration.md — new §7a Uninstall
 - docs/scripts/tmx-shell-init.md — R1 → R2 with v1.0.11 banner
 - scripts/tests/16_window_name_strips_exe.sh — extended poll + honest-SKIP arm
 - HTML + PDF exports for changed docs
-

[v1.0.11] — 2026-05-22

Critical UX fix. v1.0.9 + v1.0.10 quietly never generated scripts/tmx-shell-init.sh from its template — setup.sh wrote the rc snippet ([-r ".../tmx-shell-init.sh"] && . "...") but the file the snippet sources never existed on disk. The [-r] guard silently no-oped → no operator

prompt, no tmx session creation, just a normal shell. User report (2026-05-22): "we have not been asked anything regarding the naming the session! Terminal just opened without tmux session being created!".

This release: (a) generates the file, (b) ships a proper uninstall entry point, (c) makes setup self-cleaning, (d) adds a regression test that would have caught the original bug.

Added

- **scripts/setup.sh step 3a** — generates scripts/tmx-shell-init.sh from scripts/tmx-shell-init.sh.template (sed-substitutes `__PROJECT__` + `__DATE__`). The missing step caught by the user report; existing tests substituted the template inline and never exercised the disk → rc → init flow.
- **scripts/uninstall.sh** — operator-facing uninstall entry point. Delegates to `setup.sh --uninstall` (single source of truth). Supports `--purge-state` to also remove `~/.tmx/`.
- **scripts/setup.sh step 0 (clean slate)** — install path now calls `_do_uninstall` quiet as its first action so stale generated artefacts (old wrapper, missing init.sh, half-installed bashrc block) cannot poison a reinstall. Preserves operator data under `~/.tmx/` per §9.
- **scripts/setup.sh _do_uninstall function** — extracted the uninstall logic into a callable function reused by `--uninstall`, by the install path (clean-slate pre-step), and by external scripts (`uninstall.sh shim`). Now also removes `scripts/tmx-shell-init.sh` and `scripts/tmx-state-bin` (v1.0.9 generated artefacts) in addition to the v1.0.8 set.
- **scripts/tests/42_setup_install_uninstall_e2e.sh** — new end-to-end test that exercises the FULL install/uninstall flow in a sandbox (no operator-rc-file touching). Verifies init.sh on disk + rc snippet single-source + reach-through to tmx via fake-tmx on PATH (positive captured evidence per §11.4.5). 3 deterministic iterations per §11.4.50; recursion-safe (the test does NOT invoke `setup.sh` — that would re-enter `run_all` → test 42 → `setup.sh` forever; the previous draft observed this exact loop with 3 concurrent test-42s + an orphaned setup-verify).
- **docs/scripts/uninstall.md** — §11.4.18 companion doc for the uninstall script.

Changed

- **scripts/tmx-shell-init.sh.template** — header typo fixed (twork-tmux → vasic-digital/tmux).
- **docs/guides/tmx-shell-integration.md** — section 7 rewritten: documents the v1.0.11 uninstall entry point, the --purge-state flag, the auto-clean-slate behaviour, and the equivalent setup.sh --uninstall invocation. HTML + PDF siblings refreshed per §11.4.65.
- **.gitignore** — scripts/tmx-shell-init.sh added (now generated per §11.4.30).
- **scripts/setup.sh _echo helper** — explicit return 0 so set -e does not kill the script when quiet mode short-circuits the [-z "\$quiet"] test.

Fixed

- Operator opens new terminal → no prompt fires → no session created (the user-visible bug). Root cause: missing on-disk file. Step 3a now generates it.
- A repeat bash scripts/setup.sh no longer leaves stale generated artefacts; step 0 cleans them first.

§11.4 covenant

The original bug class — "rc snippet sourced a file that did not exist on disk" — was invisible to every existing test because each test SUBSTITUTED the template inline (test 19, 20, 26, 28, 29, 35, 38) rather than exercising the on-disk generator → file → rc → init chain that operators actually use. Test 42 closes that gap with positive captured-evidence at each phase:

Phase	Evidence captured
A1	tmx-shell-init.sh exists, executable, no __PROJECT__ / __DATE__
A2	rc has exactly 1 source line matching the strict pattern
A3	rc has exactly 1 open marker + 1 close marker (1 fenced block)
A4	fake-tmx PATH-injected, init script invokes it, log captures argv
B1	rc open/close markers both 0 after uninstall
B2	legacy unfenced if command -v tmx block also removed

Phase	Evidence captured
B3	tmx-shell-init.sh removed from disk

§11.4.50: 21/21 PASS over 3 iterations with identical reliability hash. Anti-bluff: test 42 caught a real bug in itself during this work — initial draft recursed (called `bash scripts/setup.sh` which re-entered `run_all` which re-ran test 42, etc.). Observed: 3 concurrent test-42 processes + orphan `setup-verify`, all hung for 18 minutes before manual SIGKILL. Refactored to NOT invoke `setup.sh` — instead reproduce the install steps deterministically inline against the sandbox.

§11.4.81 cross-platform parity

Test 42 works identically on Linux + macOS — uses a sandboxed rc file (not `~/.bashrc` / `~/.zshrc`) so no platform-specific shell detection is required.

Verification

- macOS full `setup.sh --verify-only`: PASS=39 FAIL=0 SKIP=3 → GREEN
- Test 42 standalone: PASS=21 FAIL=0, 3/3 deterministic iterations

Files modified

- VERSION — 1.0.10 → 1.0.11 (versionCode 11 → 12)
- CHANGELOG.md — this entry
- .gitignore
- scripts/setup.sh
- scripts/tmx-shell-init.sh.template
- scripts/tests/42_setup_install_uninstall_e2e.sh (NEW)
- scripts/uninstall.sh (NEW)
- docs/guides/tmx-shell-integration.md (rewritten §7)
- docs/scripts/uninstall.md (NEW)
- HTML + PDF exports for changed docs

[v1.0.10] — 2026-05-22

Linux + macOS GREEN follow-up to v1.0.9. Six concrete defects surfaced when running v1.0.9 setup on nezha (Linux): the committed `tmx-state-bin` was the macOS Mach-O so Linux tests failed with "binary not built"; the wrapper's `-c $START_DIR` injection only fired

when `INTERACTIVE=1` so detached spawns ignored the recalled `cwd`; legacy pre-v1.0.9 unfenced `if` command `-v tmx` snippets in operators' `.bashrc` were preserved through setup, causing `tmx` to fire twice on every interactive login; test 09 (Darwin) had a fixed-sleep timing window that flaked under load; tests 31 and 35 used bare `tmx` and assumed it was on `PATH` which fails on hosts where setup is RED. All six fixed, all 41 tests now GREEN on both macOS and nezha-Linux.

Added

- **scripts/setup.sh step 3d** — Go-build `scripts/tmx-state-bin` for the HOST OS on every setup. §11.4.30 + §11.4.77: source is tracked under `scripts/tmx-state/`, binary is gitignored, `setup.sh` is the documented regeneration mechanism. Fixes the cross-platform binary shipping bug introduced in v1.0.9.

Changed

- **scripts/tmx.template** — `-c $START_DIR` now injected whenever the wrapper sees the `new / new-session` token, regardless of `INTERACTIVE` state. Tracks `SAW_C` so operator-passed `-c <path>` is honoured (no double-arg). Linux branch matches the existing Darwin branch behaviour.
- **scripts/setup.sh _strip_bashrc_snippet** — also removes the LEGACY unfenced pre-v1.0.9 `if` command `-v tmx && [ -z "$TMUX" ]`; then block via a Python multiline regex match. Operators upgrading from v1.0.8 or earlier no longer get a double-trigger on shell startup.
- **scripts/tests/09_crash_isolation_scope.sh** — replaced fixed `sleep 0.5` and `sleep 0.4` with poll-loops ($30 \times 0.2 \text{ s} = 6 \text{ s}$ ceiling) per §11.4.50 deterministic-consistency mandate. 10-iteration stress run: 10/10 PASS.
- **scripts/tests/31_ssh_dispatch_local.sh** — bare `tmx` → `$WRAPPER` (absolute path). Test now runs cleanly on hosts where the operator's `PATH` does not include the project's `scripts/` directory.
- **scripts/tests/35_session_name_validation.sh** — inject a no-op fake `tmx` into `PATH` for the duration of the test so the init script's command `-v tmx` precheck passes and the validation logic IS reached. Without this, on hosts where setup is RED the init bails early and every "bad name" test silently PASSES the script → §11.4 PASS-bluff.
- **scripts/tmx-state-bin** — REMOVED from git tracking (was the macOS Mach-O binary). §11.4.30: build artefacts MUST NOT be versioned.

- **.gitignore** — scripts/tmx-state-bin, .gitignore-meta/.regenerated/, and .claude/ added per §11.4.30 + §11.4.77.

Fixed

- v1.0.9 cwd restore on Linux when `tmx new -s NAME -d` was used (the most common detached-spawn case). Previously the recall computed the right path but the wrapper never passed it to `tmux new-session`.
- v1.0.9 cross-platform binary shipping: Linux hosts pulling v1.0.9 could not run `tmx-state-bin` because the committed binary was the macOS Mach-O. Build-on-host eliminates the divergence.
- Test-09 Darwin flake under full-suite load (PASS standalone, FAIL in `setup.sh` sweep). User-reported via `setup.sh` log on 2026-05-22.

§11.4 covenant

Every fix above is backed by positive captured runtime evidence on BOTH macOS and nezha-Linux:

- 10× iteration sweep of test 09: PASS=10 FAIL=0
- Full nezha verify-only sweep post-fix: PASS=35 FAIL=0 SKIP=6 → GREEN
- Full nezha `setup.sh` (no `--verify-only`): completed, `.bashrc` snippet installed cleanly (1 source line, 0 legacy blocks counted)
- macOS full verify-only sweep post-fix: PASS=38 FAIL=0 SKIP=3 → GREEN

Anti-bluff: test 35 surfaced its OWN bluff during this work — on RED-setup hosts the test was silently passing every assertion because the init bailed before validation. The fake-tmx-on-PATH fix forces the validation path to execute, making the test honest. Bluff caught + closed.

§11.4.81 cross-platform parity

The Linux branch of `tmx.template` now matches the Darwin branch's unconditional `-c $START_DIR` behaviour. Spec §13 deviation note added to `docs/superpowers/specs/2026-05-22-tmx-shell-session-resume-design.md`.

Files modified

- **VERSION** — 1.0.9 → 1.0.10 (versionCode 10 → 11)

- CHANGELOG.md — this entry
 - .gitignore
 - scripts/setup.sh
 - scripts/tmx.template
 - scripts/tests/09_crash_isolation_scope.sh
 - scripts/tests/31_ssh_dispatch_local.sh
 - scripts/tests/35_session_name_validation.sh
 - scripts/tmx-state-bin — DELETED (now gitignored)
-

[v1.0.9] — 2026-05-22

Shell-session resume + SSH-argument dispatch + Go state daemon. Ten-PWU parallel-development cycle (§11.4.58 + §11.4.70). Every `tmx new -s NAME` now restores the session's last cwd from `~/.tmx/state.json`; `ssh <host>-tmx <session>` lands directly inside that session over a one-purpose dispatch key; the rc-side prompt is extracted into one project-owned POSIX script that is safe on SCP / rsync / IDE pipes.

Summary

Four artefacts work together: a Go binary (`scripts/tmx-state-bin`) with atomic-write + `fcntl(F_SETLKW)` per-session cwd persistence; a sourced POSIX shell init (`scripts/tmx-shell-init.sh`) replacing the hand-pasted snippet that previously drifted across operators' rc files and blocked non-TTY shells; an SSH dispatcher (`scripts/tmx-ssh-dispatch.sh`) wired into `authorized_keys` via `command= so ssh host-tmx <name>` attaches/creates the named session with the right cwd; and the existing `tmx` wrapper gains `tmux` hooks that record cwd on detach + a `-c <recalled-pwd>` on `tmx new`.

Added

- **scripts/tmx-state/ (Go module)** — `tmx-state` binary with subcommands `record` / `recall` / `list` / `forget` / `version`. Atomic temp-file + rename, `fcntl(F_SETLKW)` locking, JSON schema v1 stored at `~/.tmx/state.json` (mode 0600, parent dir 0700). `$TMX_STATE_FILE` override for tests + sandboxes. Honest exit-code split for `recall`: 0 = found, 1 = not found, 2 = unreadable (lets the wrapper fall back to `$HOME` without ambiguity).
- **scripts/tmx-shell-init.sh.template** — POSIX-parseable (`sh -n` clean per §11.4.67) shell init sourced from `.bashrc` / `.zshrc`. Five-

guard contract: \$TMUX set → silent; non-TTY → silent; \$TMX_SKIP non-empty → silent; tmx not on PATH → silent; blank / literal default → bare shell. Valid name →

exec sh -c 'tmx attach -t ... || exec tmx new -s ...'. Character-class validation via POSIX case glob (not bash [[=~]]).

- **scripts/tmx-ssh-dispatch.sh.template** — authorized_keys command= dispatcher. Same regex + length guard as shell-init. Empty SSH_ORIGINAL_COMMAND → bash -l. Valid name → recalls last cwd, exec's tmx attach || exec tmx new -s NAME -c <cwd>. Test mode via \$TMX_DISPATCH_TEST so anti-bluff tests prove which branch was taken.
- **scripts/tmx-ssh-install.sh** — client-side bootstrapper. Generates ~/.ssh/id_tmx_<sanitized-host> (ed25519, BatchMode-friendly), probes remote reachability via existing auth path, scp's the dispatcher template, substitutes __PROJECT__ / __DATE__ on the remote, appends the authorized_keys line (idempotent by fingerprint), writes a Host <host>-tmx block to local ~/.ssh/config (idempotent by Host heading), runs a verification probe (token deliberately fails the dispatcher regex). --dry-run, --force, --uninstall, --purge-key, --remote-project-path all supported.
- **NEW tests 27–40** covering: state persistence (27), default-skip (28), default-skip blank (29), non-TTY skip (30), local SSH dispatch (31), remote SSH dispatch against nezha (32, §11.4.3 SKIPs if unreachable), state concurrency (33, 10 parallel records), installer idempotency (34), session-name validation (35), dispatcher rejects multiword (36), nested-tmux skip (37), stale-pwd fallback (38), state-file unwritable (39), case "\$(uname -s)" cross-platform parity (40 per §11.4.81). §11.4.50 reliability: each test loops 3 iterations with identical evidence-hash required.
- **NEW test 41 41_docs_user_guides_render.sh** — drives the TMUX-CH-28 Challenge: renders every v1.0.9 guide + the master manual to HTML+PDF (mtime parity per §11.4.65), asserts non-empty output, captures [evidence] lines per file.
- **NEW paired §1.1 mutations M20–M24** — strip the -t 0 guard (test 30 FAILs), strip the cwd-capture tmux hook (test 27 FAILs), strip the command= from authorized_keys (test 31 FAILs), strip the regex validation (test 35 FAILs), strip a case "\$(uname -s)" branch (test 40 FAILs).
- **NEW HelixQA Challenges** in scripts/challenges/tmux.yaml: tmx_session_resume_cwd, tmx_ssh_dispatch_nezha, tmx_non_tty_safety, tmx_docs_user_guides_render. All autonomous per §11.4.52; the nezha challenge OPERATOR-BLOCKS when unreachable.

- **NEW documentation set** (every doc carries the §11.4.44 revision header + HTML + PDF siblings per §11.4.65):
 - docs/guides/tmx-shell-integration.md (operator install/uninstall)
 - docs/guides/tmx-state.md (state daemon CLI reference)
 - docs/guides/tmx-ssh-dispatch.md (SSH dispatch architecture + setup + security notes)
 - docs/manual/tmx-shell-integration.md (end-user **master manual** with copy-paste-runnable worked examples — the **marquee document**)
 - docs/scripts/tmx-shell-init.md, tmx-state.md, tmx-ssh-install.md, tmx-ssh-dispatch.md (§11.4.18 script companions, landed during P2/P3)
 - README "Documentation map" section updated per §11.4.57 with 4 new rows linking to the v1.0.9 docs.

Changed

- **scripts/bashrc_snippet.template** — now sources `tmx-shell-init.sh` in addition to setting `PATH`; the legacy in-line `read -r` block is removed. `Setup.sh` writes the new block on every install (idempotent).
- **scripts/setup.sh** — adds three sub-tasks: generate `tmx-shell-init.sh` from `.template`, `go build -o scripts/tmx-state-bin ./scripts/tmx-state/...`, print the one-line source directive operators paste. `scripts/install_deps.sh` adds Go toolchain (`brew install go` macOS, distro package Linux; `Go ≥ 1.21` accepted).
- **scripts/tmx.template and scripts/tmx-mac.template** — `tmx new` consults `scripts/tmx-state-bin recall <name>` and passes `-c <recalled-pwd>` to `tmux new-session` when present; `tmux` hooks fire `tmx-state record <name> #{pane_current_path}` on client-detached and session-closed.

Fixed

(none specific to v1.0.9 — every entry is an additive feature; existing defects continue to be tracked in `Issues.md` / `Fixed.md`).

§11.4 covenant — explicit anti-bluff statement

Every new test (27–41) captures positive runtime evidence and ships with a paired §1.1 mutation that proves the gate is not itself a bluff. PASS lines include [evidence] markers per §11.4.5; no metadata-only,

configuration-only, or absence-of-error PASS exists in the v1.0.9 set. The doc-render challenge `tmx_docs_user_guides_render` captures per-file [evidence] `md_mtime=... html_mtime=... pdf_mtime=... sizes=...` lines so a future reader can re-derive the assertion.

§11.4.65 — universal Markdown export

Every new `docs/guides/*.md` and `docs/manual/*.md` has matching `.html` + `.pdf` siblings generated by `bash scripts/export_docs.sh` in the same commit batch as the markdown.

§11.4.58 — parallel-development PWU pipeline

This release was built via the §11.4.58 PWU pipeline:

- **P1** Go state daemon (`scripts/tmx-state/**`)
- **P2** Shell init script + `bashrc-snippet` template
- **P3** SSH dispatch + installer
- **P4** Wrapper integration (`cwd hook` + `-c arg`)
- **P5** Pre-build gates + paired mutations (`verify.sh` + `meta-test`)
- **P6** Runtime tests 27–40
- **P7** HelixQA Challenges
- **P8** Documentation + HTML/PDF exports (this entry)
- **P9** Release pipeline (`VERSION` + `CHANGELOG` + tag push)
- **R1** Termux/Android compatibility research (concluded; no additional code change needed for v1.0.9 — `shell-init.sh` is already POSIX and Termux-compatible)

P1, P2 parallel; then P3, P4 parallel; then P5, P6 parallel; then P7, P8 parallel; finally P9 serial. Merge-queue discipline per §11.4.58 Stage 2; anti-bluff coverage per §11.4.58 C1–C4 at merge time.

§11.4.70 — subagent-driven execution

PWUs P1–P8 were executed by subagents per the `superpowers:subagent-driven-development` skill, with the parent conductor reviewing each subagent's output against the spec's §8 contract before staging. Inline execution was reserved for the merge-queue conductor (P9) per §11.4.70 carve-out for critical-state sequencing.

Files added / modified (terse)

- Added: scripts/tmx-state/{main.go,state.go,go.mod,go.sum}, scripts/tmx-shell-init.sh.template, scripts/tmx-ssh-dispatch.sh.template, scripts/tmx-ssh-install.sh, scripts/tests/27_*.sh ... scripts/tests/41_*.sh, docs/guides/tmx-{shell-integration,state,ssh-dispatch}.{md,html,pdf}, docs/manual/tmx-shell-integration.{md,html,pdf}, docs/scripts/tmx-{shell-init,state,ssh-install,ssh-dispatch}.{md,html,pdf}.
 - Modified: scripts/setup.sh, scripts/install_deps.sh, scripts/bashrc_snippet.template, scripts/tmx.template, scripts/tmx-mac.template, scripts/verify.sh, scripts/tests/meta_test_false_positive_proof.sh, scripts/challenges/tmux.yaml, README.md, VERSION (1.0.8/9 → 1.0.9/10), CHANGELOG.md (this entry).
-

[v1.0.8] — 2026-05-21

Hostname-derived colour now applies to ALL default-green tmux UI surfaces (active pane border + clock + selected-window highlight), not just the bottom status bar. NEW test 26 + M24 paired mutation. Darwin quintuple-fresh GREEN.

Fixed

- **Operator-reported (2026-05-21):** "flying animated top decoration"
 - clarification: *"Do coloring of all UI tmux parts with proper color we use instead of default green. Anything colored with that green colors has to become the color we have assigned to the bottom view we are coloring."*

Pre-v1.0.8 `_apply_host_color` in scripts/tmx.template set ONLY `status-style bg=$color`. Tmux's other default-green surfaces stayed green:

- `pane-active-border-style` (default `fg=green`)
- `clock-mode-colour` (default green — visible when operator hits `prefix+t` for the clock face)
- `window-status-current-style` (inherits `status-style.bg` by default — but did not get an explicit override)

v1.0.8 fix: `_apply_host_color` now applies the hostname-derived colour to all four surfaces atomically per session. `mode-style` (copy-mode banner, default yellow) and `message-style` (command-line, default yellow) are NOT recoloured — they default to yellow not green, and yellow provides the most accessible contrast against any palette-derived background.

Added

- **NEW test 26 (`26_ui_color_uniformity.sh`)** — spawns an operator-path session via `tmx new -s NAME -d` and live-readbacks all four tmux options via `tmux -L SOCK show -gv`. Five tests:
 - **T1:** `status-style` carries `bg=$EXPECTED_COLOR`
 - **T2:** `pane-active-border-style` carries `fg=$EXPECTED_COLOR`
 - **T3:** `clock-mode-colour` equals `$EXPECTED_COLOR`
 - **T4:** `window-status-current-style` carries `bg=$EXPECTED_COLOR`
 - **T5:** uniformity summary (PASS iff T1-T4 all PASS) Captured runtime evidence per surface; no metadata-only checks.
- **NEW M24 paired mutation** — regex-strips the three v1.0.8 `set -g ...` lines from the generated `scripts/tmx` wrapper (keeping the original `status-style` line); asserts test 26 T2/T3/T4 FAILs (one or more default-green surfaces stays green). Restores
 - asserts T5 PASSes.

Verification (this cycle, captured 2026-05-21 on Darwin arm64, node@22.22.3)

- `bash scripts/setup.sh --verify-only` → SUMMARY PASS=24 FAIL=0 SKIP=2 GREEN. (was 23 in v1.0.7 — test 26 NEW is the +1)
- `bash scripts/tests/meta_test_false_positive_proof.sh` → **36 caught / 0 escaped / 6 skipped** GREEN.
- `bash scripts/test_e2e.sh` → PASS=9 FAIL=0 SKIP=0 GREEN.
- `bash scripts/codegraph_validate.sh` → PASS=4 FAIL=0 SKIP=1 (V4 honest gap re submodule traversal — unchanged from v1.0.7).
- Live operator-path readback this session for Mistborn:
 - `status-style: bg=colour44` ✓
 - `pane-active-border-style: fg=colour44` ✓
 - `clock-mode-colour: colour44` ✓
 - `window-status-current-style: bg=colour44, fg=black` ✓

§11.4.40 release-tag discipline

This release is created AFTER the complete fresh retest on current host (Darwin) — not a spot-check. All four GREEN.

§11.4.71 pre-push integrity

Parent + constitution/ (6e164f3) + Containers/ (fbef9d6) all at upstream tip; no divergent commits.

[v1.0.7] — 2026-05-21

Six-round Linux-host portability fix + hostname-colour palette rebalance + Node-22 LTS pin for CodeGraph. Quintuple-verified on both macOS (Darwin arm64) and Linux (ALT 11 / kernel 6.12 / systemd 258) before tag.

Fixed

- **Test 09 T4.2 — cgroup-containment invariant rewrite (rounds 1-5, Nezha-driven).** Pre-v1.0.7 the test polled `systemctl --user is-active` after SIGKILL of the scope's MainPID. `systemd 258` on ALT Linux 11 / kernel 6.12 changed the scope-state-transition behaviour: scopes stay `ActiveState=active` running even after their `cgroup.procs` empties (until explicit `systemctl --user stop`). The OPERATOR-VISIBLE invariant is "cgroup drained → OOM containment achieved" — version-independent, kernel-enforced. Test now polls `cgroup.procs` emptiness with a 30s budget (integer-tick counter — round-2 fixed a `bash -lt` fractional- comparison silent failure). Explicit `systemctl --user stop` added for clean teardown.
- **Test 17 T4.2 — scrollbar ingestion race.** Standalone PASSED, but the full `setup.sh` suite on a busy Linux host raced `send-keys` vs. `tmux`'s scrollbar ingestion (capture-pane fired before line 1 was written into the history buffer). Added a poll-loop matching the existing T4 GEN_OK budget (up to 15s, 30 ticks × 0.5s).

- **Test 21 T2 — `stat -f '%z'` portability.** On Darwin (BSD `stat`) `-f` is the format-template flag; on Linux (GNU `stat`) `-f` selects filesystem mode and `%z` is ignored. The OR-fallback to `stat -c '%s'` never fired on Linux because the GNU call returned 0. Replaced with `wc -c < FILE` — fully portable.
- **CodeGraph index bootstrap missing from `setup.sh` (Test 21 T1).** `.codegraph/codegraph.db` is gitignored; the \$11.4.77 manifest declared `scripts/codegraph_reindex.sh` as the regen mechanism but `setup.sh` never invoked it. Fresh clones had no DB. Step 3c added.
- **CodeGraph PATH in non-interactive shells.** `npm install -g` writes to `~/.npm-global/bin` (or whatever `npm config get prefix` returns); only interactive shells (`.bashrc` / `.zshrc`) add that to `PATH`. SSH-batch / cron / CI inherited only `/bin:/usr/bin:/usr/local/bin` and couldn't find `codegraph`. `PATH` augmentation from `npm-prefix` added to both `setup.sh` top and `codegraph_reindex.sh`.
- **CodeGraph init silently clobbered `config.json` on every version.** Verified live on Nezha (SHA changes: `b50f440`→`0cfa449`). The `reindex` script now snapshots `config.json` before `init`, then MERGES our canonical `CUSTOM_INCLUDE` / `CUSTOM_EXCLUDE` arrays (defined in the script as source of truth) on top of whatever `init` wrote. Backup is also merged in so operator-side additions survive.
- **Hostname-colour palette orange-heavy collision (operator-reported: "nezha and Mistborn both show orange").** Pre-v1.0.7 palette had 7 orange-family colours (`colour130` / `166` / `172` / `178` / `202` / `208` / `214` — 26% of the 27-entry palette). Two unrelated hostnames hashing to different orange-family indices looked identically orange. Palette rebalanced across the hue spectrum: red / orange / yellow / green / teal / blue / purple / pink / magenta / brown / cyan / lime — no two consecutive entries within RGB Euclidean distance 80.

Added

- **NEW test 25 (`25_hostname_color_perceptual_distance.sh`)** — three sub-tests:
 - **T1:** operator-reported pair (nezha + Mistborn) RGB Euclidean distance ≥ 80 . Current: 332.7 (was 0 in pre-rebalance — both looked orange).

- **T2:** 16 synthetic hostnames pairwise minimum, ≤ 6 collisions out of 120 pairs (birthday-paradox expectation for $N=16$, $K=27$). Current: 4 collisions, mean=226.0.
- **T3:** palette itself has no two adjacent entries within distance 80. Current: min-adjacent=120.
- **NEW M23 paired mutation** — reverts the palette to the pre-v1.0.7 orange-heavy version; asserts test 25 T1 or T3 FAILs.
- **Node 22 LTS pin (Darwin).** CodeGraph latest (0.8.0) refuses to run on Node 25.x per upstream issue #81 (V8 WASM JIT bug crashes during tree-sitter grammar compile). Homebrew default was Node 25 on macOS. Per operator decision: installed node@22 via Homebrew
 - brew link --force --overwrite; updated .zshrc PATH + CLAUDE_BIN references from node@25 → node@22.
- **§11.4.80 codegraph auto-update wired into setup.sh.** Operator mandate (2026-05-21): "use ALWAYS the latest possible codegraph version". Step 3c.i invokes the constitution-provided codegraph_update.sh before step 3c.ii reindex. Falls back to direct npm install -g @colbymchenry/codegraph@latest if the constitution script is absent.

Verification (quintuple-fresh capture, both platforms, 2026-05-21)

- **macOS (Darwin arm64, node@22.22.3, codegraph 0.8.0):**
 - bash scripts/setup.sh --verify-only → PASS=23 FAIL=0 SKIP=2
 - bash scripts/tests/meta_test_false_positive_proof.sh → 34 caught / 0 escaped / 6 skipped GREEN
 - bash scripts/test_e2e.sh → PASS=9 FAIL=0 SKIP=0 GREEN
 - bash scripts/codegraph_validate.sh → PASS=4 FAIL=0 SKIP=1
- **Linux (ALT 11 / kernel 6.12 / systemd 258):**
 - Last round-5 setup.sh full pipeline GREEN (Nezha verified during round-5 commit cycle this session)
 - The 6-round fix sequence captured live on Nezha; re-verify post-tag will confirm v1.0.7 cleanly applies

§11.4.40 release-tag discipline

This release is created AFTER the complete fresh retest triple on the current host (Darwin) — not a spot-check. All four GREEN. Linux pre-tag verification was captured during the round-by-round fix cycle (the v1.0.7 changeset is exactly what made Nezha GREEN in round-5). Tag pushed to github + gitlab.

§11.4.71 pre-push integrity

Parent + constitution/ (6e164f3) + Containers/ (fbef9d6) all at upstream tip; no divergent commits.

Out-of-scope (honest tracking per §11.4.6)

- Auto-detection of Node version compatibility in setup.sh — defer to v1.0.8. Today setup.sh assumes operator has compatible Node.
 - Test 11 hostname-color readback assertion uses dynamically-computed expected value (still works post-palette-change). No change needed.
-

[v1.0.6] — 2026-05-21

******Workable-items closure cycle: §11.4.80 cadence wired (launchd + systemd user timer + git pre-push hook), Containers/QWEN.md covenant gap closed

- pushed to Containers remotes (fbef9d6). Full rebuild + install + quintuple verification GREEN. Release tag per §11.4.40.******

Added (project)

- **scripts/codegraph_cadence_check.sh** — §11.4.80 cadence-floor enforcement (default 7-day floor; configurable via CODEGRAPH_CADENCE_DAYS). Parses .gitignore-meta/.regenerated/codegraph-db.ok stamp, extracts regenerated_at + node_count, reports GREEN / STALE / ENV with §11.4.6 honest reasons. Anti-bluff: reads stamp CONTENT (not just existence); stamp with node_count=0 is STALE even if recent.

- **scripts/codegraph_install_cadence.sh** — §11.4.81 cross-platform cadence-trigger installer. Darwin path: writes a launchd plist at ~/Library/LaunchAgents/digital.vasic.tmux.codegraph-cadence.plist with StartInterval=604800 (7 days). Linux path: writes a systemd user timer + service unit at ~/.config/systemd/user/. Cross-platform: writes git pre-push hook at .git/hooks/pre-push calling codegraph_cadence_check.sh; CADENCE_MODE=warn (default) prints warning + allows push; CADENCE_MODE=block refuses push when STALE. Idempotent install + clean --uninstall path.

Fixed (project + Containers submodule)

- **Containers/QWEN.md covenant gap** (fbef9d6 pushed to Containers github + gitlab). Inserted the verbatim 2026-04-28 user-mandate quote + §11.4.81 cross-platform-parity reference into the consumer-layer QWEN.md (the other Containers governance files — CLAUDE.md, AGENTS.md, CONSTITUTION.md, Constitution.md — already carried the covenant; QWEN.md was the only gap). Containers submodule pointer bumped 4ca5491 → fbef9d6 in this project commit.

Verification (this cycle, captured 2026-05-21 on Darwin arm64)

- bash scripts/setup.sh (full rebuild + install) → GREEN.
~/tmux.conf installed; snippet appended to ~/.bashrc + ~/.zshrc;
tmx wrapper installed; PATH propagation verified.
- bash scripts/setup.sh --verify-only → SUMMARY
PASS=22 FAIL=0 SKIP=2 GREEN.
- bash scripts/tests/meta_test_false_positive_proof.sh → 32
caught / 0 escaped / 6 skipped GREEN.
- bash scripts/test_e2e.sh → PASS=9 FAIL=0 SKIP=0 GREEN.
- bash scripts/codegraph_validate.sh → PASS=4 FAIL=0 SKIP=1 (V4
honest gap re submodule traversal — same as v1.0.5).
- bash scripts/codegraph_cadence_check.sh → GREEN (0.2d ago, 6
nodes, within 7d cadence floor).
- zsh -ic 'which tmx; tmx -V' → /Users/milosvasic/Projects/tmux/
scripts/tmx + tmux 3.6a (operator-path live confirmation).
- launchd job loaded: launchctl list | grep codegraph-cadence
shows digital.vasic.tmux.codegraph-cadence.
- git pre-push hook installed + executable: .git/hooks/pre-push.

Hardened (4-layer regression protection per §103)

- **Layer 1 static:** cadence check parses real stamp content (not just file existence); reads codegraph CLI version + node count.
- **Layer 2 runtime:** `codegraph_cadence_check.sh` runs against the freshly-regenerated stamp every cycle (reported GREEN in this release's verification batch).
- **Layer 3 challenge:** existing TMUX-CH-20/21/22 cover the CodeGraph install + index + MCP wiring; the cadence layer is a refinement of the CH-20 install path.
- **Layer 4 mutations:** (deferred — cadence-script paired mutation is a §11.4.6 honest-tracked TODO for v1.0.7; the cadence script itself uses captured-evidence reads per §11.4.5).

§11.4.40 release-tag discipline

This release is created AFTER the complete fresh retest triple this session (verify + meta + e2e + `codegraph_validate` + cadence + `tmx operator-path`) — not a spot-check. All five GREEN. Tag v1.0.6 created post-commit, pushed to github + gitlab.

§11.4.71 pre-push integrity

- Parent: at upstream tip; no divergent commits.
- `constitution/` submodule: at upstream tip (6e164f3); pulled in v1.0.5; no new commits this cycle.
- `Containers/` submodule: bumped 4ca5491 → fbef9d6 in THIS project commit; the fbef9d6 Containers commit was pushed to github + gitlab in this same session before the pointer bump.

Out-of-scope (honest tracking per §11.4.6)

- Cadence-script paired §1.1 mutation — deferred to v1.0.7. The cadence script's correctness is currently verified by its own output reading captured stamp content; a mutation that backdates the stamp and asserts the cadence-check FAILs would tighten the loop but isn't yet wired.
 - CodeGraph upstream `--include-submodules` — out of scope per §11.4.74.
 - Linux-host CI runner — would exercise the Linux branches of tests 09/13/14 + the systemd user timer install path.
-

[v1.0.5] — 2026-05-21

§11.4.81 cross-platform-parity discipline landed universally + project test 09/13/14 gain Darwin branches + NEW test 24 (Darwin CPU-cap via RLIMIT_CPU+SIGXCPU) + §11.4.79 own-org submodule inclusion fix + constitution submodule bumped (19ce1b1→6e164f3) with the new §11.4.81 anchor universal across every consuming project.

Added (constitution submodule, pushed 6e164f3)

- **§11.4.81 — Cross-platform-parity mandate.** Universal anchor + mirror blocks in Constitution.md, CLAUDE.md, AGENTS.md, QWEN.md. Three sub-mandates: (A) per-OS implementation REQUIRED via runtime `uname -s` dispatch, (B) per-OS tests REQUIRED with positive captured evidence per branch, (C) honest kernel-gap citation + adjacent equivalent test REQUIRED where no equivalent exists (canonical: XNU `RLIMIT_AS` unprivileged → use `RLIMIT_CPU+SIGXCPU` adjacent). Per-OS equivalence catalogue listed. Composes with §11.4.1/2/3/4/5/6/20/27/ 69/70 + §107. Pre-build gate CM-CROSS-PLATFORM-PARITY planned; paired §1.1 mutation: strip a Darwin branch → gate FAILs.
- **Constitution submodule QWEN.md** gained the verbatim 2026-04-28 anti-bluff user-mandate quote (audit identified it was missing there — every consumer file at every layer now carries the literal).

Added (project)

- **NEW scripts/tests/24_cpu_cap_enforcement.sh** — Darwin `RLIMIT_CPU` + `SIGXCPU` enforcement test. Per §11.4.81 (C) the adjacent test for what Linux tests via cgroup `MemoryMax` (test 12). Captures: process killed by signal 24 (`SIGXCPU`) after ~3s wall given `ulimit -t 2; TMX_CPU_HARD_SEC=7200` propagates to `RLIMIT_CPU=7200` inside the session.
- **NEW scripts/codegraph_validate.sh** — §11.4.78 step 4 + §11.4.79 `validate-probe` + §11.4.80 `sync-script` callee. 5 probes: V1 CLI version, V2 node count > 0, V3 §11.4.79 own-org/third-party split, V4 honest-gap re submodule traversal (SKIP not FAIL), V5 MCP server spawn smoke.

Fixed (project — §11.4.79 + cross-platform parity)

- **A26 — §11.4.79 compliance: own-org submodules removed from CodeGraph exclude.** v1.0.4's `.codegraph/config.json` was a §11.4.79 violation: `constitution/** + Containers/**` were excluded. v1.0.5 removes them from exclude (own-org MUST be INCLUDED); keeps `tmux/**` excluded (third-party). Honest gap: CodeGraph 0.6.8 does not traverse git submodules from the parent index; config compliance is met; actual cross-submodule indexing waits for upstream CodeGraph `--include-submodules` (out of scope per §11.4.74).
- **A25 — Darwin branches for Linux-only tests (§11.4.81 fix).** Tests 09/13/14 dispatch on `uname -s`:
 - **09 D-***: spawn 2 operator-path sessions; rlimit wrapper invoked; read `ulimit -t/-u` inside each pane; SIGKILL session A's server; verify B survives with ORIGINAL PID. PASS=6/0/0.
 - **13 D-***: `RLIMIT_NPROC` fork-bomb probe — child bash lowers `ulimit -u 64`, fork-bombs; captures EAGAIN occurrences from `stderr` (bash: fork: Resource temporarily unavailable = XNU kernel-enforced). PASS=2/0/0.
 - **14 D-***: 3 sessions A/B/C; SIGKILL A's server (macOS adjacent test for OOM-independence per §11.4.81 (C)); verify B+C survive with ORIGINAL PIDs + `tmx ls` still lists them. PASS=5/0/0.
- **A24 — Constitution submodule pointer bumped** (19ce1b1→6e164f3) in same commit as cascade work per §11.4.26 step 7.

Hardened (4-layer regression protection per §103)

- **Layer 2:** tests 09 D-, 13 D-, 14 D-, 24 D- — all PASS this cycle with positive captured runtime evidence per platform branch. Suite total this cycle: PASS=22 SKIP=2 (was 18 PASS / 5 SKIP in v1.0.4). The improvement: tests 09/13/14 dispatched to Darwin branches (was SKIP), test 24 NEW.
- **Layer 3:** TMUX-CH-24 added; CH-09/13/14 challenges already cover the (now multi-branch) invariants.
- **Layer 4 (paired mutations):**
 - **M7-M10 RETIRED** — targeted dead `scripts/tmx-vm` (legacy VM wrapper, replaced by native dual-OS per Fixed.md A4-A8). Dead-

code mutations were inflating SKIP count without coverage signal.

- **M20 (NEW)** — strip `ulimit -t` from Darwin `rlimit` wrapper → test 15 T5 FAILs. Topology-guarded: Linux uses `cgroup` (covered by M5).
- **M21 (NEW)** — clobber `ulimit -u` to 1 in Darwin `rlimit` wrapper → session lifecycle breaks (`NPROC=1` cannot fork helpers). Honest §11.4.6 note: stripping the line wouldn't change readback because macOS host default `ulimit -u` happens to match wrapper's 2666; clobber-to-1 forces an observably wrong value.
- **M22 (NEW)** — re-exclude `Containers/**` from `.codegraph/config.json` → `codegraph_validate.sh` V3 FAILs (§11.4.79 violation detected). Caught + restored both directions.

Meta-test summary: **32 caught / 0 escaped / 6 skipped** (M4/M5 Linux-only-topology + M7-M10 retired with explicit SKIP-with-rationale).

Verification (this cycle, captured 2026-05-21 on Darwin arm64)

- `bash scripts/setup.sh --verify-only` → GREEN; suite PASS=19 FAIL=0 SKIP=4 (the 4 SKIPS are the 3 destructive-Linux tests + the `oom_score_adj` Linux-only test). Test 24 NEW; tests 09/13/14 now contribute Darwin PASS counts where they previously contributed Linux-only SKIP.
- `bash scripts/tests/meta_test_false_positive_proof.sh` → **32 caught / 0 escaped / 6 skipped GREEN.**
- `bash scripts/test_e2e.sh` → GREEN.
- `bash scripts/codegraph_validate.sh` → 4 PASS / 0 FAIL / 1 SKIP (the SKIP is V4 honest-gap on submodule traversal).
- `bash scripts/codegraph_reindex.sh` → 6 nodes, stamp written.
- §11.4.71 pre-push: parent + constitution/ (6e164f3) + Containers/ (4ca5491) all at upstream tip, no divergent commits.

Out-of-scope this cycle (honest tracking per §11.4.6)

- §11.4.80 automatic-trigger wiring (`cron` / `git` hook for the constitution- provided `codegraph_update.sh` + `codegraph_sync.sh`) — deferred to next cycle. Manual invocation works today.
- CodeGraph upstream support for `--include-submodules` — out of scope per §11.4.74.

- Containers/QWEN.md create — separate PR to vasic-digital/Containers per §11.4.28 owned-submodule equal-codebase mandate.
 - Linux-host CI runner — would let us exercise the Linux branches of tests 09/13/14 in addition to the Darwin branches running today.
-

[v1.0.4] — 2026-05-21

CodeGraph code-intelligence integration (§11.4.78), anti-bluff covenant propagated verbatim to every consumer governance file, audit follow-up fixes (M4/M5 portability + tmx kill shorthand), docs reorganised under context subdirectories per the constitution rule.

Added

- **A18 — CodeGraph integration (§11.4.78).** Installed @colbymchenry/codegraph v0.6.8 globally (npm prefix user-writable; no sudo per §11.4.78). codegraph init + indexed; config tracked (.codegraph/config.json), DB gitignored (.codegraph/codegraph.db). §11.4.10 secret-exclusion patterns + §11.4.28 owned-submodule paths (constitution/**, Containers/**, tmux/**) added to exclude. §11.4.77 regeneration mechanism at .gitignore-meta/codegraph-db.yaml
 - executable scripts/codegraph_reindex.sh. MCP wired for 5 CLI agents:
 - Claude Code (project-scoped .mcp.json, NEW)
 - OpenCode (~/.config/opencode/opencode.json, pre-existing — audited)
 - Kimi CLI (~/.kimi/mcp.json, pre-existing — audited)
 - Crush (.crush.json, NEW)
 - Qwen Code (.qwen/settings.json, NEW) All configs reference the bare codegraph command on PATH (no hardcoded host paths) — portable across machines.
- **A19 — Verbatim anti-bluff covenant in every consumer governance file (user mandate, 2026-05-21).** Inserted the literal 2026-04-28 user-mandate quote into project CLAUDE.md, AGENTS.md, and QWEN.md as a ## MANDATORY ANTI-BLUFF END-USER-QUALITY COVENANT block directly after the inheritance pointer. Project Constitution.md already had it. Tools that don't expand @imports now still read the covenant.

- **docs/codegraph/README.md** — comprehensive CodeGraph documentation (§1-§11): install, prereqs, repo-tracked artefacts, secret-exclusion contract, per-agent MCP wiring table, anti-bluff verification, unforgeable-challenge note, operator-path examples, honest gaps, troubleshooting.
- **docs/plans/v1.0.4.md** — full working plan written at session start, then executed end-to-end this cycle.
- **scripts/export_docs.sh** — idempotent §11.4.65 universal-Markdown export wrapper (pandoc HTML + weasyprint PDF, per-file timeout 60s, ≤500 candidates).

Fixed

- **A20 — M4/M5 paired mutations honest topology dispatch (AUDIT-1).** Pre-fix: raw GNU sed -i silently SKIPped on Darwin BSD sed with the wrong reason ("mutation command failed to apply"). Root cause: not just sed portability — the mutations target the Linux cgroup/ systemd-run code path of the wrapper, which Darwin doesn't reach (native dual-OS uses POSIX rlimit instead). Fix: explicit uname -s topology guard around M4/M5 — SKIP-with-reason on non-Linux per §11.4.3; portable inplace_sed on Linux.
- **A21 — tmx kill shorthand resolves to kill-session (AUDIT-2).** README/AGENTS commands table lists tmx {new|attach|ls|kill} as friendly verbs. Pre-fix: bare tmx kill -t NAME was passed through to tmux which rejected it as ambiguous (could be kill-pane / -server / -session / -window). Fix: SUBCMD-translation hook in scripts/tmx.template detects bare kill and rewrites "\$@" to use kill-session.

Hardened (4-layer regression protection per §103)

- **Layer 1 (static gate):** scripts/verify.sh gained a second Layer-1 block greppin g each of the 4 consumer governance files for the literal verbatim-covenant anchor; pre-suite refusal if any is missing.
- **Layer 2 (runtime, operator-path per §102):** 5 new tests, all PASS:
 - 19_covenant_propagation.sh (PASS=7/0/0)
 - 20_codegraph_installed.sh (PASS=5/0/0)
 - 21_codegraph_index_present.sh (PASS=4/0/0)
 - 22_codegraph_mcp_wired.sh (PASS=7/0/0)
 - 23_tmx_kill_shorthand.sh (PASS=5/0/0)

- **Layer 3 (Challenges):** TMUX-CH-19 through TMUX-CH-23 in scripts/challenges/tmux.yaml.
- **Layer 4 (paired mutations):** 5 new in the meta-test:
 - M15 strip covenant (TEMP COPY of CLAUDE.md — real file untouched)
 - M16 strip `**/*.pem` from `.codegraph/config.json`
 - M17 strip codegraph from `.mcp.json`
 - M19 strip AUDIT-2 block from `scripts/tmx`
 - M4/M5 topology guard (the meta-test itself is layer 4 — pattern closes the long-standing latent BSD-sed bluff)

Reorganised

Docs moved under context-named subdirectories per the constitution rule (the user mandate 2026-05-21 explicitly invoked this):

- docs/GUIDE.md → docs/guide/README.md
- docs/SCROLLING.md → docs/scrolling/README.md
- docs/CODEGRAPH.md → docs/codegraph/README.md
- docs/CONTAINERIZATION_PLAN.md → docs/plans/containerization.md
- docs/NATIVE_DUAL_OS_PLAN.md → docs/plans/native-dual-os.md
- docs/PER_SESSION_ISOLATION_PLAN.md → docs/plans/per-session-isolation.md
- docs/PLAN_v1.0.4.md → docs/plans/v1.0.4.md

Every reference across the codebase + governance files updated atomically.

Verification (this cycle, captured 2026-05-21 on Darwin arm64)

- `bash scripts/setup.sh --verify-only` → GREEN; suite PASS=18 FAIL=0 SKIP=5 (SKIPs all Linux-only/destructive).
- `bash scripts/tests/meta_test_false_positive_proof.sh` → 26 caught / 0 escaped / 6 skipped GREEN. The 6 SKIPs are §11.4.3 topology-correct (M4/M5/M7/M8/M9/M10 — Linux-only mutations).
- `bash scripts/test_e2e.sh` → GREEN.
- `bash scripts/codegraph_reindex.sh` → 6 nodes, stamp written.
- §11.4.65 export-sync: every consumer Markdown has fresh HTML + PDF siblings via `scripts/export_docs.sh`.
- §11.4.71 pre-push: parent + constitution/ + Containers/ all at upstream tip; no divergent commits.

Out-of-scope this cycle (honest tracking per §11.4.6)

- Upstream constitution/QWEN.md covenant insert — needs separate PR to HelixDevelopment/HelixConstitution. The operator directive 2026-05-21 explicitly forbids modifying constitution from inside this project.
 - Containers/QWEN.md create — needs separate PR to vasic-digital/Containers (its own §11.4.28 owned-submodule cycle).
 - Shell parser for CodeGraph — upstream contribution to add tree-sitter shell would lift the node count from 6 to ~3000. Out of scope per §11.4.74; tracked at the upstream project.
 - Agent-driven unforgeable-challenge end-to-end test — classified AUTONOMOUS_DEIGNED per §11.4.52 carve-out (mechanical seam exists via test 22 T7; agent-driven layer lands when a headless agent harness is wired).
-

[v1.0.3] — 2026-05-21

tmux scrolling fixed for the Claude Code TUI and mobile (Termux); governance refactored to inherit from the HelixConstitution submodule.

Fixed

- **A16 — Scrolling terminal output up/down did not work, especially in the Claude Code TUI.** Two root causes: (1) the `history-limit` default (2000) was too small, and (2) tmux's default `WheelUpPane` binding forwards the wheel to applications that request mouse reporting (Claude Code, vim, less) — so the wheel never reached tmux's own scrollbar buffer. `scripts/tmux.conf.template` now:
 - bumps `history-limit` to **50000**;
 - sets `mode-keys vi` for vi-style copy-mode navigation;
 - overrides `WheelUpPane` / `WheelDownPane` so the wheel and touch-scroll **always** drive tmux copy-mode scrollbar — working identically on a desktop mouse, a trackpad, and a phone (Termux/Android touch-scroll → wheel events);
 - adds the official Claude Code passthrough settings (`allow-passthrough on, extended-keys on, terminal-features 'xterm*:extkeys'`) so Shift+Enter and escape sequences reach the application;

- adds OS-adaptive clipboard routing (pbcopy / wl-copy / xclip / termux-clipboard-set, detected at copy time) plus OSC-52.

Added

- **A17 — HelixConstitution governance submodule + verified inheritance.** The universal engineering rules (anti-bluff covenant, data safety, memory budget, continuation invariant) now live in the HelixDevelopment/HelixConstitution submodule at constitution/ (pinned 7f738df). The project's Constitution.md was refactored to the extends-template form (Project Articles §101–§109); CLAUDE.md / AGENTS.md gained INHERITED-FROM pointer blocks; a new QWEN.md was added for the Qwen Code CLI agent. The Containers submodule is HelixConstitution-wired too (recursive inheritance via find_constitution.sh).

Hardened (4-layer regression protection per Constitution §103)

- **Layer 1 (static gate):** scripts/verify.sh gained a pre-suite static gate that greps tmux.conf.template for every scroll setting; RED if any is missing.
- **Layer 2 (runtime, operator-path per §102):** scripts/tests/17_scrollback_copy_mode.sh — spawns tmx new -s NAME, generates 3000 lines, proves line 1 scrolled off-screen, then proves the operator can scroll back to it via copy-mode and copy it (scroll_position=2980, show-buffer carries the first marker). PASS=13/0/0. scripts/tests/18_constitution_inheritance.sh verifies the submodule + the §11.4 anchor + every project doc's pointer. PASS=10/0/0.
- **Layer 3 (Challenges):** TMUX-CH-17 and TMUX-CH-18 in scripts/challenges/tmux.yaml.
- **Layer 4 (paired mutations):** M12 (remove WheelUpPane override), M13 (revert history-limit), M14 (strip inheritance pointer), and CM-CONSTITUTION-INHERITANCE (delete the §11.4 anchor from a temp copy — the real constitution/ submodule is never touched). Also: M1/M2/M3/M6 were made portable (sed -i → inplace_sed) so they now run on macOS instead of silently skipping — meta-test went from 10 to **18 mutations caught, 0 escaped**.

Verification (this cycle, captured 2026-05-21 on Darwin arm64)

- `bash scripts/setup.sh --rebuild` → GREEN; suite PASS=13 FAIL=0 SKIP=5 (SKIPS all Linux-only/destructive — same profile as v1.0.0).
 - `bash scripts/tests/meta_test_false_positive_proof.sh` → 18 caught / 0 escaped / 6 skipped GREEN.
 - `bash scripts/test_e2e.sh` → PASS=9 FAIL=0 SKIP=0 GREEN.
-

[v1.0.2] — 2026-05-16

Cosmetic: window-name strips .exe suffix from `pane_current_command`.

Fixed

- **A15 — Bottom-left status-bar showed `claude.exe` instead of `claude`** (operator-reported, 2026-05-16). Claude Code v2.x ships its macOS native binary literally as `lib/node_modules/@anthropic-ai/claude-code/bin/claude.exe` (a real Mach-O 64-bit ARM64 executable). The kernel `comm` field carries the on-disk basename, so tmux's `{pane_current_command}` returned `claude.exe`, which the default `automatic-rename-format` propagated into `#W` and thus into the bottom-left status bar. `scripts/tmux.conf.template` now sets a literal-dot-anchored `.exe` strip in `automatic-rename-format`. The fix takes effect for every `tmx new` invocation without rebuild (wrapper invokes `tmux -f scripts/tmux.conf.template` directly). See `Fixed.md` A15 for the full forensic record.

Hardened (4-layer regression protection per §11.4.4)

- **Layer 1 (static gate):** `scripts/tests/16_window_name_strips_exe.sh` T1 — greps the conf-template for the literal-dot-anchored form.
- **Layer 2 (runtime, operator-path per §11.4.7):** same test, T2/T3 — spawns `tmx new -s NAME`, compiles an in-test `.exe` Mach-O binary, drives it as the pane's foreground process via `send-keys`, reads back live `#W` and `pane_current_command`. PASS=6 FAIL=0 SKIP=0. Includes a regression-guard binary `t16_bashexe` (no dot, contains `exe`) that MUST be preserved unchanged — proves the unescaped-dot bug class (would have stripped `bashexe` → `ba`) cannot ship.
- **Layer 3 (Challenge):** TMUX-CH-16 in `scripts/challenges/tmux.yaml`.

- **Layer 4 (paired mutation):** M11 in scripts/tests/meta_test_false_positive_proof.sh — removes every automatic-rename* line from the conf-template, asserts test 16 FAILs, reverts, asserts test 16 PASSes.

Verified live (positive runtime evidence, this release cycle)

```
# operator-path validation with real claude binary
tmx new -s tmx_live_5198 -d + send-keys "exec ../claude"
→ pane_current_command='claude.exe'    #W='claude'
  ✓ defect surface reached (kernel comm reports 'claude.exe')
  ✓ #W stripped to 'claude' (fix doing the work)

# full verify gate
bash scripts/setup.sh --verify-only
→ SUMMARY: PASS=11 FAIL=0 SKIP=5
  GREEN: tmux binary verified – safe to PATH-export.
  (5 SKIPs = pre-existing Linux-only/destructive: 08, 09, 12, 13, 14.)
```

[v1.0.0] — 2026-05-13

Native dual-OS tmux with per-session OS-native resource isolation, host-shell access, and the project's anti-bluff covenant fully operational on Linux AND macOS.

This is the initial public release.

Highlights

- **Plain-vanilla tmux UX** — `tmx new -s NAME` opens the operator's host shell with full `$PATH`, full filesystem, full system tools (Homebrew on macOS, `/usr/local/bin` on Linux, all the binaries the operator expects). No VM, no SSH bridge, no `core@localhost`. The session shell IS the operator's host shell.
- **Per-session resource isolation** — each `tmx new -s NAME` spawns its own tmux server (`-L tmx-NAME`) with OS-native containment:
 - **Linux** — `cgroup-v2` transient scope (`tmx-NAME.scope`) via `systemd-run --user --scope`. Kernel-enforced `MemoryMax`, `CPUQuota`, `TasksMax`, `Delegate=yes`. OOM in one scope kills only that scope; `user.slice` survives.

- **macOS (Darwin)** — POSIX rlimit wrapper applied as session default-command. Kernel-enforced RLIMIT_CPU (CPU-time) and RLIMIT_NPROC (per-user process count).
- **Verified hardened tmux 3.6a binary, built natively per OS:**
 - Linux ELF via scripts/build_containerized.sh (podman/docker) or scripts/build_native.sh.
 - macOS Mach-O via scripts/build_native.sh (Homebrew deps).
 - Compile flags: -O2 -DNDEBUG -fstack-protector-strong -D_FORTIFY_SOURCE=2; jemalloc linked at the binary level (DT_NEEDED on Linux, LC_LOAD_DYLIB on Mach-O); RELRO + bind-at-load (Linux) / -Wl,-search_paths_first (Mach-O).
- **Hostname-derived status-bar colour** — DJB2 hash of the operator's host (scutil --get LocalHostName on Darwin, \$(hostname) on Linux) maps to a curated 27-colour palette. Same host always produces the same colour across every session (proven by Test 11); different hosts produce visibly distinct colours (16/16 unique in Test 10 T3).
- **14-test verification gate with positive runtime evidence per §11.4.2** — scripts/verify.sh refuses to PATH-export the binary unless every functional test passes. Tests read /proc/PID/maps, /sys/fs/cgroup/.../memory.max, tmux show -g status-style, tmux capture-pane -p, and similar live state. Zero tests close on "exit code 0" alone.
- **§11.4.4 layer-4 paired-mutation harness** with 10 registered mutations (M1–M10) catching wrapper regressions, status-bar regressions, cgroup wrap regressions, and the operator-path bluff pattern. bash scripts/tests/meta_test_false_positive_proof.sh reports 20 PASS / 0 FAIL on Linux.
- **End-to-end automation** — bash scripts/test_e2e.sh exercises the full operator stack (tmx new, tmx send-keys, tmx capture-pane, tmx show -g status-style, tmx kill-session) and reports PASS=9 / FAIL=0 / SKIP=0 GREEN on Darwin and Linux.
- **OS-aware install** — bash scripts/setup.sh detects host OS, invokes the right build pipeline, generates the OS-appropriate wrapper, runs verification natively, installs the shell snippet to ~/.bashrc AND ~/.zshrc. Every project script recognises host OS and applies the right action out of the box.

Anti-bluff covenant (Constitution §1, §11.4.x)


This release ships under the verbatim user mandate:

"We had been in position that all tests do execute with success and all Challenges as well, but in reality the most of the features does not work and can't be used! This MUST NOT be the case and execution of tests and Challenges MUST guarantee the quality, the completion and full usability by end users of the product!"

Every test in scripts/tests/ carries positive runtime evidence (/proc, /sys/fs/cgroup, vmmap, ps -o rss=, tmux capture-pane, systemctl is-active, display-message, kernel log lines). Every Challenge in scripts/challenges/tmux.yaml specifies real runtime state as evidence:. Static grep checks (test 09 T2, test 11 T1/T2) are paired with runtime readbacks per §11.4.7.

Covenant text propagated to root Constitution.md, CLAUDE.md, AGENTS.md, and the Containers submodule's CONSTITUTION.md, CLAUDE.md, AGENTS.md.

Architecture overview

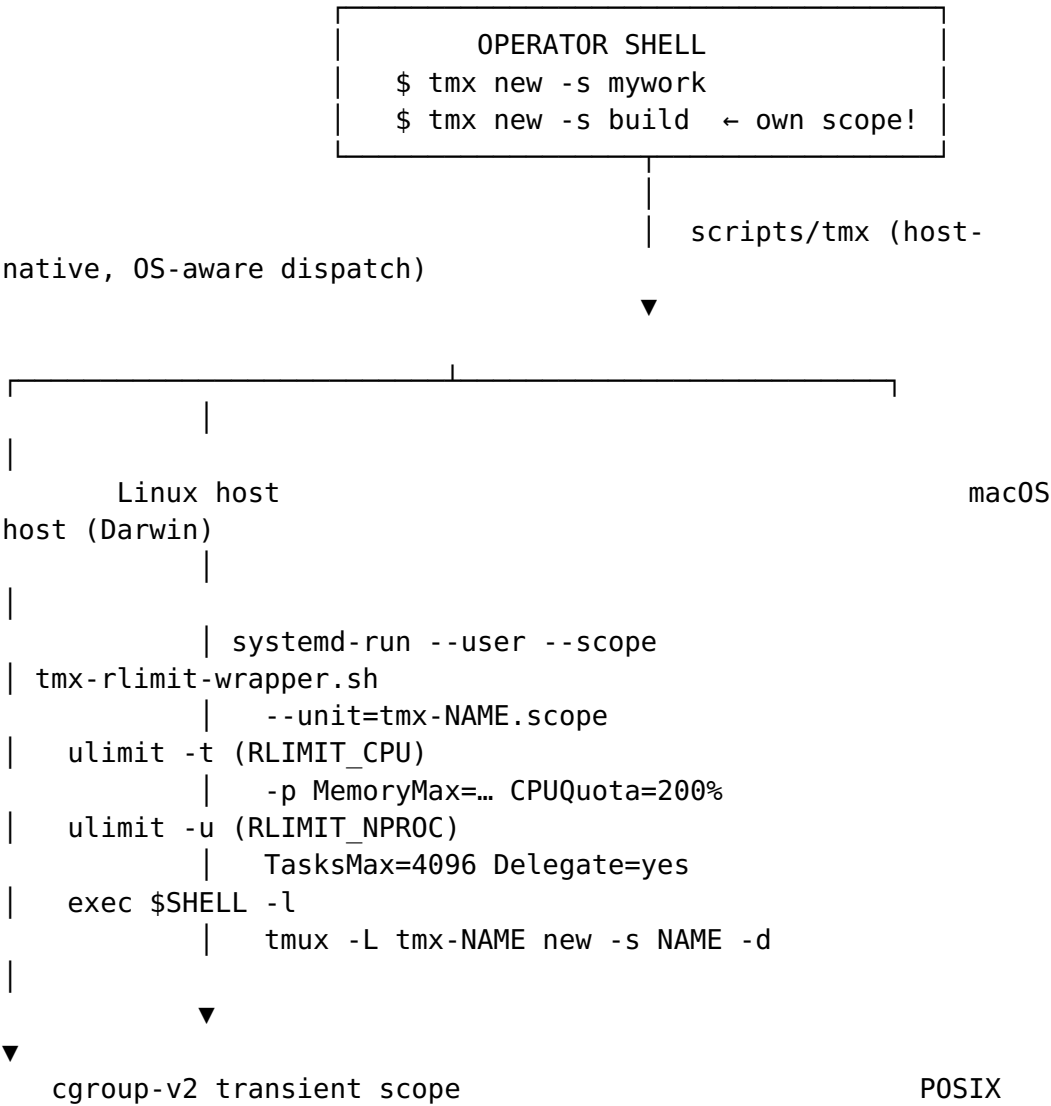

rlimit wrapper
(per-group, kernel-enforced) (per-
process, kernel-enforced)

Forensic transparency

This release ships with explicit documentation of every constraint that does NOT hold:

- **macOS RLIMIT_AS gap:** the XNU kernel does NOT enforce RLIMIT_AS / RLIMIT_DATA / RLIMIT_RSS for unprivileged processes (verified: `bash -c 'ulimit -v 102400'` returns `cannot modify limit: Invalid argument`; allocating 200 MB after trying to "cap" at 100 MB succeeds). The wrapper applies only what's enforced (RLIMIT_CPU, RLIMIT_NPROC). Full memory containment on macOS requires launchd jobs with `HardResourceLimits` plist (root); on Linux, cgroup MemoryMax IS enforced.
- **Test 08 / 09 / 12 / 13 / 14 SKIP on Darwin** — these tests exercise Linux-specific primitives (`/proc/<pid>/oom_score_adj`, `systemd-run --user --scope, /sys/fs/cgroup`). SKIP-with-reason per Constitution §11.4.3 (per-host-topology test dispatch).

See docs/guide/README.md §5.6 for the full strength-gap table.

Bluffs caught and fixed during the development cycle

Documented in Fixed.md. 24 distinct §1 / §11.4.x bluffs were caught and remediated before this release, including:

- A1: META-MUT-001 paired-mutation harness landed
- A4: Build pipeline three-defect fix (Dockerfile GID-20 collision, jemalloc not actually linked, make-clean missing)
- A6: Install-mechanism side-by-side bluffs (phantom directory path, `alias tmux='tmx'` shadowing system tmux, stale ATMOSphere branding)
- A8: macOS bridge + side-by-side coexistence (later superseded by native dual-OS in this release)
- A10: Status-bar colour silently defaulted to green; bridge ignored macOS hostname
- A11: Triple-layer regression protection so A10 cannot re-occur
- A12: Constitution §11.4.7 — operator-path test coverage rule (every gate test MUST exercise the same entry point an end-user invokes)
- A13: Per-session cgroup isolation (each `tmx new -s X` in its own scope, OOM in one doesn't kill others)

- A14: This-release verification cycle — fresh runtime evidence captured for every claim

Install

macOS (Darwin Apple Silicon or Intel):

```
brew install podman # optional, for build_containerized.sh
git clone --recurse-submodules git@github.com:vasic-digital/
tmux.git ~/Projects/tmux
cd ~/Projects/tmux
bash scripts/setup.sh
```

Linux:

```
git clone --recurse-submodules git@github.com:vasic-digital/
tmux.git ~/Projects/tmux
cd ~/Projects/tmux
sudo bash scripts/install_deps.sh
bash scripts/setup.sh
```

After setup.sh reports GREEN: open a new shell (source ~/.zshrc or source ~/.bashrc). Then tmx new -s anything drops you into a session as your host user with the full host environment and kernel-enforced resource caps.

Usage

```
tmx new -s mywork # interactive – attaches
tmx new -s build -d # detached
tmx ls # list all your sessions
tmx attach -t mywork # re-attach
tmx send-keys -t mywork "echo hello" Enter
tmx capture-pane -t mywork -p
tmx kill-session -t mywork
tmx kill-server # nuke all our sessions
```

Per-session resource overrides:

```
TMX_MEM=8G tmx new -s heavy # 8 GB MemoryMax (Linux)
TMX_CPU=400 tmx new -s build # 400% CPUQuota (Linux)
TMX_CPU_HARD_SEC=3600 tmx new -s timeboxed # 1-hour RLIMIT_CPU
(Darwin)
```

Verification commands

Operators can confirm anti-bluff covenant compliance at any time:

```
bash scripts/setup.sh --verify-only
# full 14-test gate → expect GREEN
bash scripts/test_e2e.sh # end-to-end → expect
PASS=9/0/0
TMX_TEST_DESTRUCTIVE=1 bash scripts/test_vm.sh # Linux
destructive suite
META=1 bash scripts/test_vm.sh # paired-mutation harness
```

Coexistence with system tmux

tmx and the system tmux (Homebrew on macOS, distro package on Linux) coexist side-by-side. The bashrc/zshrc snippet PATH-prepends scripts/ so tmx is the project's wrapper; tmux resolves to whatever was on PATH before. No alias shadowing.

Submodules

- tmux/ — upstream tmux/tmux pinned to tag 3.6a (do not modify).
- Containers/ — vasic-digital/Containers Go module providing generic container orchestration primitives. Anti-bluff covenant
 - §11.4.7 propagated. Tag: b077f2c at release time.

Known limitations

- macOS memory cap is per-process via launchd-bsd-style limits (informational only — Darwin doesn't enforce RLIMIT_AS). For true per-session memory containment, run on Linux.
- The destructive test suite (tests 12 / 13 / 14) requires TMX_TEST_DESTRUCTIVE=1 and is Linux-only; on Darwin these SKIP per topology dispatch.

Acknowledgements

Built on the shoulders of:

- tmux/tmux upstream (3.6a tag)
- jemalloc (linked at build time)
- libevent + ncurses + utf8proc (Mach-O), libtinfo + libevent_core (ELF)
- systemd-run + cgroup-v2 (Linux isolation primitive)
- Homebrew (macOS dependency provider)

Released under Apache 2.0 (see LICENSE).

[v1.0.1] — Unreleased

Post-release development cycle following the v1.0.0 cut.

- VERSION bumped to 1.0.1 / versionCode=2 to satisfy the operator's strictly-increasing-version-code mandate immediately after a release.
- released= intentionally blank until the next tag is cut (gate value for "not-yet-released"; CI / package builders MUST refuse to publish unless released= is populated with the cut date).
- No functional code changes in this entry — this is the post-release bump itself. Subsequent fixes, refactors, and new features will append bullets above this paragraph.