

vasic-digital tmux — optimized + verified containerized build

What's new — interactive wizard + session passwords (2026-07-05)

Capability	Behavior
Session password	Interactive <code>tmx new -s NAME</code> (or via wizard) prompts for a password + confirmation ONLY when NAME has never been protected before; reopening an already-protected NAME (even after an idle recycle) verifies the existing password once. <code>-d/</code> non-interactive creation never prompts.
Interactive wizard	Typing a name at the login-shell prompt always creates <code>name-NNNN</code> (4 random digits); pressing Enter with existing sessions present offers a numbered picker (<code>1..N</code>) + <code>0</code>) None. <code>TMX_EXACT_NAME=1</code> suppresses the suffix for scripts.

All password input is masked with `*` while typing. Full guide: [docs/guides/tmx-session-passwords.md](#); wizard details in [docs/guides/tmx-shell-integration.md](#).

What's new in v1.0.15 / v1.0.16 (2026-05-28)

- **Multi-line copy + paste-IN + Claude Code TUI support.** New bind `-n M-MouseDrag1Pane copy-mode -M` (Alt-drag, macOS) and bind `-n S-MouseDrag1Pane copy-mode -M` (Shift-drag, Linux) force tmux selection even when Claude Code / vim / less / htop hold the alt-screen with mouse tracking. New `@clip-read` user option + prefix + `P` paste-IN binding pulls the OS clipboard INTO the current pane through `tmux paste-buffer -p` (bracketed paste). See [docs/guides/clipboard.md](#) for the operator recipe.
- **Workable-items SQLite SSoT (`cmd/workable-items/`).** Project-local Go binary implementing the \$11.4.93 SQLite single-source-of-truth for every workable item in `Issues.md` / `Fixed.md`.

Pure-Go (no CGO) via modernnc.org/sqlite. DB at docs/workable_items.db is **TRACKED in git per \$11.4.95**. See docs/workable-items/README.md for the subcommand reference.

- **DOCX export on every Markdown sync.** scripts/sync_all_markdown_exports.sh now produces .docx siblings alongside the existing .html + .pdf exports — verified across 44 candidate documents with pandoc-emitted "Microsoft Word 2007+" output.

A reproducible, hardened build of `tmux` with built-in jemalloc support, OOM-protection helper, and a comprehensive verification gate. **Runs natively on any Linux host** (Ubuntu, ALT, Fedora, Arch, openSUSE, Alpine) where podman or docker is available. **macOS hosts** (Apple Silicon + Intel) are supported via a transparent bridge into the podman machine VM — the operator gets a working `tmx` command on the macOS shell with no manual SSH-juggling.

The 18 verification tests are why this matters: a typical "build `tmux` from source" guide assumes the build worked. This project ships a hard wall — `bash scripts/setup.sh` will refuse to PATH-export the binary unless functional tests pass with positive runtime evidence (cgroup interface readbacks, `/proc` files, real session output), backed by a \$11.4.4 layer-4 paired-mutation harness that proves the gates aren't themselves bluffs. SKIPs document precondition gates (CAP_SYS_RESOURCE, libjemalloc presence, destructive-test opt-in) explicitly. No PASS-bluffs.

Install (one-liner)

Obtain and run the installer in a single `curl` command, like any modern CLI:

```
curl -fsSL https://raw.githubusercontent.com/vasic-digital/tmux/main/scripts/install.sh | bash
```

That one command **clones the whole project (with all submodules, fully recursive) → builds + verifies (scripts/setup.sh) → runs the full validation suite (scripts/tests/run_all.sh) → wires tmx onto your PATH**. It installs into `$HOME/tmux` by default (the project name, lowercase snake_case per the constitution naming convention). When it finishes, `source ~/.bashrc` (or `~/.zshrc`) — or open a new terminal — and run `tmx new -s <name>`.

It is honest by construction (§11.4 anti-bluff): any failure in clone, build, verification, or tests makes the installer **exit non-zero** — it never PATH-exports an unverified binary, and it **refuses to clobber** a non-empty directory that is not our checkout (§9.2). It runs **no sudo** under the pipe.

Prerequisites: git (required), plus either a **C toolchain** (compiler + libevent-dev + libncurses-dev) **or** a **container engine** (podman/docker) for the build — setup.sh picks the right path and surfaces missing deps honestly. On Linux, install build deps once with sudo bash scripts/install_deps.sh. Missing runtime deps (jemalloc) are obtained git-ignored into .local-deps/ automatically (§11.4.77).

Options (env var OR flag — flag wins; pass flags under the pipe with bash -s -- ...):

Env var	Flag	Default	Meaning
TMX_INSTALL_DIR	--dir DIR	\$HOME/tmux	install root
TMX_REPO_URL	--repo URL	https:// github.com/ vasic- digital/ tmux.git	clone source (HTTPS so keyless users can clone)
TMX_INSTALL_BRANCH	-- branch B	main	branch to clone / track
TMX_INSTALL_NO_SETUP=1	-- clone- only	(off)	clone + submodules only (no build / no host writes)

Re-running the installer over an existing checkout **updates** it (git pull --ff-only + recursive submodule update) — idempotent.

File exports the installer wires (what ends up on your host): the PATH+session snippet is appended to whichever shell rc your host uses — ~/.bashrc and/or ~/.zshrc (and ~/.bash_profile / ~/.profile for bash login shells); ~/.tmux.conf is installed (any pre-existing non-ours config is backed up to ~/.tmux.conf.pre-vasic-digital); and the generated **scripts/tmx** wrapper is prepended onto PATH so tmx resolves to this verified build while the system tmux stays reachable side-by-side. Full reference: [docs/scripts/install.md](#).

Hit a snag? Rootless-Podman subuid/subgid exhaustion, the containerized-vs-native build choice, and the SSH-keyed private-submodule HTTPS-rewrite edge (TMX_INSTALL_NO_HTTPS_REWRITE=1) are covered in [docs/guides/troubleshooting.md](#).

Quick install (one command)

Linux host:

```
git clone --recurse-submodules git@github.com:vasic-digital/
tmux.git ~/Projects/tmux
cd ~/Projects/tmux
sudo bash scripts/install_deps.sh      # one-time host build deps
bash scripts/setup.sh                  # build + verify + install
                                       (no sudo)
```


macOS host (Apple Silicon or Intel):

```
brew install podman                    # one-time: container
                                       runtime
podman machine init && podman machine start
git clone --recurse-submodules git@github.com:vasic-digital/
tmux.git ~/Projects/tmux
cd ~/Projects/tmux
bash scripts/setup.sh                  # build + VM-verify +
                                       install bridge
```


After setup.sh reports GREEN: open a new shell, or source the rc for your shell (source ~/.bashrc or source ~/.zshrc). Then tmx new|attach|ls|kill invokes the verified vasic-digital build; the system tmux command stays untouched and reachable side-by-side.

Local dependencies (§11.4.77). Missing build/runtime deps (e.g. jemalloc) are obtained git-ignored into .local-deps/ automatically by setup via scripts/obtain_local_deps.sh — it resolves a present dep by absolute path (§11.4.111; fixes the non-interactive-PATH case) and builds/extracts it locally when missing (cross-platform: Linux source/container, macOS source/brew). See [docs/scripts/obtain_local_deps.md](#).

Architecture (native dual-OS per-session isolation)

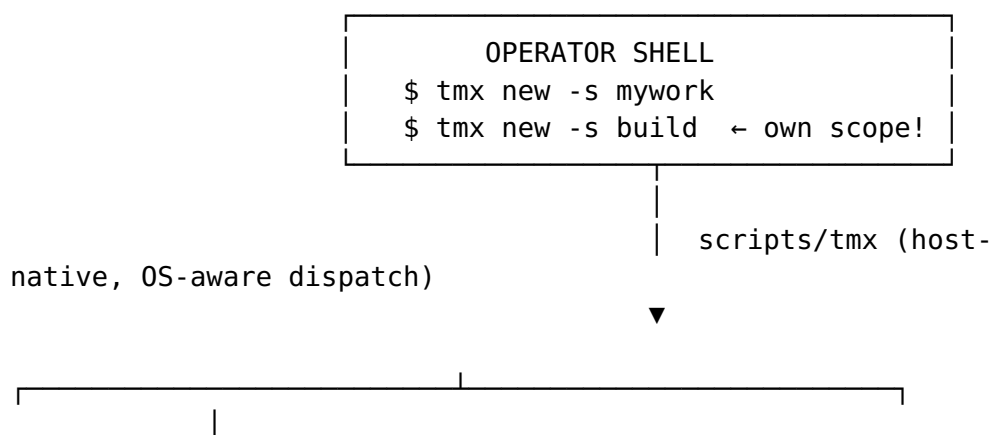

```
|
|         Linux host                                     macOS
| host (Darwin)
|
|         | for each `tmx new -s NAME`:
| for each `tmx new -s NAME`:
|         |     systemd-run --user --scope
| tmux -L tmx-NAME new-session -d -s NAME \
|         |         --unit=tmx-NAME.scope
|         "tmx-rlimit-wrapper.sh \
|         |         -p MemoryMax=infinity
|         <mem-kb> <cpu-sec> <nproc> \
|         |         [-p CPUQuota=...] [-p TasksMax=...] ← opt-in only
|         $SHELL -l"
|         |         -p Delegate=yes
| set -g default-command "rlimit-wrapper ..."
|         |     tmux -L tmx-NAME new -s NAME -d
|
|         |
```

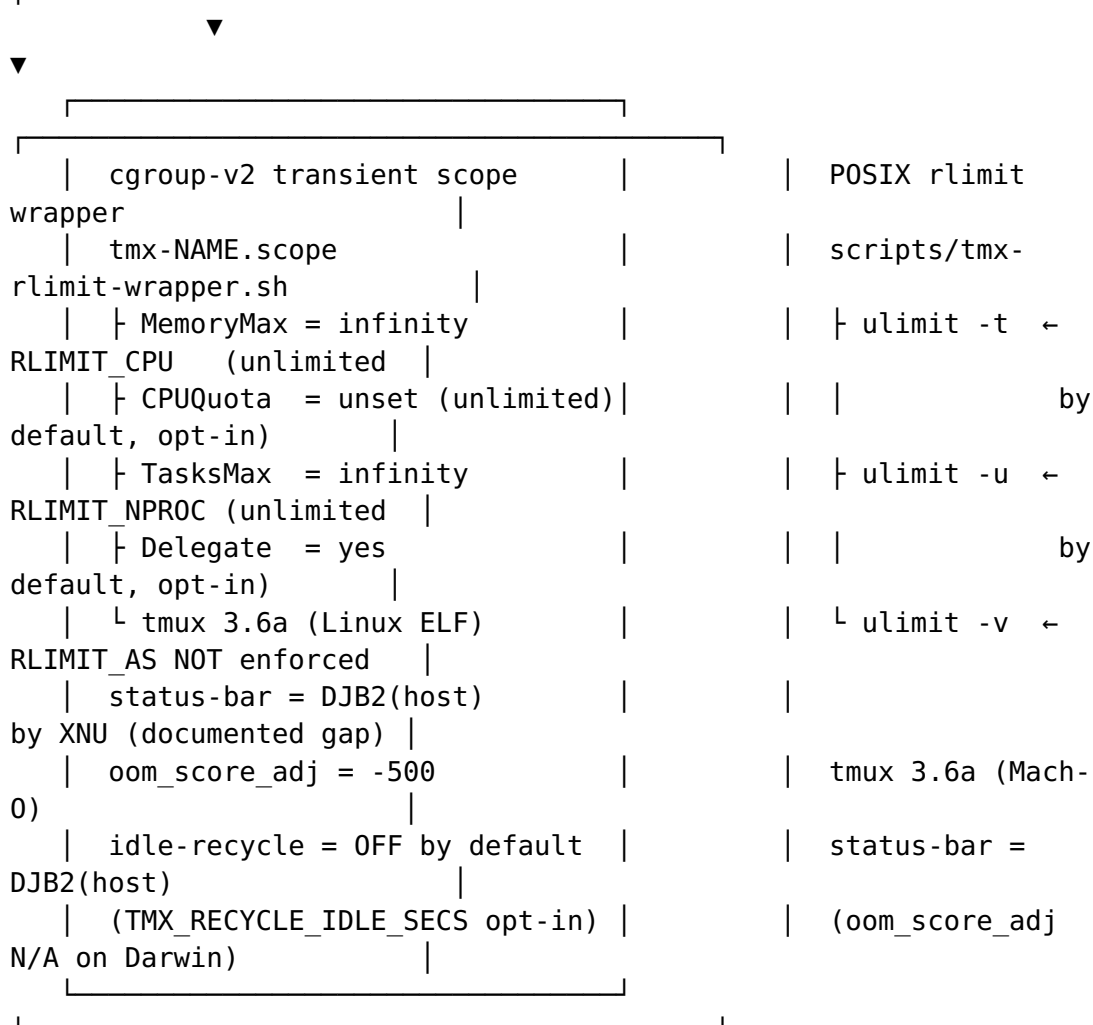

Shell sees the operator's	Shell sees the
operator's macOS host:	
Linux host: full FS, full PATH,	full FS, full PATH

(Homebrew, system tools,
all system binaries reachable. all Mach-0
binaries), `id` = operator's user.

Native dual-OS per-session isolation (architecture since 2026-05-13; NO resource or lifetime limit by default since v1.0.39 — see docs/guide/README.md §5.6). Each `tmx new -s NAME` invocation creates its own tmux server (socket `tmx-NAME`) with OS-native isolation, unbounded unless the operator opts in:

- **Linux** — cgroup-v2 transient scope `tmx-NAME.scope` via `systemd-run --user --scope`. `MemoryMax=infinity` always; `CPUQuota/TasksMax` are OMITTED (unlimited) unless `TMX_CPU/TMX_TASKS` opt in. OOM in one session is contained to that scope — every other session AND user.slice survive (Constitution §1 invariant). The idle-timeout session recycler is OFF by default (`TMX_RECYCLE_IDLE_SECS=0`) — a session is never auto-torn-down just because no client is attached; `TMX_RECYCLE_IDLE_SECS=<secs>` opts in.
- **macOS (Darwin)** — POSIX rlimit wrapper sets `RLIMIT_CPU` (CPU time) and `RLIMIT_NPROC` (per-user process count) to unlimited by default before exec'ing the operator's `$SHELL`; `TMX_CPU_HARD_SEC/TMX_PROC_MAX` opt in to an explicit cap. The Darwin XNU kernel enforces these per-process when set. Children inherit. **RLIMIT_AS (virtual memory) is NOT enforced** by XNU for unprivileged processes — this is a documented gap; full memory containment on macOS requires `launchd` jobs with `HardResourceLimits` plist (root). See docs/guide/README.md §5.6 for the strength comparison and the full opt-in knob table.

Both OS paths deliver the **same operator UX**: plain-vanilla tmux behaviour, the operator's shell with full host PATH (Homebrew on macOS, `/usr/local/bin` on Linux, all system tools), and no resource/lifetime ceiling unless the operator explicitly asks for one. No VM. No bridge. No `core@localhost`. No bluff.

What you get

Component	Why
tmux 3.6a (latest stable)	Pinned to a known-good upstream tag
Hardened compile flags	<code>-O2 -DNDEBUG -fstack-protector-strong -D_FORTIFY_SOURCE=2, RELRO + immediate-binding link</code>
Build-time -ljemalloc	jemalloc linked at the binary level (more aggressive RAM return than glibc malloc)

Component	Why
Runtime <code>LD_PRELOAD=libjemalloc.so</code>	Wrapper preloads jemalloc even on hosts where the linker resolved a different malloc
OOM-score protection	Optional setcap-enabled helper (<code>tmx-oom-set</code>) sets <code>oom_score_adj=-500</code> on the spawned server, making tmux survive most OOM cascades
Bounded history-limit	Explicit 2000 (the default — explicit so future bumps are intentional)
Per-session cwd memory (v1.0.13+)	<code>tmx-shell-init.sh</code> installs a <code>PROMPT_COMMAND</code> / <code>precmd</code> hook inside every pane; every command's cwd is recorded to <code>~/.tmx/state.json</code> . Reopen the same session name → wrapper passes <code>-c <last-pwd></code> to <code>tmux new-session</code> ; the pane materialises where you left off. End-to-end guarantee verified by <code>scripts/tests/43_e2e_cwd_persist_real_shell.sh</code> .
Hermetic install	Built artifact lives in <code>tmux/build/</code> . <code>PATH</code> export points there; system <code>tmux</code> untouched. Removable via <code>bash scripts/uninstall.sh</code> (or <code>bash scripts/setup.sh --uninstall</code> — both delegate to the same single source of truth).

Verification gate

SUMMARY: PASS=41 FAIL=0 SKIP=3

GREEN: tmux binary verified – safe to PATH-export.

The 44 numbered tests cover (among others): smoke + binary version, session lifecycle, jemalloc loaded, history-limit honored, clear-history releases memory, 10 concurrent panes, sustained session no-leak, OOM-score wrapper, crash isolation scope (`cgroup-v2` transient), hostname-derived status-bar colour (algorithm + integration), memory pressure under cap, `TasksMax` stress, concurrent OOM independence, per-session `cgroup` distinctness, window-name `.exe` strip, **scrollback + copy-mode scrolling** (operator-path: 3000 lines generated, proven scrolled off-screen, reachable via copy-mode), `HelixConstitution` inheritance (submodule + every governance doc's pointer), `CodeGraph` index materialisation, cross-platform parity branches (macOS ↔ Linux), `tmx-shell-init` non-TTY guard, `tmx-state` cwd persistence end-to-end across exit + reopen, SSH dispatch to

remote nezha, dispatcher session-name validation, setup install/uninstall E2E, and — new in **v1.0.14** — **clipboard copy-OUT physically proven** end-to-end (test 44: marker round-trip through y keystroke → @clip shell-pipe → pbpaste / wl-paste / xclip / termux-clipboard-get returns the marker).

Four honest SKIPS document precondition gates:

- 03_jemalloc_loaded SKIPS if host doesn't have libjemalloc — sudo bash scripts/install_deps.sh provides it
- 08_oom_score_adj SKIPS unless running as root OR the setcap helper is installed — sudo bash scripts/build_oom_set.sh --install enables it
- Tests 12 / 13 / 14 (memory-pressure / TasksMax / concurrent-OOM) require TMX_TEST_DESTRUCTIVE=1 — run only on dedicated test hosts

A layer-4 paired-mutation harness (Constitution §103) lives at scripts/tests/meta_test_false_positive_proof.sh: registered mutations M1-M14 plus CM-CONSTITUTION-INHERITANCE each break a feature, assert the matching test then FAILs, revert, and assert it PASSes again. On macOS the harness reports **18 caught / 0 escaped / 6 skipped** (the 6 SKIPS are Linux-only isolation mutations); the remainder run on Linux via META=1 bash scripts/test_vm.sh. The gate is not considered self-validating until every runnable mutation is caught.

Roadmap

See docs/plans/containerization.md for the **per-session containerization plan** — each tmux session running in its own cgroup-bounded container so that:

- 2 CPU + reasonable RAM cap per session
- Crash isolation: if one session OOMs/crashes, only that session dies; other sessions and their processes survive
- One-command bootstrap: tmx new <session> transparently creates the container

Documentation map

Every project doc lives under a context-named subdirectory of docs/ per constitution/Constitution.md's file-layout rule. Every Markdown has a synced HTML + PDF sibling generated by scripts/export_docs.sh per §11.4.65 universal-Markdown-export.

Area	Doc
Operator guide	

Area	Doc
	docs/guide/README.md — install, OS-by-OS notes, isolation comparison, troubleshooting
v1.0.14 / v1.0.15 clipboard	docs/guides/clipboard.md — multi-line copy + paste-IN + Alt/Shift-drag inside Claude Code
v1.0.15 workable-items SSoT	docs/workable-items/README.md — cmd/workable-items/ Go binary, subcommand reference, honest gaps
v1.0.9 shell-session resume	docs/manual/tmx-shell-integration.md — end-user master manual with copy-paste worked examples
v1.0.9 shell integration	docs/guides/tmx-shell-integration.md — operator install/uninstall guide for tmx-shell-init.sh (incl. 2026-07-05 wizard redesign: random-suffix create + existing-session picker)
Session passwords (2026-07-05)	docs/guides/tmx-session-passwords.md — create/confirm flow, masked input, single-prompt reopen, delete-reset, decision-flow diagram
Operator FAQ	docs/guides/FAQ.md — double-password-prompt history, exact-name scripting, existing-session picker
v1.0.9 state daemon	docs/guides/tmx-state.md — operator CLI reference + state-file schema for tmx-state
v1.0.9 SSH dispatch	docs/guides/tmx-ssh-dispatch.md — ssh <host>-tmx <session> install, security, troubleshooting
Scrolling (Claude Code TUI + mobile)	docs/scrolling/README.md
CodeGraph (§11.4.78)	docs/codegraph/README.md — install, per-agent MCP wiring, anti-bluff verification
Local dependencies (§11.4.77)	docs/scripts/obtain_local_deps.md — per-host obtain-or-resolve mechanism for git-ignored deps (jemalloc)
Build & install troubleshooting	docs/guides/troubleshooting.md — rootless-Podman subuid fix, containerized-vs-native build, private-submodule HTTPS-rewrite edge, .local-deps/ obtain
Architecture plans	docs/plans/native-dual-os.md — current native-host design (no VM) docs/plans/per-session-isolation.md — per-session OOM containment

Area	Doc
Cycle plans	docs/plans/containerization.md — original (now superseded) containerization plan docs/plans/v1.0.4.md — this cycle's plan (CodeGraph + covenant propagation + AUDIT fixes)
Research notes	docs/research/customization/colors.md — hostname-derived status colour
Governance	Constitution.md — Project Articles §101-§109 (extends constitution/); CLAUDE.md , AGENTS.md , QWEN.md — per-agent inheritance pointers + project-specific overlay
Universal governance	constitution/ submodule (HelixDevelopment/HelixConstitution, pinned 7f738df)
Live state	CONTINUATION.md — read first on a fresh conversation
Tracker	Issues.md (open) / Fixed.md (closed with closure SHA + evidence)
Changelog	CHANGELOG.md — per-release positive-evidence verification record

Repository conventions

This repo follows the **vasic-digital anti-bluff covenant**: every test that **PASS**es carries positive evidence of the feature working; every **SKIP** documents its precondition; every gate has a paired mutation in `meta_test_*.sh` proving the gate isn't itself a bluff. The covenant is restated verbatim in [Constitution.md](#), [CLAUDE.md](#), [AGENTS.md](#), and [QWEN.md](#) (per the 2026-05-21 operator mandate) so that any tool which doesn't expand `@imports` still reads it. The upstream source lives in [constitution/Constitution.md](#) §11.4.

CodeGraph (code-intelligence)

This project is wired with [CodeGraph](#) per [constitution/Constitution.md](#) §11.4.78. The MCP server is configured for Claude Code, OpenCode, Kimi CLI, Crush, and Qwen Code — see [docs/codegraph/README.md](#) for the install + per-agent wiring contract.

License

Apache 2.0 — see [LICENSE](#).