


SDSS

The same five reserved quasars and five reserved field sources in every version

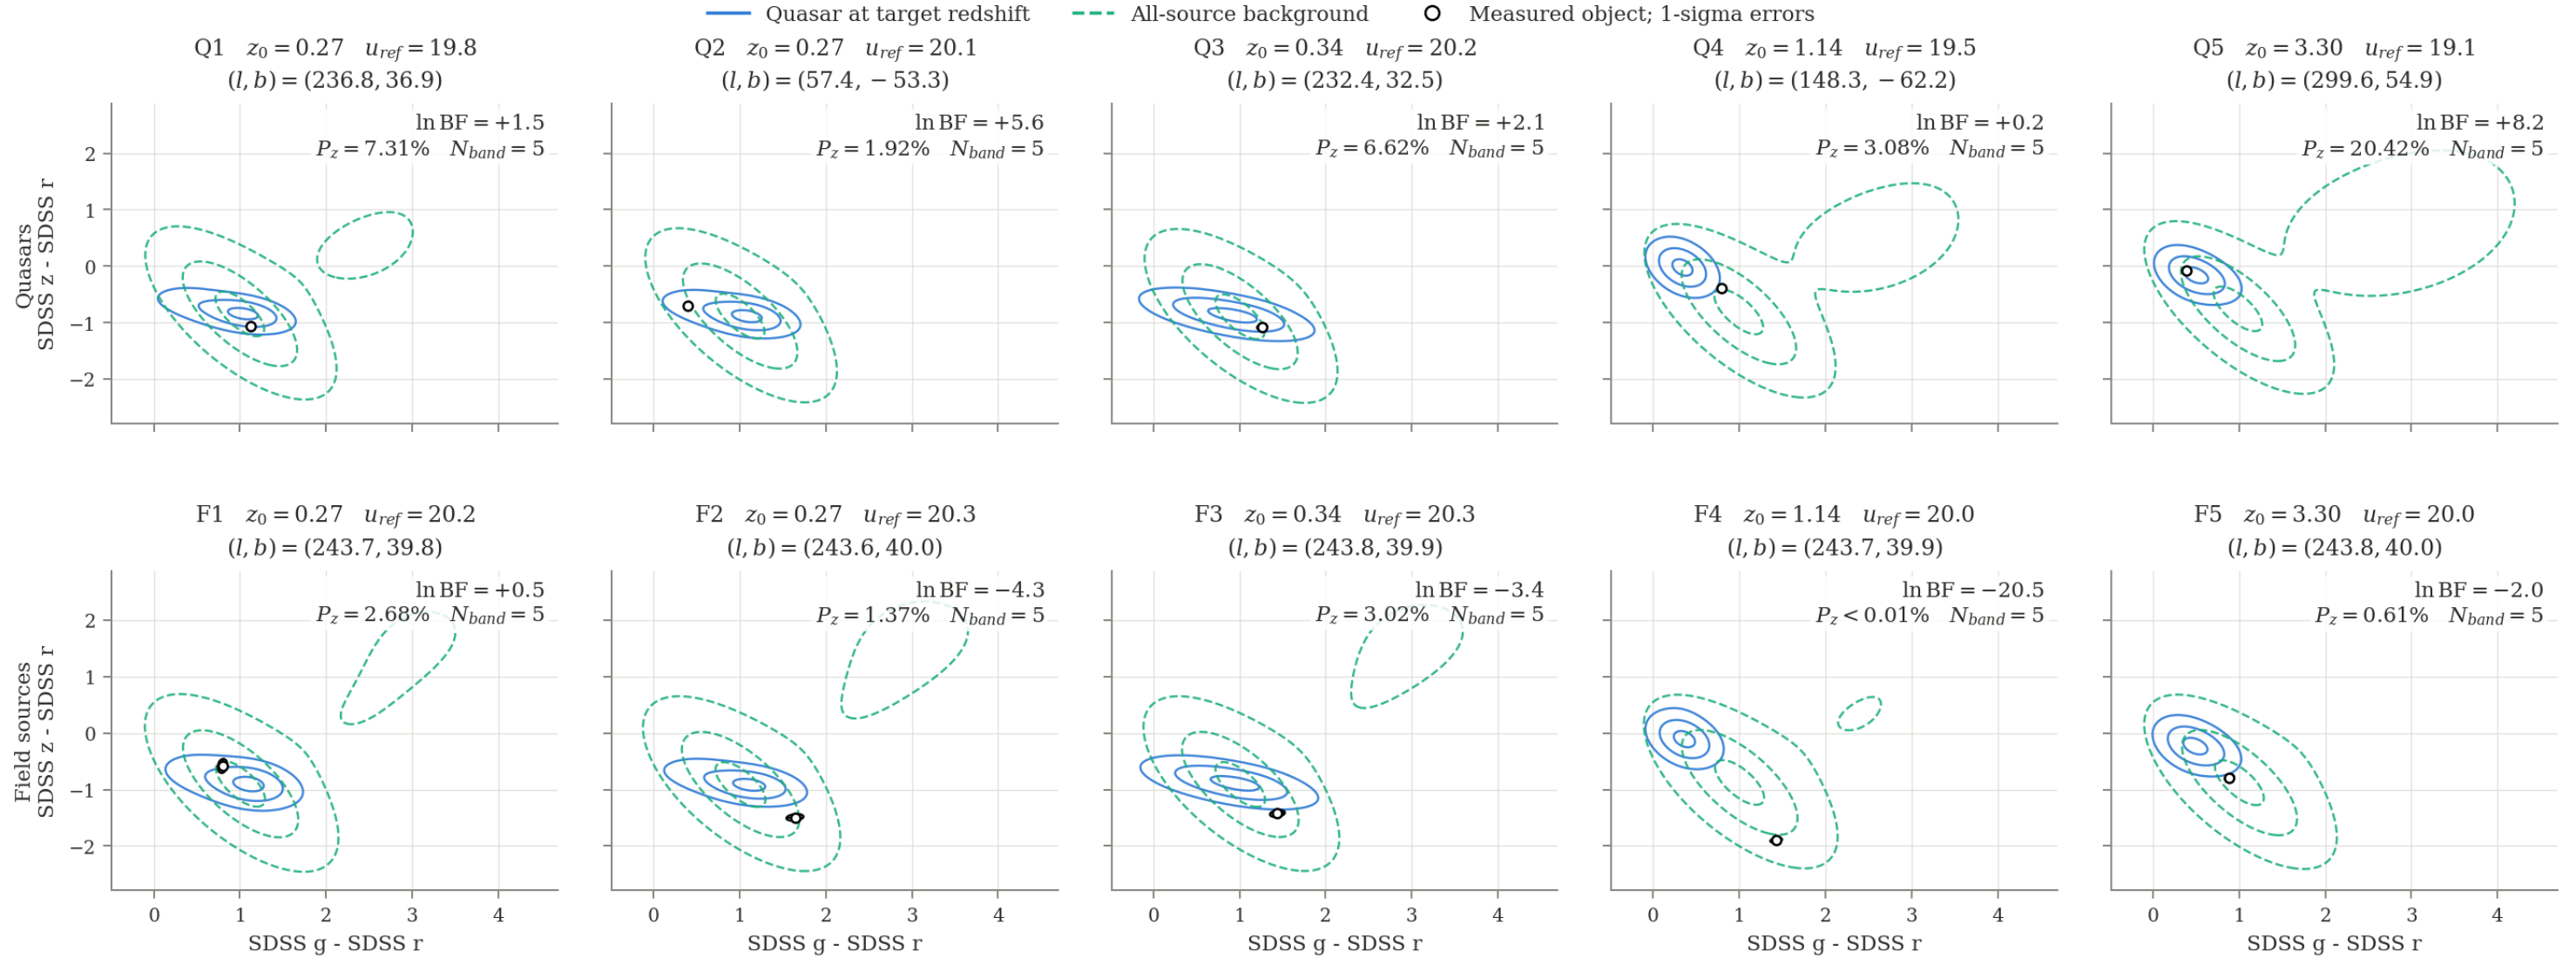


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

DECaLS

The same five reserved quasars and five reserved field sources in every version

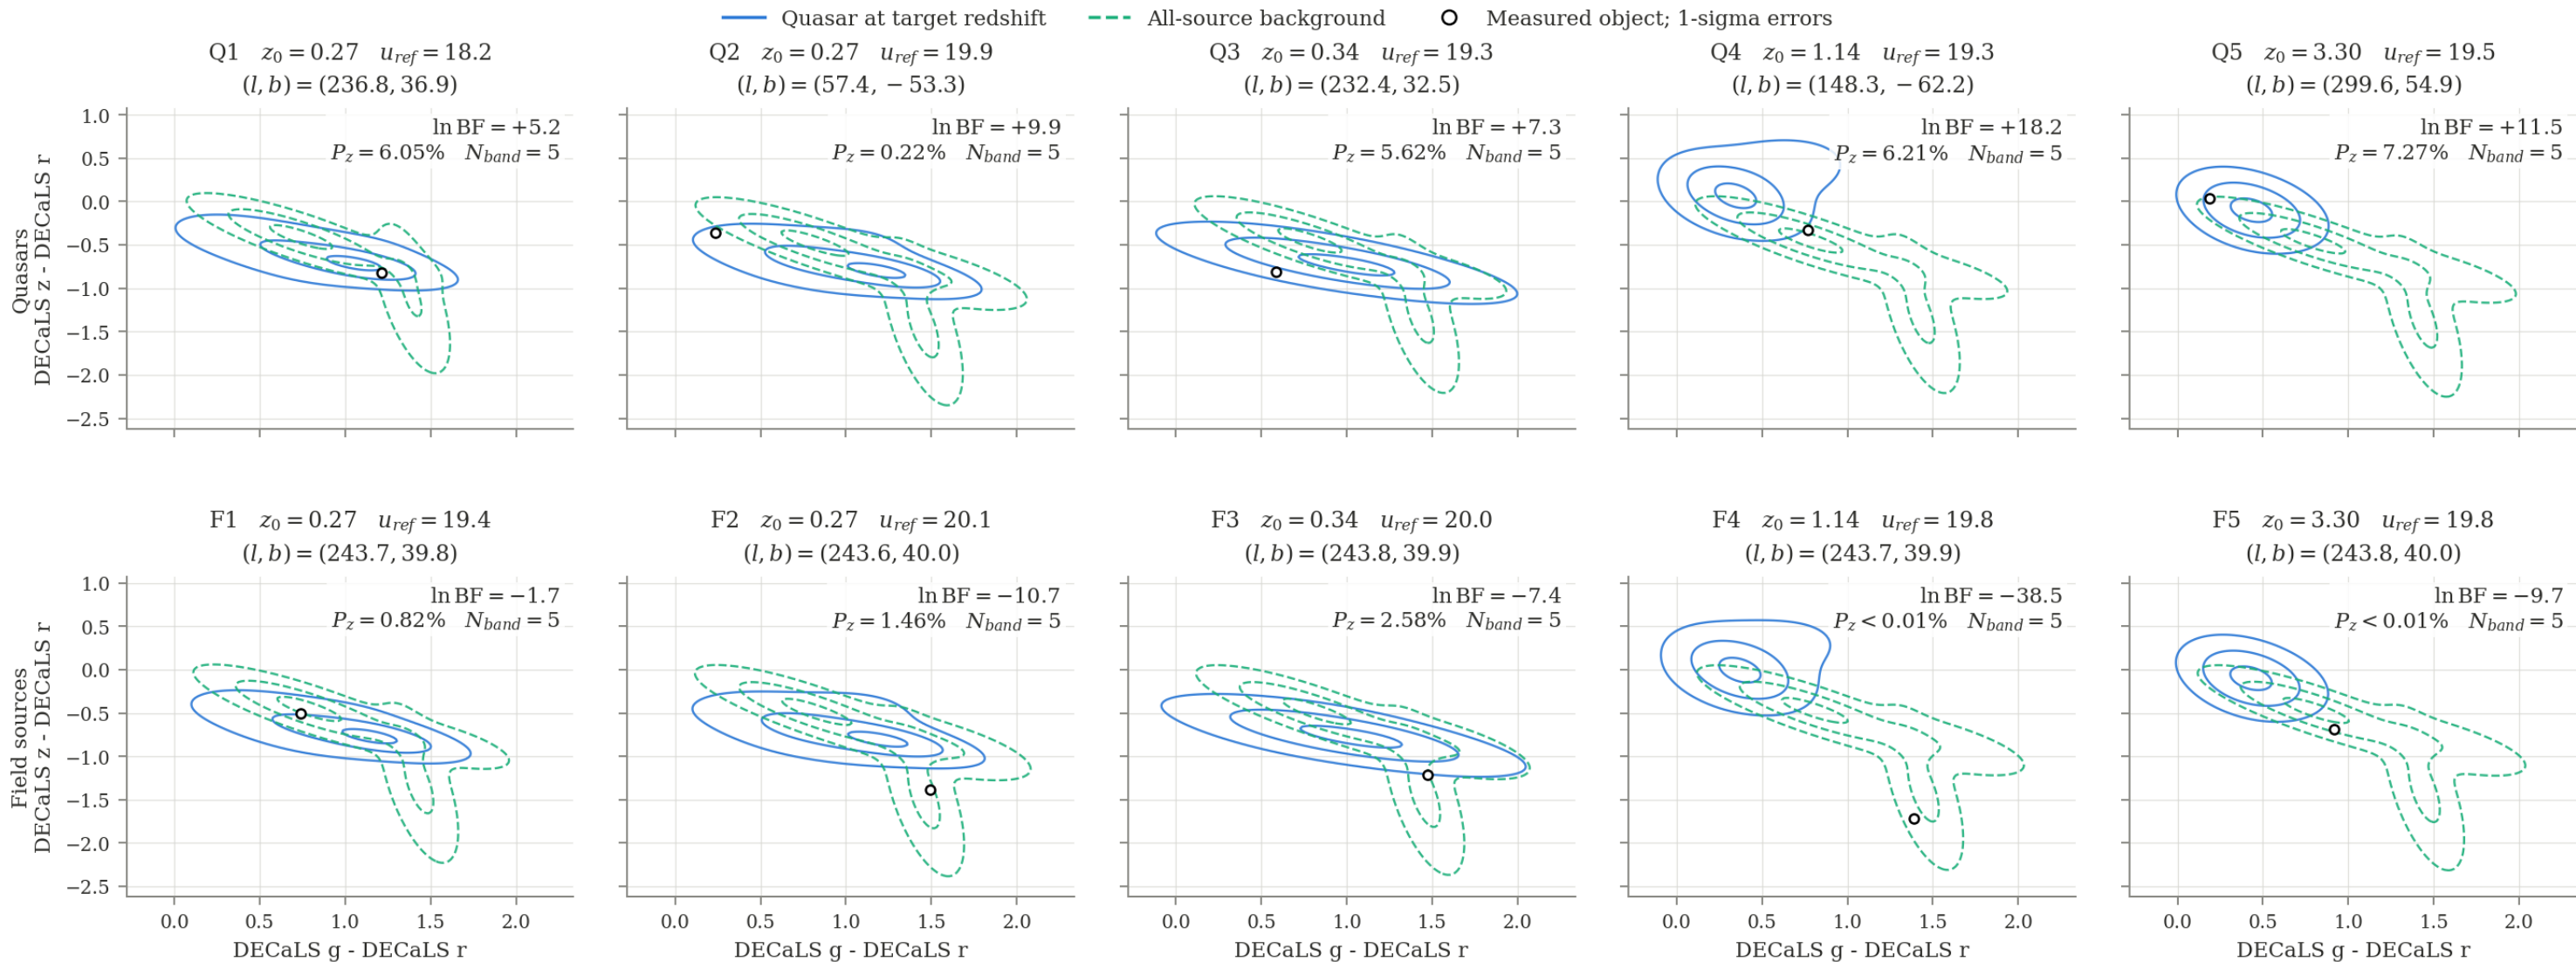


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

ALLWISE

The same five reserved quasars and five reserved field sources in every version

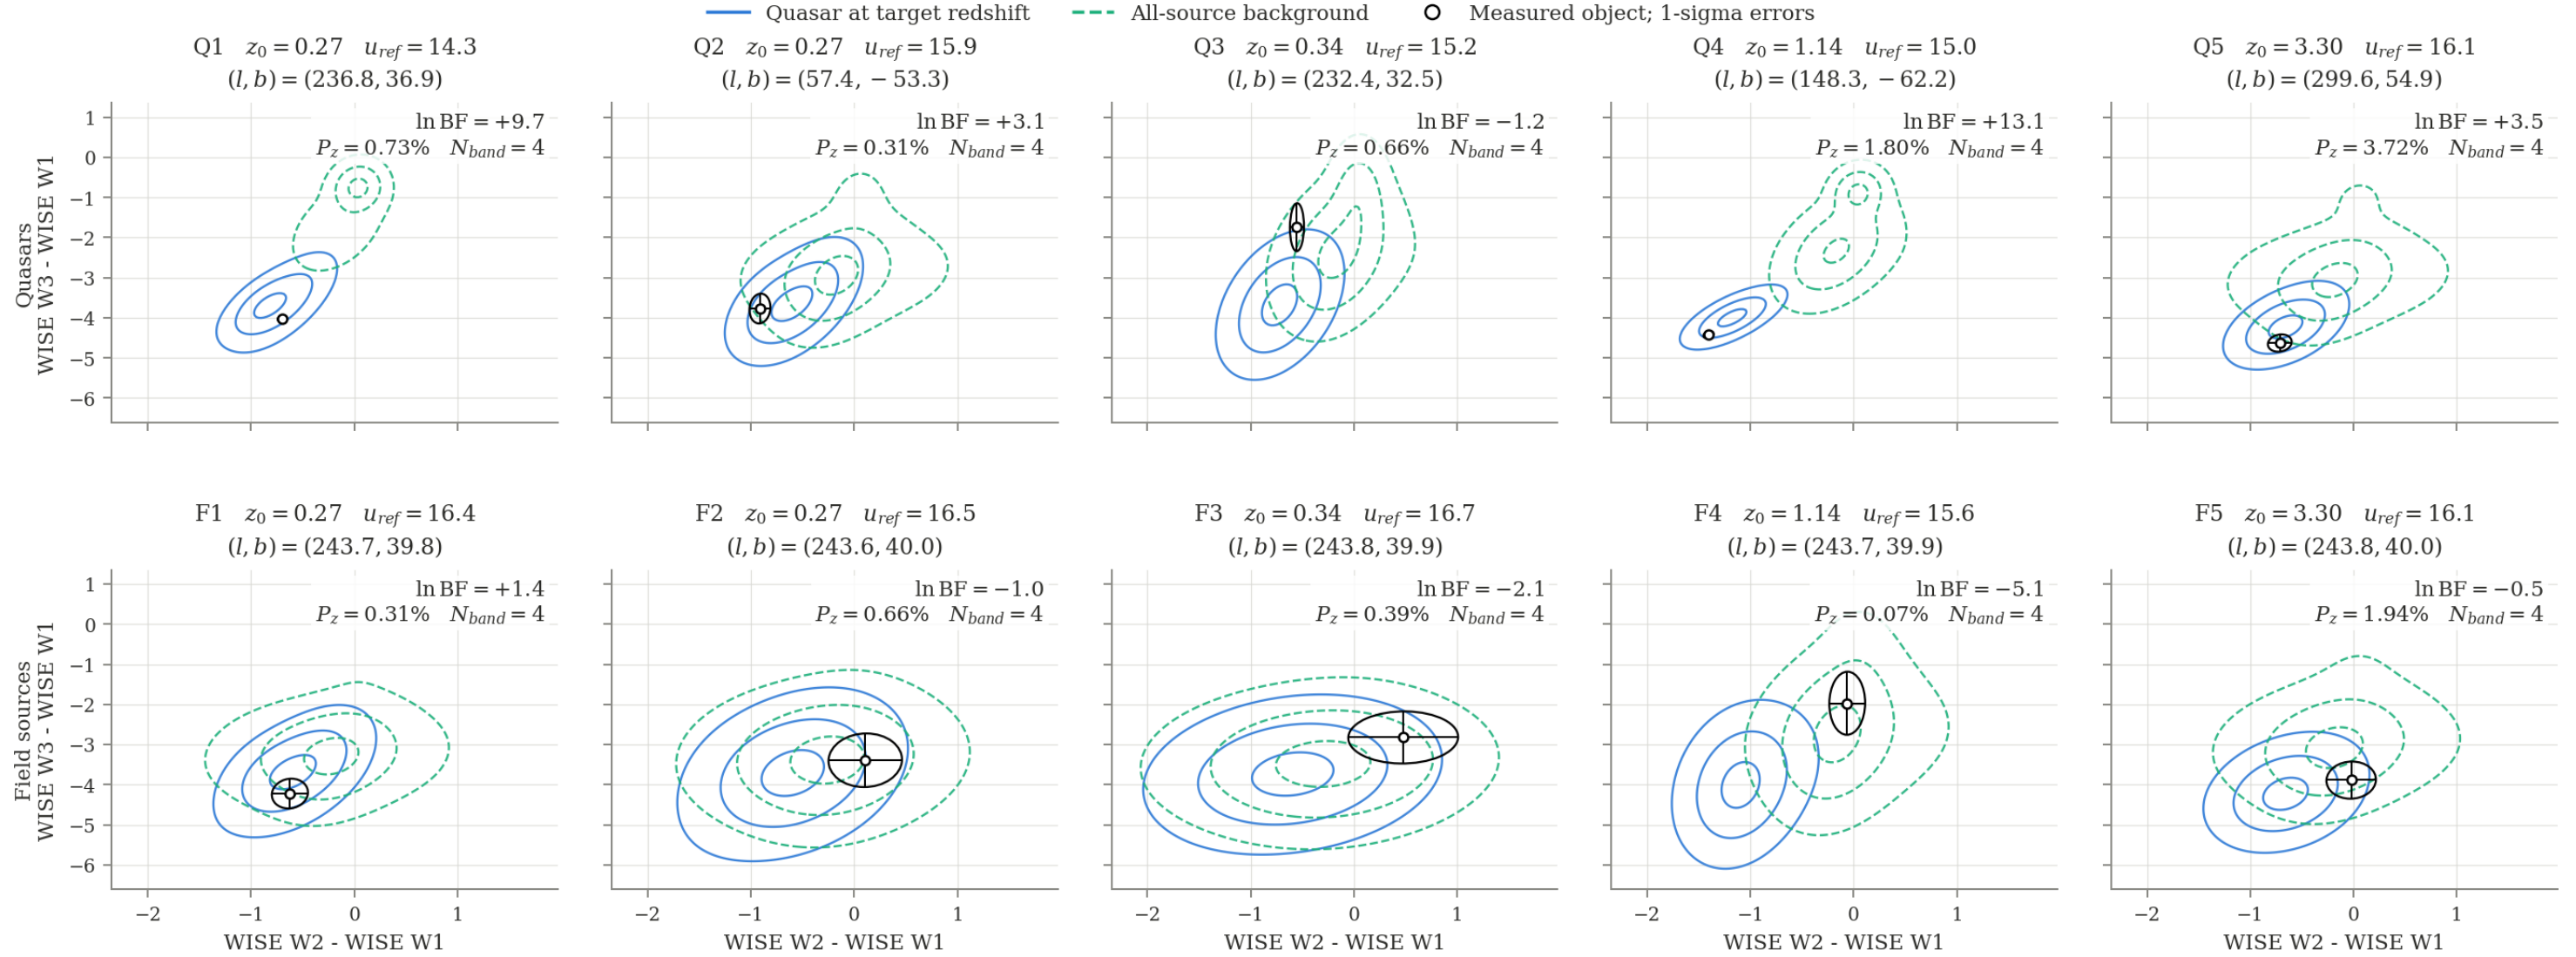


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

PS1

The same five reserved quasars and five reserved field sources in every version

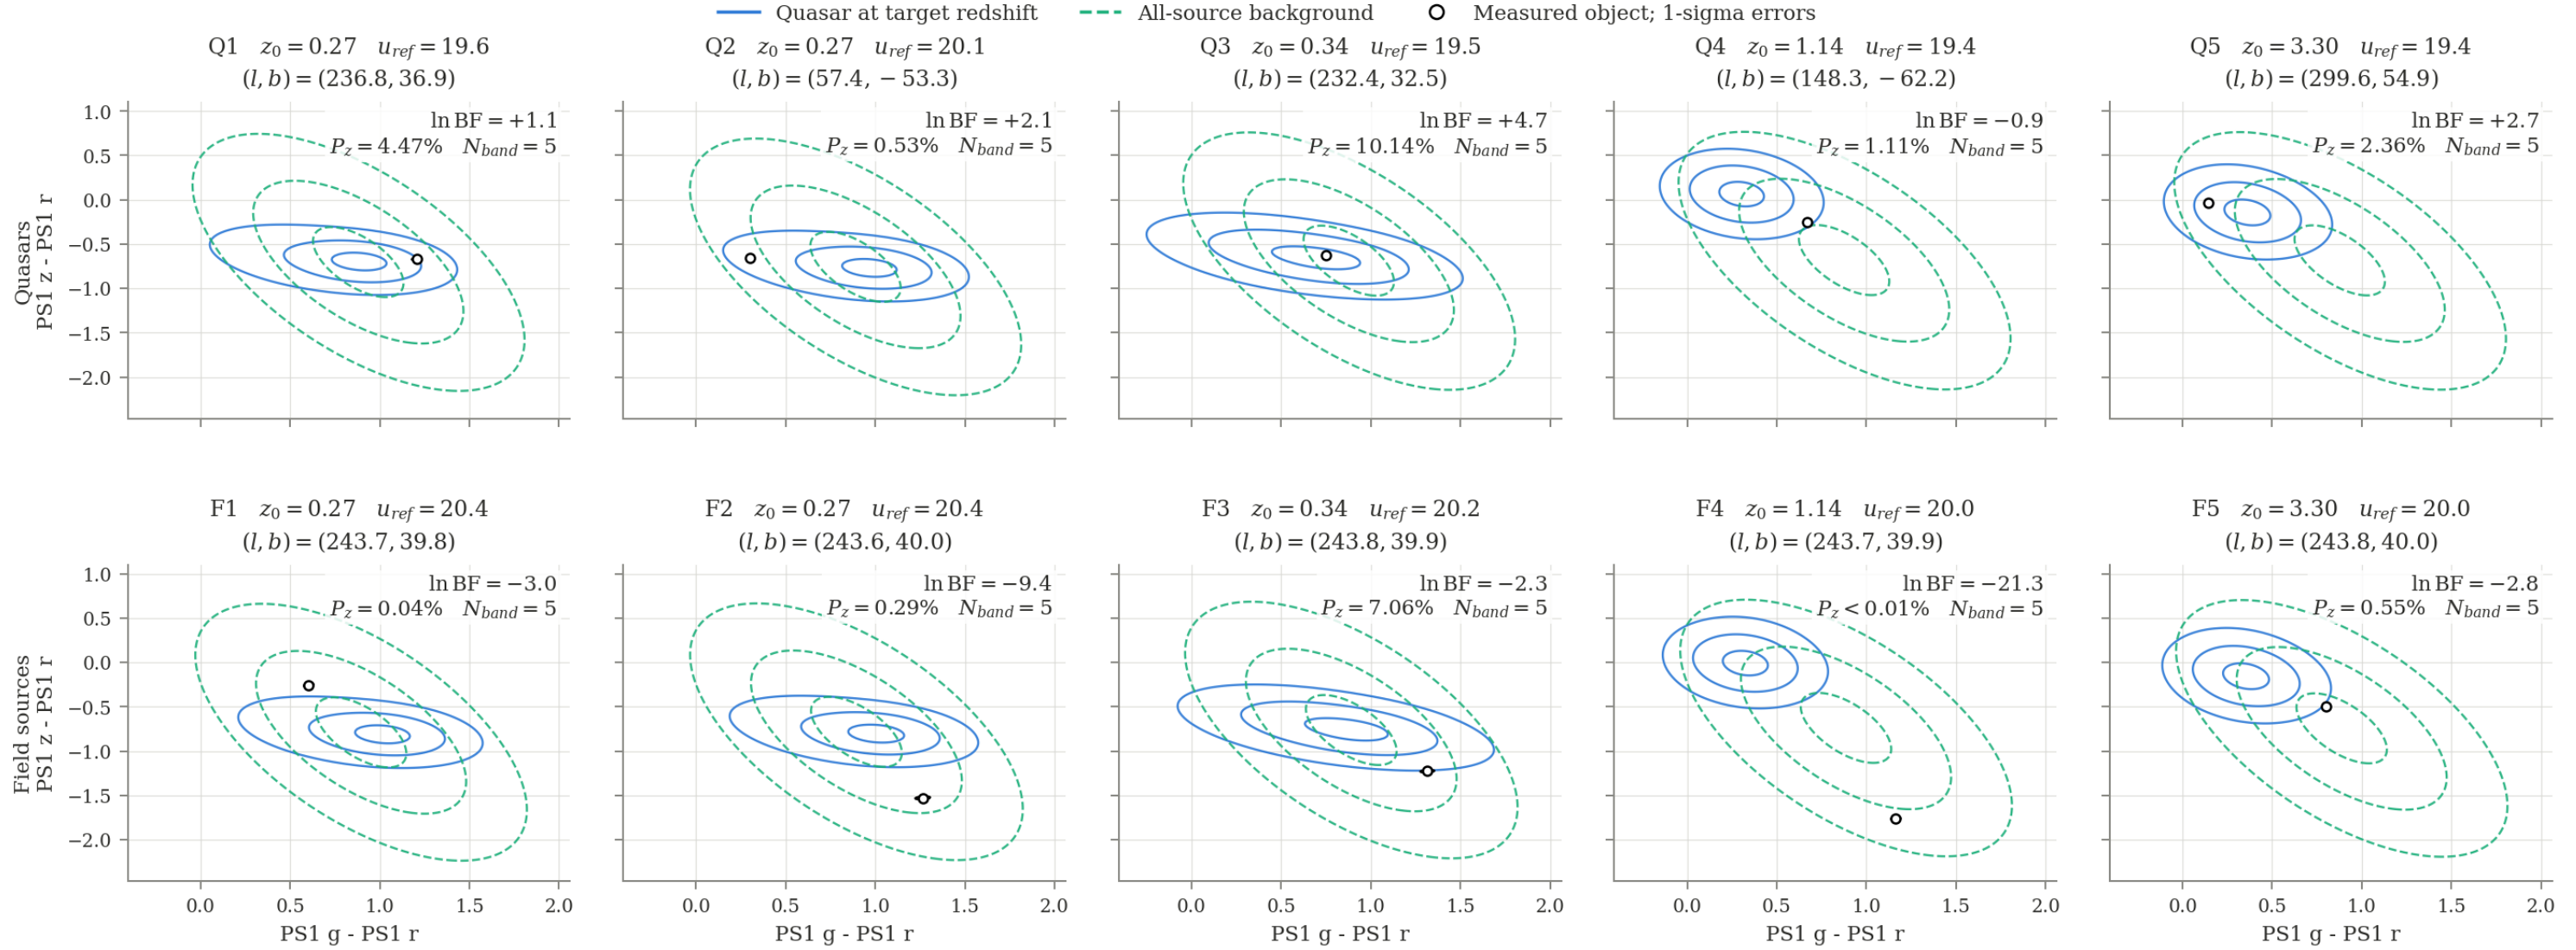


Axes: native-system lu ptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

NSC

The same five reserved quasars and five reserved field sources in every version

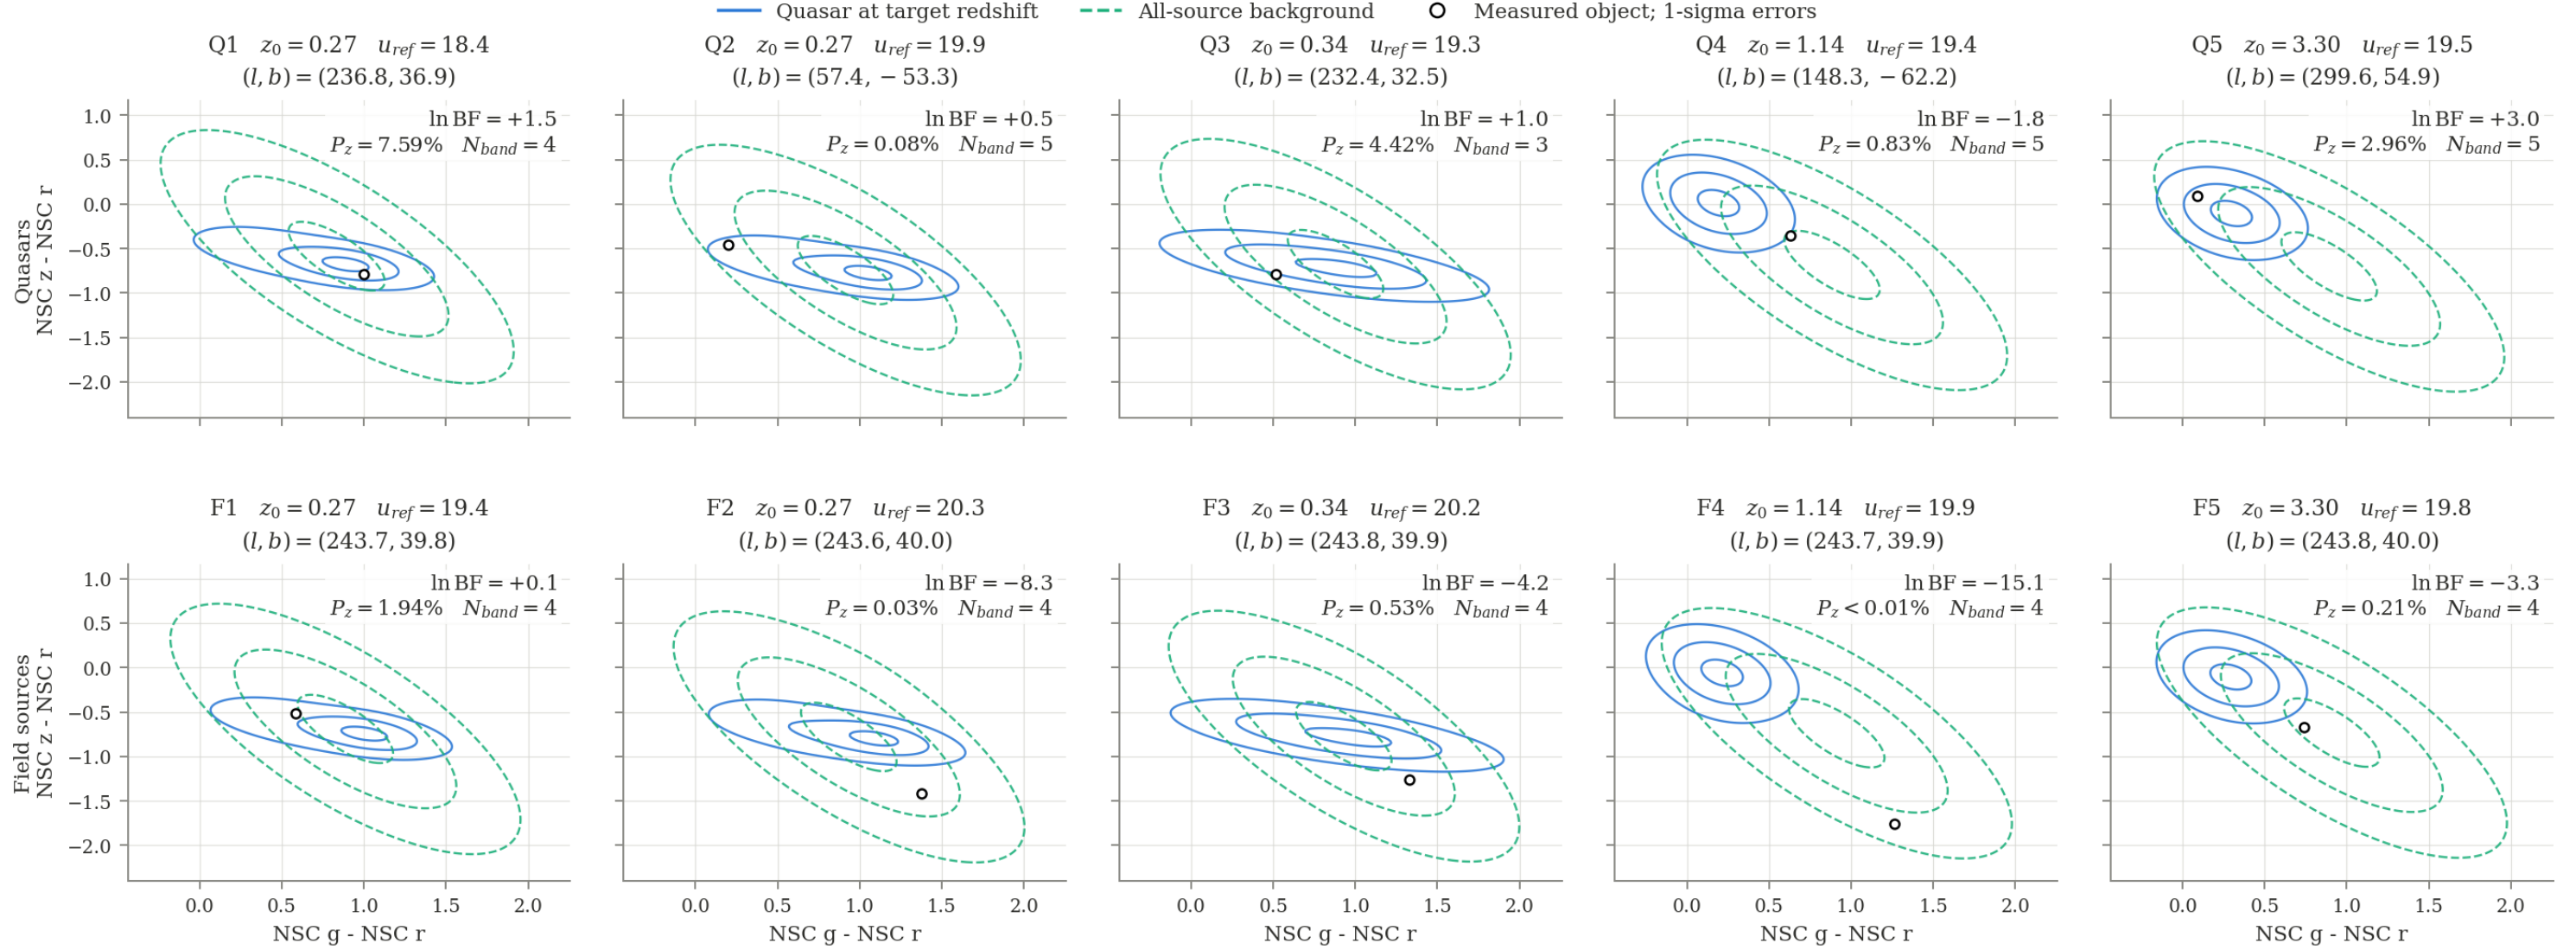


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

SkyMapper

The same five reserved quasars and five reserved field sources in every version

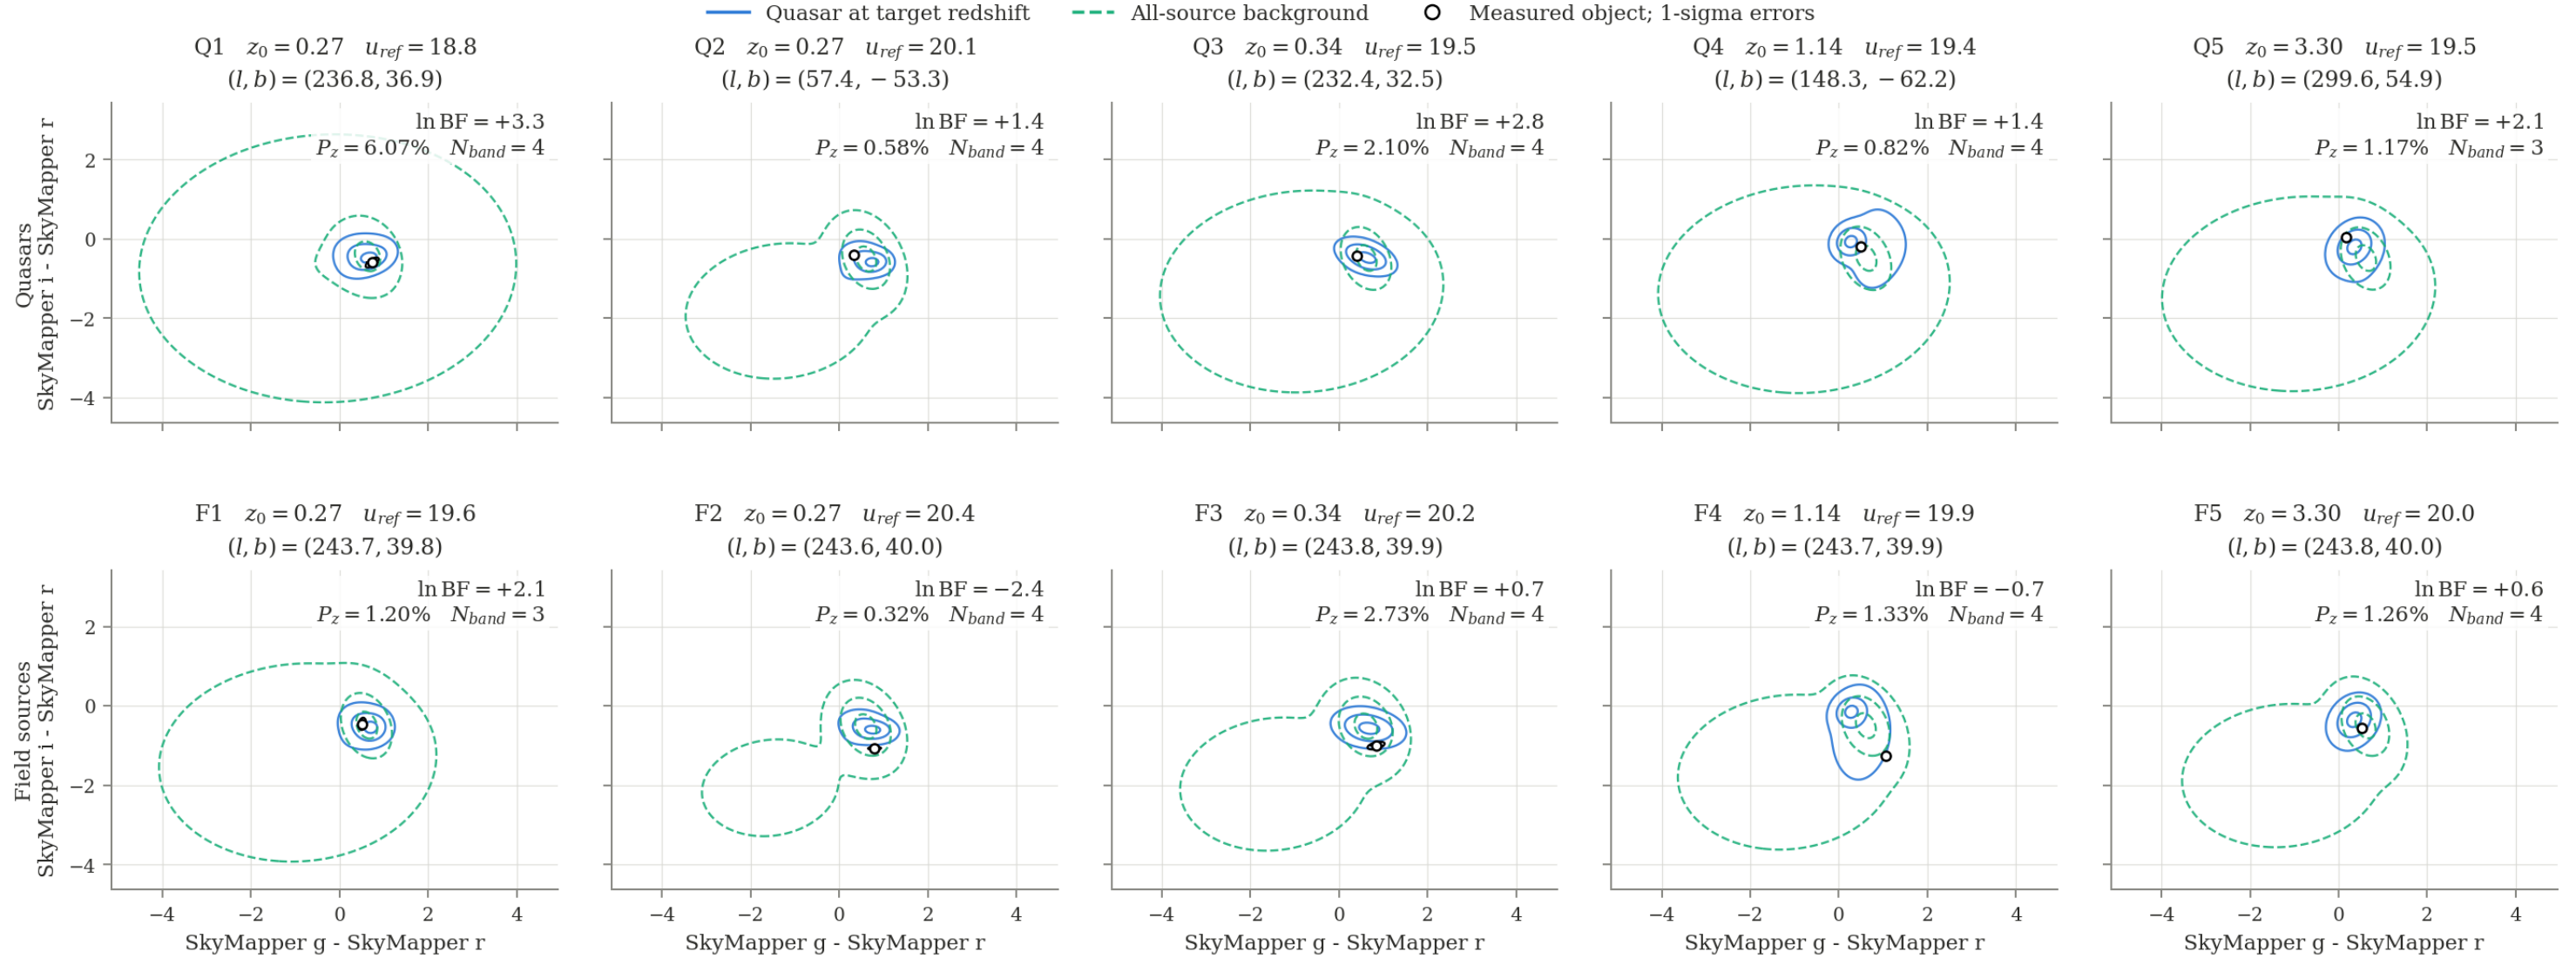


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

VHS

The same five reserved quasars and five reserved field sources in every version

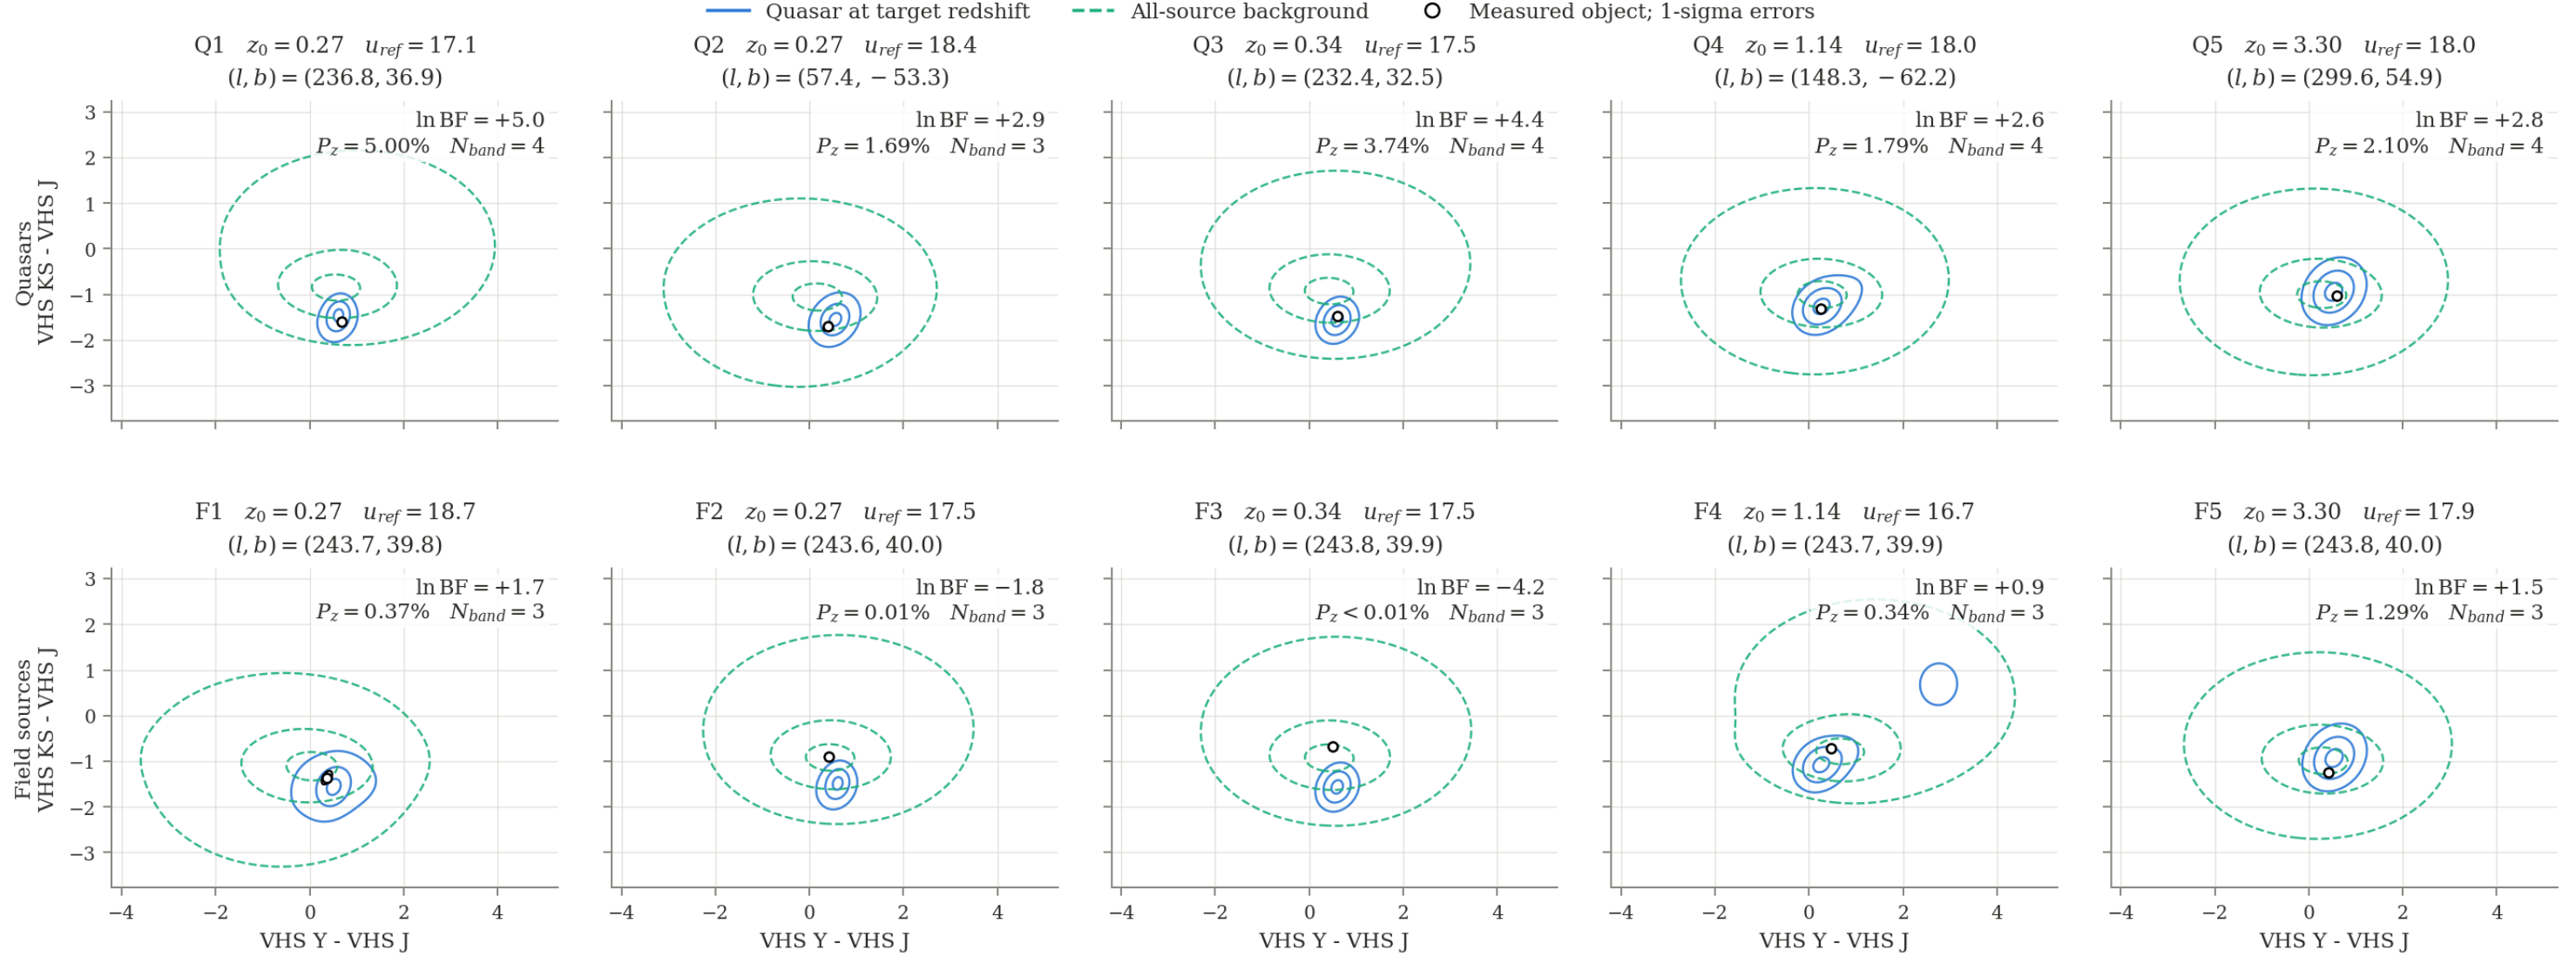


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

DECaLS + ALLWISE

The same five reserved quasars and five reserved field sources in every version

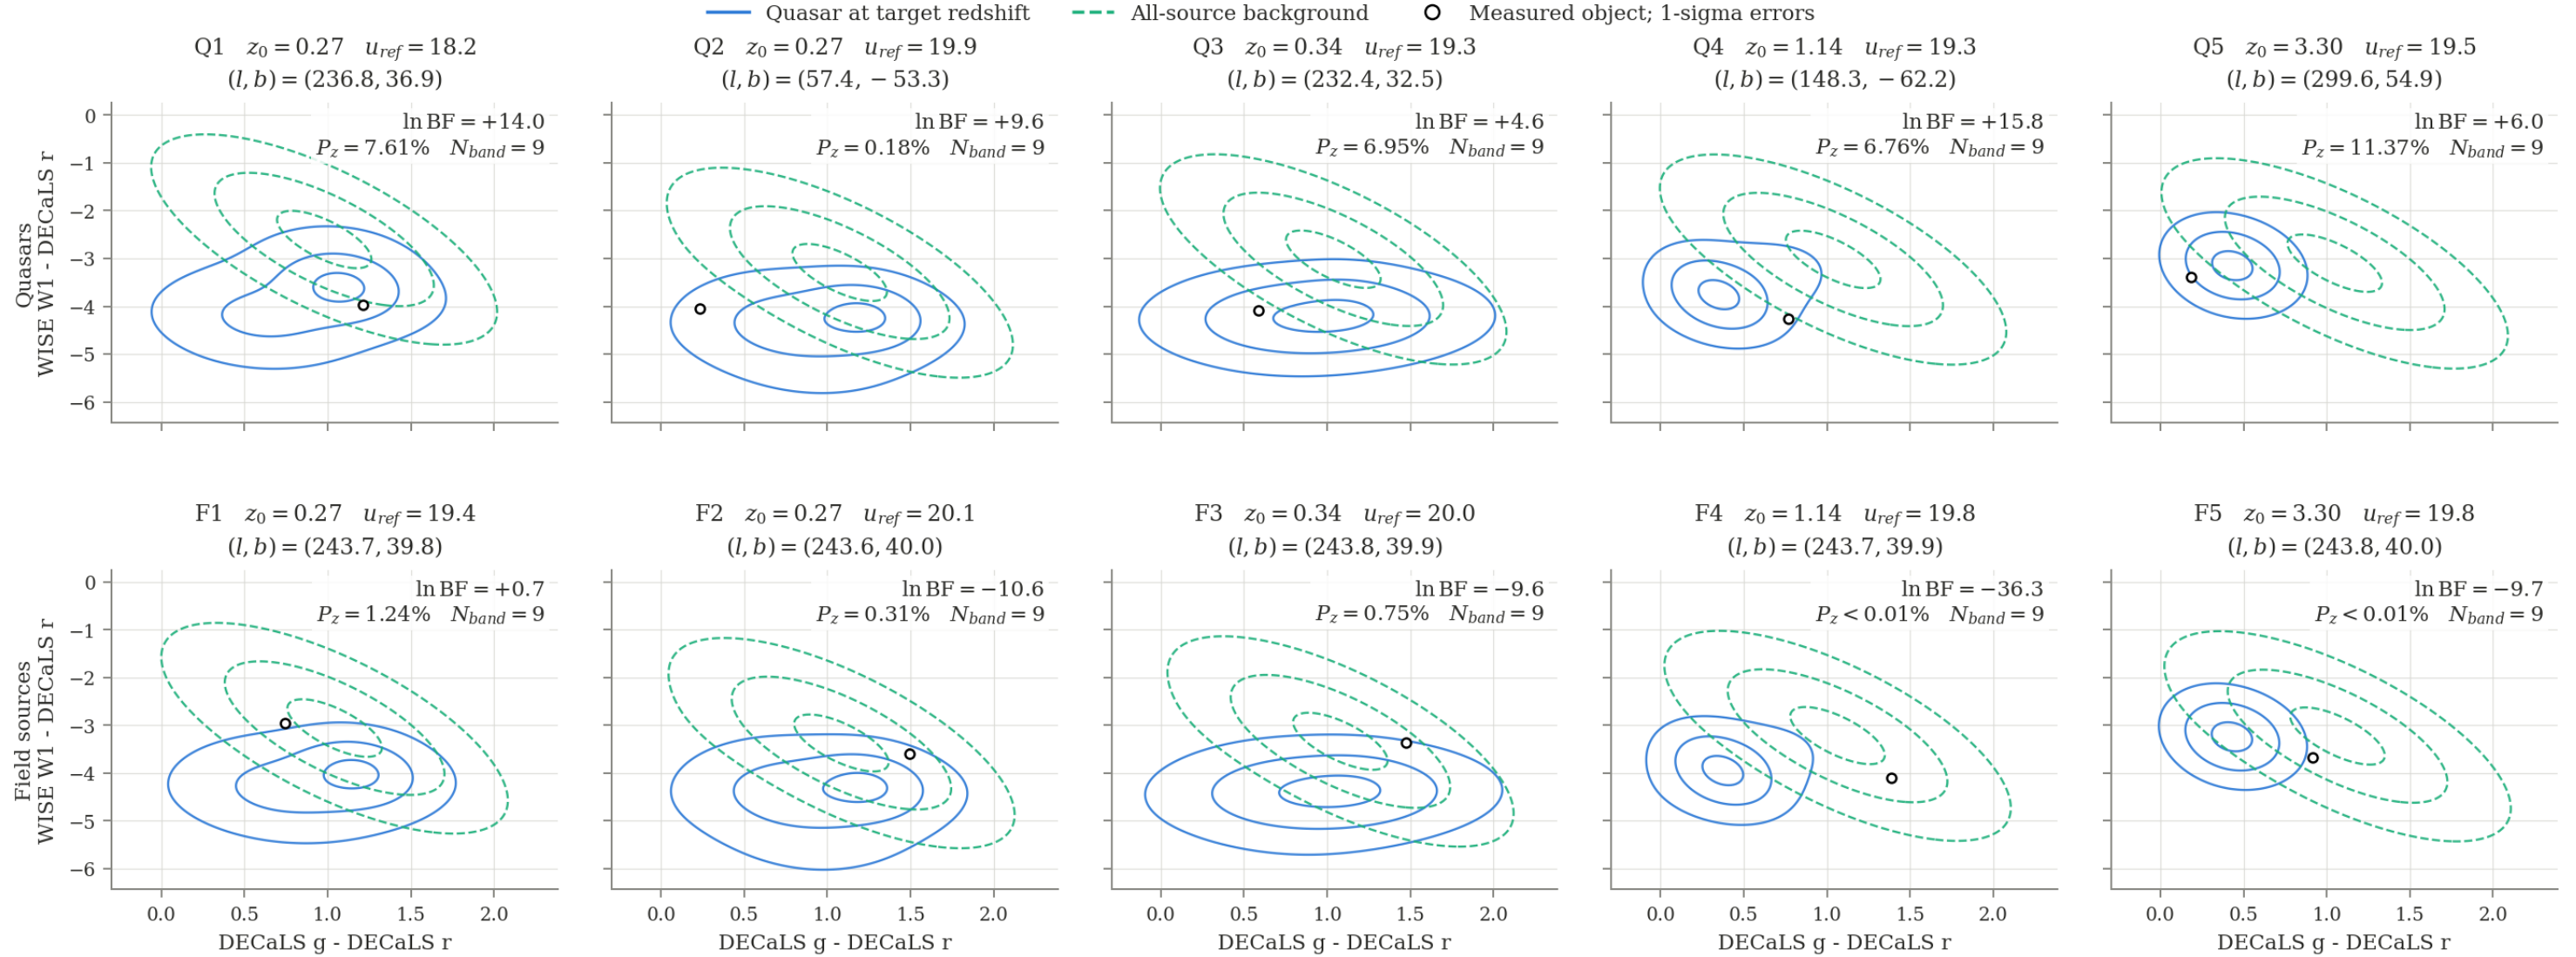


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

SDSS + ALLWISE

The same five reserved quasars and five reserved field sources in every version

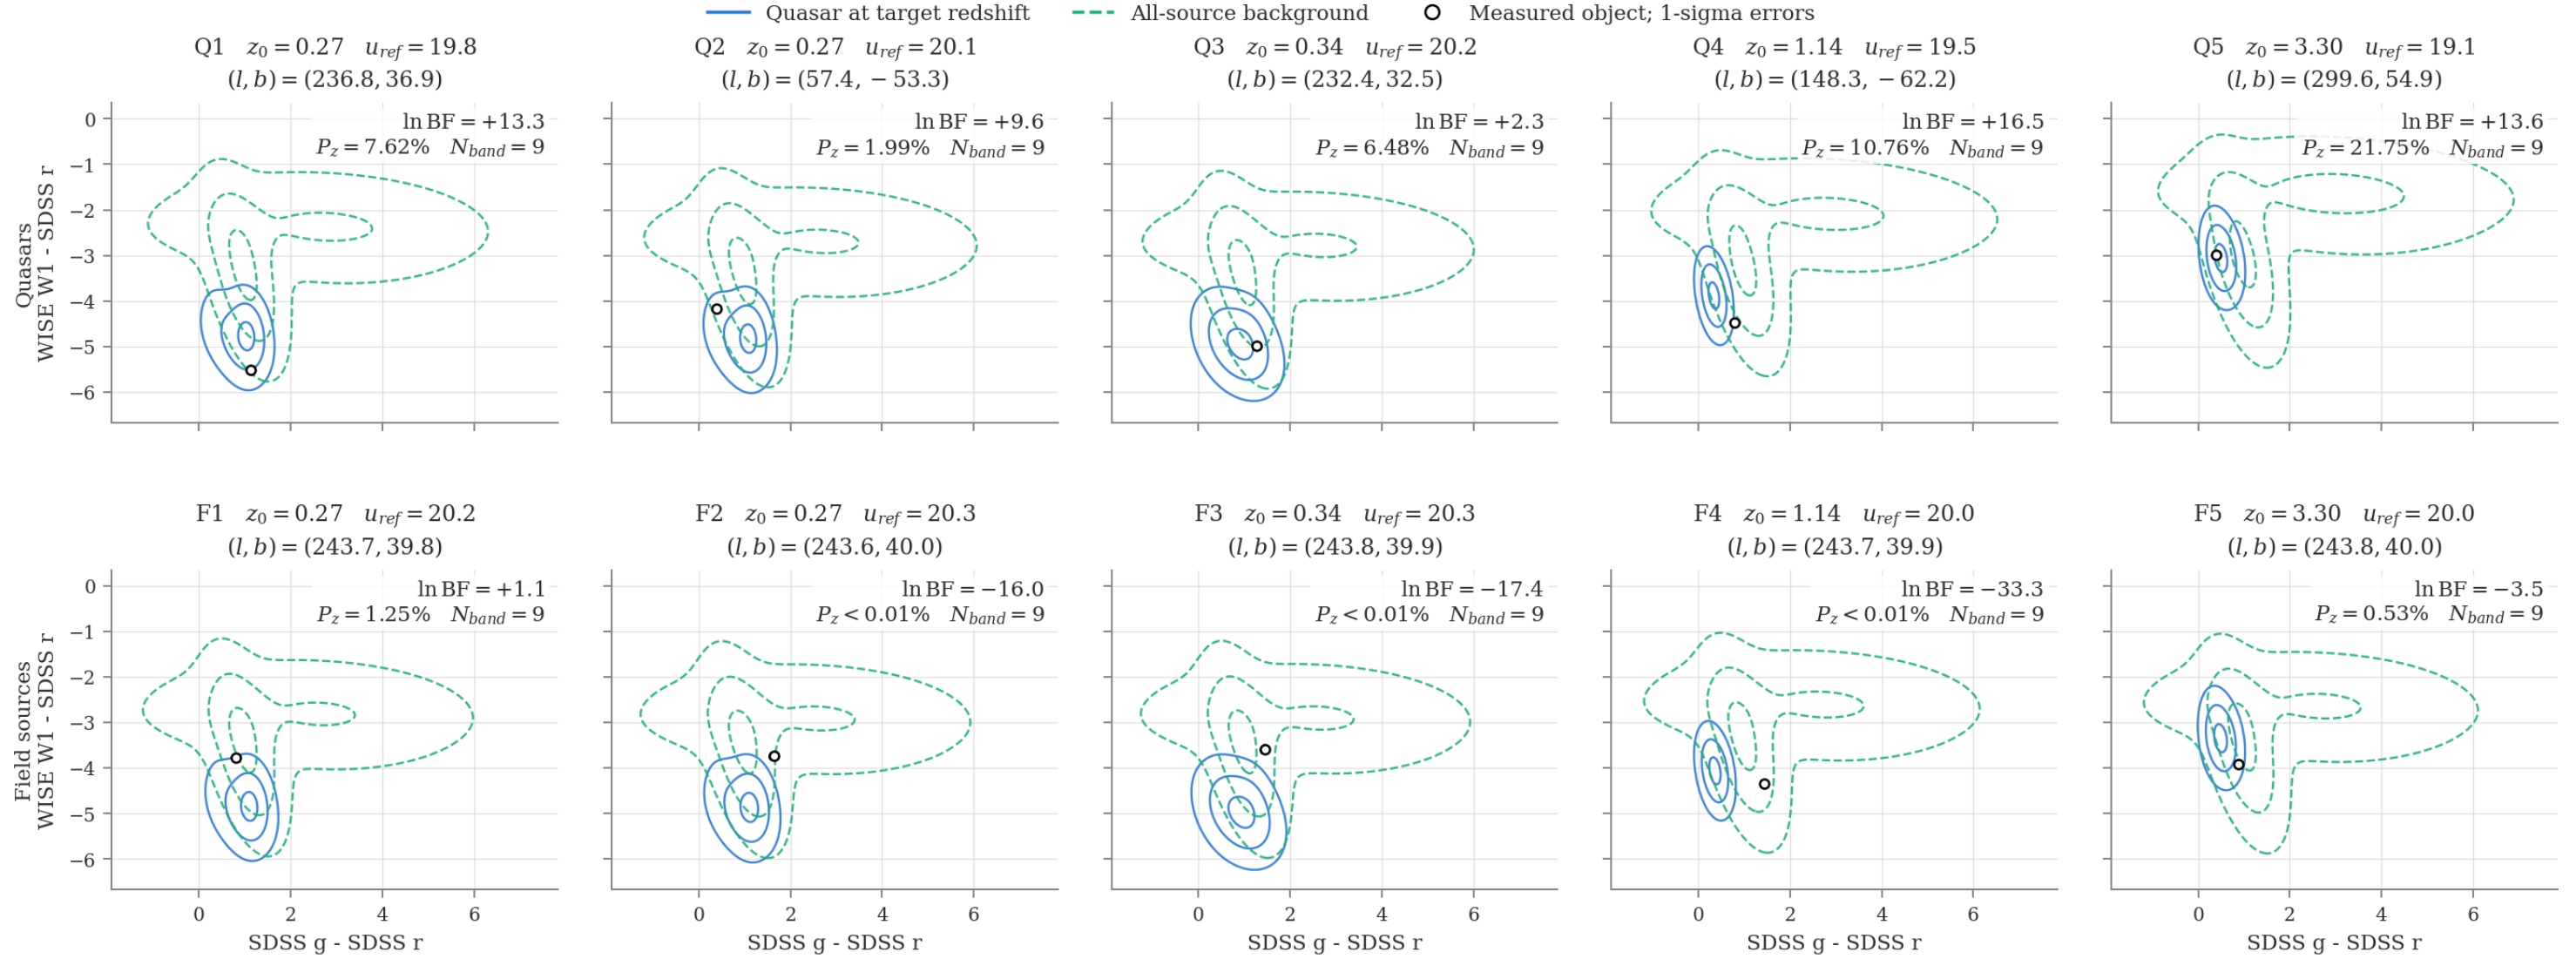


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

PS1 + ALLWISE

The same five reserved quasars and five reserved field sources in every version

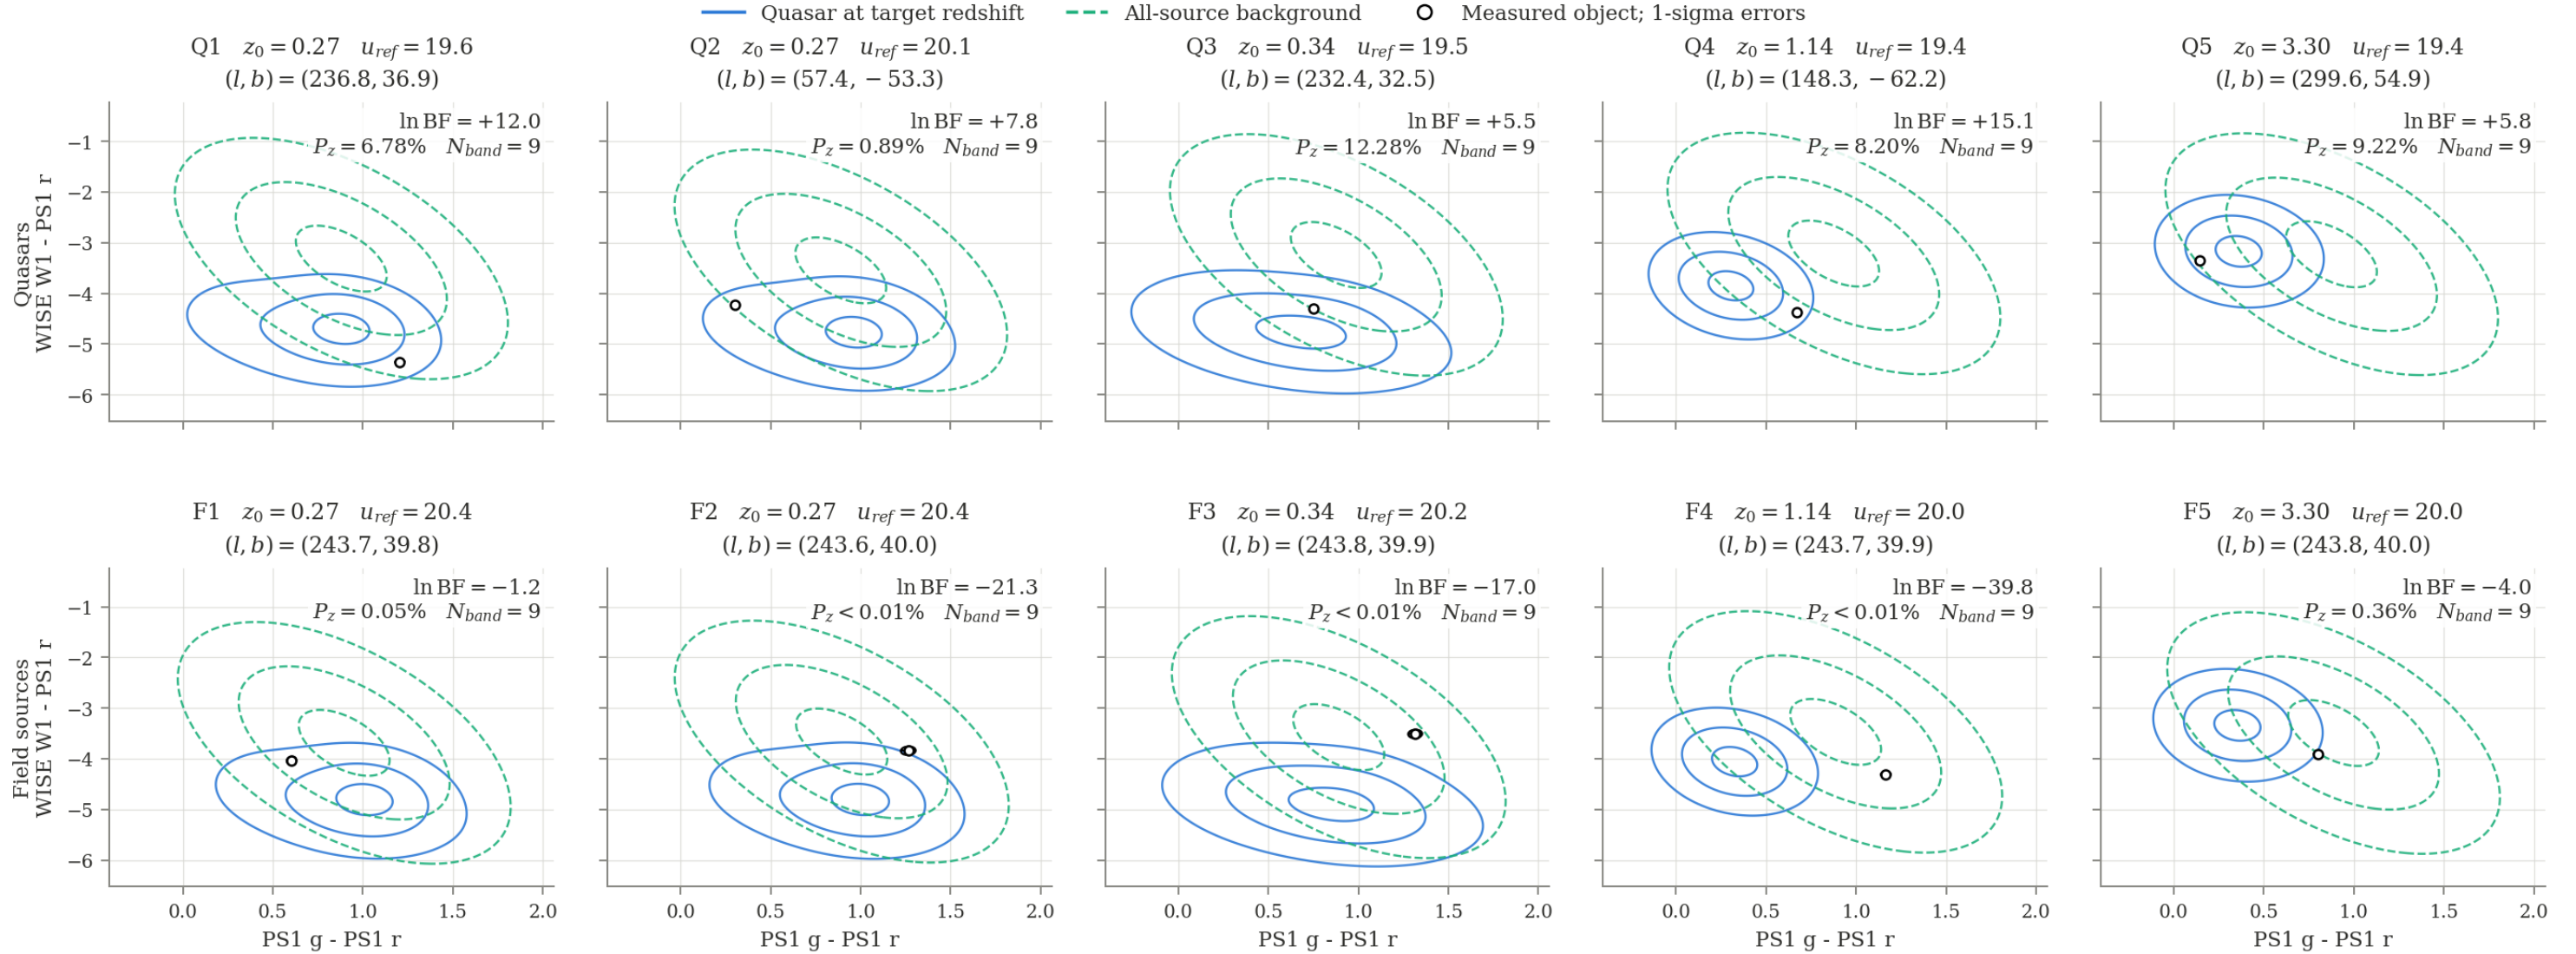


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

ALLWISE + VHS

The same five reserved quasars and five reserved field sources in every version

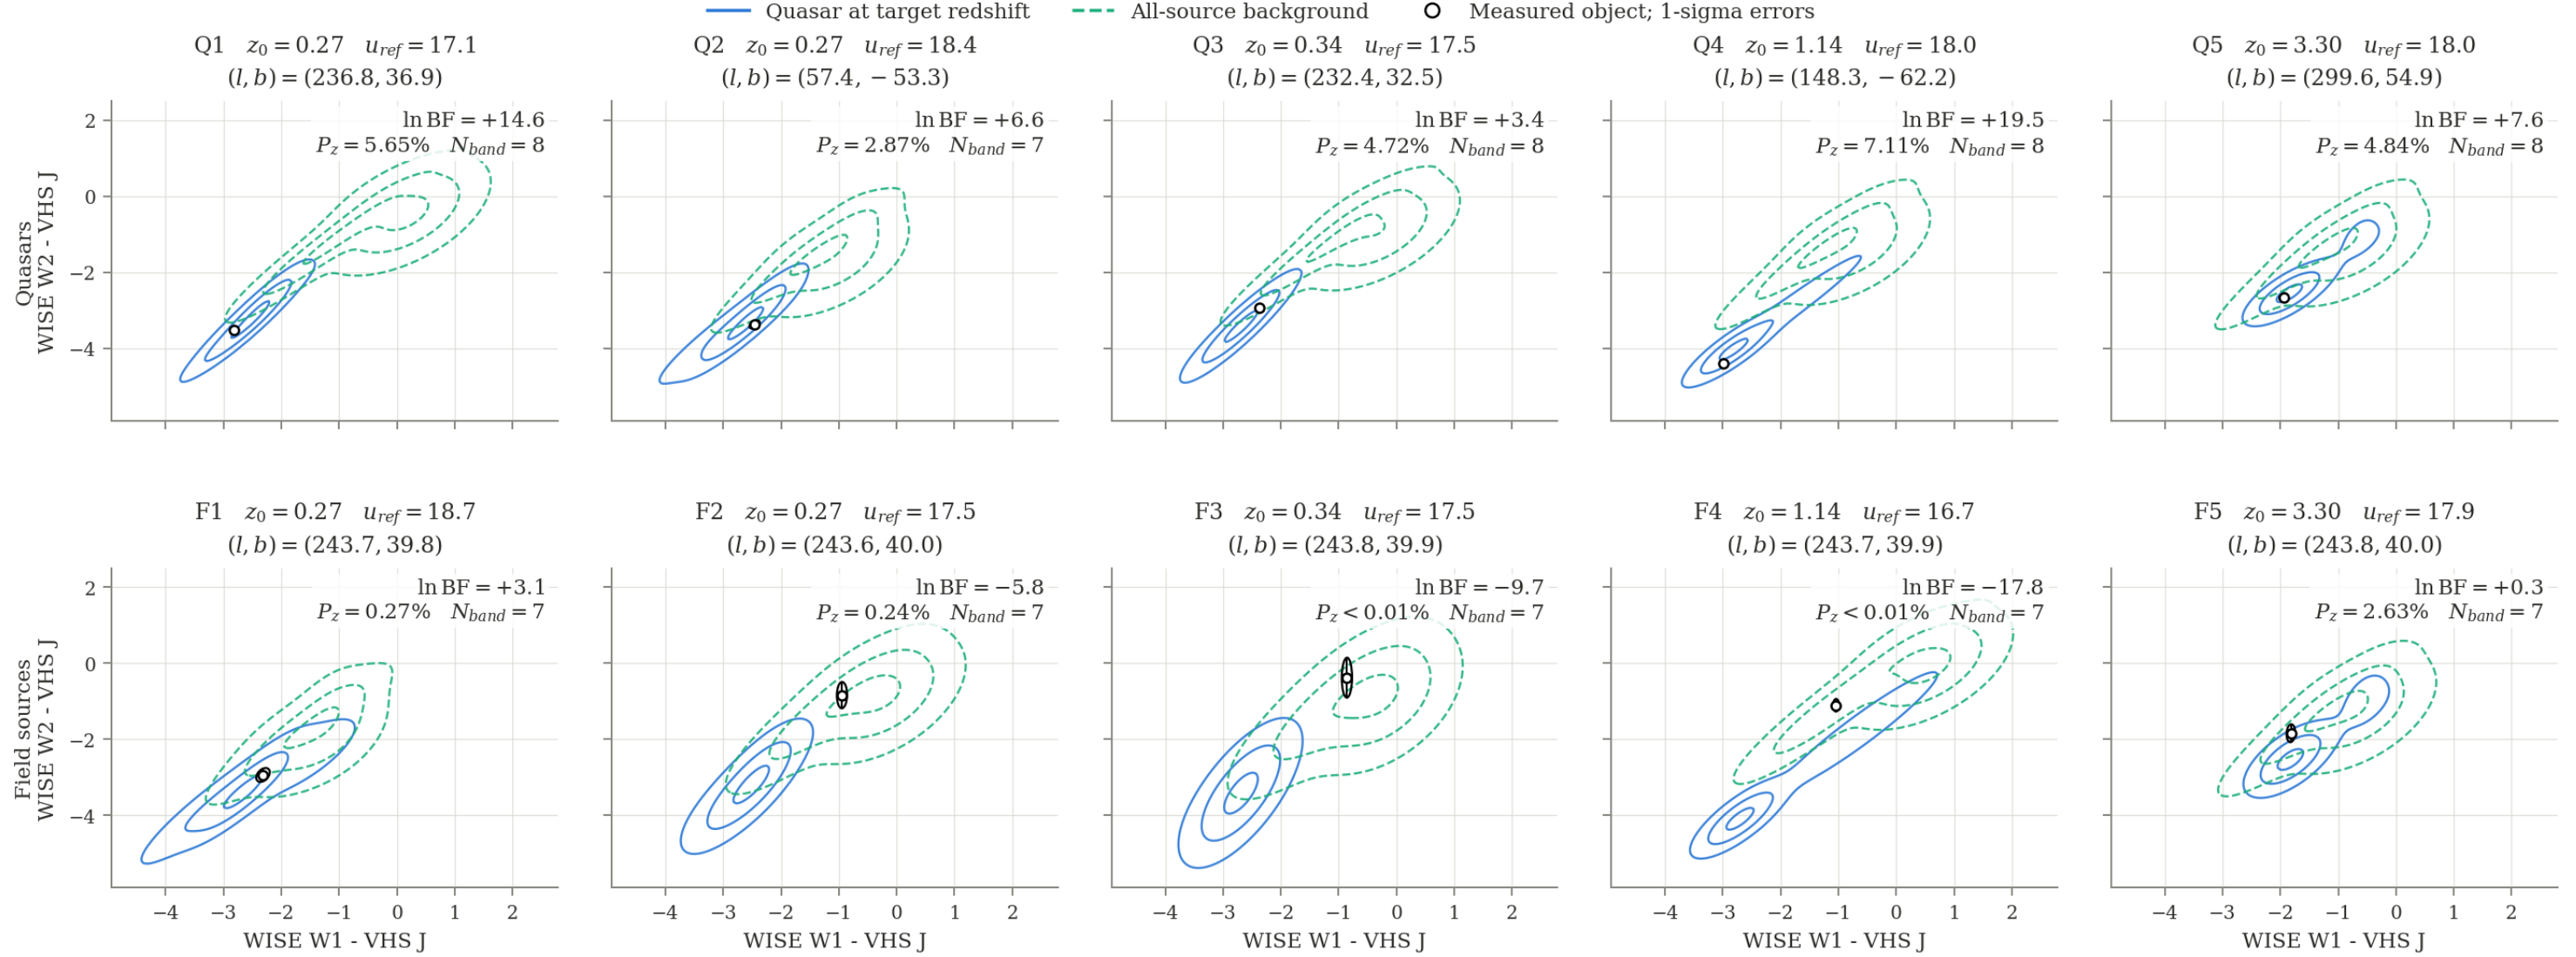


Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.

All seven surveys

The same five reserved quasars and five reserved field sources in every version

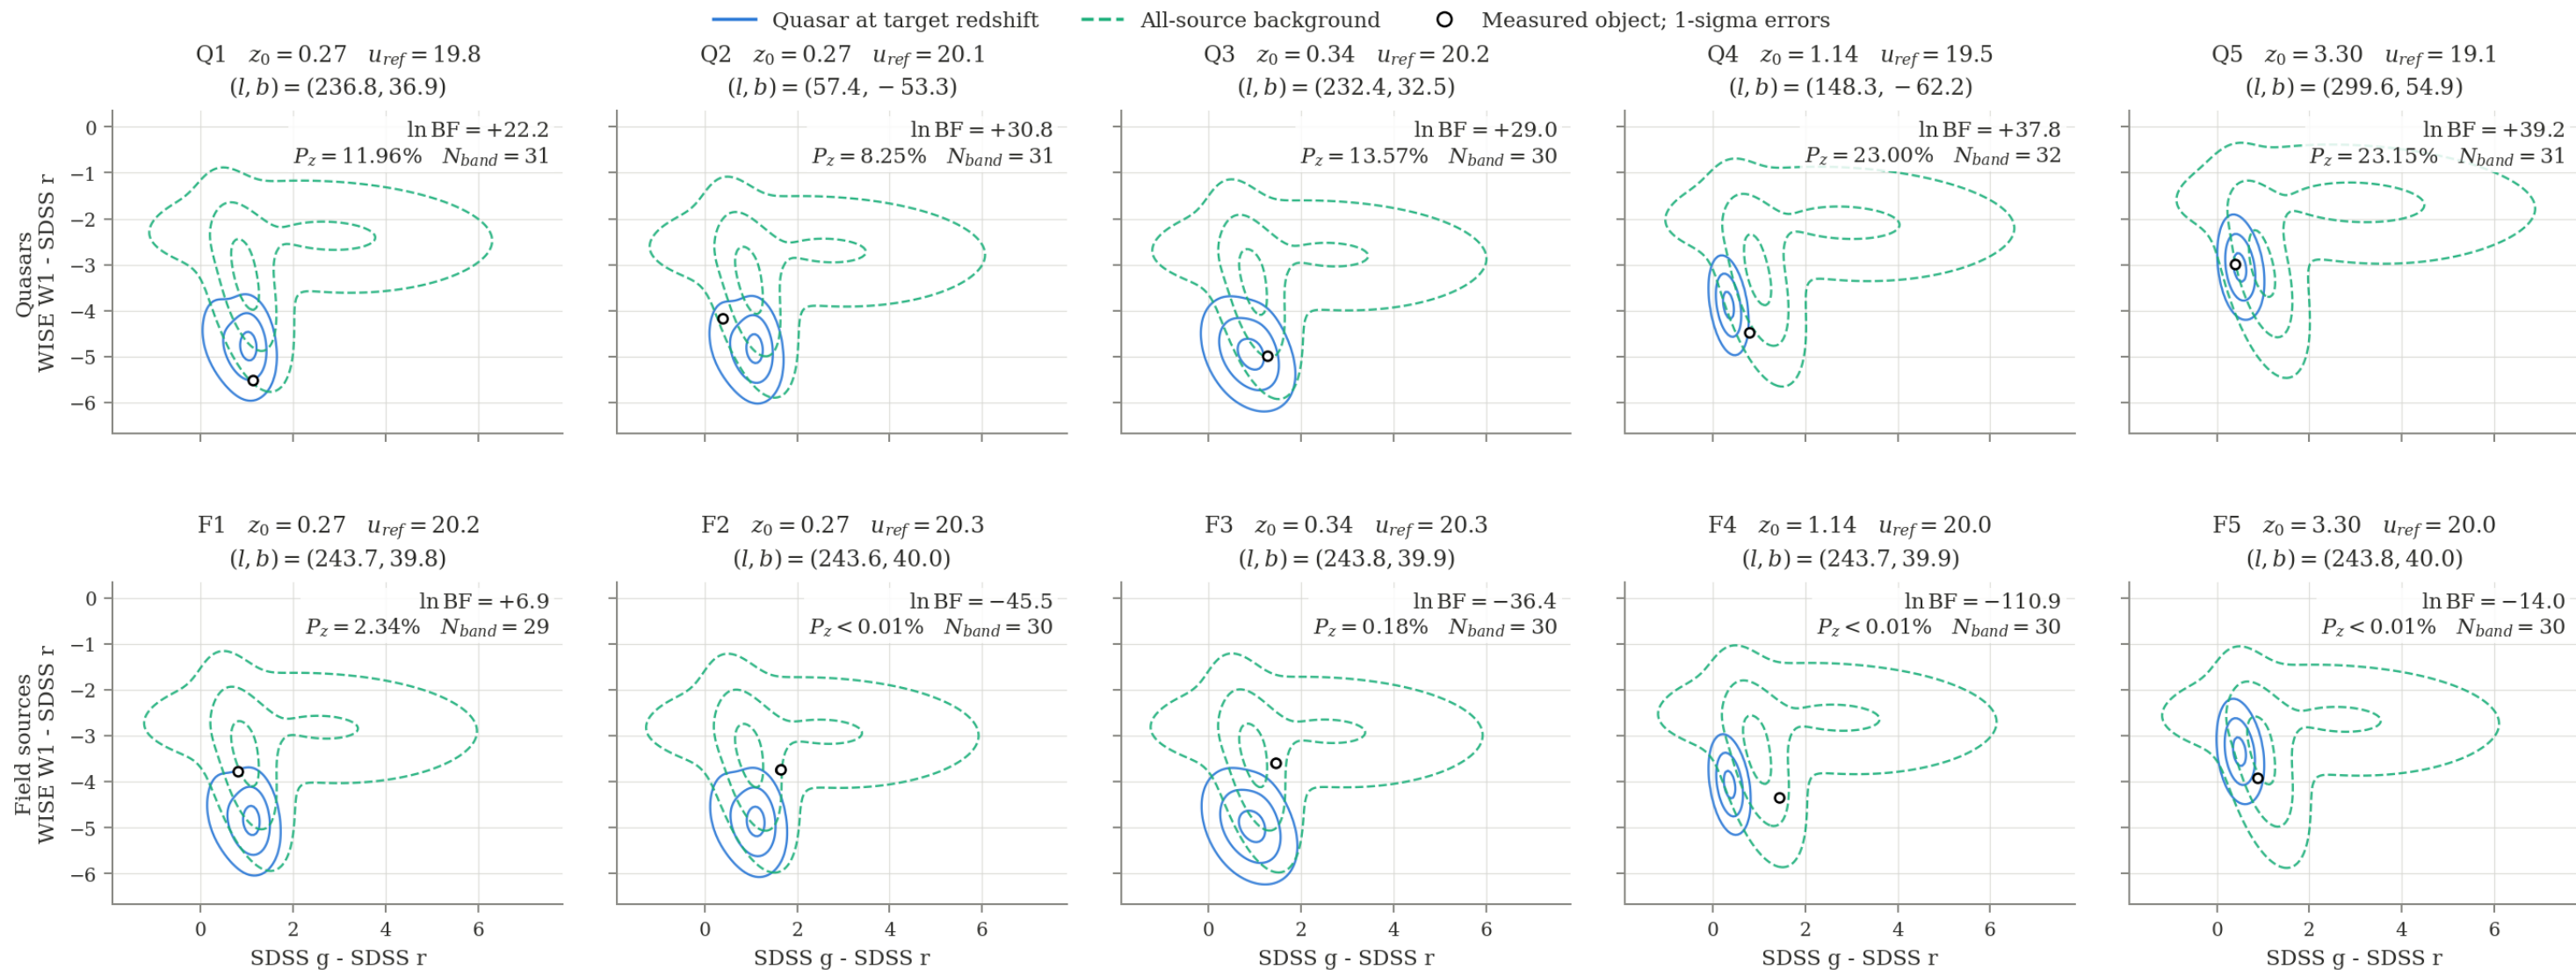

Axes: native-system luptitude colours (mag). Contours: two-colour marginals at 5%, 30%, 80% of peak; conditioned on the reference.

Scores use ALL available bands of the selected surveys. P_z : target-redshift probability conditional on being a quasar; flat redshift prior.

Window: +/-2000 km/s. Field objects share one overlap field and have no class labels. Population posterior unavailable.