

03 Linear modeling

Shravan Vasishth and Bruno Nicenboim

SMLP 2019

Linear modeling

Suppose y is a vector of continuous responses; assume for now that it is coming from a normal distribution:

$$y \sim \text{Normal}(\mu, \sigma)$$

This is the simple linear model:

$$y = \mu + \varepsilon \text{ where } \varepsilon \sim \text{Normal}(0, \sigma)$$

There are two parameters, μ, σ , so we need priors on these. We expand on this simple model next.

Linear modeling

Recall from the foundations lecture that the way we will conduct data analysis is as follows.

- Given data, specify a *likelihood function*.
- Specify *prior distributions* for model parameters.
- Evaluate whether model makes sense, using fake-data simulation, *prior predictive* and *posterior predictive* checks, and (if you want to claim a discovery) calibrating true and false discovery rates.
- Using software, derive *marginal posterior distributions* for parameters given likelihood function and prior density. I.e., simulate parameters to get *samples from posterior distributions* of parameters using some *Markov Chain Monte Carlo (MCMC) sampling algorithm*.
- Check that the model converged using *model convergence* diagnostics,
- Summarize *posterior distributions* of parameter samples and make your scientific decision.

We will now work through some specific examples to illustrate how the data analysis process works.

Example 1: A single subject pressing a button repeatedly

As a first example, we will fit a simple linear model to some reaction time data.

The data frame `df_spacebar` contains data of a subject pressing the space bar without reading in a self-paced reading experiment.

Load the data

Install the library `bcogsci`. See:

<https://github.com/bnicenboim/bcogsci>

Visualizing the data

It is a good idea to look at the distribution of the data before doing anything else. See Figure 1.

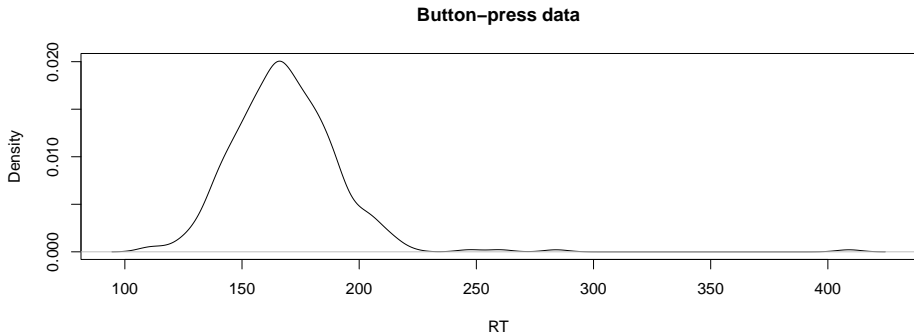


Figure 1: Visualizing the data.

The data looks a bit skewed, but we ignore this for the moment.

Define the likelihood function

Let's model the data with the following assumptions:

- There is a true underlying time, μ , that the participant needs to press the space-bar.
- There is some noise in this process.
- The noise is normally distributed (this assumption is questionable given the skew but; we fix this assumption later).

Define the likelihood function

This means that the likelihood for each observation n will be:

$$rt_n \sim \text{Normal}(\mu, \sigma) \quad (1)$$

where $n = 1 \dots N$.

This is just the simple linear model:

$$rt = \mu + \varepsilon \text{ where } \varepsilon \sim \text{Normal}(0, \sigma) \quad (2)$$

Define the priors for the parameters

We are going to use the following priors for the two parameters in this model:

$$\begin{aligned}\mu &\sim \text{Normal}(0, 2000) \\ \sigma &\sim \text{Normal}(0, 500) \text{ truncated so that } \sigma > 0\end{aligned}\tag{3}$$

Define the priors for the parameters

In order to decide on a prior for the parameters, always visualize them first. See Figure 2.





Figure 2: Visualizing the priors for example 1.

Prior predictive checks

With these priors, we are going to generate something called the **prior predictive distribution**. This helps us check whether the priors make sense.

Formally, we want to know the density $f(\cdot)$ of data points rt_1, \dots, n , given a vector of priors Θ . In our example, $\Theta = \langle \mu, \sigma \rangle$. The prior predictive density is:

$$f(rt_1, \dots, rt_n) = \int f(rt_1) \cdot f(rt_2) \cdots f(rt_n) f(\Theta) d\Theta \quad (4)$$

Prior predictive checks

In essence, we integrate out the parameters. Here is one way to do it in R:

- Take one sample from each of the priors
- Generate *nobs* data points using those samples

This would give us a matrix containing $\text{nsim} * \text{nobs}$ generated data. We can then plot the prior predictive densities generated.

Prior predictive checks

```
library(extraDistr) ## needed for half-normal distribution





##
## Attaching package: 'extraDistr'

## The following object is masked from 'package:purrr':
##
##      rdunif

## number of simulations
nsim<-1000
## number of observations generated each time:
nobs<-100
y<-matrix(rep(NA,nsim*nobs),ncol = nobs)
mu<-rnorm(nsim,mean=0,sd=2000)
## truncated normal, cut off at 0:
sigma<-rtnorm(nsim,mean=0,sd=500,a=0)

for(i in 1:nsim){
```

Prior predictive checks



Prior predictive checks

We can try to redefine the prior for μ to have only positive values, and then check again. We still get some negative values, but that is because we are assuming that





$$y \sim \text{Normal}(\mu, \sigma)$$

which will have negative values for small μ and large σ .

Prior predictive checks

```
y<-matrix(rep(NA,nsim*nobs),ncol = nobs)
mu<-rtnorm(nsim,mean=0,sd=2000,a=0)
for(i in 1:nsim){
  y[i,<-rnorm(nobs,mean=mu[i],sd=sigma[i])
}
```

Prior predictive checks



Prior predictive checks

We can generate a prior predictive distribution using Stan as follows.

First, we define a Stan model that defines the priors and defines how the data are to be generated.

Documentation on Stan is available at mc-stan.org.

Prior predictive checks

```
priorpred<-"data {  
  int N;  
}  
parameters {  
  real<lower=0> mu;  
  real<lower=0> sigma;  
}  
model {  
  mu ~ normal(0,2000);  
  sigma ~ normal(0,500);  
}  
generated quantities {  
  vector[N] y_sim;  
  for(i in 1:N) {  
    y_sim[i] = normal_rng(mu,sigma);  
  }}"
```

Prior predictive checks

Load RStan and brms.

```
## load rstan  
library(rstan)  
options(mc.cores = parallel::detectCores())  
library(brms)
```

Prior predictive checks

Then we generate the data:

```
## generate 100 data-points
dat<-list(N=100)

## fit model:
m1priorpred<-stan(model_code=priorpred,
                  data=dat,
                  chains = 4,
                  warmup = 1000,
                  iter = 2000)
```


Prior predictive checks

```
## extract and plot one of the data-sets:  
y_sim<-extract(m1priorpred, pars="y_sim")  
str(y_sim)
```

```
## List of 1  
## $ y_sim: num [1:4000, 1:100] 523 384 2703 499 1103 ...  
## ..- attr(*, "dimnames")=List of 2  
## .. ..$ iterations: NULL  
## .. ..$ : NULL
```

Prior predictive checks

```
hist(y_sim$y_sim[100,],  
     main="Prior predictive distribution",  
     xlab="y_sim", freq=FALSE)
```

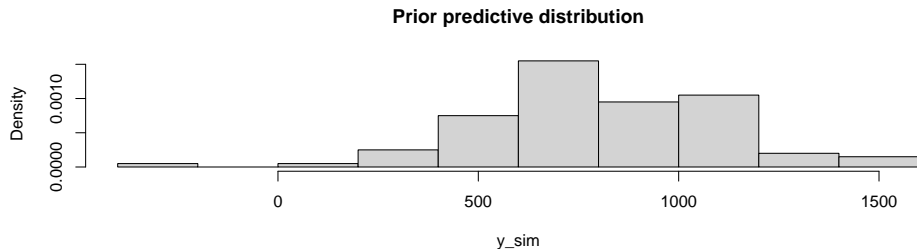

Prior predictive checks

Having satisfied ourselves that the priors mostly make sense, we now fit the model to fake data. The goal here is to ensure that the model recovers the true underlying parameters.

Fake-data simulation and modeling

Next, we write the Stan model, adding a likelihood in the model block:

Fake-data simulation and modeling

```
m1<-"data {  
  int N;  
  real y[N]; // data  
}  
parameters {  
  real<lower=0> mu;  
  real<lower=0> sigma;  
}  
model {  
  mu ~ normal(0,2000);  
  sigma ~ normal(0,500);  
  y ~ normal(mu,sigma);  
}  
generated quantities {  
  vector[N] y_sim;  
  for(i in 1:N) {  
    y_sim[i] = normal_rng(mu,sigma);  
  }  
}  
"
```

Fake-data simulation and modeling

Then generate fake data with known parameter values (we decide what these are):

```
set.seed(123)
N <- 500
true_mu <- 400
true_sigma <- 125
y <- rnorm(N, true_mu, true_sigma)

y <- round(y)
fake_data <- data.frame(y=y)
dat<-list(y=y,N=N)
```

Fake-data simulation and modeling

Finally, we fit the model:

```
## fit model:
m1rstan<-stan(model_code=m1,
              data=dat,
              chains = 4,
              iter = 2000)

## extract posteriors:
posteriors<-extract(m1rstan,pars=c("mu","sigma"))
```

Fake-data simulation and modeling

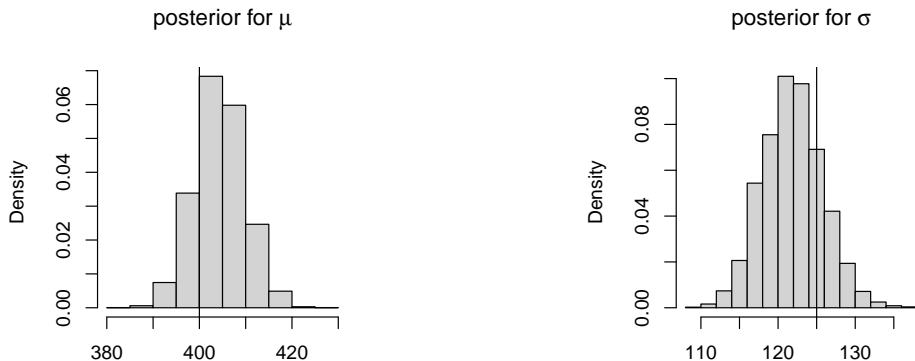


Figure 3: Posteriors from fake data, model m1. Vertical lines show the true values of the parameters.

Posterior predictive checks

Once we have the posterior distribution $f(\Theta | y)$, we can derive the predictions based on this posterior distribution:

$$p(y_{pred} | y) = \int p(y_{pred}, \Theta | y) d\Theta = \int p(y_{pred} | \Theta, y) p(\Theta | y) d\Theta \quad (5)$$

Posterior predictive checks

Assuming that past and future observations are conditionally independent given Θ , i.e., $p(y_{pred} | \Theta, y) = p(y_{pred} | \Theta)$, we can write:

$$p(y_{pred} | y) = \int p(y_{pred} | \Theta) p(\Theta | y) d\Theta \quad (6)$$

Note that we are conditioning y_{pred} only on y , we do not condition on what we don't know (Θ); **we integrate out the unknown parameters.**

Posterior predictive checks

This posterior predictive distribution is different from the frequentist approach, which gives only a predictive distribution of y_{pred} given our estimate of θ (a point value).

In the Stan code above, we have already generated the posterior predictive distribution, in the generated quantities block.

Implementing model in brms

This model is expressed in brms in the following way. First, define the priors:

```
priors <- c(set_prior("normal(0, 2000)",  
                    class = "Intercept"),  
            set_prior("normal(0, 500)",  
                    class = "sigma"))
```


Implementing model in brms

Then, define the generative process assumed:

```
m1brms<-brm(rt~1,df_spacebar,prior = priors,  
  iter = 2000,  
  warmup = 1000,  
  chains = 4,  
  family = gaussian(),  
  control = list(adapt_delta = 0.99))
```

Summarizing the posteriors, and convergence diagnostics

A graphical summary of posterior distributions of model m1 is shown in Figure 4:

```
## Warning: Method 'stanplot' is deprecated. Please use 'mcmc_
```

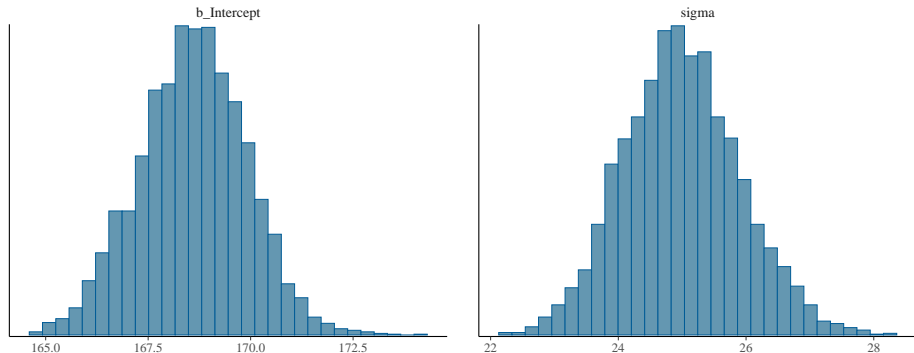


Figure 4: Posterior distributions of the parameters in model m1.

Summarizing the posteriors, and convergence diagnostics

The trace plots in Figure 5 show how well the four chains are mixing:

```
## Warning: Method 'stanplot' is deprecated. Please use 'mcmc'
```

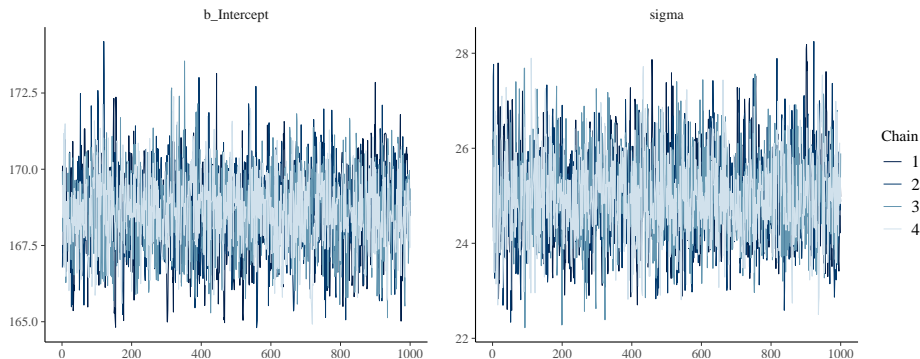


Figure 5: Trace plots in model m1.

Summarizing the posteriors, and convergence diagnostics

An alternative way to plot is shown in Figure 6.

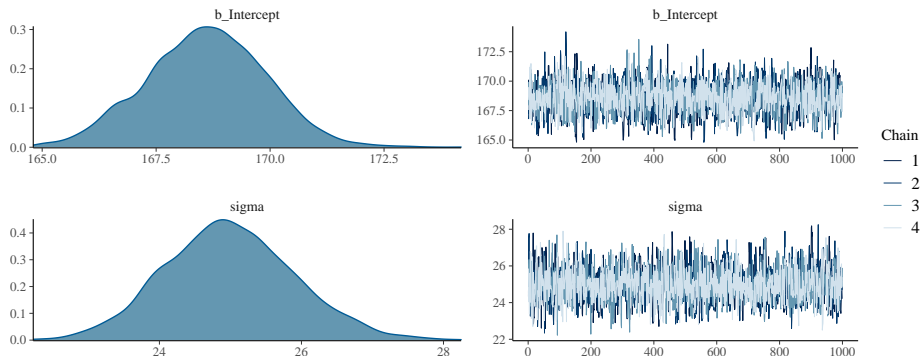


Figure 6: Posterior distributions and trace plots in model m1.

Fitting the brms model on fake data

```
m1_fakebrms<-brm(y~1,fake_data,prior = priors,  
  iter = 2000, chains = 4,family = gaussian(),  
  control = list(adapt_delta = 0.99))
```

Summarizing the posterior distribution: posterior probabilities and the credible interval

We are assuming that there's a true underlying time it takes to press the space bar, μ , and there is normally distributed noise with distribution $\text{Normal}(0, \sigma)$ that generates the different RTs. All this is encoded in our likelihood by assuming that RTs are distributed with an unknown true mean μ (and an unknown standard deviation σ).

Summarizing the posterior distribution: posterior probabilities and the credible interval

The objective of the Bayesian model is to learn about the plausible values of μ , or in other words, to get a distribution that encodes what we know about the true mean of the distribution of RTs, and about the true standard deviation, σ , of the distribution of RTs.

Summarizing the posterior distribution: posterior probabilities and the credible interval

Our model allows us to answer questions such as:

What is the probability that the underlying value of the mindless press of the space bar would be over, say 170 ms?

Summarizing the posterior distribution: posterior probabilities and the credible interval

As an example, consider this model that we ran above.

```
priors <- c(set_prior("normal(0, 2000)",  
                    class = "Intercept"),  
            set_prior("normal(0, 500)",  
                    class = "sigma"))  
  
m1brms<-brm(rt~1,df_spacebar,prior = priors,  
            iter = 2000,  
            warmup = 1000,  
            chains = 4,  
            family = gaussian(),  
            control = list(adapt_delta = 0.99))
```

Summarizing the posterior distribution: posterior probabilities and the credible interval

We now compute the posterior probability $Prob(\mu > 170)$:

```
mu_post<-posterior_samples(m1brms,  
                             variable=c("b_Intercept"))$b_Int  
  
## Warning: Method 'posterior_samples' is deprecated. Please s  
## recommended alternatives.  
  
mean(mu_post>170)  
  
## [1] 0.15325
```

Summarizing the posterior distribution: posterior probabilities and the credible interval

The credible interval

The 95% credible interval can be extracted for μ as follows:

```
posterior_interval(m1brms, variable = c("b_Intercept"))
```

```
##                2.5%      97.5%  
## b_Intercept 165.9521 171.3085
```

```
posterior_summary(m1brms, variable=c("b_Intercept"))
```

```
##           Estimate Est.Error      Q2.5      Q97.5  
## b_Intercept 168.6193   1.361652 165.9521 171.3085
```

This type of interval is also known as a *credible interval*.

A credible interval demarcates the range within which we can be certain with a certain probability that the “true value” of a parameter lies given the data and the model.

Summarizing the posterior distribution: posterior probabilities and the credible interval

The percentile interval is a type of credible interval (the most common one), where we assign equal probability mass to each tail.

We generally report 95% credible intervals. But we can extract any interval, a 73% interval, for example, leaves 13.5% of the probability mass on each tail, and we can calculate it like this:

```
round(quantile(mu_post,prob=c(0.135,0.865)))
```

```
## 13.5% 86.5%
```

```
##    167    170
```

Influence of priors and sensitivity analysis

$$\begin{aligned}\mu &\sim \text{Uniform}(0, 5000) \\ \sigma &\sim \text{Uniform}(0, 500)\end{aligned}\tag{7}$$

```
priors <- c(set_prior("uniform(0, 5000)",  
                    class = "Intercept"),  
            set_prior("normal(0, 500)",  
                    class = "sigma"))
```

Influence of priors and sensitivity analysis

```
m2<-brm(rt~1,df_spacebar,prior = priors,  
        iter = 2000, chains = 4,family = gaussian(),  
        control = list(adapt_delta = 0.99))
```

Influence of priors and sensitivity analysis

```
summary(m2)
```

```
## Family: gaussian
## Links: mu = identity; sigma = identity
## Formula: rt ~ 1
## Data: df_spacebar (Number of observations: 361)
## Draws: 4 chains, each with iter = 2000; warmup = 1000; thin = 1;
## total post-warmup draws = 4000
##
## Population-Level Effects:
##      Estimate Est.Error l-95% CI u-95% CI Rhat Bulk_ESS Tail_ESS
## Intercept  168.62      1.28  166.14  171.19 1.00    2410    2224
##
## Family Specific Parameters:
##      Estimate Est.Error l-95% CI u-95% CI Rhat Bulk_ESS Tail_ESS
## sigma    25.01      0.95   23.23   26.98 1.00    2179    1909
##
## Draws were sampled using sampling(NUTS). For each parameter, Bulk_ESS
## and Tail_ESS are effective sample size measures, and Rhat is the potential
## scale reduction factor on split chains (at convergence, Rhat = 1).
```

Influence of priors and sensitivity analysis

In general, we don't want our priors to have too much influence on our posterior.

This is unless we have *very* good reasons for having informative priors, such as a very small sample and/or a lot of prior information; an example would be if we have data from an impaired population, which makes it hard to increase our sample size.

Influence of priors and sensitivity analysis

We usually center the priors on 0 and we let the likelihood dominate in determining the posterior.

This type of prior is sometimes called a *weakly informative prior*. Notice that a uniform prior is not a weakly informative prior, it assumes that every value is equally likely, zero is as likely as 5000.

You should always do a *sensitivity analysis* to check how influential the prior is: try different priors and verify that the posterior doesn't change drastically.

Example 2: Investigating adaptation effects

More realistically, we might have run the small experiment to find out whether the participant tended to speedup (practice effect) or slowdown (fatigue effect) while pressing the space bar.

Example 2: Investigating adaptation effects

Preprocessing the data

- We need to have data about the number of times the space bar was pressed for each observation, and add it to our list.
- It's a good idea to center the number of presses (a covariate) to have a clearer interpretation of the intercept.
- In general, centering predictors is always a good idea, for interpretability and for computational reasons.
- See Schad et al. (2019) for details on this point.

Example 2: Investigating adaptation effects

Preprocessing the data

```
df_spacebar <- df_spacebar %>%  
  mutate(c_trial = trial - mean(trial))
```

Example 2: Investigating adaptation effects

Probability model

Our model changes, because we have a new parameter.

$$rt_n \sim \text{LogNormal}(\alpha + c_trial_n \cdot \beta, \sigma) \quad (8)$$

where $n = 1 \dots N$.

We are going to use the following priors:

$$\alpha \sim \text{Normal}(0, 2000)$$

$$\beta \sim \text{Normal}(0, 500) \quad (9)$$

$$\sigma \sim \text{Normal}(0, 500) \text{ truncated so that } \sigma > 0$$

Example 2: Investigating adaptation effects

Probability model

We are basically fitting a linear model, α represents the intercept (namely, the grand mean of the RTs), and β represents the slope.

What information are the priors encoding?

Do the priors make sense?

Example 2: Investigating adaptation effects

Probability model

We'll write this in brms as follows.

```
priors <- c(set_prior("normal(0, 2000)",  
                    class = "Intercept"),  
            set_prior("normal(0, 500)",  
                    class = "b",  
                    coef="c_trial"),  
            set_prior("normal(0, 500)",  
                    class = "sigma"))
```

Example 2: Investigating adaptation effects


Probability model

```
m2<-brm(rt~1+c_trial,df_spacebar,  
        prior = priors,  
        iter = 2000, chains = 4,family = gaussian(),  
        control = list(adapt_delta = 0.99))  
  
## Compiling Stan program...  
## Start sampling
```


Example 2: Investigating adaptation effects

Posteriors

Warning: Method 'stanplot' is deprecated. Please use 'mcmc

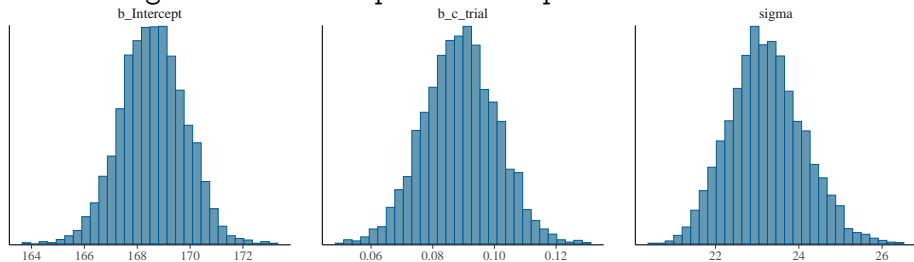

Example 2: Investigating adaptation effects

Summarizing the posterior and inference

We'll need to examine what happens with β . The summary gives us the relevant information:

Example 2: Investigating adaptation effects

Summarizing the posterior and inference

```
m2_post_samp_b <- posterior_samples(m2, "^b")
```

```
## Warning: Method 'posterior_samples' is deprecated. Please see  
## recommended alternatives.
```

```
str(m2_post_samp_b)
```

```
## 'data.frame':    4000 obs. of  2 variables:
```

```
## $ b_Intercept: num  167 167 168 169 170 ...
```

```
## $ b_c_trial   : num  0.0937 0.1056 0.1057 0.0686 0.1139 ...
```

```
beta_samples <- m2_post_samp_b$b_c_trial
```

```
beta_mean <- mean(beta_samples)
```

```
quantiles_beta <- quantile(beta_samples,  
                             prob=c(0.025,0.975))
```

```
beta_low <- quantiles_beta[1]
```

```
beta_high <- quantiles_beta[2]
```

Example 2: Investigating adaptation effects

Summarizing the posterior and inference

We'll need to examine what happens with β . The summary gives us the relevant information:

```
m2_post_samp_b2 <- posterior_summary(m2, "^b")
```

```
## Warning: Argument 'pars' is deprecated. Please use 'variables'
```

```
round(m2_post_samp_b2, 2)
```

##	Estimate	Est.Error	Q2.5	Q97.5
## b_Intercept	168.59	1.21	166.16	170.87
## b_c_trial	0.09	0.01	0.07	0.11

Example 2: Investigating adaptation effects

Posterior predictive checks

Let's say we know that our model is working as expected, since we already used fake data to test the recovery of the parameters.

Example 2: Investigating adaptation effects

Posterior predictive checks

To do posterior predictive checks for our last example, using `brms`, we need to do:

```
## Warning: Argument 'nsamples' is deprecated. Please use argument 'nsim' instead.
```

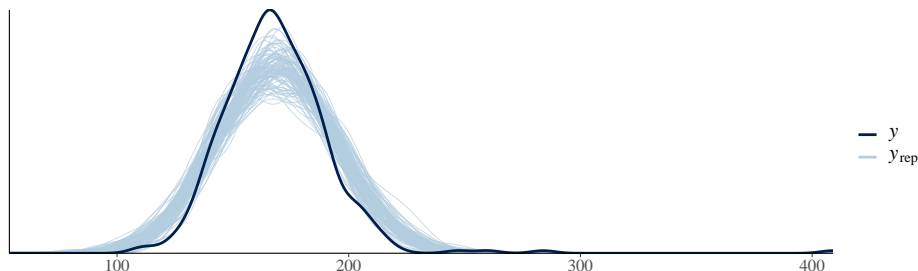


Figure 7: Posterior predictive check of model m2.

Example 2: Investigating adaptation effects

Using the log-normal likelihood

Log-normal distribution

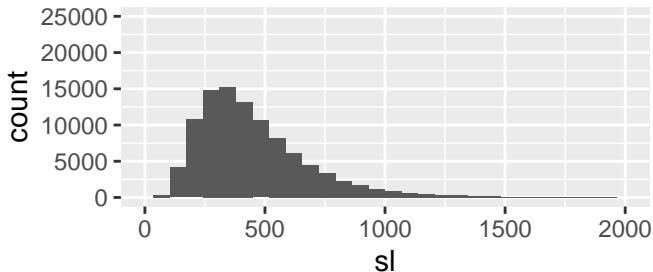


Figure 8: The log-normal distribution.

Example 2: Investigating adaptation effects

Using the log-normal likelihood

Exponentiated samples of
a normal distribution

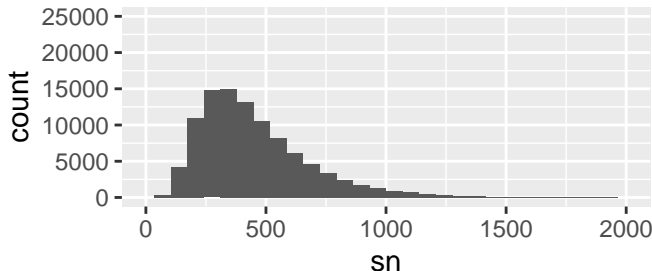


Figure 9: Exponentiated samples from a log-normal distribution.

Example 2: Investigating adaptation effects

Re-fit the model assuming a log-normal likelihood

If we assume that RTs are log-normally distributed, we'll need to change our model:

$$RT_i \sim \text{LogNormal}(\alpha + \text{presses}_i \cdot \beta, \sigma) \quad (10)$$

where $n = 1 \dots N$

But now the scale of our priors needs to change! They are no longer in milliseconds.

$$\begin{aligned} \alpha &\sim \text{Normal}(0, 10) \\ \beta &\sim \text{Normal}(0, 1) \\ \sigma &\sim \text{Normal}(0, 2) \text{ truncated so that } \sigma > 0 \end{aligned} \quad (11)$$

Example 2: Investigating adaptation effects

Re-fit the model assuming a log-normal likelihood

```
priors_log <- c(set_prior("normal(0, 10)",  
                        class = "Intercept"),  
               set_prior("normal(0, 1)",  
                        class = "b",  
                        coef="c_trial"),  
               set_prior("normal(0, 2)",  
                        class = "sigma"))  
  
m2_logn<-brm(rt~1+ c_trial,df_spacebar,  
             prior = priors_log,  
             iter = 2000, chains = 4,family = lognormal(),  
             control = list(adapt_delta = 0.99,  
                           max_treedepth=15))  
  
## Compiling Stan program...  
## Start sampling
```

Example 2: Investigating adaptation effects

Summarizing the posterior and inference

Next, we turn to the question of what we can report as our results, and what we can conclude from the data.

- We can summarize the posterior and do inference as discussed in Example 1.
- If we want to talk about the effect estimated by the model, we summarize the posterior of β in the following way:
- $\hat{\beta} = 0.0874295$, 95% CrI = $[0.0670383, 0.1084813]$, $P(\beta > 0) \approx 1$

Example 2: Investigating adaptation effects

Posterior predictive checks and distribution of summary statistics

We can now verify whether our predicted datasets look more similar to the real dataset. See Figure 10.

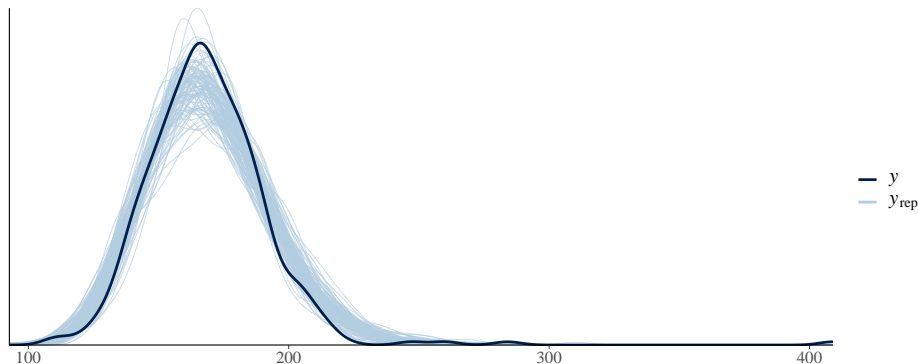


Figure 10: Posterior predictive check.

Example 2: Investigating adaptation effects

Posterior predictive checks and distribution of summary statistics

```
m2_logn<-brm(rt~1+c_trial,df_spacebar,  
             prior = priors_log,  
             iter = 2000, chains = 4,  
             family = lognormal(),  
             control = list(adapt_delta = 0.99,  
                             max_treedepth=15))
```

General workflow

This is the general workflow that we suggest for a Bayesian model.

- ① Define the full probability model:
 - a. Decide on the likelihood.
 - b. Decide on the priors.
 - c. Write the brms or Stan model.
- ② Do prior predictive checks to determine if priors make sense.
- ③ Check model using fake data simulations:
 - a. Simulate data with known values for the parameters.
 - b. Fit the model and do MCMC diagnostics.
 - c. Verify that it recovers the parameters from simulated data.
- ④ Fit the model with real data and do MCMC diagnostics.
- ⑤ Evaluate the model's fit (e.g., posterior predictive checks, distribution of summary statistics). This may send you back to 1.
- ⑥ Inference/prediction/decisions.
- ⑦ Conduct model comparison if there's an alternative model (to be discussed later).

Related reading: Schad, Betancourt, and Vasishth (2020).

References

- Schad, Daniel J., Michael Betancourt, and Shravan Vasishth. 2020. "Toward a Principled Bayesian Workflow in Cognitive Science." *Psychological Methods* 26 (1): 103–26.
<https://doi.org/https://doi.org/10.1037/met0000275>.
- Schad, Daniel J., Sven Hohenstein, Shravan Vasishth, and Reinhold Kliegl. 2019. "How to Capitalize on a Priori Contrasts in Linear (Mixed) Models: A Tutorial." *Journal of Memory and Language*.