


```
query_columns< ::ebi  
::vcf::Error, id_sqlite,  
A::base_traits >
```

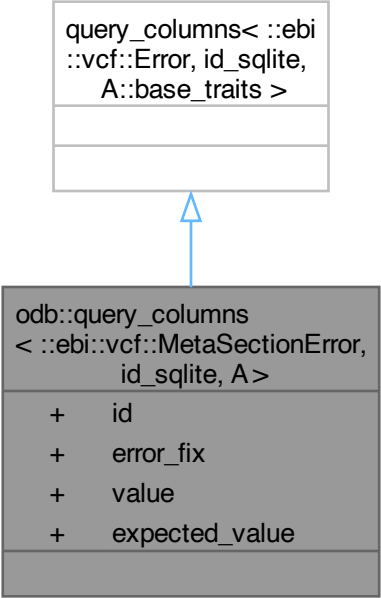

The diagram illustrates an inheritance relationship. A blue arrow points from the `odb::query_columns` struct (bottom box) to the `query_columns` struct (top box). The top box is white with a grey border, and the bottom box is grey with a grey border. The bottom box contains the `odb::query_columns` definition, which includes a list of fields: `id`, `error_fix`, `value`, and `expected_value`.

```
odb::query_columns  
< ::ebi::vcf::MetaSectionError,  
id_sqlite, A>
```

```
+ id  
+ error_fix  
+ value  
+ expected_value
```