

Name: Vatsa Nagaria

UID: 2019130041

TE COMPS

Batch C

Date: 29/11/21

## Experiment 7

**Aim:** To design and implement an expert system, incorporating the match algorithm and the rule language.

### Problem statement:

Read the below passage carefully and answer the questions:

Five cities all got more rain than usual this year. The five cities are Last Stand, Mile City, New Town, Olliopolis, and Polberg. The cities are located in five different areas of the country: the mountains, the forest, the coast, the desert, and in a valley.

The rainfall amounts were: 12 inches, 27 inches, 32 inches, 44 inches, and 65 inches.

- \* The city in the desert got the least rain; the city in the forest got the most rain.

- \* New Town is in the mountains.

- \* Last Stand got more rain than Olliopolis.

- \* Mile City got more rain than Polberg, but less rain than New Town.

- \* Olliopolis got 44 inches of rain.

- \* The city in the mountains got 32 inches of rain; the city on the coast got 27 inches of rain.

1. Which city got the most rain?

2. How much rain did Mile City get?

3. Which city is in the desert?

4. Where is Olliopolis located?

### Code:

```
city(C) :-  
    length(C,5),  
    % CITY NAMES  
    member(h('Last Stand',_,_),C),  
    member(h('Mile City',_,_),C),  
    member(h('New Town',_,_),C),  
    member(h('Olliopolis',_,_),C),  
    member(h('Polberg',_,_),C),  
  
    % CITY REGIONS
```

```
member(h(_, 'mountains', _), C),
member(h(_, 'forest', _), C),
member(h(_, 'coast', _), C),
member(h(_, 'desert', _), C),
member(h(_, 'valley', _), C),
```

```
% RAINFALL AMOUNTS
```

```
member(h(_, _, 12), C),
member(h(_, _, 27), C),
member(h(_, _, 32), C),
member(h(_, _, 44), C),
member(h(_, _, 65), C),
```

```
% FACTS
```

```
% The city in the desert got the least rain;
% the city in the forest got the most rain.
member(h(_, 'desert', 12), C),
```

```
% New Town is in the mountains.
member(h('New Town', 'mountains', _), C),
```

```
% Last Stand got more rain than Olliopolis.
member(h('Last Stand', _, A), C),
member(h('Olliopolis', _, B), C),
A > B,
```

```
% Mile City got more rain than Polberg,
% but less rain than New Town.
member(h('Mile City', _, D), C),
member(h('Polberg', _, E), C),
member(h('New Town', _, F), C),
D > E,
D < F,
```

```
% Olliopolis got 44 inches of rain.
member(h('Olliopolis', _, 44), C),
```


```
% The city in the mountains got 32 inches of rain;
% the city on the coast got 27 inches of rain.
member(h(_, 'mountains', 32), C),
member(h(_, 'coast', 27), C).
```

```
get_city_rain(City, Rainfall):-
```

```
city(C),
member(h(City, _, Rainfall), C),
write(City), write(" has received "), write(Rainfall), write(" inches"), nl.
```

```
get_city_region(City, Region):-  
    city(C),  
    member(h(City,Region,_),C),  
    write(City),write(" is in "),write(Region),write(" region"),nl.
```

### Output:

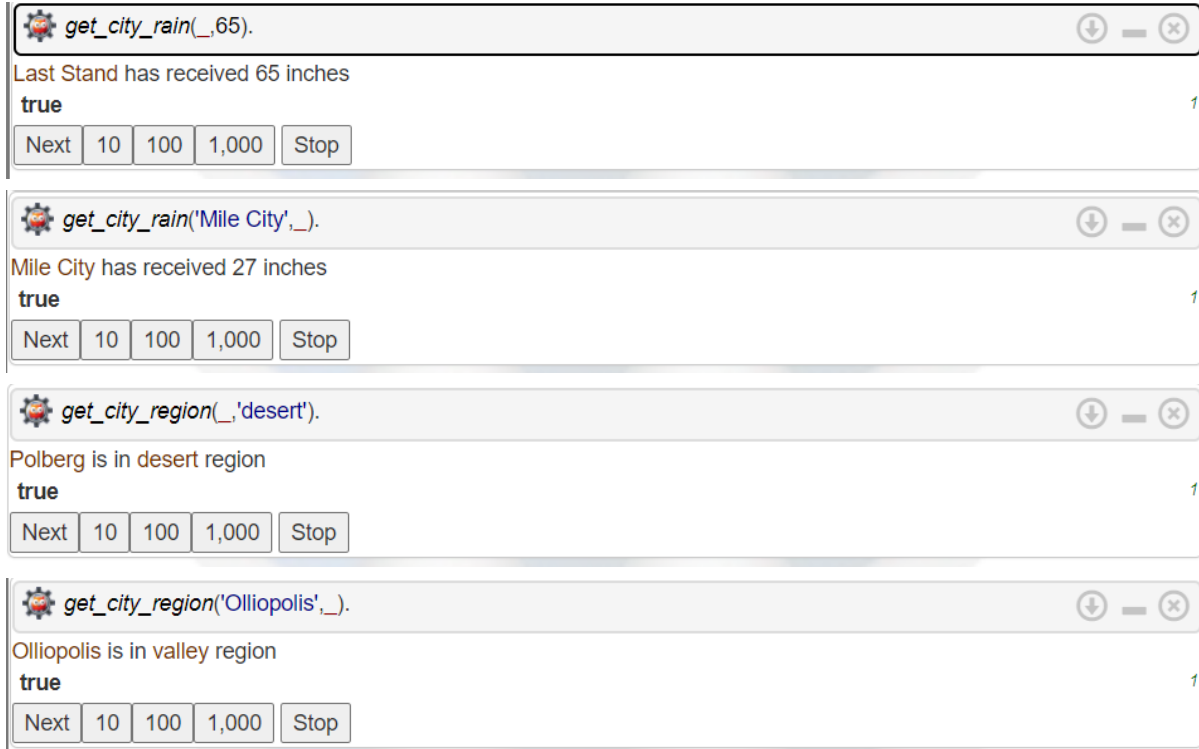

The image displays four sequential screenshots of a Prolog interpreter window, each showing the execution of a query. The window has a title bar with a gear icon and standard window controls. The queries and their outputs are as follows:

- Query 1:** `get_city_rain(_,65).`  
Output: Last Stand has received 65 inches  
`true`  
Buttons: Next, 10, 100, 1,000, Stop
- Query 2:** `get_city_rain("Mile City",_).`  
Output: Mile City has received 27 inches  
`true`  
Buttons: Next, 10, 100, 1,000, Stop
- Query 3:** `get_city_region(_, 'desert').`  
Output: Polberg is in desert region  
`true`  
Buttons: Next, 10, 100, 1,000, Stop
- Query 4:** `get_city_region("Olliopolis",_).`  
Output: Olliopolis is in valley region  
`true`  
Buttons: Next, 10, 100, 1,000, Stop

Swish link: [https://swish.swi-prolog.org/p/aiml\\_exp7.pl](https://swish.swi-prolog.org/p/aiml_exp7.pl)

GitHub: <https://github.com/vatsa1101/AIML>