



INTERVIEW

10 Important Paytm Coding Interview Questions

By Archana

Oct 03, 2024 | 14 Min Read | 3800 Views

(Last Updated)



If you are in a rush to crack that Paytm coding Interview Questions round then here is a short pocketbook that you should go through. Make sure you practice all the 10 coding questions in here, (and study the related ones) because these are the most asked Paytm coding interview questions, say the interviewees!

Table of contents

1. Top 10 Paytm Coding Interview Questions

- Given an integer number, convert it to a roman numeral.
- Given a string s, reverse the order of words.
- Sort an array of 0s, 1s and 2s
- Convert a Binary Tree into its Mirror Tree
- Remove duplicates from an unsorted linked list
- Write a function to get the Nth node in a Linked List
- Delete a node in a Doubly Linked List

Top 10 Paytm Coding Interview Questions

Coding comes in handy when you practise it several times. And one coding question can solve multiple related queries on the go. So do practise as many coding questions as you can!

<https://giphy.com/gifs/life-interesting-footage-ZVik7pBtu9dNS>

Paytm coding interview questions

Before diving into the next section, ensure you're solid on full-stack development essentials like front-end frameworks, back-end technologies, and database management. If you are looking for a detailed Full Stack Development career program, you can join GUVI's [Full Stack Development Course](#) with placement assistance. You will be able to master the MERN stack (MongoDB, Express.js, React, Node.js) and build real-life projects.

Additionally, if you would like to explore JavaScript through a self-paced course, try GUVI's [JavaScript certification course](#).

1. Given an integer number, convert it to a roman numeral.

Answer: A combination of some symbols represent Roman numerals.

Value	Symbol
1	I
5	V
10	X
50	L
100	C
500	D
1000	M
Integers & their roman numerals	

Sample Input:

num: 10

Expected output:

"X"

Code: IntegerToRoman.java

```
public class IntegerToRoman
{
    //method to convert integer to roman
    //function that converts an integer to roman
    public static String intToRoman(int number)
    {
        //creating an array of place values
        String[] thousands = {"", "M", "MM", "MMM"};
```

```
String[] hundreds = {"", "C", "CC", "CCC", "CD", "D", "DC", "DC  
C", "DCCC", "CM"};
```

```
String[] tens = {"", "X", "XX", "XXX", "XL", "L", "LX", "LXX", "LXXX  
", "XC"};
```

```
String[] units = {"", "I", "II", "III", "IV", "V", "VI", "VII", "VIII", "IX"};
```

```
return thousands[number / 1000] + hundreds[(number % 1  
000) / 100] + tens[(number % 100) / 10] + units[number % 1  
0];
```

```
}
```

```
public static void main(String args[])
```

```
{
```

```
//creating an array of integers to be  
converted into roman
```

```
int[] numbers = {13, 21, 38, 50, 190, 141, 117, 120, 125, 138, 149,  
6, 712, 181, 197, 918, 199, 1100, 1101, 1248, 1253};
```

```
for (int number: numbers)
```

```
{
```

```
System.out.printf("%4d -  
> %8s\n", number, intToRoman(number));
```

```
}
```

```
}
```

```
}
```

Output:

13	->	XIII
21	->	XXI
38	->	XXXVIII
50	->	L
190	->	CXC
141	->	CXLI
117	->	CXVII
120	->	CXX
125	->	CXXV
138	->	CXXXVIII
149	->	CXLIX
6	->	VI
712	->	DCCXII
181	->	CLXXXI
197	->	CXCVII
918	->	CMXVIII
199	->	CXCIX
1100	->	MC
1101	->	MCI
1248	->	MCCXLVIII
1253	->	MCCLIII

Paytm coding interview questions

Elevate Your Career Zen Class
Courses with Placement Guidance

[Learn More](#)



2. Given a string s, reverse the order of words.

Sample Input

```
life is beautiful
enjoy it
live upto it
```

Expected Output

```
beautiful is life
it enjoy
it upto live
```

Code:

```
class Solution {
    String reverseWords(String s) {
        int numOfWords = 1;
        for (int i = 0; i < s.length(); i++) {
```

```

        if(s.charAt(i) == ' ') {
            numOfWords++;
        }
    }
    String[] allWords = new String[numOfWords];
    String currentWord = "";
    int index = 0;
    for(int i = 0; i < s.length(); i++) {
        if(s.charAt(i) == ' ') {
            allWords[index++] = currentWord;
            currentWord = "";
        } else {
            currentWord += s.charAt(i);
        }
    }
    allWords[index++] = currentWord;
    String ans = "";
    for(int i = index - 1; i > 0; i--) {
        ans += allWords[i];
        ans += ' ';
    }
    ans += allWords[0];
    return ans;
}
}

```

3. Sort an array of 0s, 1s and 2s


Sample Input:

{0, 1, 2, 0, 1, 2}

Output:

{0, 0, 1, 1, 2, 2}

Sort an array of **0s**, **1s**, and **2s**

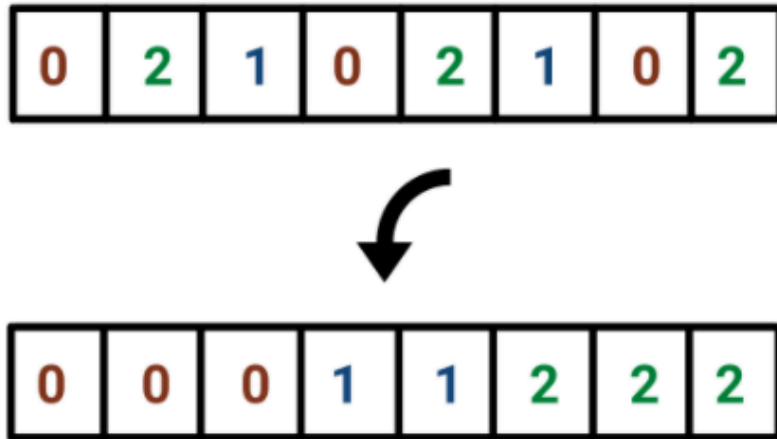

Paytm coding interview questions

Code:

```
import java.io.*;

classcountzot{

    // Sort the input array, the array is assumed to
    // have values in {0, 1, 2}

    static void sort 012(inta[], intarr_size){

        intlo = 0;

        inthi = arr_size - 1;

        intmid = 0, temp = 0;

        // Iterate till all the elements are sorted

        while(mid <= hi) {

            switch(a[mid]) {

                // If the element is 0

                case0: {
```

```

        temp = a[lo];

        a[lo] = a[mid];

        a[mid] = temp;

        lo++;

        mid++;

        break;
    }

    // If the element is 1

case1:

    mid++;

    break;

    // If the element is 2

case2: {

    temp = a[mid];

    a[mid] = a[hi];

    a[hi] = temp;

    hi--;

    break;

}

}

}

}

/* Utility function to print array arr[] */

static void print Array(intarr[], intarr_size){

    inti;

```

```

        for(i = 0; i < arr_size; i++)

            System.out.print(arr[i] + " ");

        System.out.println("");

    }

    /*Driver function to check for above functions*/

    public static void main(String[] args){

        intarr[] = { 0, 1, 1, 0, 1, 2, 1, 2, 0, 0, 0, 1};

        intarr_size = arr.length;

        sort012(arr, arr_size);

        printArray(arr, arr_size);

    }

}


```

Practise more Paytm coding interview questions: [Placement Preparation with GUVI](#)



Paytm coding interview questions

4. Convert a Binary Tree into its Mirror Tree

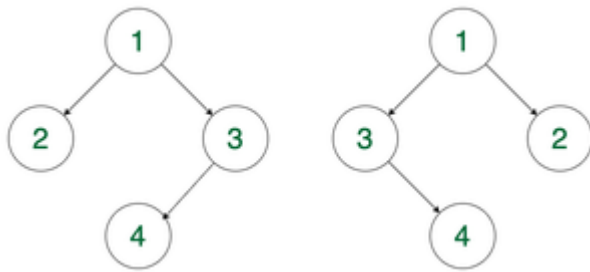

Binary tree & its Mirror tree- Paytm coding interview questions

Code:

```

/* Class containing left and right child of current node and
key value*/

classNode {
intdata;
Node left, right;
publicNode(intitem)
{
data = item;
left = right = null;
}
}

classBinaryTree {
Node root;
voidmirror() {
root = mirror(root);
}

Node mirror(Node node) {
    if(node == null)
returnnode;

    /* do the subtrees */
Node left = mirror(node.left);
Node right = mirror(node.right);
/* swap the left and right pointers */

```

```
node.left = right;
node.right = left;
return node;
}
```

```
void inOrder() {
```

```
inOrder(root);
}
```

```
/* Helper function to test mirror().
```

```
Given a binary search tree, print out its data elements
in increasing sorted order.*/
```

```
void inOrder(Node node){
if(node == null)
return;
inOrder(node.left);
System.out.print(node.data + " ");
    inOrder(node.right);    }
```

```
/* testing for example nodes */
```

```
public static void main(String args[]){
```

```
/* creating a binary tree and entering the nodes */
```

```
BinaryTree tree = new BinaryTree();
tree.root = newNode(1);
tree.root.left = newNode(2);
tree.root.right = newNode(3);
tree.root.left.left = newNode(4);
tree.root.left.right = newNode(5);
```

```
/* print inorder traversal of the input tree */
System.out.println("Binary tree is");
tree.inOrder();
```

```

System.out.println("");

/* convert tree to its mirror */
tree.mirror();

/* print inorder traversal of the minor tree */
System.out.println("Mirror tree is ");
tree.inOrder();
}
}

```

Output

Binary tree is

4 2 5 1 3

Mirror tree is

3 1 5 2 4

5. Remove duplicates from an unsorted linked list

Input:

linked list = 12->11->12->21->41->43->21

Output:

12->11->21->41->43.

Code:

```

// Java program to remove duplicates from unsorted//
linked listclassLinkedList {
static Node head;
static class Node{

```



```

int data;
Node next;
Node(intd){
data = d;
next = null;
}
}

/* Function to remove duplicates from an unsorted linked list
*/
void remove_duplicates(){
Node ptr1 = null, ptr2 = null, dup = null;
ptr1 = head;
/* Pick elements one by one */
while(ptr1 != null&& ptr1.next != null)
{
    ptr2 = ptr1;

    /* Compare the picked element with rest of the elements
    */

    while(ptr2.next != null) {

        /* If duplicate then delete it */
        if(ptr1.data == ptr2.next.data) {

            /* sequence of steps is important
            here */
            ptr2.next = ptr2.next.next;
            System.gc();
        }
        else/* This is tricky */{
            ptr2 = ptr2.next;
        }
    }

    ptr1 = ptr1.next;
}
}

```

```

}

void printList(Node node){

while(node != null){
System.out.print(node.data + " ");
node = node.next;
}
}

public static void main(String[] args){

LinkedList list = newLinkedList();
list.head = newNode(10);
list.head.next = newNode(12);
list.head.next.next = newNode(11);
list.head.next.next.next = newNode(11);
list.head.next.next.next.next = newNode(12);
list.head.next.next.next.next.next = newNode(11);
list.head.next.next.next.next.next.next= newNode(10);

System.out.println("Linked List before removing
duplicates:");

list.printList(head);
list.remove_duplicates();

System.out.println("\n");

System.out.println("Linked List after removing
duplicates:");
list.printList(head);
}
}

```

Output

Linked list before removing duplicates 10 12 11 11 12 11 10

Linked list after removing duplicates 10 12 11

More articles related to Paytm coding interview questions: [Interview Questions](#)

6. Write a function to get the Nth node in a Linked List

Input: 5->10->15->20, index = 2

Output: 15

The node at index 2 is 15

```
// Java program to find n'th node in linked list
class Node {
    int data;
    Node next;
    Node(int d) {
        data = d;
        next = null;
    }
}

class LinkedList {
    Node head; // the head of list

    /* Takes index as argument and return data at index */

    public int GetNth(int index) {
        Node current = head;
        int count = 0;
        /* index of Node we are currently looking at */
        while (current != null) {
            if (count == index)
                return current.data;
            count++;
            current = current.next;
        }
        /* if we get to this line, the caller was asking for a non-
        existent element so we assert fail */
    }
}
```

```

assert(false);
return 0;
}

/* Given a reference to the head of a list and an int, inserts a
new Node on the front of the list. */

public void push(int new_data)
{
    /* 1. alloc the Node and put data */
    Node new_Node = newNode(new_data);
    /* 2. Make next of new Node as head */
    new_Node.next = head;
    /* 3. Move the head to point to new Node */
    head = new_Node;
}

/* Driver code */

public static void main(String[] args)
{
    /* Start with empty list */
    LinkedList llist = new LinkedList();


    /* Use push() to construct below list 1->12->1->4->1
    */
    llist.push(1);
    llist.push(4);
    llist.push(1);
    llist.push(12);
    llist.push(1);
    /* Check the count function */
    System.out.println("Element at index 3 is "+
        llist.GetNth(3));
}
}

```

Output

Element at index 3 is 4

7. Delete a node in a Doubly Linked List

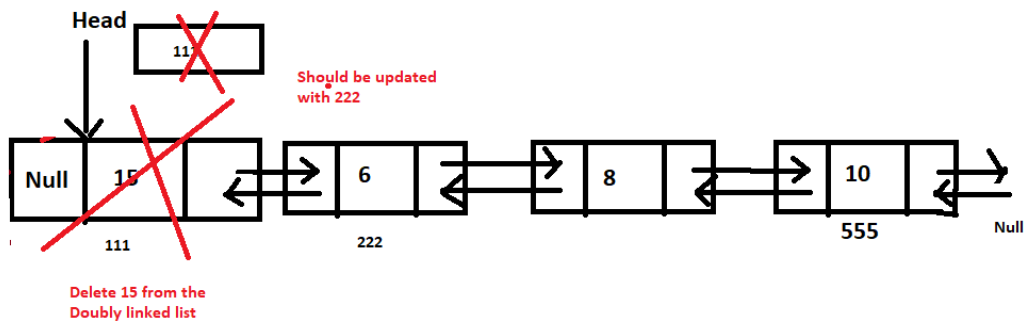

Paytm coding interview questions

Code:

```
// Java program to delete a node from
// Doubly Linked List//

Class for Doubly Linked ListpublicclassDLL {
Node head; // head of list

/* Doubly Linked list Node*/
classNode {
intdata;
Node prev;
Node next;

// Constructor to create a new node next and prev is by default
initialized as null

Node(intd) { data = d; }    }

// Adding a node at the front of the list
publicvoidpush(intnew_data)
{

// 1. allocate node
// 2. put in the data
```

```
Node new_Node = newNode(new_data);

// 3. Make next of new node as head and previous as NULL

new_Node.next = head;
new_Node.prev = null;

// 4. change prev of head node to new node
if(head != null)
head.prev = new_Node;

// 5. move the head to point to the new node
head = new_Node;
}

// This function prints contents of linked list starting from
the given node

public void print list(Node node)
{
Node last = null;
while(node != null) {
System.out.print(node.data + " ");
last = node;
node = node.next;
}
System.out.println();
}

// Function to delete a node in a Doubly Linked List. head_ref -
-> pointer to head node pointer.
// del --> data of node to be deleted.

void delete Node(Node del){
// Base case

if(head == null|| del == null){
```

```

return;
}

// If node to be deleted is head node
if(head == del) {
head = del.next;
}

// Change next only if node to be deleted is NOT the last
node
if(del.next != null) {
del.next.prev = del.prev;
}

// Change prev only if node to be deleted is NOT the first
node

if(del.prev != null) {
del.prev.next = del.next;
}

// Finally, free the memory occupied by del
return;
}

// Driver Code

public static void main(String[] args){
// Start with the empty list
DLL dll = newDLL();
// Insert 3. So linked list becomes 3-
>NULL      dll.push(3);
// Insert 6. So linked list becomes 6->3->NULL
dll.push(6);
// Insert 9. So linked list becomes 9->6->3-
>NULL  dll.push(9);

```

```

// Insert 12. So linked list becomes
// 12->9->6->3->NULL

dll.push(12);
System.out.print("Original Linked list ");
dll.printlist(dll.head);
dll.deleteNode(dll.head);

/*delete first node*/

dll.deleteNode(dll.head.next);
/*delete middle node*/

dll.deleteNode(dll.head.next);
/*delete last node*/
System.out.print("\nModified Linked list ");
dll.printlist(dll.head);
}
}

```

Output

Original Linked list 12 9 6 3

Modified Linked list 9

8. Delete all the nodes from the doubly linked list that are greater than a given value

Input: 20 31 6 3 11, X = 11

Output: 6 3 11

Code:

```

// Java implementation to delete all the nodes from the double
// linked list that are greater than the specified value

xclassGFG{
// Node of the doubly linked list

```



```

static class Node{
intdata;
Node prev, next;
};

// function to insert a node at the beginning of the Doubly
Linked List

static Node push(Node head_ref, intnew_data){
// allocate node
Node new_node = newNode();
// put in the data
new_node.data = new_data;    // since we are adding at the
beginning,

// prev is always null

new_node.prev = null;
// link the old list off the new node

new_node.next = (head_ref);

// change prev of head node to new node

if((head_ref) != null)
(head_ref).prev = new_node;    // move the head to point to the
new node

(head_ref) = new_node;
returnhead_ref;
}

// function to delete a node in a Doubly Linked List.// head_ref
-. pointer to head node pointer.// del -. pointer to node to be
deleted

static Node deleteNode(Node head_ref, Node del){

```

```

// base case
if(head_ref == null || del == null)
return null;

// If node to be deleted is head node

if(head_ref == del)
head_ref = del.next;
// Change next only if node to be deleted is NOT the last
node

if(del.next != null)
del.next.prev = del.prev;

// Change prev only if node to be deleted is NOT the first
node

if(del.prev != null)
del.prev.next = del.next;
return head_ref;
}

// function to delete all the nodes from the doubly linked list
that are greater than the specified value
x

static Node deleteGreaterNodes(Node head_ref, int x){
Node ptr = head_ref;
Node next;
while(ptr != null){
next = ptr.next;
// if true, delete node 'ptr'
if(ptr.data > x){
deleteNode(head_ref, ptr);
ptr = next;
}
return head_ref;
}
}

```

```

// function to print nodes in a given doubly linked list

static void printList(Node head){
while(head != null)
{
System.out.print(head.data + " ");
head = head.next;
}
}

// Driver code
public static void main(String args[]){

// start with the empty list
Node head = null;

// create the doubly linked list 10<.8<.4<.11<.9

head = push(head, 9);
head = push(head, 11);
head = push(head, 4);
head = push(head, 8);
head = push(head, 10);
intx = 9;

System.out.print( "Original List: ");
printList(head);
head=deleteGreaterNodes(head, x);
System.out.print( "\nModified List: ");
printList(head);
}
}

```

Output

Original List: 10 8 4 11 9

Modified List: 8 4 9

9. Interchange elements of the first and last rows in the matrix

One of the most asked Paytm coding interview questions:

Input: 6 4 7 0 5

3 2 7 1 2

4 8 1 2 6

5 6 1 1 2

Output: 5 6 1 1 2

3 2 7 1 2

4 8 1 2 6

6 4 7 0 5

Code:

```
// Java code to swap the element of first and last row and
display the result

import java.io.*;

public class Interchange {

    static void interchangeFirstLast(int m[][]){
        int rows = m.length;          // swapping of element
        // between first and last rows

        for(int i = 0; i < m[0].length; i++) {
            int t = m[0][i];
            m[0][i] = m[rows - 1][i];
            m[rows - 1][i] = t;        }
        }

    // Driver code
    public static void main(String args[])
```

```
throwsIOException    {           // input in the array
intm[][] = { { 8, 9, 7, 6}, { 4, 7, 6, 5},{ 3, 2, 1, 8},{ 9, 9,
7, 7} }; // Function call


interchangeFirstLast(m);           // printing the interchanged
matrix
for(inti = 0; i < m.length; i++) {
for(intj = 0; j < m[0].length; j++)
System.out.print(m[i][j] + " ");
System.out.println();
}
}
}
```

Output

```
9 9 7 7
4 7 6 5
3 2 1 8
8 9 7 6
```

10. Write a function to print the ZigZag order traversal of a binary tree.

The zigzag order traversal for the below binary tree will be **1 3 2 7 6 5 4**.

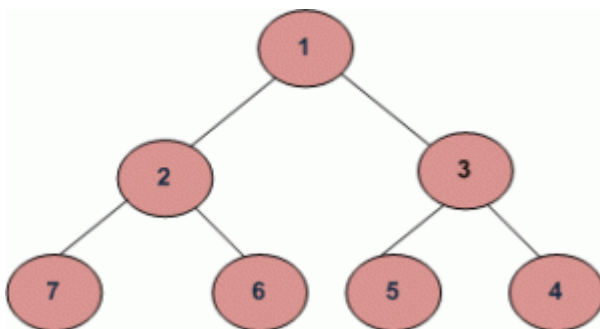

Paytm coding interview questions

Code:

```
// Java implementation of a O(n) time method for Zigzag order
traversal
```

```

import java.util.*;

// Binary Tree
node class Node {
    int data;
    Node leftChild;
    Node rightChild;
    Node(int data) {
        this.data = data;
    }
}

class BinaryTree {
    Node rootNode;

    // function to print the zigzag traversal

    void print ZigZagTraversal() {
        // if null then return
        if (rootNode == null) {
            return;
        }
        // declare two stacks
        Stack<Node> currentLevel = new Stack<>();
        Stack<Node> nextLevel = new Stack<>();    // push the root
        currentLevel.push(rootNode);
        boolean leftToRight = true;    // check if stack is empty
        while (!currentLevel.isEmpty()) {
            // pop out of stack

            Node node = currentLevel.pop();
            // print the data in it

            System.out.print(node.data + " ");    // store data according to
            current order.

            if (leftToRight) {
                if (node.leftChild != null) {

```

```

nextLevel.push(node.leftChild);
}
        if(node.rightChild != null) {
nextLevel.push(node.rightChild);
}
}
else{
if(node.rightChild != null) {
nextLevel.push(node.rightChild);
}
        if(node.leftChild != null) {
nextLevel.push(node.leftChild);
}
}

if(currentLevel.isEmpty()) {

leftToRight = !leftToRight;
Stack<Node> temp = currentLevel;
currentLevel = nextLevel;          nextLevel = temp;
}
}
}
}

public class zigZagTreeTraversal {
// driver program to test the above function

public static void main(String[] args){
BinaryTree tree = new BinaryTree();
tree.rootNode = newNode(1);
tree.rootNode.leftChild = newNode(2);
tree.rootNode.rightChild = newNode(3);
tree.rootNode.leftChild.leftChild = newNode(7);
tree.rootNode.leftChild.rightChild = newNode(6);
tree.rootNode.rightChild.leftChild = newNode(5);
tree.rootNode.rightChild.rightChild = newNode(4);
System.out.println("ZigZag Order traversal of binary tree
is");
}
}

```

```
tree.printZigZagTraversal();}  
}
```

Output

ZigZag Order traversal of binary tree is

1 3 2 7 6 5 4

**Elevate Your Career Zen Class
Courses with Placement Guidance**

[Learn More](#)



More Paytm coding interview questions

Definitely, there is more to this. Find the top Paytm coding interview questions on our award-winning practice platform– [**CODEKATA: where practice always makes you perfect!**](#)

For more Paytm coding interview-related questions click here: [**Placement Preparation with GUVI**](#)



Paytm coding interview questions

Related blogs: [Paytm coding interview questions](#)

[Paytm Interview Experience](#)



[CRED Interview Questions](#)

[Amazon Interview Questions](#)

Kickstart your Full Stack Development journey by enrolling in GUVI's certified [Full Stack Development Course](#) with placement assistance where you will master the MERN stack (MongoDB, Express.js, React, Node.js) and build interesting real-life projects. This program is crafted by our team of experts to help you upskill and assist you in placements.

Alternatively, if you want to explore JavaScript through a self-paced course, try GUVI's [JavaScript course](#).

Career transition

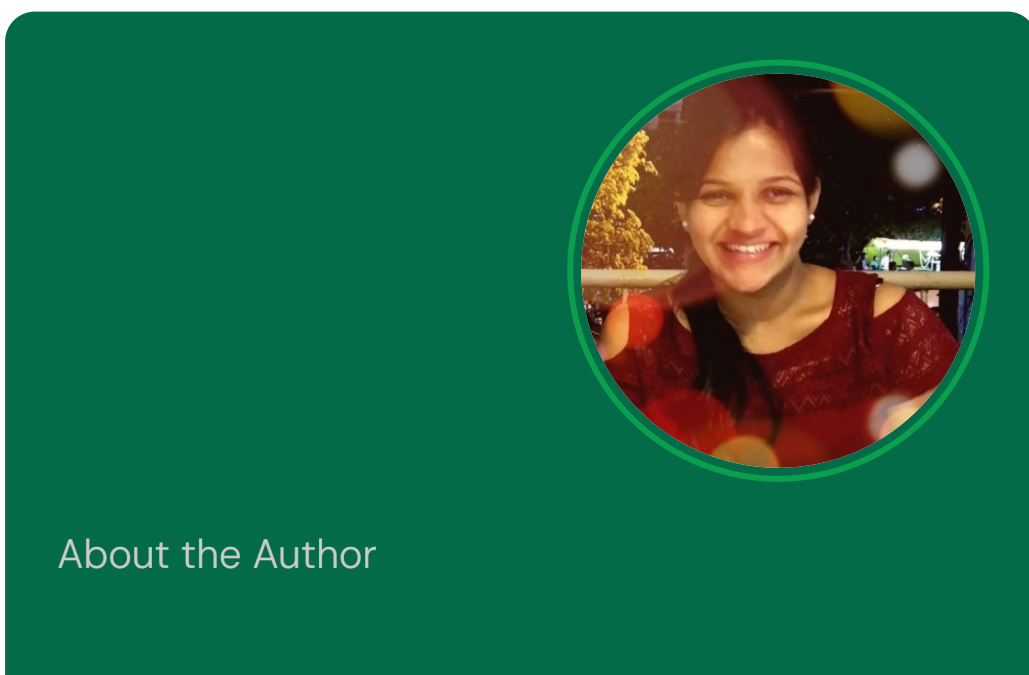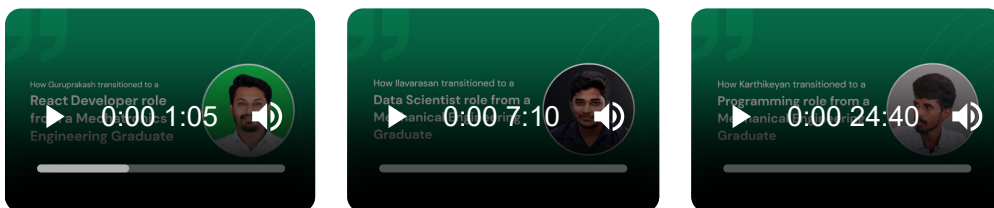

Archana

A traveler, and explorer, Archana is an active writer at GUVI. You can usually find her with a book/kindle binge-reading (with an affinity to the mystery/humor).

Connect with me @



Did you enjoy this article?

Name

Email

Rate this Article     

Enter Your Comment

Submit My Comment

Learn

Full Stack Development

in your favourite programming stack

- MERN, MEAN, Java, Python & more
- Mentors from Global Companies
- Build Portfolio with 20+ Projects

Enroll Now

**Learn in english, தமிழ், ಕನ್ನಡ & हिंदी*





SOUTH ASIAN
WOMEN IN TECH

Join the World's Largest Women-Only Gen AI Learning Challenge



Sept 21st, 2024

Exclusive Access & Celebrations

Learnathon & Hackathon

Courses & Certifications

Register Now



Get In Touch For Details!

Name*

Email ID*

Phone Number*

Select your interested program*

Get In Touch Request Information

Recommended Courses

Career Programs

Micro Courses



MOST POPULAR

Java Full Stack Development Course

Available in

ENGLISH TAMIL

Know More >>


GUVI H.S.D.E. National Skill Development Corporation Transforming the Skill Landscape



Schedule 1:1 free counselling

Talk to Career Expert

Similar Articles

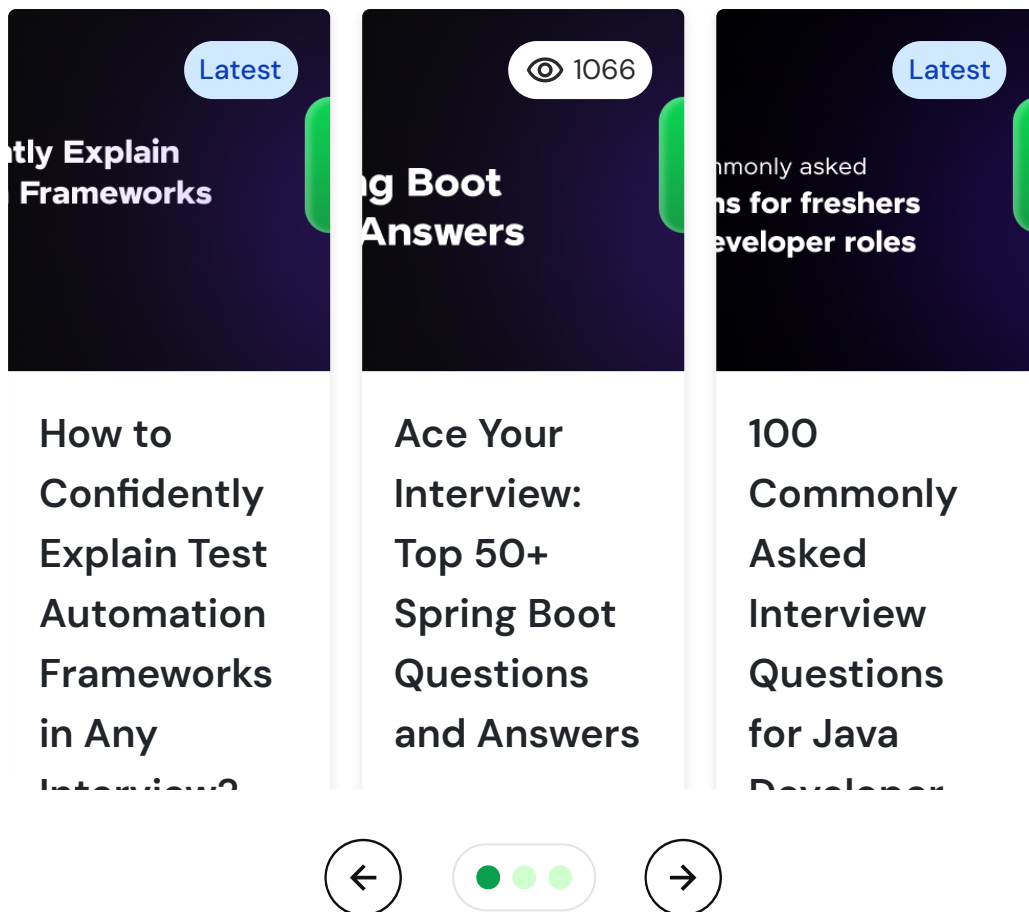

Blog Categories



Data Science

Artificial Intelligence and Machine Learning

Blockchain

Cloud Computing

Cyber Security

Digital Marketing

Full Stack Development

Interview Questions



General Interview Questions

Java Interview Questions

[Python Interview Questions](#)

[SQL Interview Questions](#)

[Selenium Interview Questions](#)

[Data Science Interview Questions](#)

Salary blog



[UI/UX Designer Salary](#)

[Data Scientist Salary](#)

[Full-Stack Developer Salary](#)

[Motion Graphics Designer Salary](#)

[Cloud Computing Engineer Salary](#)

[Digital Marketer Salary](#)

About us



[Our Story](#)

[Careers](#)

[Refund Policy](#)

[FAQs](#)

[Contact Us](#)



[Refer & Earn](#)

GUVI – India's Pioneering Vernacular EdTech, incubated by IIT-M, IIM-A, and a prestigious part of the HCL group. Empowering over 2.5 million global learners with top-tier educational solutions through a vernacular approach, we have revolutionized global tech education with strategic partnerships, including 'Google for Education,' AICTE,

AWS, Google Cloud, IIT-M Pravartak, UiPath, and NASSCOM. GUVI is your trusted guide to inclusive and accredited learning experiences.



Follow us on



[Terms and Conditions](#)

[Privacy Policy](#)

© GUVI Geeks Network Pvt. Ltd

 [Table of contents](#)