

Supplement to “Interaction structure constrains the emergence of conventions in group communication”

Contents

Feedback	2
Additional game transcripts	3
Number of games	5
More on matcher utterances	6
Sensitivity Analysis of full complete games only	9
Additional measure of convergence	10
Distinctiveness of tangrams	12
Summaries of model outputs	13
Accuracy models	13
Reduction models	14
Primary reduction model	14
Extra reduction model	15
Log reduction model	15
Matcher reduction models	16
Initial utterance reduction model	16
Linguistic content models	17
Convergence within games: comparison to last round	17
Divergence across games	18
Divergence across tangrams	19
Convergence to next	20
Divergence from first	21
Exploratory Mega-analytic models	22
Sensitivity check models	24
Accuracy	24
Reduction	25
Convergence within games	26
Divergence between games	27

Feedback

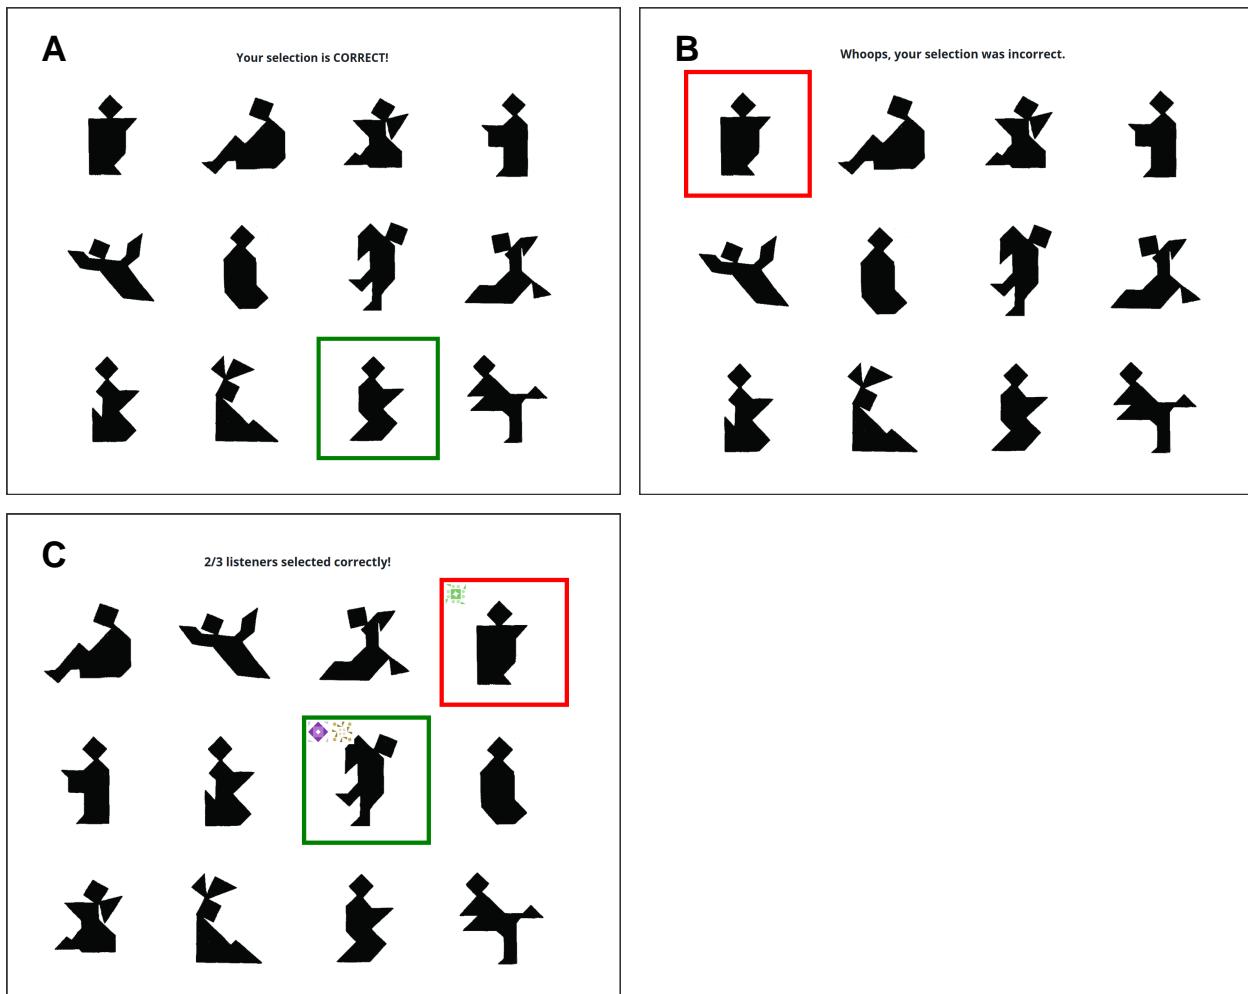


Figure 1: Feedback shown to participants. In low-coherence games, matchers saw feedback as shown in A and B. In all games, describers saw feedback like in C; icons were associated with players and indicated who selected which. In high feedback games, matchers saw grids like C, but with text as in A and B.

Additional game transcripts

Table 1: Additional examples from 6-player thick games for the same image across repetitions. Describers are indicated with an asterisk.

6-person thick game	
<i>Rep 1: 2/5 correct</i>	
V*	This shape hasn't got much sticking out. Small triangle pointing right, tilted square on top
Y	Is the triangle on the right at the bottom?
V*	Long tall shape, not far off symmetrical.
V*	Yes triangle bottom right
W	Are their two triangles on it?
X	does it look like a rabbit?
V*	Not the rabbit
X	does it look like someone on their back kicking a square soccer ball
V*	It's like one block like a gemstone
V*	but square on top
V*	Not on back
V*	It's the one with the least sharp corners I think
V*	One long gem shape with small triangle bottom right, tilted square on top
<i>Rep 2: 4/5 correct</i>	
V*	Long tall shape. Little triangle sticking out bottom right. Diamond on top
<i>Rep 3: 3/5 correct</i>	
V*	Long tall hexagon, triangle bottom right, diamond on top
<i>Rep 4: 4/5 correct</i>	
V*	Long hexagon
V*	little triangle bottom right
V*	Diamond top
<i>Rep 5: 4/5 correct</i>	
V*	Long hexagon.
V*	Diamond on top
V*	little triangle bottom right
<i>Rep 6: 4/5 correct</i>	
V*	Long hexagon
V*	Triangle bottom right

Table 2: Additional examples from 6-player thin games for the same image across repetitions. Describers are indicated with an asterisk.

6-person thin game		
<i>Rep 1: 2/5 correct</i>		
J*	Looks like a skinnier candle but with a shadow at the bottom	
K		
H		
J*	The top square looks like the flame	
J*	It has a triangle leading to that flame	
I		
<i>Rep 2: 3/5 correct</i>		
K		
I*	the simplest image in the whole, no much issues	
J		
L		
I*	1 square as the head	
L		
J		
H		
K		
I*	candle with more missing chunks	
<i>Rep 3: 1/5 correct</i>		
L*	looks like a candle with more chunks missing	
J		
I		
L*	The bottom part faces the right and forms a triangle	
L*	The top is a square	
I		
J		
<i>Rep 4: 3/5 correct</i>		
H*	Candle one with shadow	
H*	The straight one not the one with bits missing	
L		
I		
L		
H*	Lower case j but the bottom swings to the right	
I	   	
<i>Rep 5: 0/5 correct</i>		
K*	Candle with chunks missing on the right	
I	  	
<i>Rep 6: 4/5 correct</i>		
G*	candle shape with a chunk of the bottom left missing and added to the bottom right instead	
K	 	
H		
I		
6-person thin game		
<i>Rep 1: 2/5 correct</i>		
A*	Square on top	
A*	At the bottom of the base part of it sticks out to the right	
A*	The base has 8 faces (8 sides of the shape)	
C		
A*	The square balances on a triangular point of the base	
A*	It is a thick base shape, the bottom curves right	
D		
<i>Rep 2: 5/5 correct</i>		
B*	tombstone and its shadow with a rotated square on top	
D		
F		
C		
<i>Rep 3: 5/5 correct</i>		
D*	tombstone casting a shadow (sorry i've pinched that from before)	
C		
B		
E		
C		
E	 	
D*	square on top sitting on top of a triangle which is on top of a square, with 5 side shape at the bottom	
<i>Rep 4: 4/5 correct</i>		
C*	looks mummified	
C*	person with no limbs	
D		
B		
C*	square atop, chunky with triangle bottom right	
<i>Rep 5: 5/5 correct</i>		
F*	Gravestone casting shadow. Square on top	
D		
<i>Rep 6: 5/5 correct</i>		
E*	tombstone	
D		

Number of games

We could control the number of games by how many participants we recruited on Prolific. Because of the real-time nature of the games, we relied on that most Prolific workers who accepted the task would rapidly open it and go to our experiment site, where they would read the instructions and be assigned into games. Due to technical details about how games filled, we only ran one condition of games at any one time. In experiments 1 and 2, games would only start if the game was full. Thus, if for example, we recruited 28 people, and 27 people went to the experiment when we were running a 4-person game, three people would be unable to make a complete game, and we also wouldn't have a game available for a 28th person who looked later. We ran games in large batches to try to minimize the number of people who wouldn't be matched to a game. If we fell well short of a target, we could recruit another batch of participants, taking the expected attrition rate into account. However, the logistics of needing participants to all open the study at roughly the same time to match into games meant that it was infeasible to recruit fewer than 20 or so people at a time, so we could not precisely achieve the desired number of games. Thus, the number of games varied somewhat across conditions.

In addition to not having control over exactly how many games started, some games also ended prematurely when participants disconnected. These partial games were more common in larger groups. We speculate it could be due either to just having more people who might have connection issues or need to leave the game, or more frustration causing people to quit the game (sometimes very early in the game).

In experiment 3, we tried to sidestep the large attrition rate for 6 player games by allowing them to start and continue with fewer than 6 people.

In experiment 3, the 6* player games did not all have 6 players, both because games continued as participants dropped out and because if there weren't enough players after 5 minutes of waiting, the game would start with whoever was there. All analyses use "intent to treat" and call these 6 player games.

The number of games goes up in some cases because only complete blocks (where the describer said something every trial) are analysed. If there was initial confusion and a describer missed a trial, that block was excluded.

Table 3: The number of games in each experiment and condition. Complete games finished all 6 blocks; partial games ended early due to disconnections, but contributed at least one complete block of data. 6* indicates that some games started with fewer than 6 players or continued with fewer than 6 players after participants disconnected.

Experiment	Players	Complete	Partial	Total Participants
1: baseline	2	15	4	38
1: baseline	3	18	2	60
1: baseline	4	19	2	84
1: baseline	5	17	3	100
1: baseline	6	12	6	108
2: same describer	6	15	3	108
2: full feedback	6	13	4	102
2: thin	6	10	6	96
3: thin	2	35	3	76
3: thin	6*	44	0	235
3: thick	2	39	3	84
3: thick	6*	38	2	222

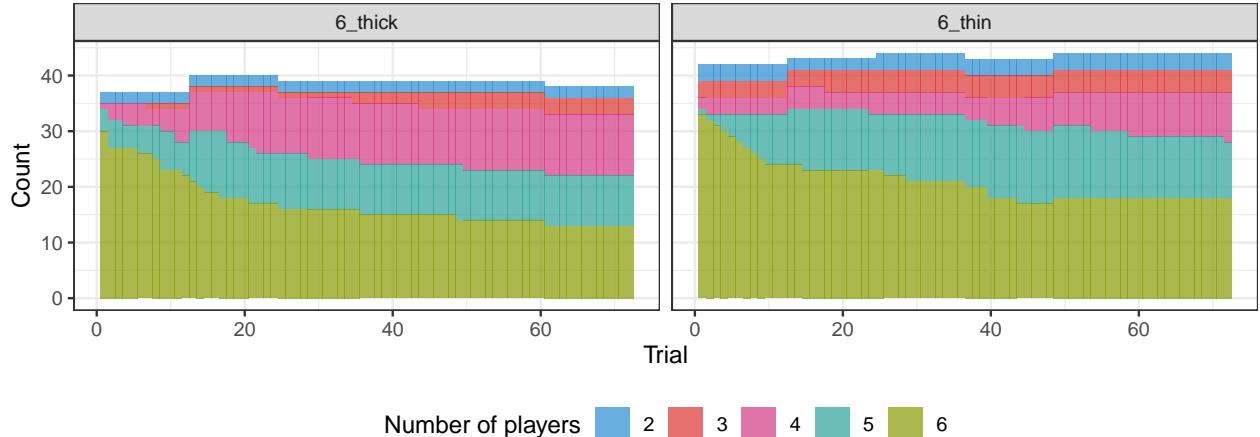


Figure 2: Number of players during 6 thin and 6 thick games in experiment 3. Blocks that were incomplete were excluded, so if a describer said nothing during a trial, that block was excluded.

More on matcher utterances

Matchers' contributions declined over the course of the game. The use of emoji in the thin games is not directly comparable to matcher language use in thick games, since some emoji usage (such as the green checkmark) is most likely equivalent to non-referential matcher language ("got it" etc.) that was excluded. The higher rate of emoji use versus referential language thus could be due to its non-equivalence, a lower level of accuracy in thin games, or matchers having a lower threshold for sending emojis compared to writing out clarifications.

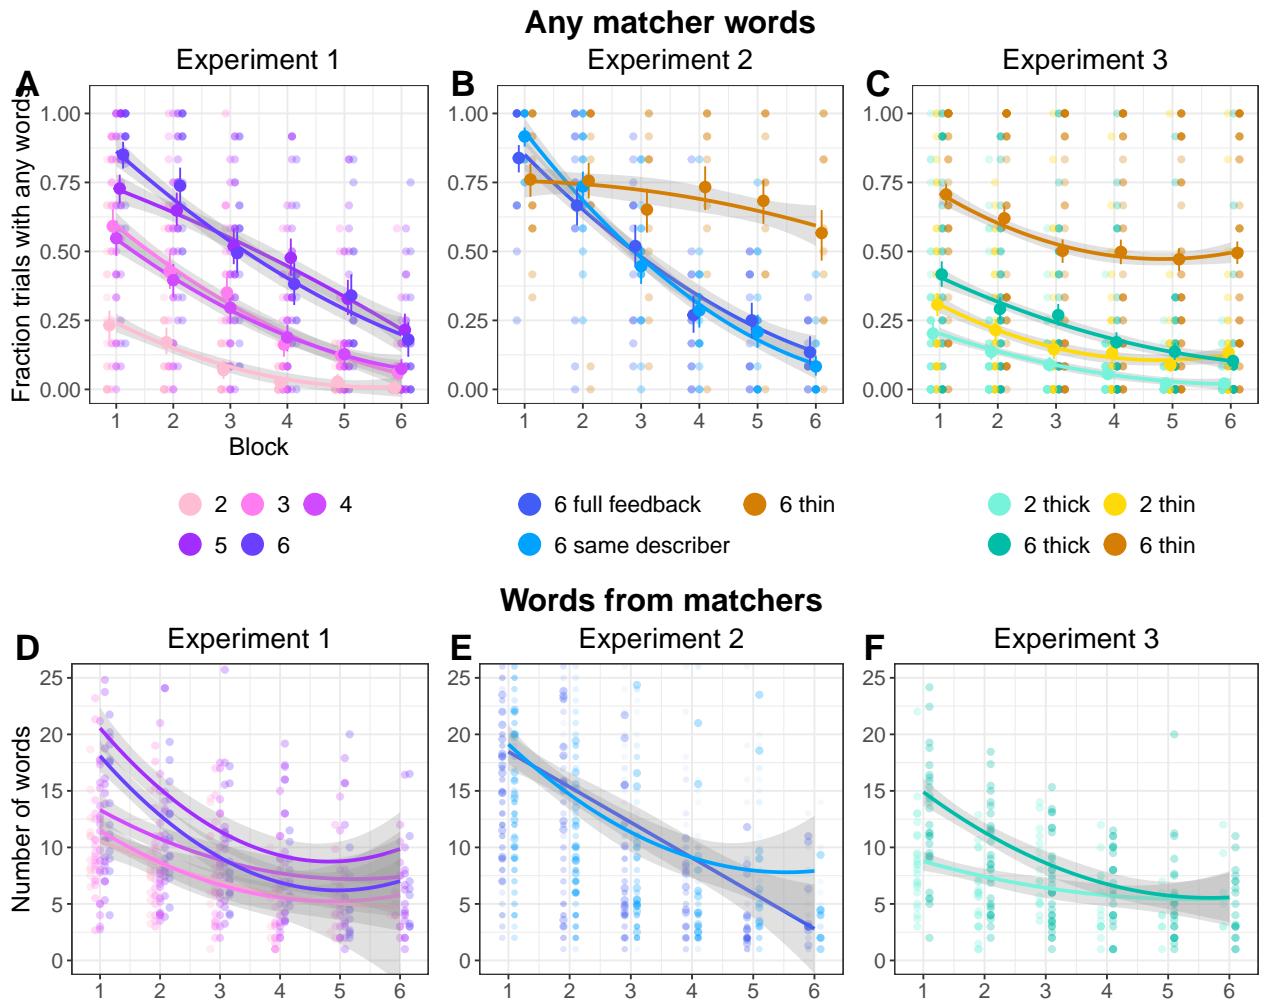


Figure 3: Matcher contributions. A-C: Fraction of trials where any matcher said anything that was referential. Dots are per game averages. Smooths are binomial fit lines. D-F: On trials where at least one matcher contributed, the number of words of referential language produced by matchers. Dots are per game averages. Smooths are quadratic fit lines. Y-axis is truncated, and a few outliers points are not visible.

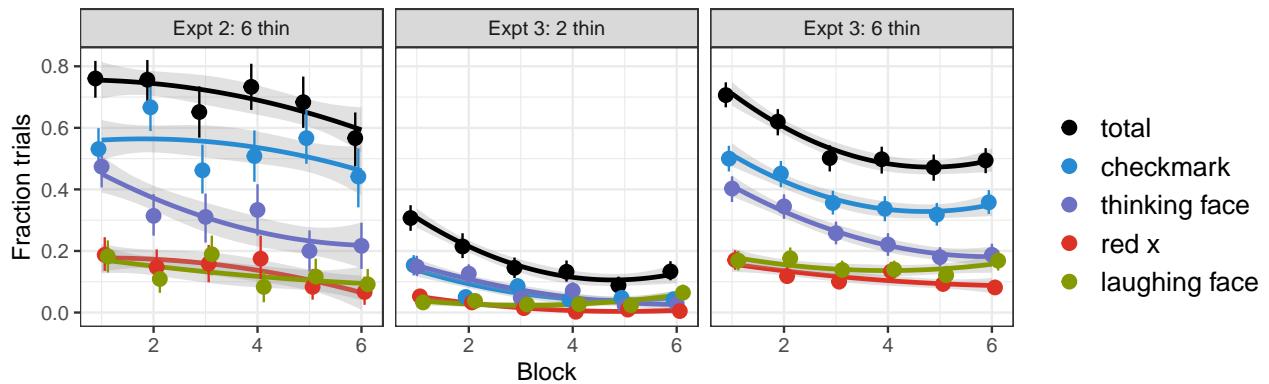


Figure 4: Fraction of trials on which at least one matcher produced the labelled emoji. Fraction of trials when any emoji was produced are shown in black. Dots are per condition, per block estimates with 95% bootstrapped CIs. Smooths are binomial fit lines.

We note a deviation from the pre-registration here in the analysis of the emojis. In the pre-registration we said we would “analyse the distribution of emoji’s produced as a function of block and its relation to accuracy and speaker utterance length.” We did not do this beyond the visualization shown here.

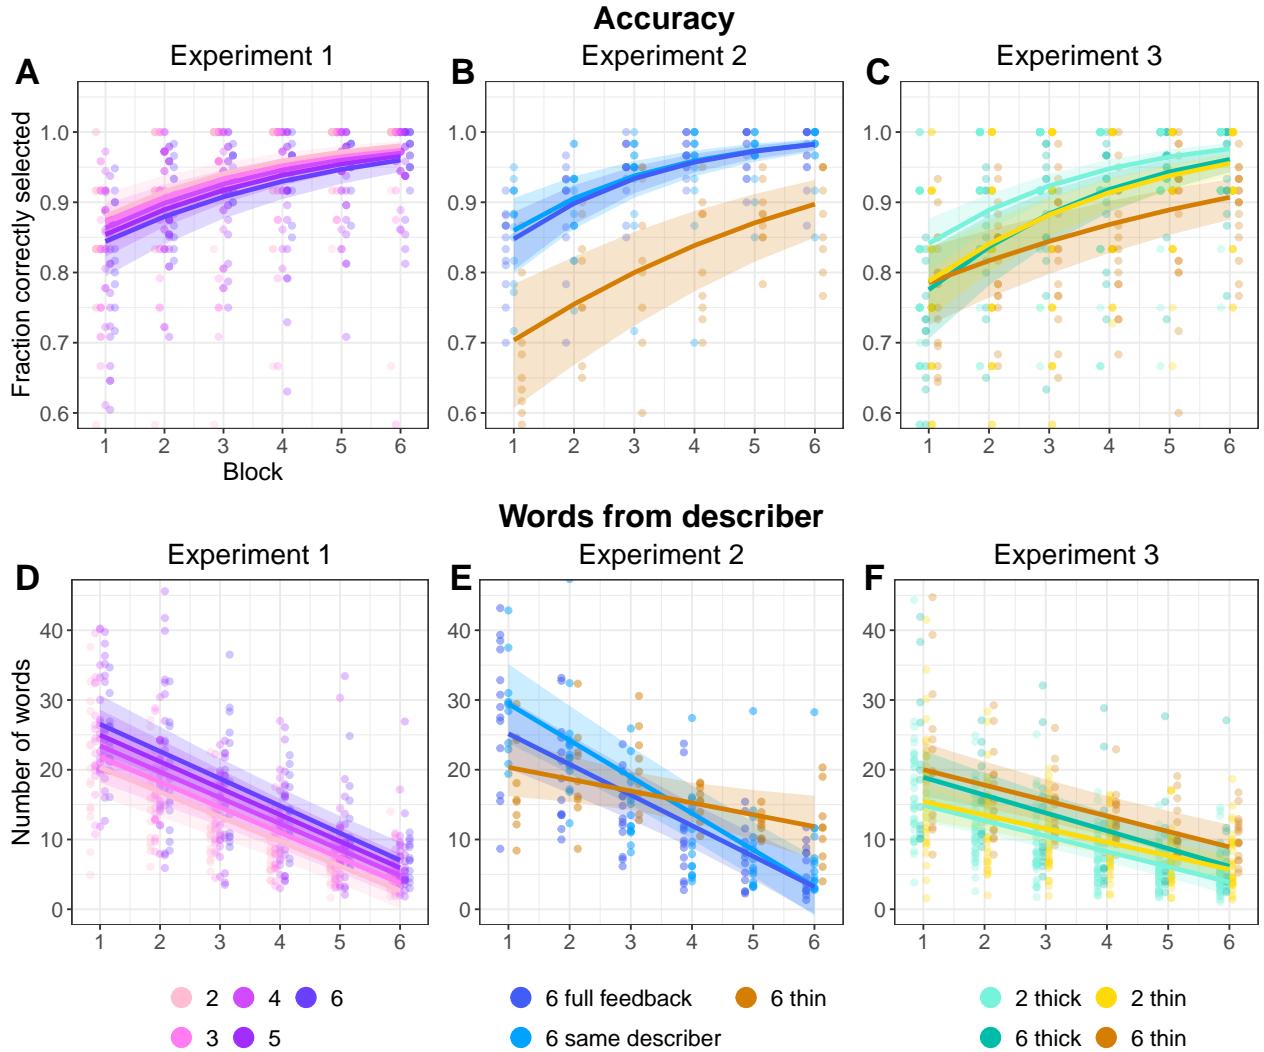


Figure 5: Equivalent of Manuscript Figure 2, with only full complete games. Behavioral results across all three experiments. (A-C). Matcher accuracy at selecting the target image. (D-F). Number of words produced by the describer each trial. For all, small dots are per game, per block means, and smooth lines are predictions from model fixed effects with 95% credible intervals. Y-axes are truncated, and a few outliers points are not visible.

Sensitivity Analysis of full complete games only

As a (post-hoc) sensitivity analysis, we re-ran our main analyses on the subset of games that completed all 6 blocks with a full set of players. This is a check on whether any of the results are driven by partial games that were included in early blocks but not later blocks or experiment 3 games that started without a full set of players or had players drop out.

The graph equivalents are shown in Figures TODO and TODO here, all of the statistical output is in supplement tables TODO to TODO.

Noticeable differences are the group size doesn't have a noticeable effect on accuracy in experiment 3 in the sensitivity analysis. Note that large experiment 3 games were the ones most likely to be excluded, both for incompleteness or for not having the full 6 players throughout.

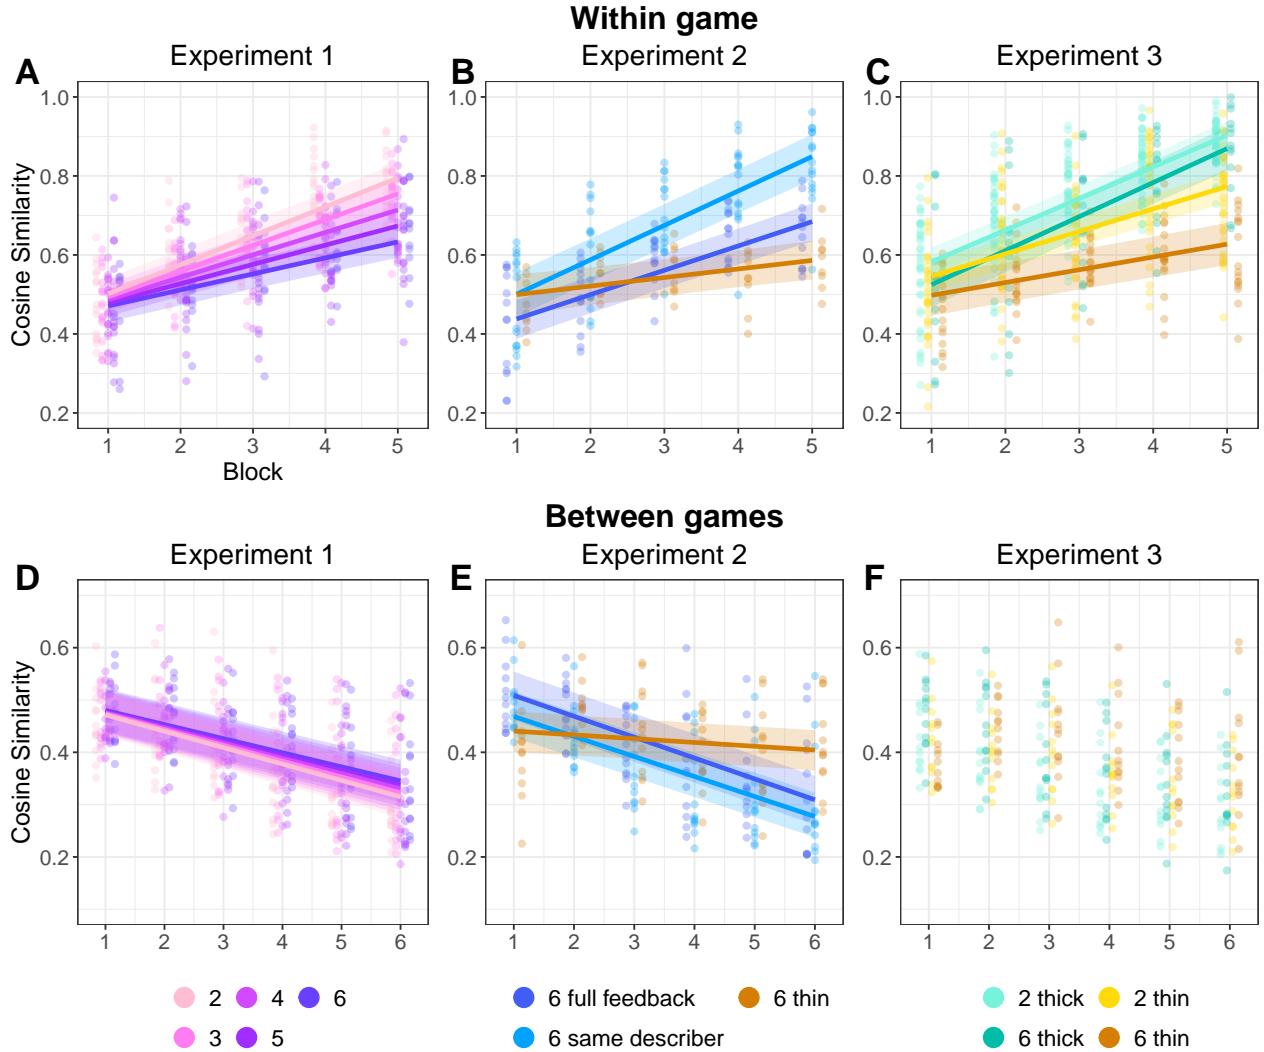


Figure 6: Equivalent of Manuscript Figure 4. Language similarity results measured with pairwise cosine similarity between embeddings of two utterances. (A-C). Convergence of descriptions within games as measured by similarity between an utterance from block 1-5 to the block 6 utterance in the same game for the same image. (D-F). Divergence of descriptions across games as measured by the similarity between two utterances produced for the same image by different groups in the same block. For all, small dots are per game, per block means, and smooth lines are predictions from model fixed effects with 95% credible intervals. Y-axes are truncated, and a few outliers points are not visible.

Additional measure of convergence

The main text included the graph for convergence comparing utterances from blocks 1-5 to the utterance from block 6. Here we show two other measures of semantic shifts for descriptions for the same tangram in the same game: similarity to the first utterance and similarity to the next utterance.

Similarity to the first utterance is not very informative (but we pre-registered it). Similarity to the next utterance is what actually drives the convergence phenomena: pairs of utterances from adjacent blocks become closer together over time.

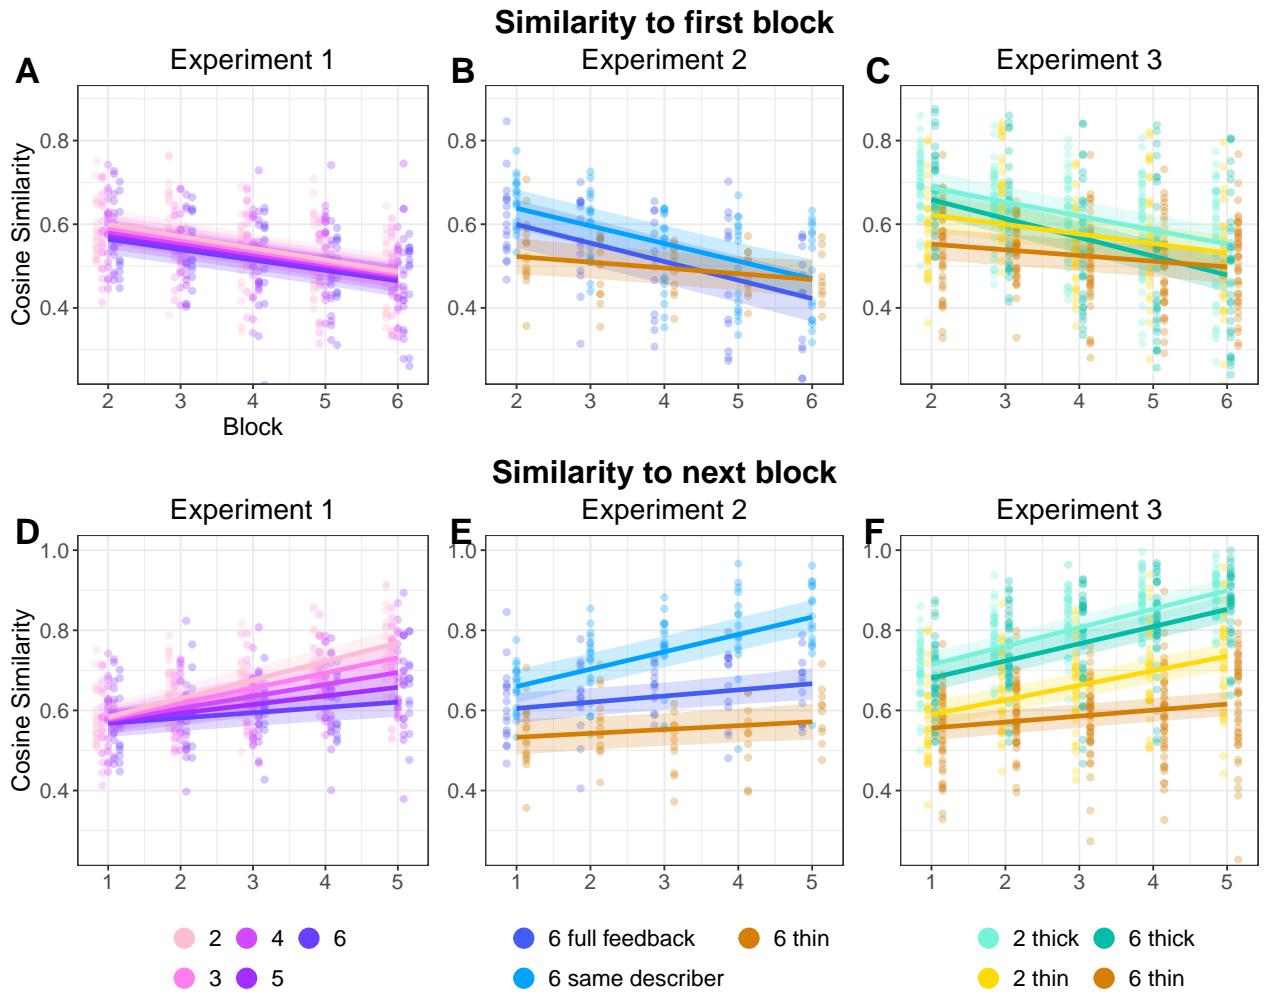


Figure 7: Additional measures of convergence and divergence. A-C is the similarity between utterances on a given block to the first block utterance for the same image, in the same game. Dots are per-game averages, smooths are quadratic. D-F is the similarity between utterances on a given block to the corresponding utterances in the next block. Dots are per-game averages, smooths are quadratic.

Distinctiveness of tangrams

An additional measure of convergence/divergence patterns is how different tangrams get described in the same game – as nicknames evolve, different tangrams get more different descriptions.

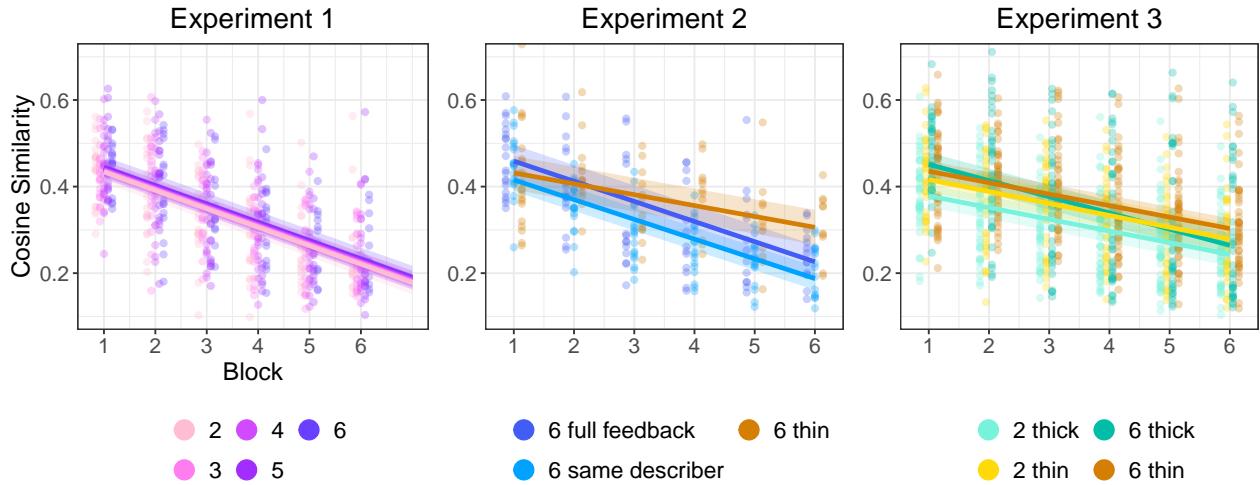


Figure 8: Divergence in descriptions of different tangrams. Cosine similarity between the descriptions of two different tangrams in the same block and group are shown. Dots are per-game averages, smooths are quadratic.

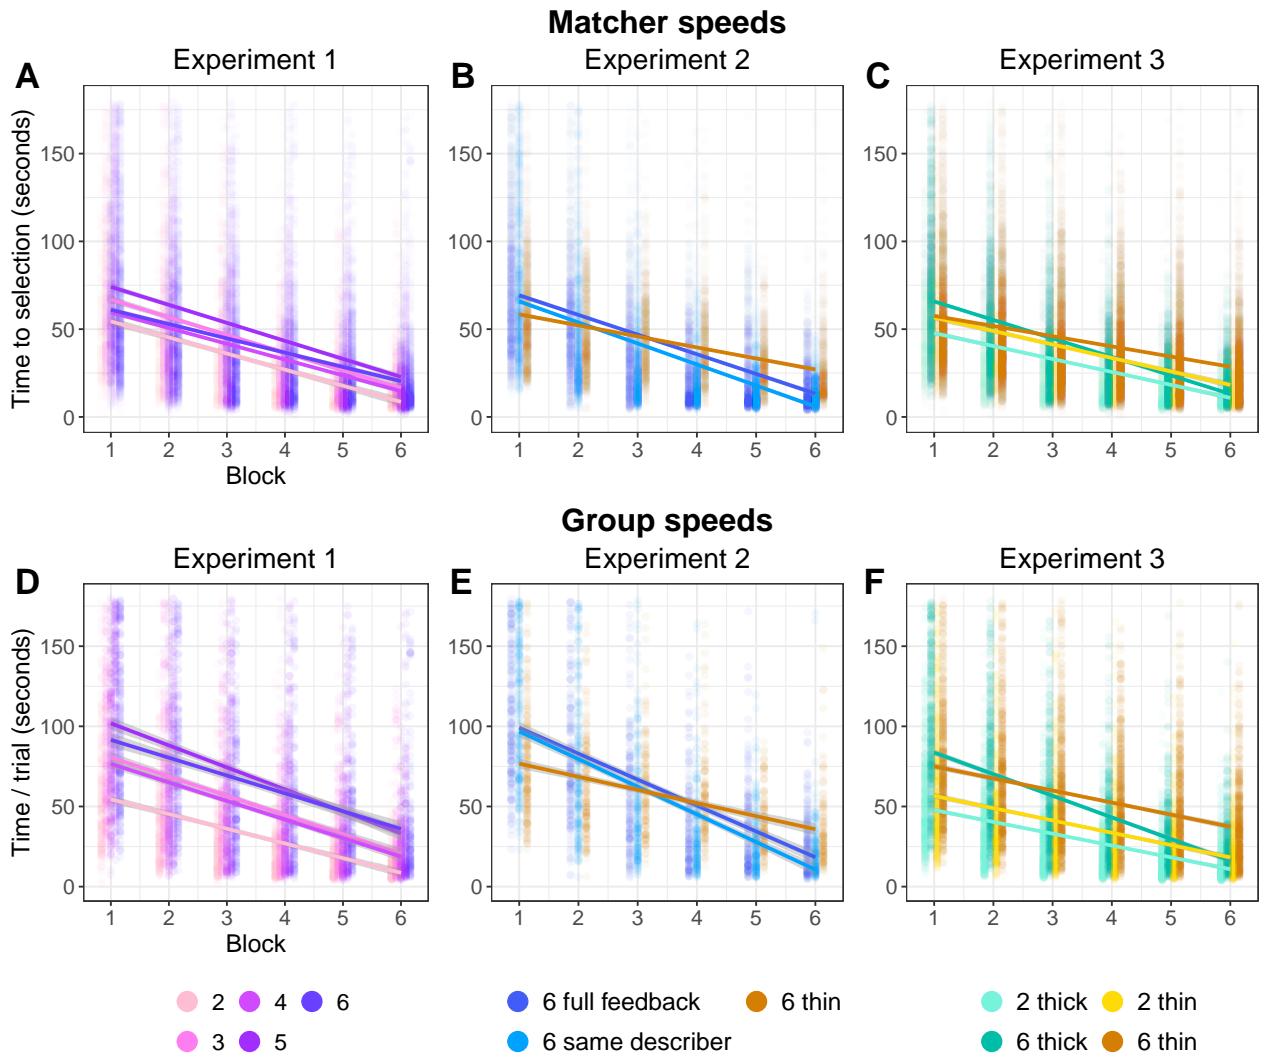


Figure 9: TODO Behavioral results across all three experiments. (A-C). Matcher accuracy at selecting the target image. (D-F). Number of words produced by the describer each trial. For all, small dots are per game, per block means, and smooth lines are predictions from model fixed effects with 95% credible intervals. Y-axes are truncated, and a few outliers points are not visible.

Analysis of reaction times

Summaries of model outputs

The following sections contain model outputs. All models were run using BRMS. We report the priors and pre-registration status for each group of models. Tables provide the individual model formulae and the point estimates and 95% credible intervals for the fixed effects.

Note that for all models, block was 0 indexed, so intercepts are what happened during the first block.

Accuracy models

Accuracy models were all run as logistic models with $\text{normal}(0,1)$ priors for both betas and sd. This model was not explicitly included in the experiment 1 and 2 pre-registrations; it was included with more ambitious

mixed effects (which did not run in a timely manner) in the experiment 3 pre-registration.

Table 4: Experiment 1 logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} \times \text{numPlayers} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	2.10	[1.57, 2.65]
block	0.44	[0.31, 0.58]
block:numPlayers	-0.02	[-0.05, 0.01]
numPlayers	-0.07	[-0.2, 0.05]

Table 5: Experiment 2: 6 same describer logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.78	[1.4, 2.19]
block	0.45	[0.39, 0.52]

Table 6: Experiment 2: 6 full feedback logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.35	[0.59, 2.06]
block	0.47	[0.39, 0.54]

Table 7: Experiment 2: 6 thin logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.88	[0.64, 1.12]
block	0.23	[0.19, 0.28]

Table 8: Experiment 3 logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} \times \text{gameSize} \times \text{channel} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.69	[1.39, 1.99]
block	0.41	[0.32, 0.5]
block:channelthin	-0.07	[-0.18, 0.04]
block:gameSize6	-0.34	[-0.43, -0.25]
block:gameSize6:channelthin	0.07	[-0.05, 0.19]
channelthin	-0.36	[-0.78, 0.05]
gameSize6	-0.64	[-1.05, -0.25]
gameSize6:channelthin	0.31	[-0.22, 0.87]

Reduction models

Primary reduction model

Reduction models were run as linear models with an intercept prior of $\text{normal}(12,20)$, a beta prior of $\text{normal}(0,10)$, an sd prior of $\text{normal}(0,5)$ and a correlation prior of $\text{lkj}(1)$. This model was pre-registered for each experiment and run with the mixed effects structure as pre-specified.

Table 9: Experiment 1: $\text{words} \sim \text{block} \times \text{numPlayers} + (\text{block}|\text{tangram}) + (1|\text{playerId}) + (1|\text{tangram:gameId}) + (\text{block}|\text{gameId})$

Term	Est.	95% CrI
Intercept	16.87	[11.63, 21.89]
block	-3.36	[-4.56, -2.18]
block:numPlayers	-0.09	[-0.37, 0.18]
numPlayers	1.60	[0.62, 2.6]

Table 10: Experiment 2: 6 same describer: $\text{words} \sim \text{block} + (\text{block}|\text{tangram}) + (1|\text{tangram:gameId}) + (\text{block}|\text{gameId})$

Term	Est.	95% CrI
Intercept	29.65	[24.82, 34.49]
block	-5.31	[-6.35, -4.3]

Table 11: Experiment 2: 6 full feedback: $\text{words} \sim \text{block} + (\text{block}|\text{tangram}) + (1|\text{tangram:gameId}) + (\text{block}|\text{gameId})$

Term	Est.	95% CrI
Intercept	25.79	[20.97, 30.29]
block	-4.64	[-5.81, -3.53]

Table 12: Experiment 2: 6 thin: $\text{words} \sim \text{block} + (\text{block}|\text{tangram}) + (1|\text{tangram:gameId}) + (\text{block}|\text{gameId})$

Term	Est.	95% CrI
Intercept	20.3	[17.37, 23.53]
block	-2.1	[-3.37, -1.12]

Table 13: Experiment 3: words \sim block \times channel \times gameSize + (block \times channel \times gameSize|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	14.74	[11.68, 17.72]
block	-2.24	[-2.92, -1.57]
block:channelthin	0.29	[-0.56, 1.23]
block:channelthin:gameSize6	0.64	[-0.59, 1.81]
block:gameSize6	-1.22	[-2.06, -0.29]
channelthin	0.80	[-2.85, 4.26]
channelthin:gameSize6	-2.21	[-7.16, 3.08]
gameSize6	7.51	[3.63, 11.3]

Extra reduction model

For experiment 1, we also pre-specified a model about whether the describer's correctness on the prior block (when they were a matcher) had an effect on how many words of description they produced. Priors were the same as for primary reduction model.

Table 14: Experiment 1: words \sim block \times numPlayers + block \times wasINcorrect + (block|tangram) + (1|playerId) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	12.16	[6.48, 18.07]
block	-2.17	[-3.39, -1]
block:numPlayers	-0.22	[-0.5, 0.06]
block:wasINcorrect	0.24	[-0.24, 0.72]
numPlayers	2.09	[0.88, 3.3]
wasINcorrect	3.07	[1.67, 4.45]

Log reduction model

As an exploratory check, we reran some of the primary reduction models using the log number of words as the DV; otherwise model specifications and priors were the same.

Table 15: Experiment 1 log reduction: logwords \sim block \times numPlayers + (block|tangram) + (1|playerId) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	2.75	[2.48, 3.01]
block	-0.38	[-0.47, -0.29]
block:numPlayers	0.01	[-0.01, 0.03]
numPlayers	0.07	[0.02, 0.12]

Table 16: Experiment 3 log reduction: $\text{logwords} \sim \text{block} \times \text{channel} \times \text{gameSize} + (\text{block} \times \text{channel} \times \text{gameSize} | \text{tangram}) + (1 | \text{tangram: gameId}) + (\text{block} | \text{gameId})$

Term	Est.	95% CrI
Intercept	2.50	[2.32, 2.69]
block	-0.27	[-0.32, -0.22]
block:channelthin	0.06	[0, 0.14]
block:channelthin:gameSize6	0.03	[-0.06, 0.13]
block:gameSize6	-0.02	[-0.09, 0.04]
channelthin	0.06	[-0.17, 0.29]
channelthin:gameSize6	-0.13	[-0.44, 0.18]
gameSize6	0.45	[0.23, 0.67]

Matcher reduction models

These models were not pre-registered.

For the model of how often any matchers made contributions, the priors were normal(0,1) for both beta and sd.

For the model of how much was said on trials when matchers talked, the priors were the same as for the primary (describer) reduction model.

Table 17: Experiment 1: words $\sim \text{block} \times \text{numPlayers} + (\text{block} | \text{gameId})$

Term	Est.	95% CrI
Intercept	4.72	[0.09, 9.44]
block	-0.17	[-1.53, 1.3]
block:numPlayers	-0.41	[-0.72, -0.11]
numPlayers	2.07	[1, 3.12]

Table 18: Experiment 1: is.words $\sim \text{block} \times \text{numPlayers} + (1 | \text{gameId})$

Term	Est.	95% CrI
Intercept	-2.67	[-3.54, -1.79]
block	-0.80	[-0.97, -0.62]
block:numPlayers	0.03	[-0.01, 0.07]
numPlayers	0.79	[0.58, 0.98]

Initial utterance reduction model

These models were not pre-registered. They looked at describer reduction only on words that were produced prior to the first matcher message each trial. These models were only run on experimental conditions where matchers could contribute textual responses.

Reduction models were run as linear models with the same priors as the primary reduction model.

Table 19: Experiment 1: words \sim block \times numPlayers + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	18.66	[14.58, 22.71]
block	-3.56	[-4.54, -2.55]
block:numPlayers	0.27	[0.03, 0.5]
numPlayers	-0.33	[-1.14, 0.53]

Table 20: Experiment 2: 6 same describer: words \sim block + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	18.06	[14.76, 21.44]
block	-2.49	[-3.19, -1.79]

Table 21: Experiment 2: 6 full feedback: words \sim block + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	16.69	[13.41, 20.02]
block	-2.49	[-3.34, -1.62]

Table 22: Experiment 3: words \sim block \times gameSize + (block \times gameSize|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	13.88	[11.62, 16.2]
block	-2.08	[-2.66, -1.47]
block:gameSize6	-0.65	[-1.43, 0.14]
gameSize6	5.13	[2, 7.95]

Linguistic content models

We ran a number of models predicting the cosine similarity between pairs of S-BERT embeddings of utterances. For all of these models, we used linear models with the priors $\text{normal}(.5,.2)$ for intercept, $\text{normal}(0,.1)$ for beta, and $\text{normal}(0,.05)$ for sd.

These models were verbally described (but not formally specified) in the pre-registrations for experiment 2 in the full feedback and thin conditions and for experiment 3, for looking at divergence between games, convergence within games (compared to first block, next block, and last block utterances), and divergence between tangrams within games.

Convergence within games: comparison to last round

This is the primary convergence metric presented in the main paper.

Table 23: Experiment 1: $\text{sim} \sim \text{earlier} \times \text{condition} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.517	[0.458, 0.573]
condition	-0.008	[-0.021, 0.005]
earlier	0.089	[0.076, 0.102]
earlier:condition	-0.008	[-0.011, -0.005]

Table 24: Experiment 2: 6 same describer: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.499	[0.444, 0.556]
earlier	0.086	[0.078, 0.094]

Table 25: Experiment 2: 6 full feedback: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.438	[0.389, 0.487]
earlier	0.062	[0.051, 0.072]

Table 26: Experiment 2: 6 thin: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.498	[0.453, 0.54]
earlier	0.023	[0.013, 0.033]

Table 27: Experiment 3: $\text{sim} \sim \text{earlier} \times \text{channel} \times \text{gameSize} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.581	[0.542, 0.62]
channelthin	-0.034	[-0.08, 0.011]
channelthin:gameSize6	0.039	[-0.021, 0.097]
earlier	0.080	[0.074, 0.086]
earlier:channelthin	-0.025	[-0.033, -0.017]
earlier:channelthin:gameSize6	-0.035	[-0.047, -0.025]
earlier:gameSize6	0.009	[0.001, 0.017]
gameSize6	-0.069	[-0.113, -0.025]

Divergence across games

This is the divergence metric presented in the paper.

Table 28: Experiment 1: $\text{sim} \sim \text{block} \times \text{condition} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.468	[0.429, 0.507]
block	-0.035	[-0.038, -0.032]
block:condition	0.001	[0.001, 0.002]
condition	0.002	[0, 0.004]

Table 29: Experiment 2: 6 same describer: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.484	[0.442, 0.526]
block	-0.041	[-0.043, -0.039]

Table 30: Experiment 2: 6 full feedback: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.502	[0.46, 0.546]
block	-0.038	[-0.04, -0.035]

Table 31: Experiment 2: 6 thin: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.434	[0.406, 0.465]
block	-0.004	[-0.006, -0.001]

Table 32: Experiment 3: $\text{sim} \sim \text{block} \times \text{channel} \times \text{gameSize} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.411	[0.368, 0.453]
block	-0.024	[-0.025, -0.023]
block:channelthin	0.004	[0.002, 0.005]
block:channelthin:gameSize6	0.017	[0.015, 0.019]
block:gameSize6	-0.008	[-0.01, -0.007]
channelthin	0.014	[0.01, 0.018]
channelthin:gameSize6	-0.030	[-0.035, -0.024]
gameSize6	0.051	[0.047, 0.055]

Divergence across tangrams

This is an additional metric comparing the similarities between descriptions for different tangrams within a game. It measures how distinct the descriptions for different tangram images are.

Table 33: Experiment 1: $\text{sim} \sim \text{block} \times \text{condition} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.429	[0.382, 0.473]
block	-0.043	[-0.046, -0.039]
block:condition	0.000	[-0.001, 0.001]
condition	0.003	[-0.008, 0.014]

Table 34: Experiment 2: 6 same describer: $\text{sim} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.416	[0.389, 0.443]
block	-0.046	[-0.048, -0.044]

Table 35: Experiment 2: 6 full feedback: $\text{sim} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.459	[0.422, 0.496]
block	-0.047	[-0.049, -0.044]

Table 36: Experiment 2: 6 thin: $\text{sim} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.432	[0.393, 0.471]
block	-0.025	[-0.028, -0.022]

Table 37: Experiment 3: $\text{sim} \sim \text{block} \times \text{channel} \times \text{gameSize} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.378	[0.352, 0.404]
block	-0.027	[-0.029, -0.025]
block:channelthin	-0.001	[-0.003, 0.002]
block:channelthin:gameSize6	0.011	[0.008, 0.015]
block:gameSize6	-0.010	[-0.013, -0.008]
channelthin	0.038	[-0.001, 0.082]
channelthin:gameSize6	-0.053	[-0.115, 0]
gameSize6	0.073	[0.035, 0.113]

Convergence to next

We also looked at how similar an utterance was to the next block utterance for the same image in the same group: this can be thought of as the derivative of the to-last comparison. (Although cosine similarities are not actually additive in the same way integrals are).

Table 38: Experiment 1: $\text{sim} \sim \text{earlier} \times \text{condition} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.591	[0.541, 0.641]
condition	-0.004	[-0.014, 0.006]
earlier	0.063	[0.051, 0.075]
earlier:condition	-0.008	[-0.011, -0.006]

Table 39: Experiment 2: 6 same describer: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.660	[0.619, 0.702]
earlier	0.043	[0.037, 0.05]

Table 40: Experiment 2: 6 full feedback: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.605	[0.569, 0.643]
earlier	0.015	[0.006, 0.024]

Table 41: Experiment 2: 6 thin: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.533	[0.49, 0.578]
earlier	0.010	[0, 0.019]

Table 42: Experiment 3: $\text{sim} \sim \text{earlier} \times \text{channel} \times \text{gameSize} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.714	[0.682, 0.746]
channelthin	-0.124	[-0.159, -0.088]
channelthin:gameSize6	0.000	[-0.051, 0.049]
earlier	0.046	[0.041, 0.052]
earlier:channelthin	-0.010	[-0.018, -0.002]
earlier:channelthin:gameSize6	-0.018	[-0.029, -0.007]
earlier:gameSize6	-0.003	[-0.011, 0.004]
gameSize6	-0.034	[-0.069, 0.003]

Divergence from first

We also looked at how similar an utterance was to the first block utterance for the same image. This is not very informative because first round utterances tend to be pretty noisy with lots of hedges and filler words.

Table 43: Experiment 1: $\text{sim} \sim \text{later} \times \text{condition} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.647	[0.591, 0.705]
condition	-0.010	[-0.022, 0.003]
later	-0.030	[-0.041, -0.019]
later:condition	0.001	[-0.002, 0.004]

Table 44: Experiment 2: 6 same describer: $\text{sim} \sim \text{later} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.680	[0.628, 0.728]
later	-0.042	[-0.049, -0.035]

Table 45: Experiment 2: 6 full feedback: $\text{sim} \sim \text{later} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.644	[0.584, 0.706]
later	-0.044	[-0.052, -0.037]

Table 46: Experiment 2: 6 thin: $\text{sim} \sim \text{later} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.537	[0.49, 0.584]
later	-0.014	[-0.023, -0.004]

Table 47: Experiment 3: $\text{sim} \sim \text{later} \times \text{channel} \times \text{gameSize} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.721	[0.681, 0.76]
channelthin	-0.076	[-0.123, -0.026]
channelthin:gameSize6	-0.062	[-0.127, 0.001]
gameSize6	-0.017	[-0.062, 0.03]
later	-0.034	[-0.039, -0.028]
later:channelthin	0.011	[0.003, 0.019]
later:channelthin:gameSize6	0.021	[0.01, 0.032]
later:gameSize6	-0.011	[-0.019, -0.004]

Exploratory Mega-analytic models

As an exploratory measure, we combined data across all experiments and re-ran the core set of models (same structure and priors as for the individual models). We binarized game thickness: all games that were not thin were counted as thick. The intercept condition is a 2-player game, in the thick condition, for the first block. Thinner means the game was in the thin condition; larger is per additional player, and block is per later block. Group size was coded based on assigned condition, not based on actual number of players at the time.

Table 48: Mega-analytic on accuracy: $\text{correct.num} \sim \text{block} \times \text{thinner} \times \text{larger} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.83	[1.6, 2.07]
block	0.46	[0.4, 0.52]
block:larger	-0.07	[-0.09, -0.05]
block:thinner	-0.12	[-0.21, -0.02]
block:thinner:larger	0.01	[-0.02, 0.04]
larger	-0.07	[-0.15, 0]
thinner	-0.50	[-0.89, -0.08]
thinner:larger	-0.02	[-0.14, 0.11]

Table 49: Mega-analytic of reduction: $\text{words} \sim \text{block} \times \text{thinner} \times \text{larger} + (\text{block}|\text{gameId})$

Term	Est.	95% CrI
Intercept	17.38	[15.59, 19.21]
block	-2.80	[-3.24, -2.36]
block:larger	-0.36	[-0.51, -0.2]
block:thinner	0.79	[0.04, 1.52]
block:thinner:larger	0.26	[0, 0.51]
larger	2.12	[1.5, 2.75]
thinner	-1.59	[-4.61, 1.55]
thinner:larger	-0.90	[-1.92, 0.11]

Table 50: Mega-analytic on divergence between groups: $\text{sim} \sim \text{block} \times \text{thinner} \times \text{larger}$

Term	Est.	95% CrI
Intercept	0.428	[0.426, 0.431]
block	-0.026	[-0.026, -0.025]
block:larger	-0.002	[-0.002, -0.002]
block:thinner	0.005	[0.004, 0.007]
block:thinner:larger	0.004	[0.004, 0.005]
larger	0.012	[0.011, 0.013]
thinner	-0.003	[-0.007, 0.001]
thinner:larger	-0.007	[-0.008, -0.006]

Table 51: Mega-analytic on convergence to last: $\text{sim} \sim \text{earlier} \times \text{larger} \times \text{thinner}$

Term	Est.	95% CrI
Intercept	0.546	[0.534, 0.558]
earlier	0.072	[0.067, 0.077]
earlier:larger	0.000	[-0.002, 0.002]
earlier:larger:thinner	-0.007	[-0.01, -0.004]
earlier:thinner	-0.016	[-0.025, -0.008]
larger	-0.016	[-0.021, -0.012]
larger:thinner	0.009	[0.002, 0.016]
thinner	0.001	[-0.021, 0.021]

Sensitivity check models

These are the same specification as the primary models, just on the subset of the data from games that were full and complete.

Accuracy

Table 52: Experiment 1 logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} \times \text{numPlayers} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	2.15	[1.5, 2.78]
block	0.43	[0.29, 0.57]
block:numPlayers	-0.02	[-0.05, 0.01]
numPlayers	-0.08	[-0.22, 0.07]

Table 53: Experiment 2: 6 same describer logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.81	[1.38, 2.27]
block	0.45	[0.37, 0.52]

Table 54: Experiment 2: 6 full feedback logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.72	[1.41, 2.05]
block	0.46	[0.39, 0.54]

Table 55: Experiment 2: 6 thin logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.86	[0.43, 1.29]
block	0.26	[0.21, 0.31]

Table 56: Experiment 3 logistic model of matcher accuracy: $\text{correct.num} \sim \text{block} \times \text{gameSize} \times \text{channel} + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	1.67	[1.4, 1.96]
block	0.41	[0.32, 0.5]
block:channelthin	-0.06	[-0.18, 0.06]
block:gameSize6	-0.02	[-0.12, 0.09]
block:gameSize6:channelthin	-0.14	[-0.27, 0]
channelthin	-0.36	[-0.77, 0.05]
gameSize6	-0.43	[-0.9, 0.03]
gameSize6:channelthin	0.42	[-0.21, 1.04]

Reduction

Table 57: Experiment 1: words \sim block \times numPlayers + (block|tangram) + (1|playerId) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	17.22	[11.42, 22.74]
block	-3.35	[-4.64, -2.05]
block:numPlayers	-0.09	[-0.39, 0.21]
numPlayers	1.55	[0.43, 2.69]

Table 58: Experiment 2: 6 same describer: words \sim block + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	29.45	[23.78, 35.14]
block	-5.23	[-6.36, -4.05]

Table 59: Experiment 2: 6 full feedback: words \sim block + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	25.17	[20.16, 30.14]
block	-4.40	[-5.5, -3.28]

Table 60: Experiment 2: 6 thin: words \sim block + (block|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	20.35	[16.21, 24.45]
block	-1.70	[-3.03, -0.38]

Table 61: Experiment 3: words \sim block \times channel \times gameSize + (block \times channel \times gameSize|tangram) + (1|tangram:gameId) + (block|gameId)

Term	Est.	95% CrI
Intercept	14.93	[12.54, 17.43]
block	-2.21	[-2.77, -1.67]
block:channelthin	0.26	[-0.48, 1.05]
block:channelthin:gameSize6	0.07	[-1.28, 1.45]
block:gameSize6	-0.35	[-1.32, 0.64]
channelthin	0.52	[-2.53, 3.52]
channelthin:gameSize6	0.58	[-4.8, 6.19]
gameSize6	3.99	[0.09, 8.14]

Convergence within games

Table 62: Experiment 1: $\text{sim} \sim \text{earlier} \times \text{condition} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.517	[0.458, 0.575]
condition	-0.008	[-0.02, 0.005]
earlier	0.090	[0.077, 0.103]
earlier:condition	-0.008	[-0.011, -0.005]

Table 63: Experiment 2: 6 same describer: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.501	[0.443, 0.556]
earlier	0.087	[0.079, 0.095]

Table 64: Experiment 2: 6 full feedback: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.438	[0.388, 0.486]
earlier	0.062	[0.052, 0.072]

Table 65: Experiment 2: 6 thin: $\text{sim} \sim \text{earlier} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.499	[0.448, 0.55]
earlier	0.022	[0.011, 0.032]

Table 66: Experiment 3: $\text{sim} \sim \text{earlier} \times \text{channel} \times \text{gameSize} + (1|\text{tangram}) + (1|\text{gameId})$

Term	Est.	95% CrI
Intercept	0.583	[0.549, 0.618]
channelthin	-0.037	[-0.084, 0.008]
channelthin:gameSize6	0.010	[-0.069, 0.09]
earlier	0.080	[0.075, 0.086]
earlier:channelthin	-0.023	[-0.032, -0.015]
earlier:channelthin:gameSize6	-0.031	[-0.046, -0.015]
earlier:gameSize6	0.006	[-0.005, 0.017]
gameSize6	-0.058	[-0.116, -0.003]

Divergence between games

Table 67: Experiment 1: $\text{sim} \sim \text{block} \times \text{condition} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.468	[0.426, 0.51]
block	-0.034	[-0.037, -0.03]
block:condition	0.001	[0, 0.002]
condition	0.002	[0, 0.005]

Table 68: Experiment 2: 6 same describer: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.469	[0.429, 0.516]
block	-0.038	[-0.041, -0.036]

Table 69: Experiment 2: 6 full feedback: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.509	[0.461, 0.554]
block	-0.040	[-0.043, -0.037]

Table 70: Experiment 2: 6 thin: $\text{sim} \sim \text{block} + (1|\text{tangram})$

Term	Est.	95% CrI
Intercept	0.441	[0.401, 0.478]
block	-0.007	[-0.011, -0.004]