Data

Dataset of N_T trajectories, each with:

- Parameters $\mu_i \in \mathbb{R}^{N_\mu}$
- Forcing $f_i(t) \in \mathbb{R}^{N_f}$
- FOM solution $u_i(t) \in \mathbb{R}^D$

μ_1, $f_1(t)$, 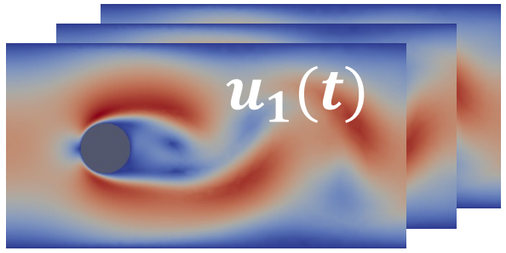

μ_{N_T}, $f_{N_T}(t)$, 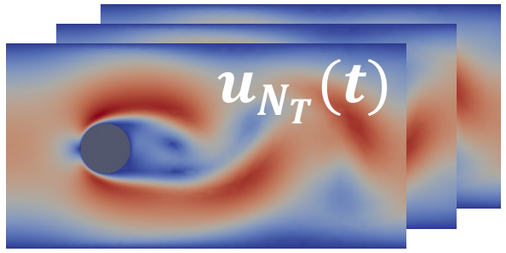

Training

Model: Three parametrized modules

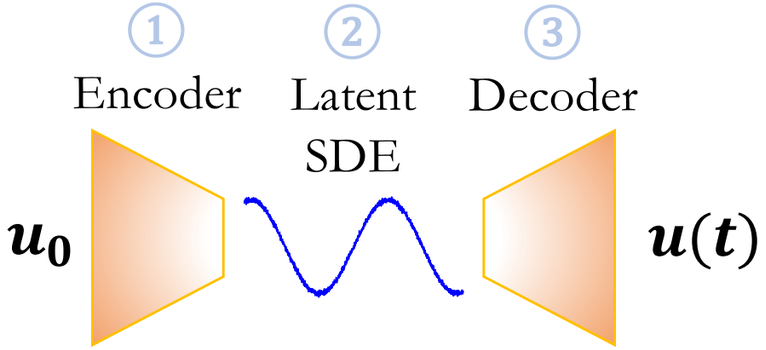

Variational distribution: Markov Gaussian process

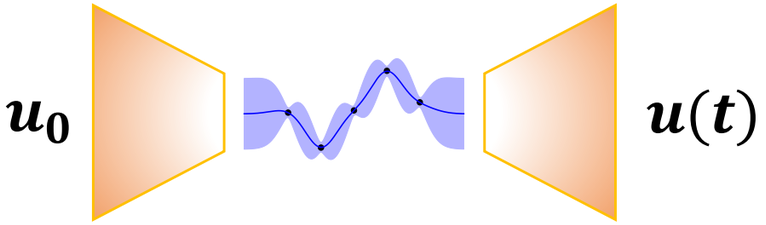

Minimize: KL divergence between variational distribution and true posterior given the dataset

Prediction

Given: test $\mu, f(t)$, and initial $u_0 \in \mathbb{R}^D$ 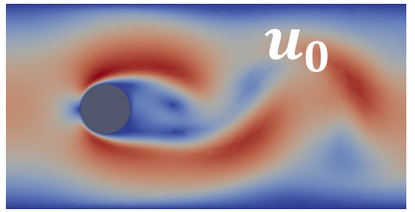

Step 1: encode initial condition u_0 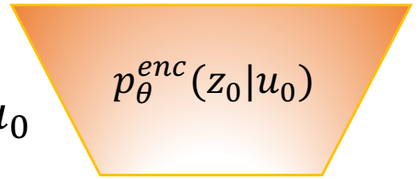

Step 2: solve latent SDE 

$$dz = \psi_\theta(z,t;\mu,f(t))dt + \Psi_\theta(t;\mu)d\beta$$

Step 3: decode solution $z(t)$ 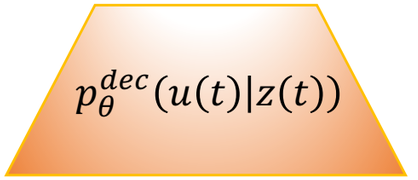

Result: ROM prediction $u(t)$