
kpp_vs_kppa

Unknown Author

November 25, 2014

```
In [19]: kppa_file = 'extended_box_model_Exa2Green/kpp-2.2.1.dat'
kpp_file = 'extended_box_model_Exa2Green/kpp-2.2.3.dat'
```

```
In [20]: %matplotlib inline
import re
from itertools import cycle
from pylab import *
from matplotlib.markers import MarkerStyle
import matplotlib.pyplot as plt

ATOL = 1.0e-2
RTOL = 1.0e-2
EPS = 2.2204460492503131E-016
REGEX = re.compile('^( [+\\-]? ) ([0-9.]+) e? ([+\\-]) ([0-9.]+) $')
def convert(s):
    """
    Converts a number in Fortran E24.16 format to a Python float
    """
    m = re.search(REGEX, s)
    if m:
        s = ''.join([m.group(1), m.group(2), 'e', m.group(3), m.group(4)])
    try:
        fval = float(s)
    except ValueError:
        print '=====> %s' % s
        fval = 0.0
    if fval < EPS:
        return 0.0
    else:
        return fval

def read_datfile(fname, tstart, cstart):
    """
    Read data from fname beginning on line tstart with concentration data beginning in
    Returns a tuple: (time, concentrations)
    Time data:
    [t0 t1 ... tN]
    Concentration data:
    [ [SPC_0(t0) SPC_1(t0) ... SPC_N(t0)]
      [SPC_0(t1) SPC_1(t1) ... SPC_N(t1)]
      : : :
      [SPC_0(tN) SPC_1(tN) ... SPC_N(tN)] ]
    """
    t = []
    c = []
    with open(fname, 'r') as f:
        while tstart:
            f.readline()
            tstart -= 1
        for line in f:
            parts = line.split()
```

```

        t.append(convert(parts[0]))
        c.append([convert(x) for x in parts[cstart:]])
    return t, c

def plot_dat(data, xlabel='Time', ylabel='Conc', names=None, titles=None):
    """
    Draw a plot of data read from read_datfile
    """
    lines = ['-', '--', '-.', ':']
    markers = MarkerStyle.filled_markers
    linecycler = cycle(lines)
    markercycler = cycle(markers)
    datastyles = ['%s%s' % (linecycler.next(), markercycler.next()) for _ in data]
    ndat = len(data)
    nspec = len(data[0][1][0])
    x = data[0][0]
    for i in xrange(0, nspec):
        fig, ax = plt.subplots()
        for j, dat in enumerate(data):
            t, c = dat
            y = [ct[i] for ct in c]
            style = datastyles[j]
            if names:
                label = '%s' % names[j]
            else:
                label = '%d' % j
            ax.plot(x, y, style, label=label)
        if ndat > 1:
            ax.legend(loc=2)
            ax.set_xlabel(xlabel)
            ax.set_ylabel(ylabel)
        if titles:
            ax.set_title(titles[i])
        else:
            ax.set_title('Species %d' % i)
        show()

def scaled_err(x, y):
    if x or y:
        return abs(x-y)/max(x, y)
    elif x == y:
        return 0.0
    else:
        return float('inf')

def calc_err(d0, d1):
    c0 = d0[1]
    c1 = d1[1]
    err = []
    nsteps = len(c0)
    nspec = len(c0[0])
    sigPow = 0.0
    errPow = 0.0
    errCount = 0.0
    for i in xrange(0, nsteps):
        e = []
        for j in xrange(0, nspec):
            x = c0[i][j]
            y = c1[i][j]
            sigPow += x*x
            errPow += (x-y)*(x-y)
            serr = scaled_err(x,y)
            if serr > RTOL:
                print '%g > %g: %g, %g' % (serr, RTOL, x, y)
                errCount += 1
        e.append(serr)

```

```

        err.append(e)
    if errPow > 0:
        snr = 20 * log10(sigPow / errPow)
    else:
        snr = float('inf')
    print 'SNR: %fdb' % snr
    if errCount:
        print '%d samples with relative error > %g' % (errCount, RTOL)
    return dl[0], err

```


In [21]: kppa_dat = read_datfile(kppa_file, 0, 1)
kpp_dat = read_datfile(kpp_file, 0, 1)



err_dat = calc_err(kpp_dat, kppa_dat)



In [22]: SNR: 273.575952db



plot_dat([kppa_dat, kpp_dat], names=[kppa_file, kpp_file], titles=None)


In [23]:

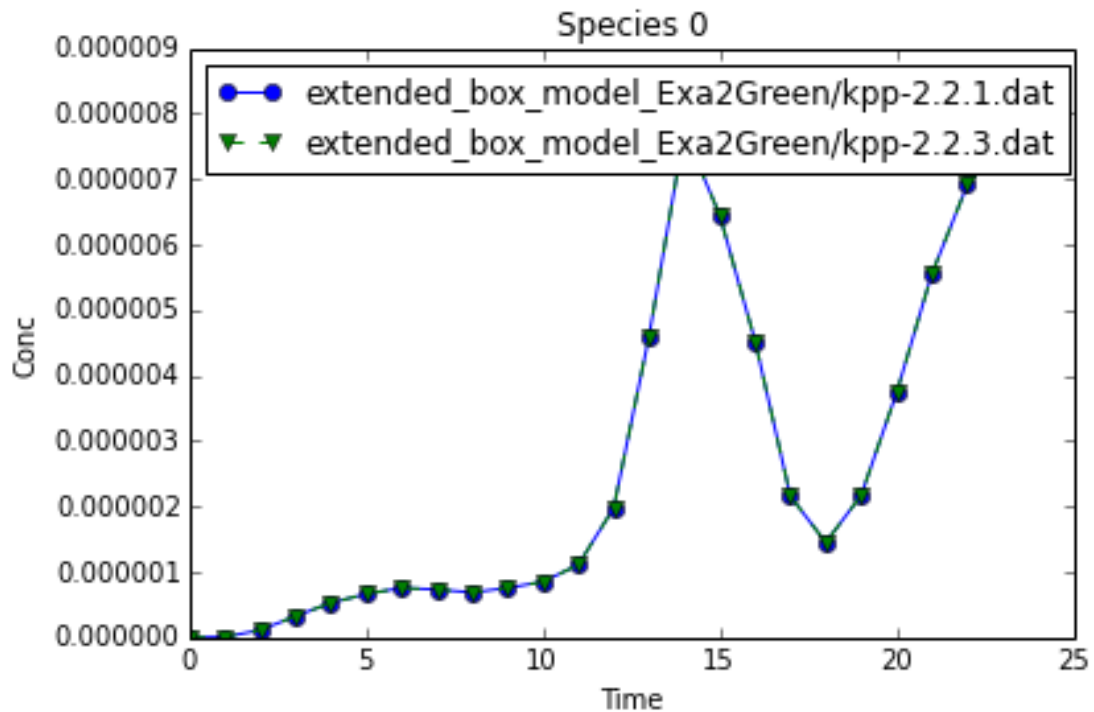

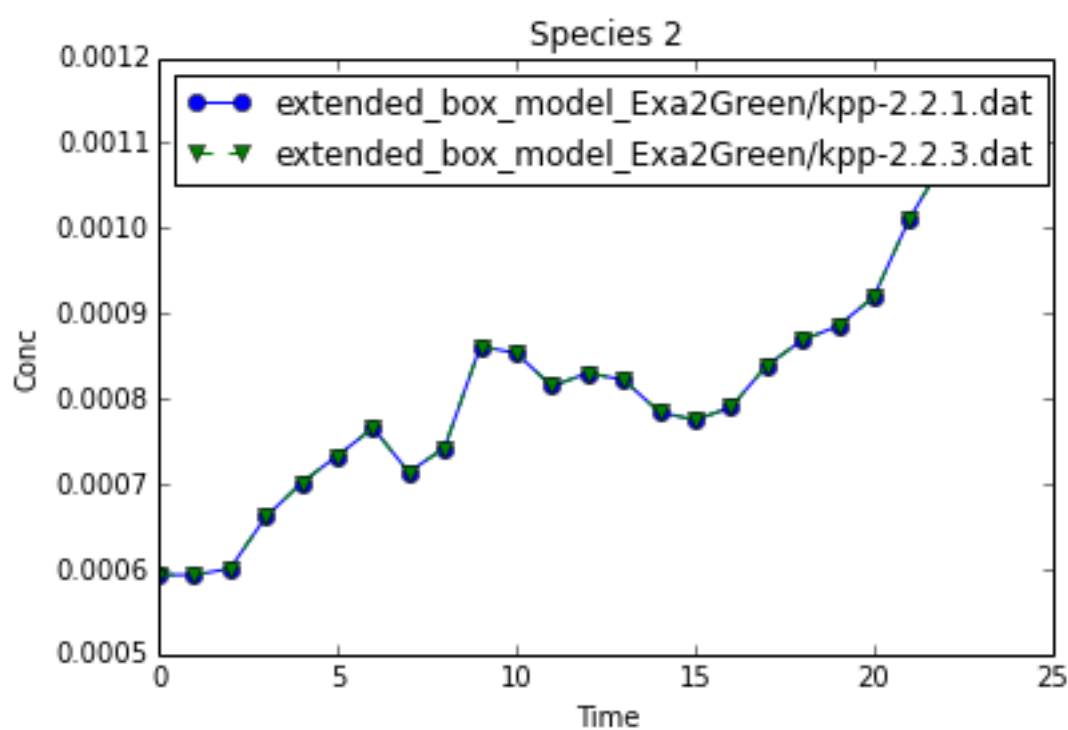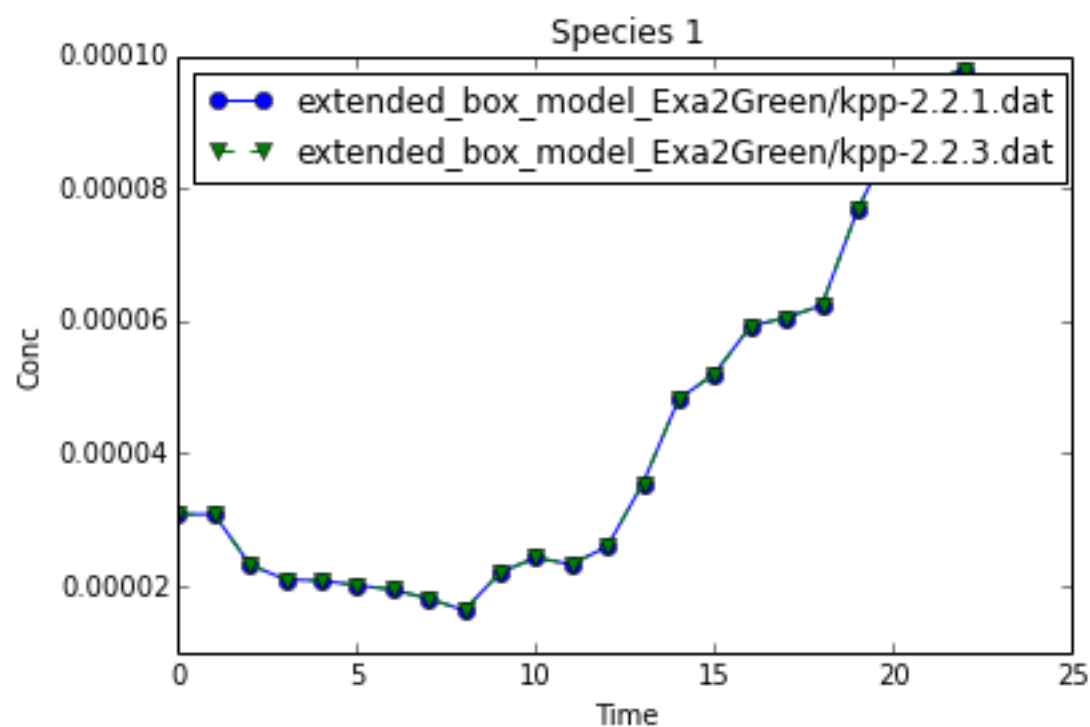

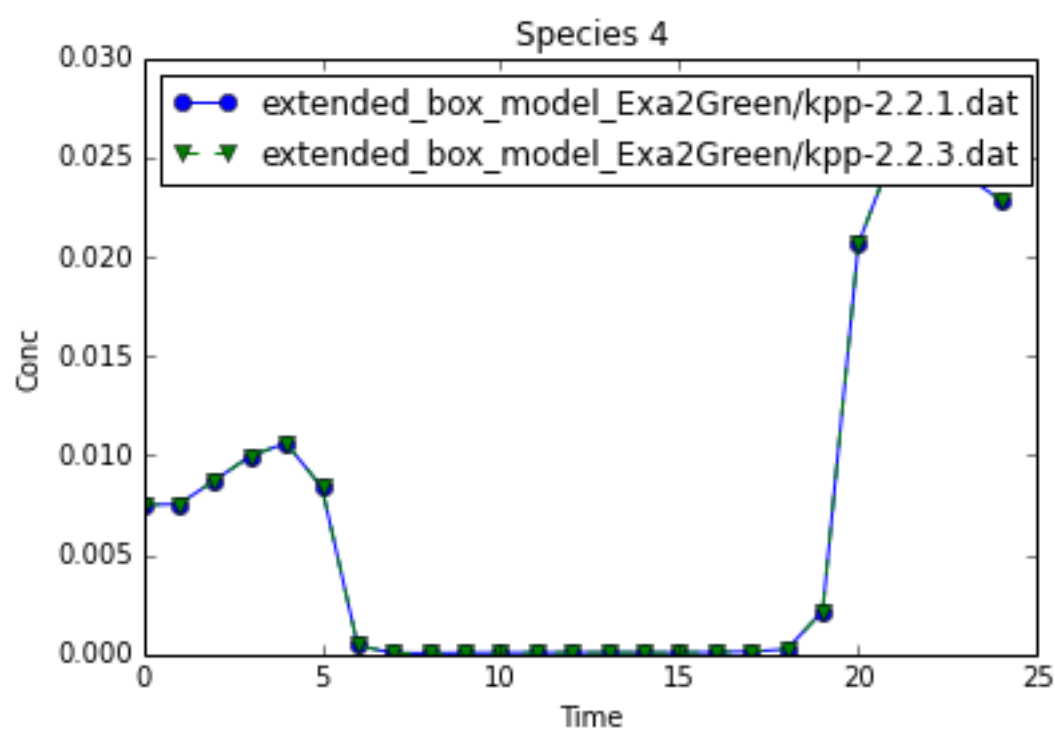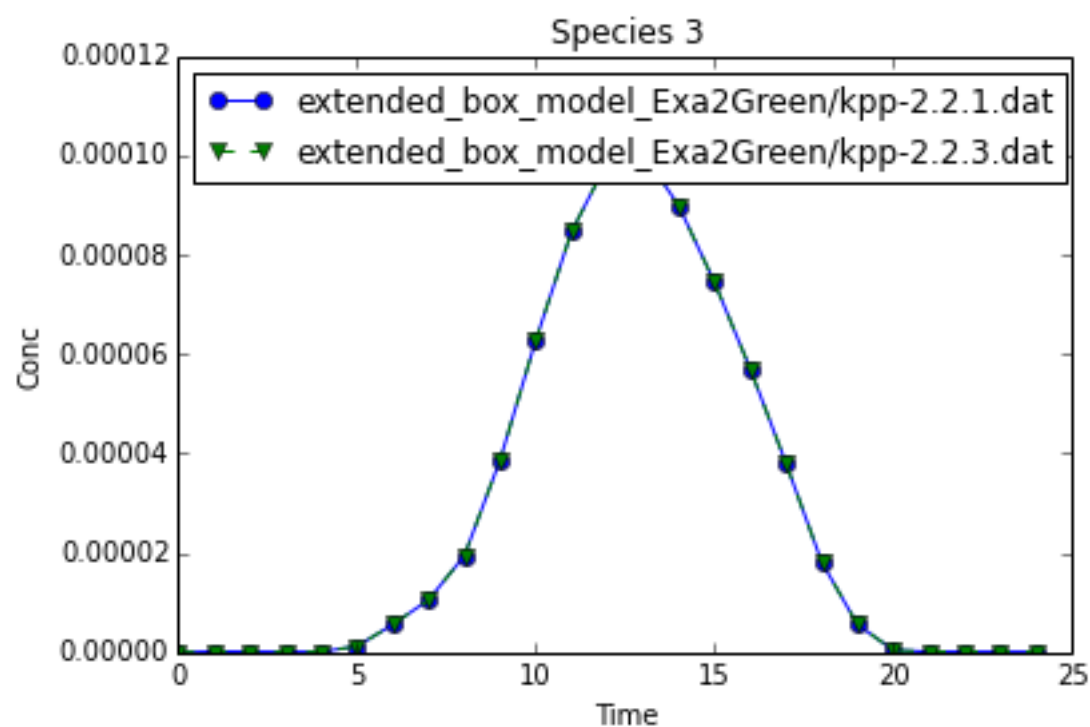


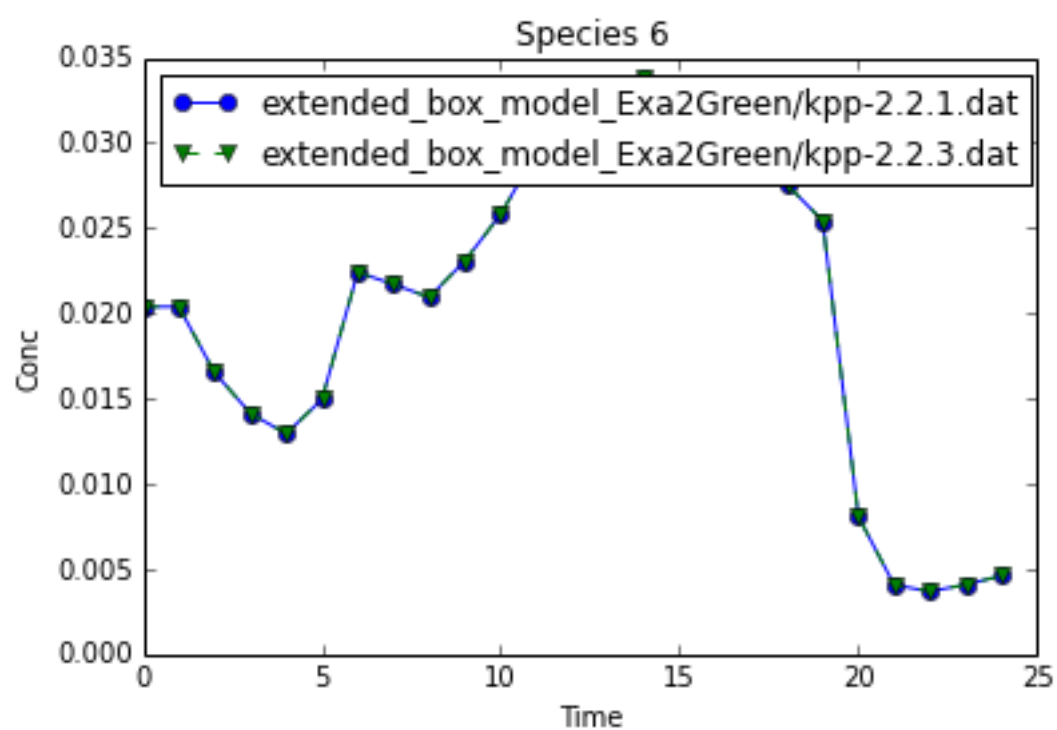
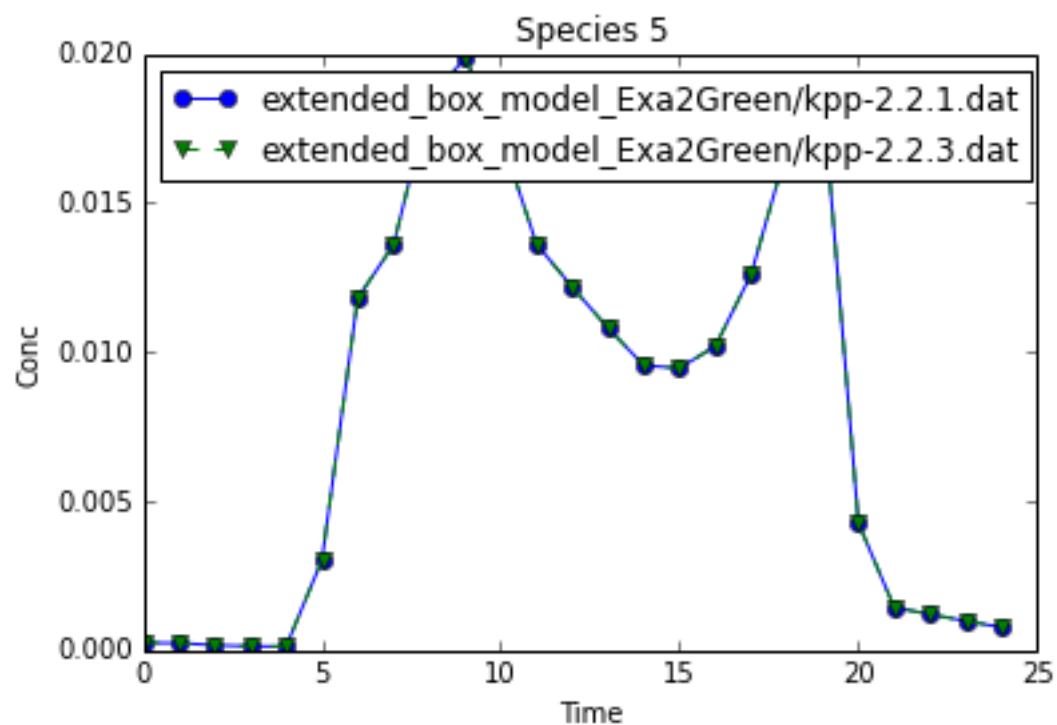



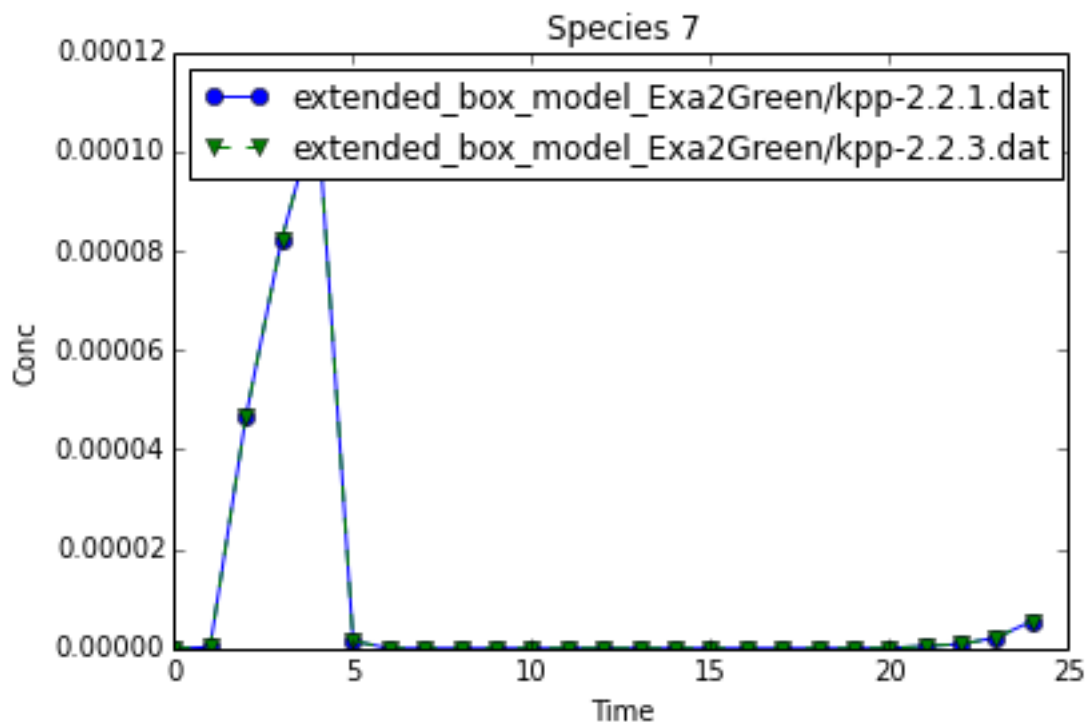




```
plot_dat([err_dat], ylabel='Relative Error')
```


In [24]:

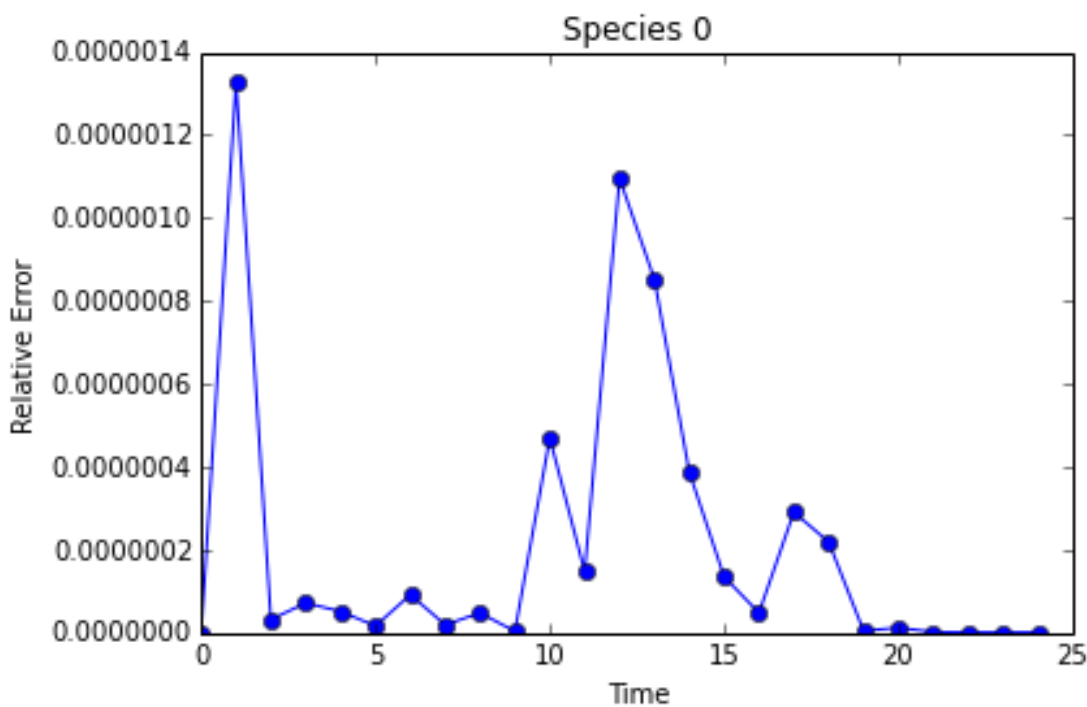

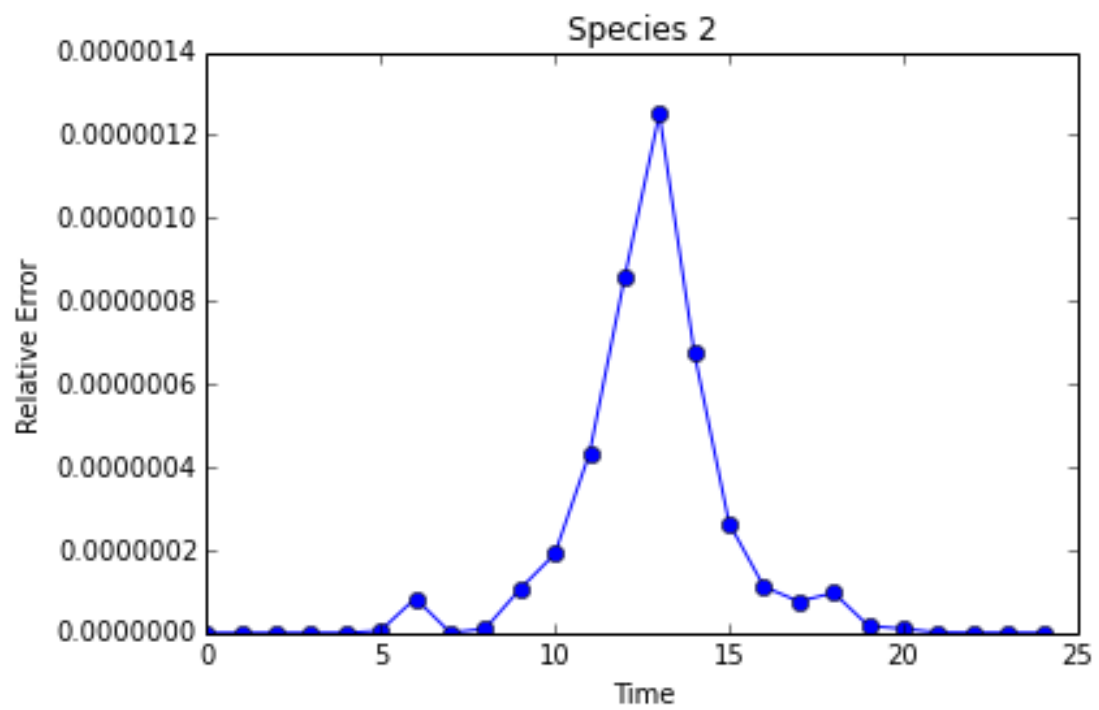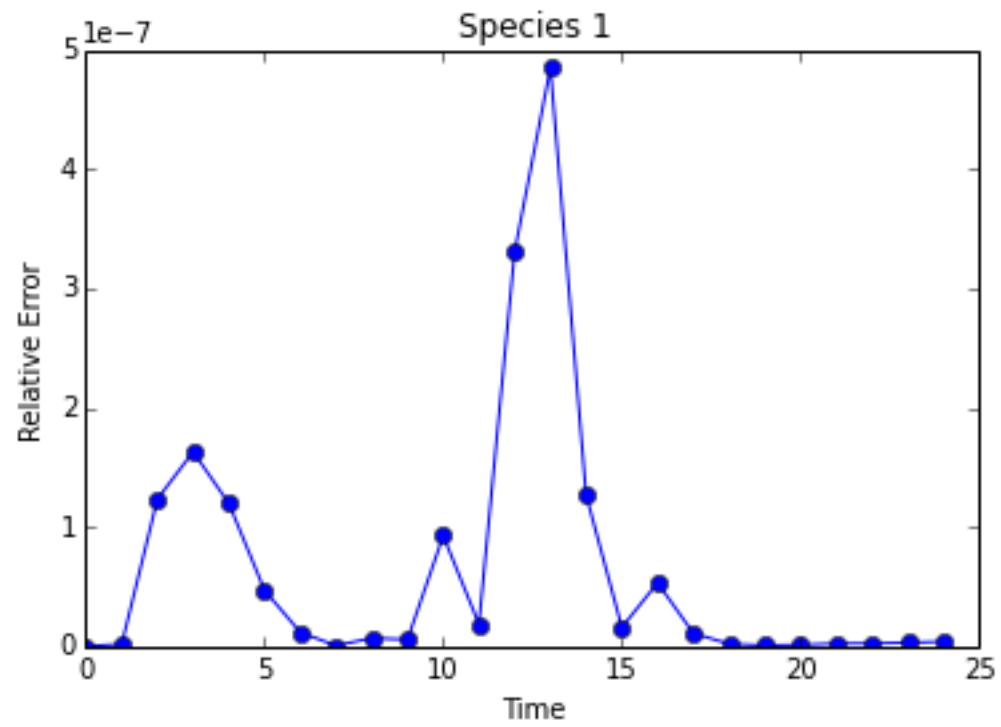

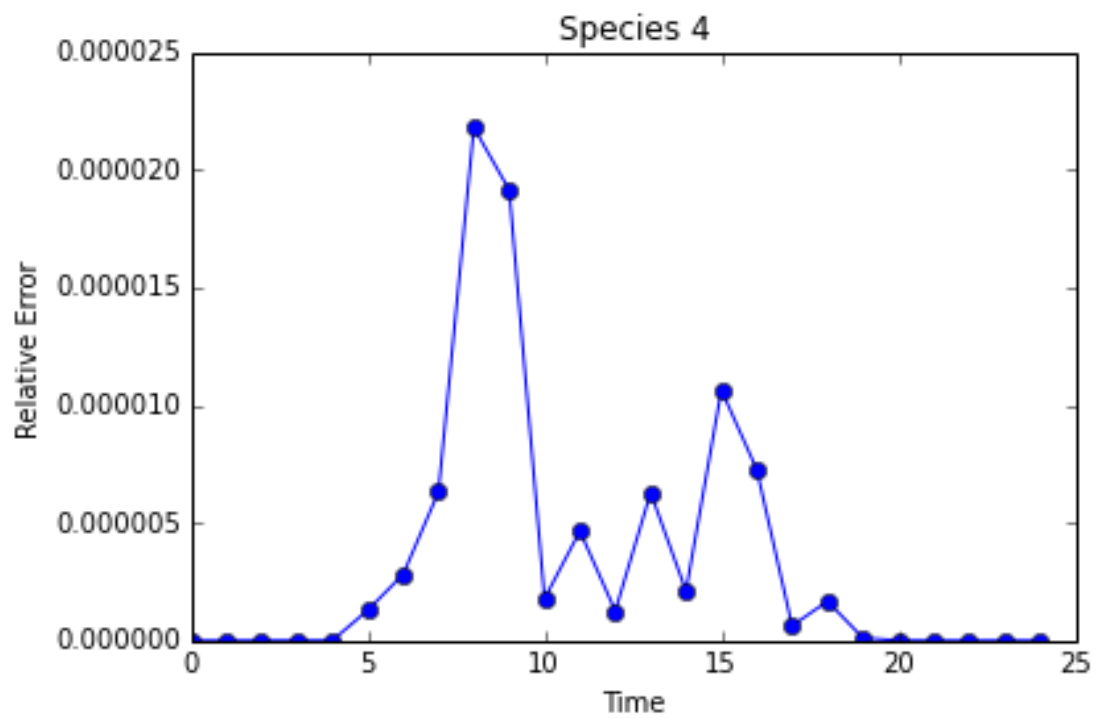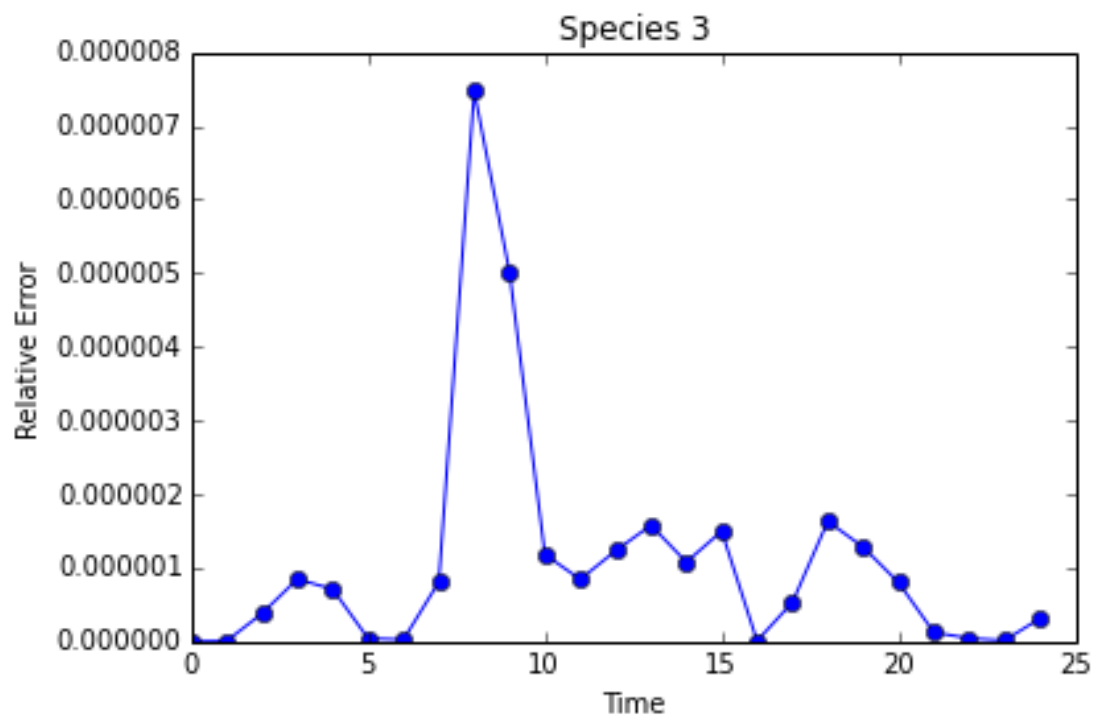

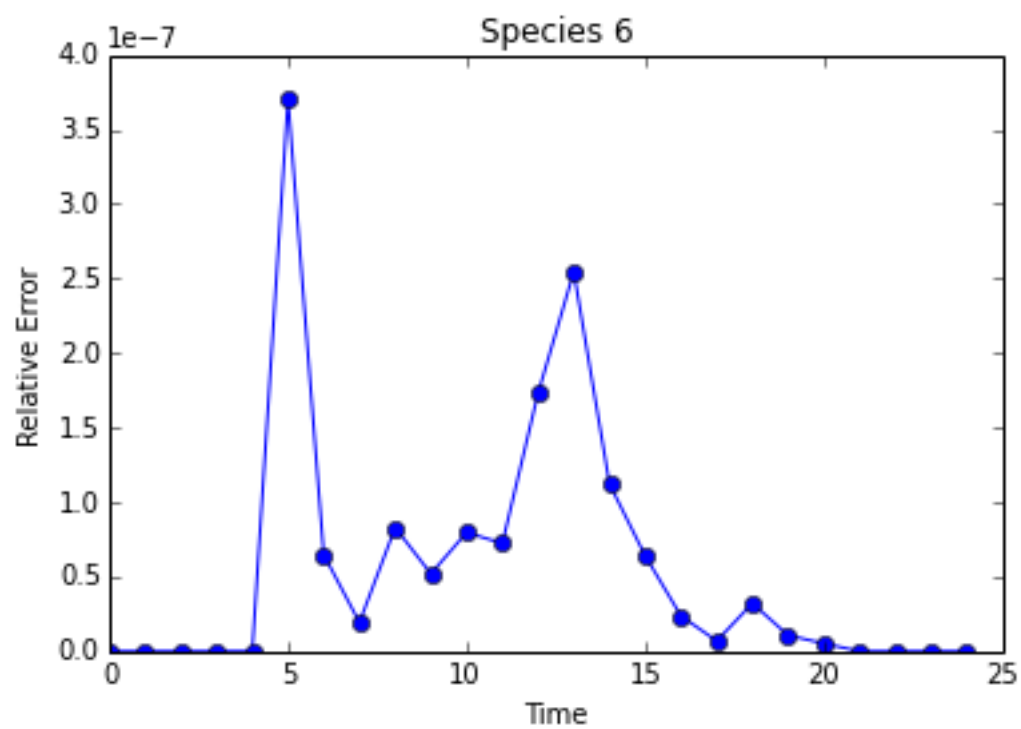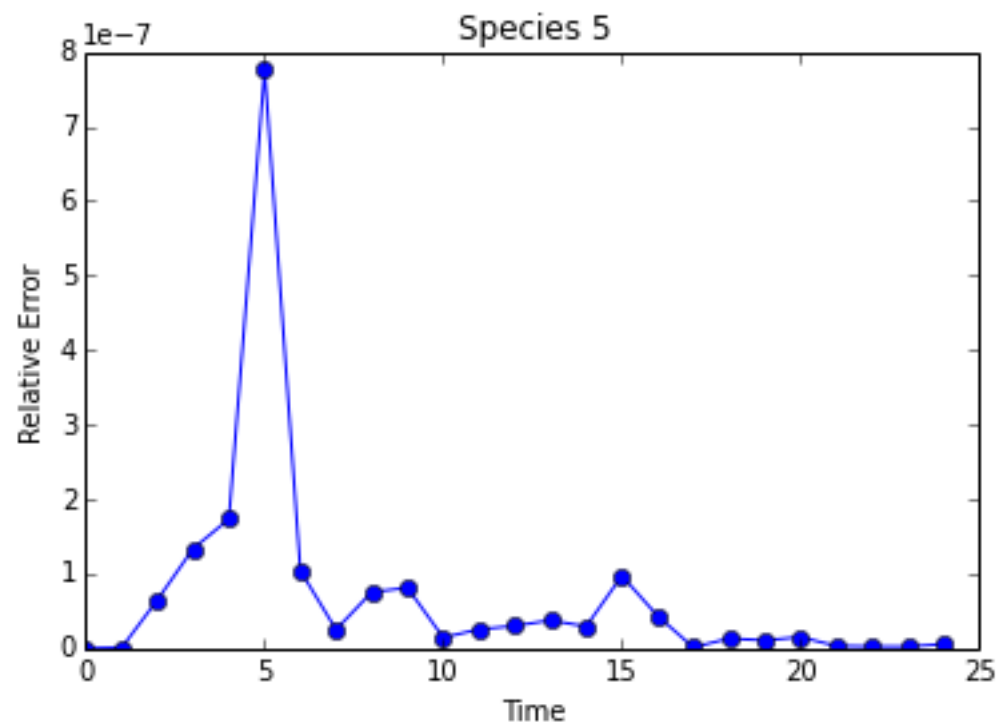

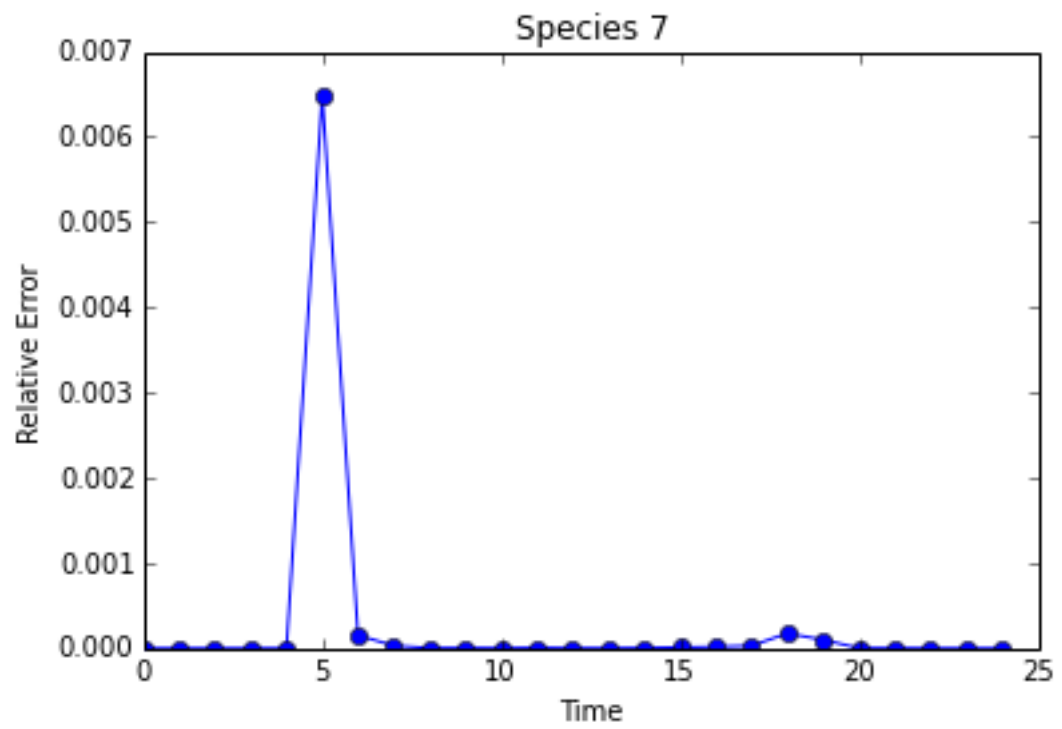

In [24]: