kpp_vs_kppa


Unknown Author


```
May 27, 2015
```

```
kpp_file_1 = 'extended_box_model_Exa2Green/box_model.dat_OpenMP'
In [37]: kpp_file_2 = 'extended_box_model_Exa2Green/box_model.dat_serial'
         %matplotlib inline
         import re
In [38]:
         from itertools import cycle
         from pylab import *
         from matplotlib.markers import MarkerStyle
         import matplotlib.pyplot as plt
         ATOL = 1.0e-2
         RTOL = 1.0e-2
         EPS = 2.2204460492503131E-016
         REGEX = re.compile('^([+\-]?)([0-9.]+)e?([+\-])([0-9.]+)$')
         def convert(s):
             Converts a number in Fortran E24.16 format to a Python float
             m = re.search(REGEX, s)
             if m:
                  s = ''.join([m.group(1), m.group(2), 'e', m.group(3), m.group(4)])
                  fval = float(s)
             except ValueError:
                 print '========> %s' % s
                 fval = 0.0
             if fval < EPS:</pre>
                 return 0.0
             else:
                  return fval
         def read_datfile(fname, tstart, cstart):
             Read data from fname beginning on line tstart with concentration data beginning in
             Returns a tuple: (time, concentrations)
             Time data:
              [t0 t1 ... tN]
             Concentration data:
              [ [SPC_0(t0) SPC_1(t0) \dots SPC_N(t0)] [SPC_0(t1) SPC_1(t1) \dots SPC_N(t1)]
              [SPC_0(tN) SPC_1(tN) ... SPC_N(tN)] ]
             C = []
             with open(fname, 'r') as f:
                  while tstart:
                     f.readline()
                      tstart -= 1
                  for line in f:
                      parts = line.split()
```


```
t.append(convert(parts[0]))
            c.append([convert(x) for x in parts[cstart:]])
    return t, c
def plot_dat(data, xlabel='Time', ylabel='Conc', names=None, titles=None);
    Draw a plot of data read from read_datfile
    lines = ['-', '--', '-.', ':']
    markers = MarkerStyle.filled_markers
    linecycler = cycle(lines)
    markercycler = cycle(markers)
    datastyles = ['%s%s' % (linecycler.next(), markercycler.next()) for _ in data]
    ndat = len(data)
    nspec = len(data[0][1][0])
    x = data[0][0]
    for i in xrange(0, nspec):
        fig, ax = plt.subplots()
        for j, dat in enumerate(data):
    t, c = dat
            y = [ct[i]  for ct  in c]
            style = datastyles[j]
            if names:
                label = '%s' % names[j]
            else:
                label = '%d' % j
            ax.plot(x, y, style, label=label)
        if ndat > 1:
            ax.legend(loc=2)
        ax.set_xlabel(xlabel)
        ax.set_ylabel(ylabel)
        if titles:
            ax.set_title(titles[i])
        else:
            ax.set_title('Species %d' % i)
        show()
def scaled_err(x, y):
    if x or y:
        return abs(x-y)/max(x, y)
    elif x == y:
        return 0.0
    else:
        return float('inf')
def calc_err(d0, d1):
    c0 = d0[1]
    c1 = d1[1]
    err = []
    nsteps = len(c0)
    nspec = len(c0[0])
    sigPow = 0.0
    errPow = 0.0
    errCount = 0.0
    for i in xrange(0, nsteps):
        e = []
        for j in xrange(0, nspec):
            \dot{x} = c0[i][j]
            y = c1[i][j]
            sigPow += x*x
            errPow += (x-y) * (x-y)
            serr = scaled\_err(x, y)
            if serr > RTOL:
                print '%g > %g: %g, %g' % (serr, RTOL, x, y)
                errCount += 1
            e.append(serr)
```


```
err.append(e)
             if errPow > 0:
    snr = 20 * log10(sigPow / errPow)
              else:
             snr = float('inf')
print 'SNR: %fdb' % snr
              if errCount:
                  print '%d samples with relative error > %g' % (errCount, RTOL)
              return d1[0], err
         kpp_dat_1 = read_datfile(kpp_file_1, 0, 1)
In [39]: kpp_dat_2 = read_datfile(kpp_file_2, 0, 1)
         err_dat = calc_err(kpp_dat_1, kpp_dat_2)
In [40]: SNR: infdb
         plot_dat([kpp_dat_1, kpp_dat_2], names=[kpp_file_1, kpp_file_2], titles=None)
In [41]:
                                          Species 0
             0.009
                          extended_box_model_Exa2Green/box_model.dat_OpenMP
             0.008
                          extended_box_model_Exa2Green/box_model.dat_serial
             0.007
             0.006
             0.005
             0.004
             0.003
             0.002
             0.001
             0.000
                                        10
                                                    15
                                                                20
                                                                           25
                                             Time
```

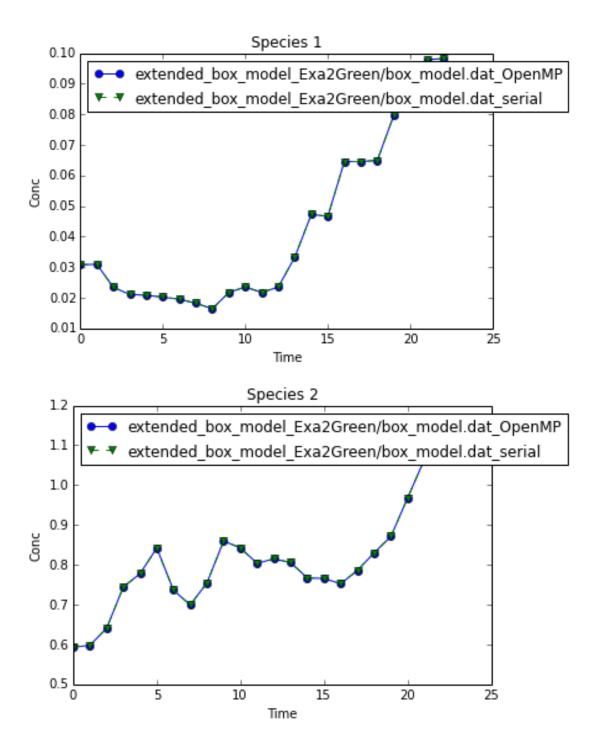


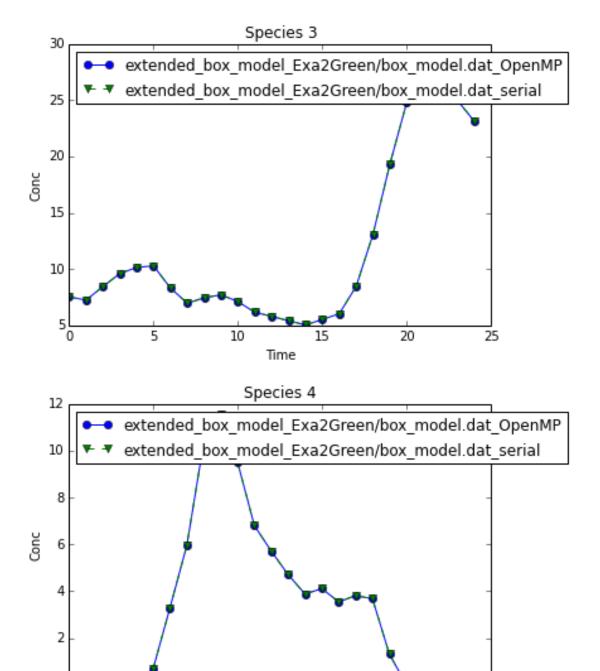


Time

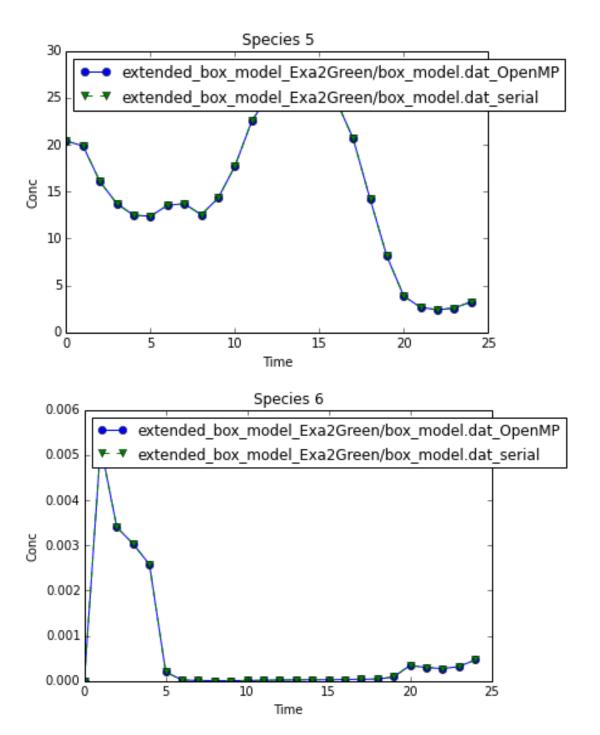


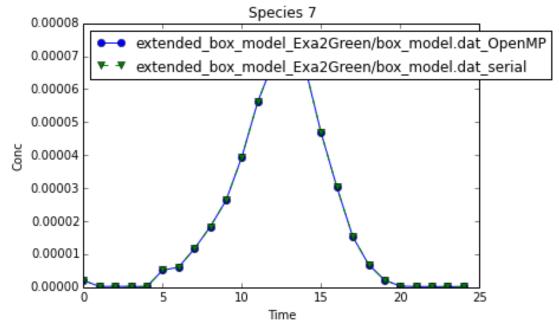


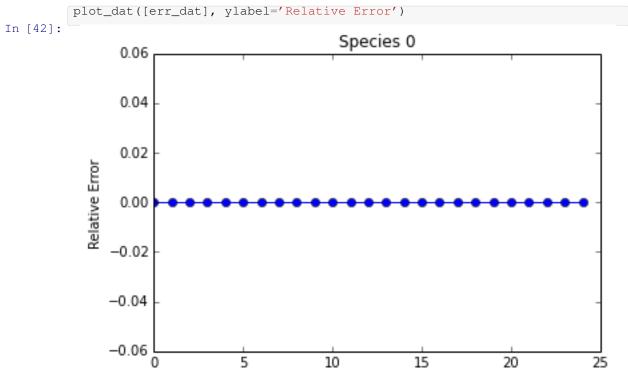


Time

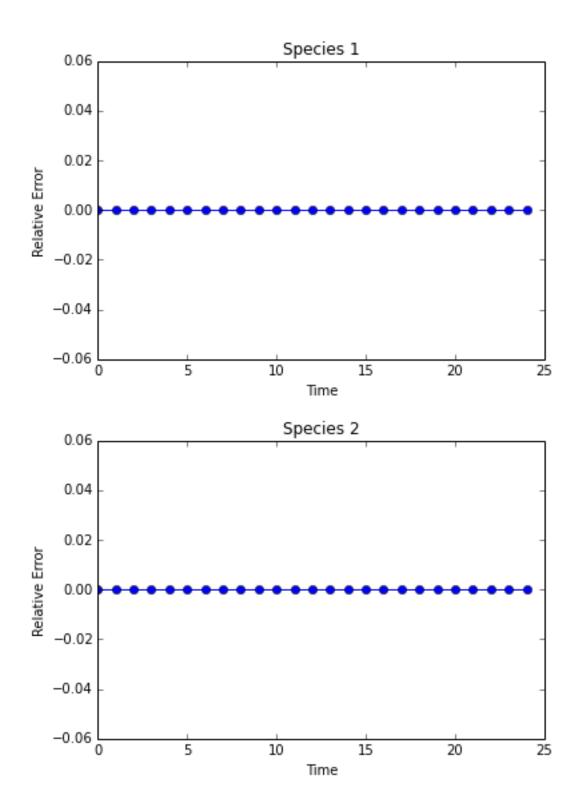

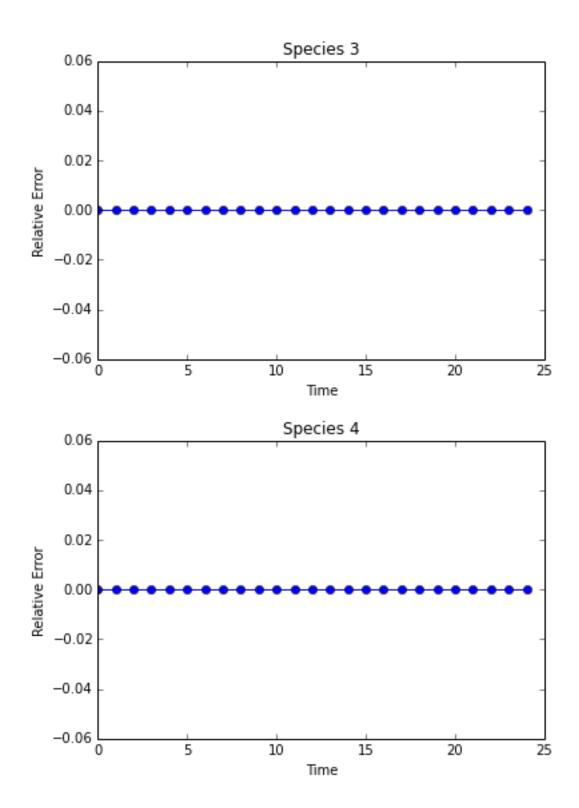

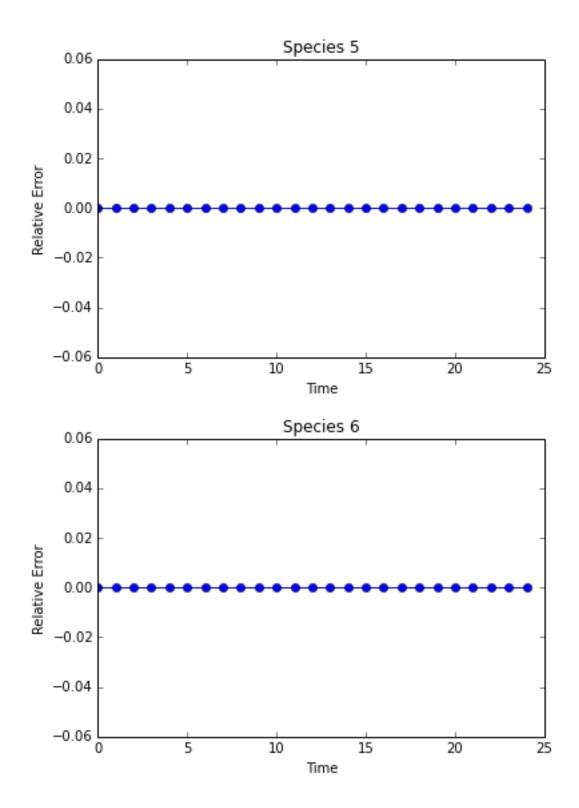

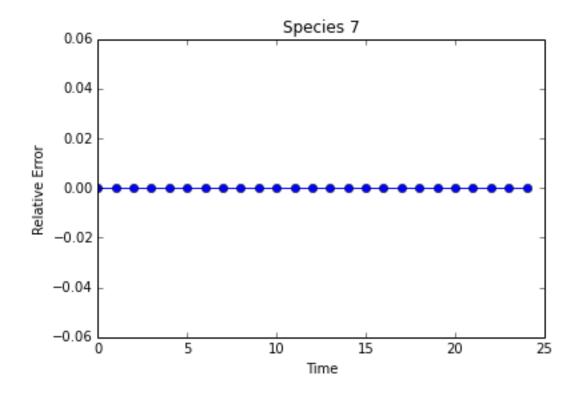

In [42]: