
kpp_vs_kppa

Unknown Author

May 27, 2015

```
In [25]: kpp_file_1 = 'extended_box_model_Exa2Green/box_model.dat_CUDA'
kpp_file_2 = 'extended_box_model_Exa2Green/box_model.dat_OpenMP'
```

```
In [26]: %matplotlib inline
import re
from itertools import cycle
from pylab import *
from matplotlib.markers import MarkerStyle
import matplotlib.pyplot as plt

ATOL = 1.0e-2
RTOL = 1.0e-2
EPS = 2.2204460492503131E-016
REGEX = re.compile('^( [+\\-]? ) ([0-9.]+) e? ([+\\-]) ([0-9.]+) $')
def convert(s):
    """
    Converts a number in Fortran E24.16 format to a Python float
    """
    m = re.search(REGEX, s)
    if m:
        s = ''.join([m.group(1), m.group(2), 'e', m.group(3), m.group(4)])
    try:
        fval = float(s)
    except ValueError:
        print '=====> %s' % s
        fval = 0.0
    if fval < EPS:
        return 0.0
    else:
        return fval

def read_datfile(fname, tstart, cstart):
    """
    Read data from fname beginning on line tstart with concentration data beginning in
    Returns a tuple: (time, concentrations)
    Time data:
    [t0 t1 ... tN]
    Concentration data:
    [ [SPC_0(t0) SPC_1(t0) ... SPC_N(t0)]
      [SPC_0(t1) SPC_1(t1) ... SPC_N(t1)]
      : : :
      [SPC_0(tN) SPC_1(tN) ... SPC_N(tN)] ]
    """
    t = []
    c = []
    with open(fname, 'r') as f:
        while tstart:
            f.readline()
            tstart -= 1
        for line in f:
            parts = line.split()
```

```

        t.append(convert(parts[0]))
        c.append([convert(x) for x in parts[cstart:]])
    return t, c

def plot_dat(data, xlabel='Time', ylabel='Conc', names=None, titles=None):
    """
    Draw a plot of data read from read_datfile
    """
    lines = ['-', '--', '-.', ':']
    markers = MarkerStyle.filled_markers
    linecycler = cycle(lines)
    markercycler = cycle(markers)
    datastyles = ['%s%s' % (linecycler.next(), markercycler.next()) for _ in data]
    ndat = len(data)
    nspec = len(data[0][1][0])
    x = data[0][0]
    for i in xrange(0, nspec):
        fig, ax = plt.subplots()
        for j, dat in enumerate(data):
            t, c = dat
            y = [ct[i] for ct in c]
            style = datastyles[j]
            if names:
                label = '%s' % names[j]
            else:
                label = '%d' % j
            ax.plot(x, y, style, label=label)
        if ndat > 1:
            ax.legend(loc=2)
        ax.set_xlabel(xlabel)
        ax.set_ylabel(ylabel)
        if titles:
            ax.set_title(titles[i])
        else:
            ax.set_title('Species %d' % i)
        show()

def scaled_err(x, y):
    if x or y:
        return abs(x-y)/max(x, y)
    elif x == y:
        return 0.0
    else:
        return float('inf')

def calc_err(d0, d1):
    c0 = d0[1]
    c1 = d1[1]
    err = []
    nsteps = len(c0)
    nspec = len(c0[0])
    sigPow = 0.0
    errPow = 0.0
    errCount = 0.0
    for i in xrange(0, nsteps):
        e = []
        for j in xrange(0, nspec):
            x = c0[i][j]
            y = c1[i][j]
            sigPow += x*x
            errPow += (x-y)*(x-y)
            serr = scaled_err(x,y)
            if serr > RTOL:
                print '%g > %g: %g, %g' % (serr, RTOL, x, y)
                errCount += 1
        e.append(serr)

```

```

        err.append(e)
    if errPow > 0:
        snr = 20 * log10(sigPow / errPow)
    else:
        snr = float('inf')
    print 'SNR: %fdb' % snr
    if errCount:
        print '%d samples with relative error > %g' % (errCount, RTOL)
    return dl[0], err

kpp_dat_1 = read_datfile(kpp_file_1, 0, 1)
kpp_dat_2 = read_datfile(kpp_file_2, 0, 1)


err_dat = calc_err(kpp_dat_1, kpp_dat_2)



In [28]: 0.0181199 > 0.01: 0.692642, 0.680091
0.0292056 > 0.01: 0.000193545, 0.000199368
0.0111126 > 0.01: 2.65865e-05, 2.6291e-05
0.0240418 > 0.01: 1.28057, 1.31212
0.0183933 > 0.01: 9.3078e-05, 9.1366e-05
0.0141128 > 0.01: 2.15374e-06, 2.18457e-06
0.0209582 > 0.01: 0.019172, 0.0195825
0.0821071 > 0.01: 0.000270325, 0.00024813
SNR: 124.431507db
8 samples with relative error > 0.01



plot_dat([kpp_dat_1, kpp_dat_2], names=[kpp_file_1, kpp_file_2], titles=None)



In [29]:


```

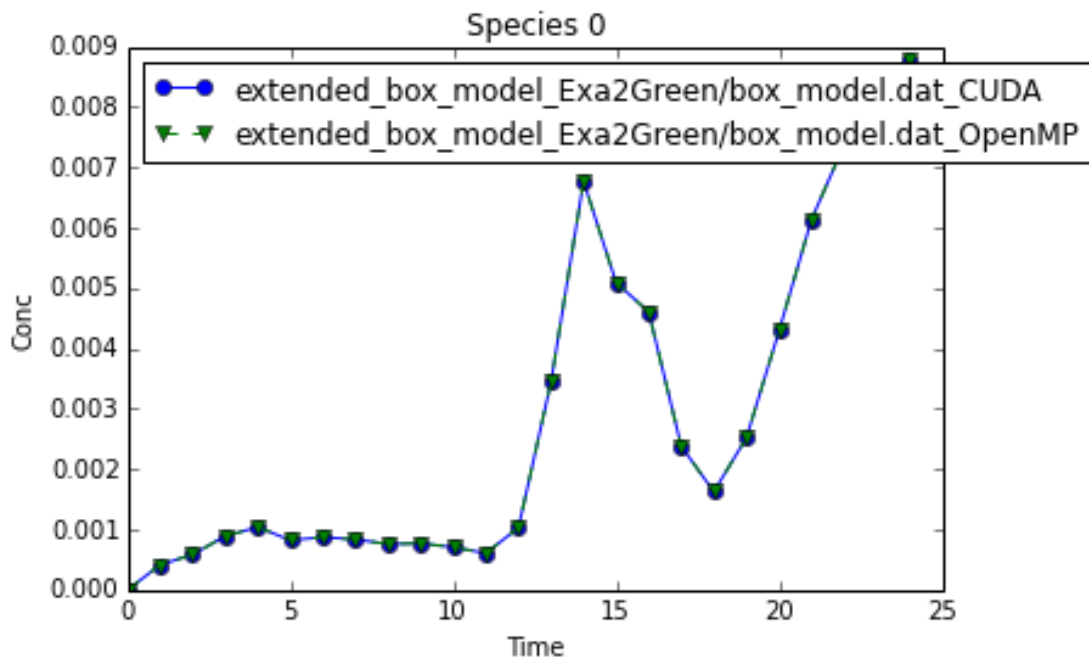

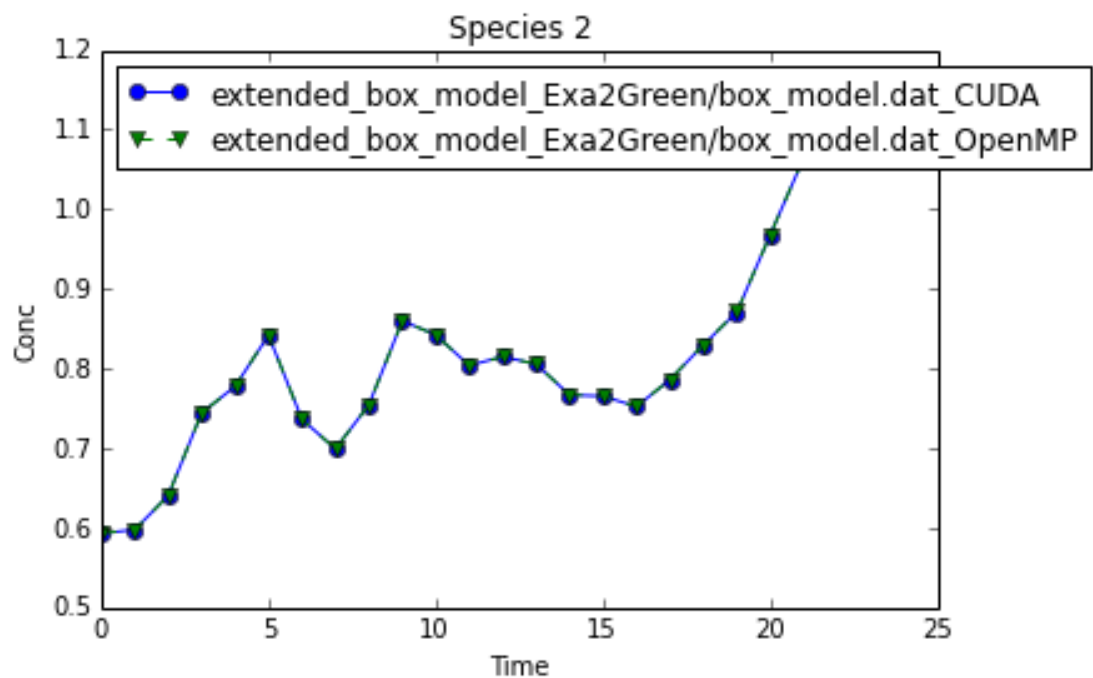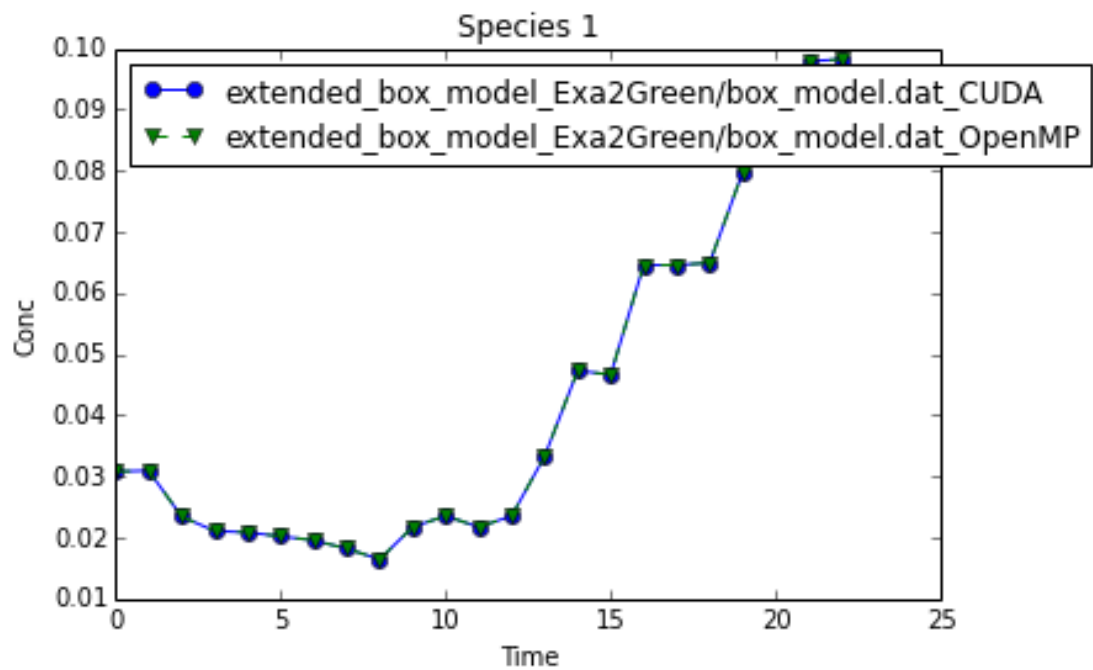

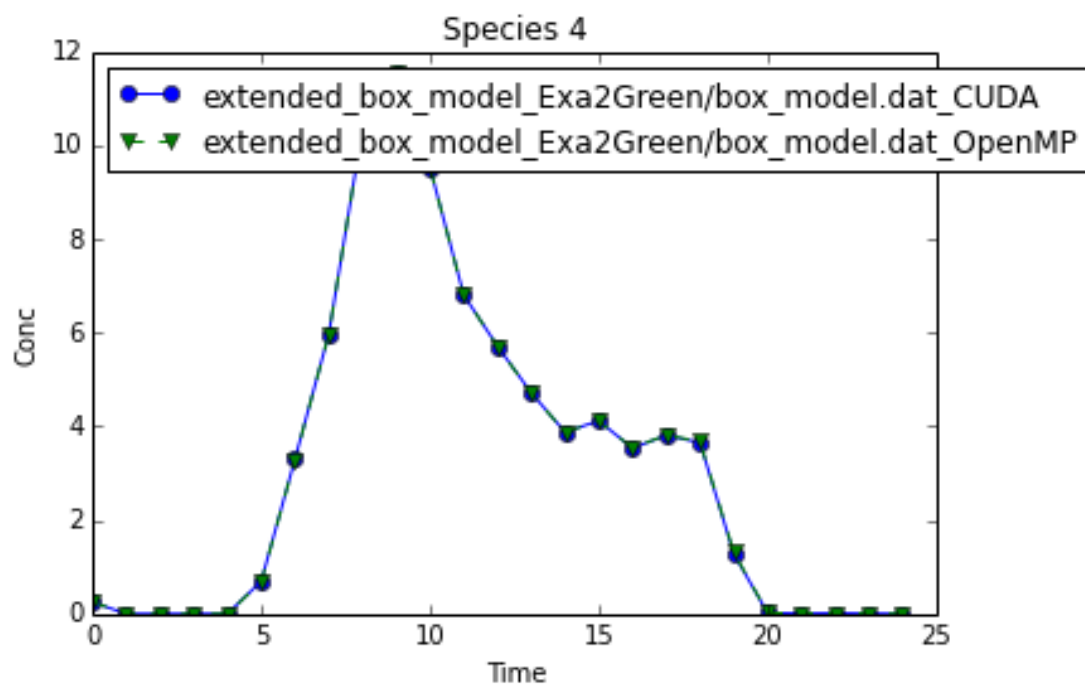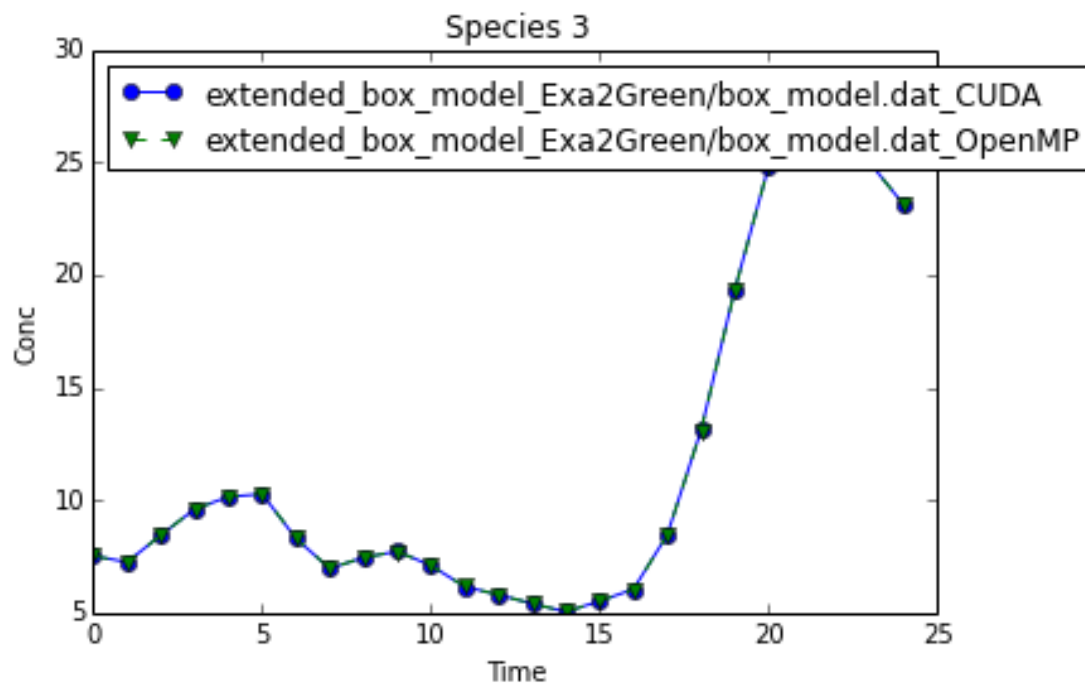


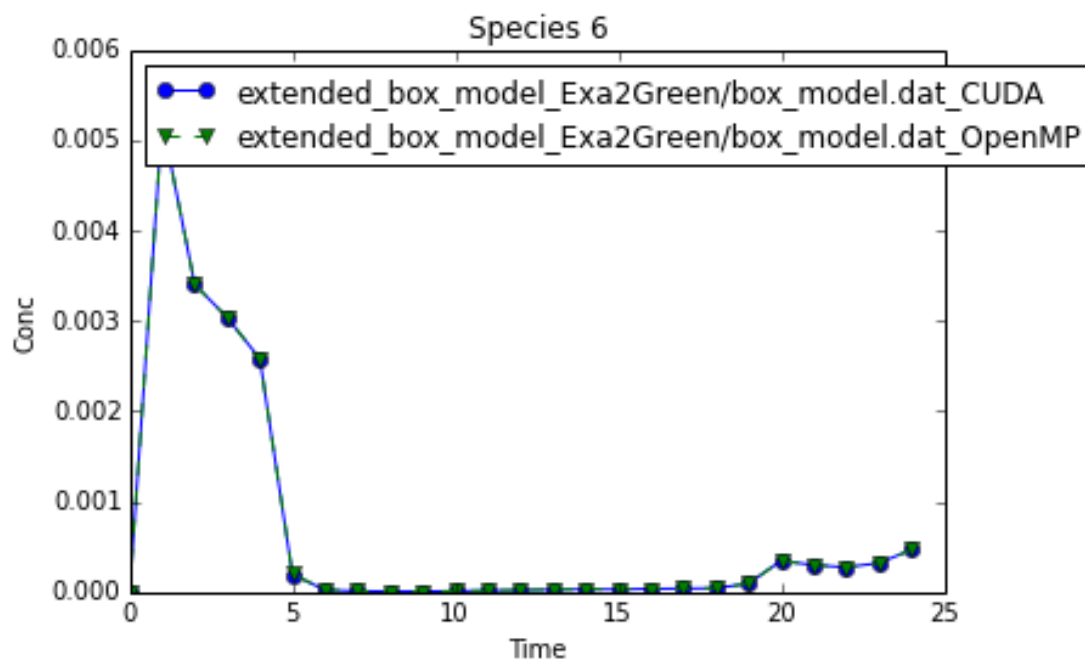
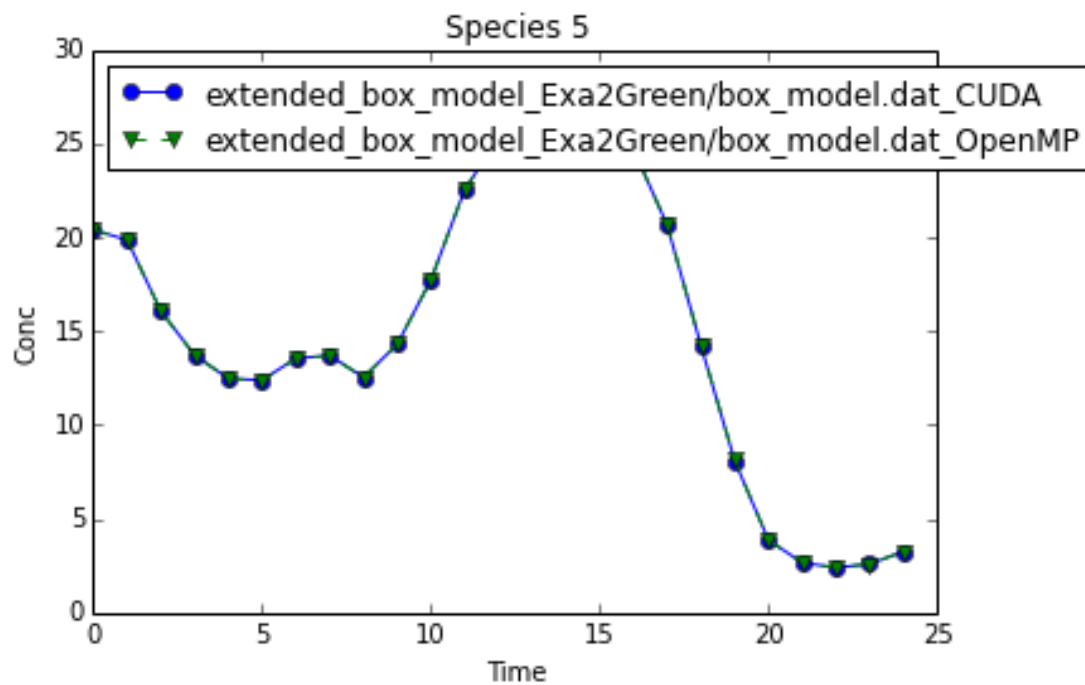



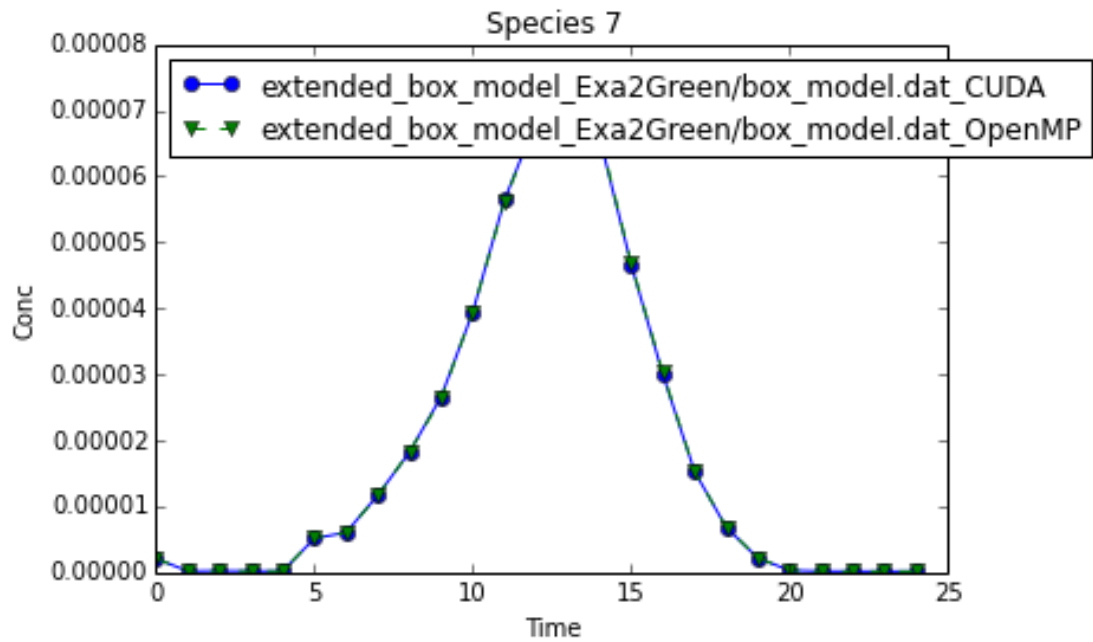




```
plot_dat([err_dat], ylabel='Relative Error')
```


In [30]:

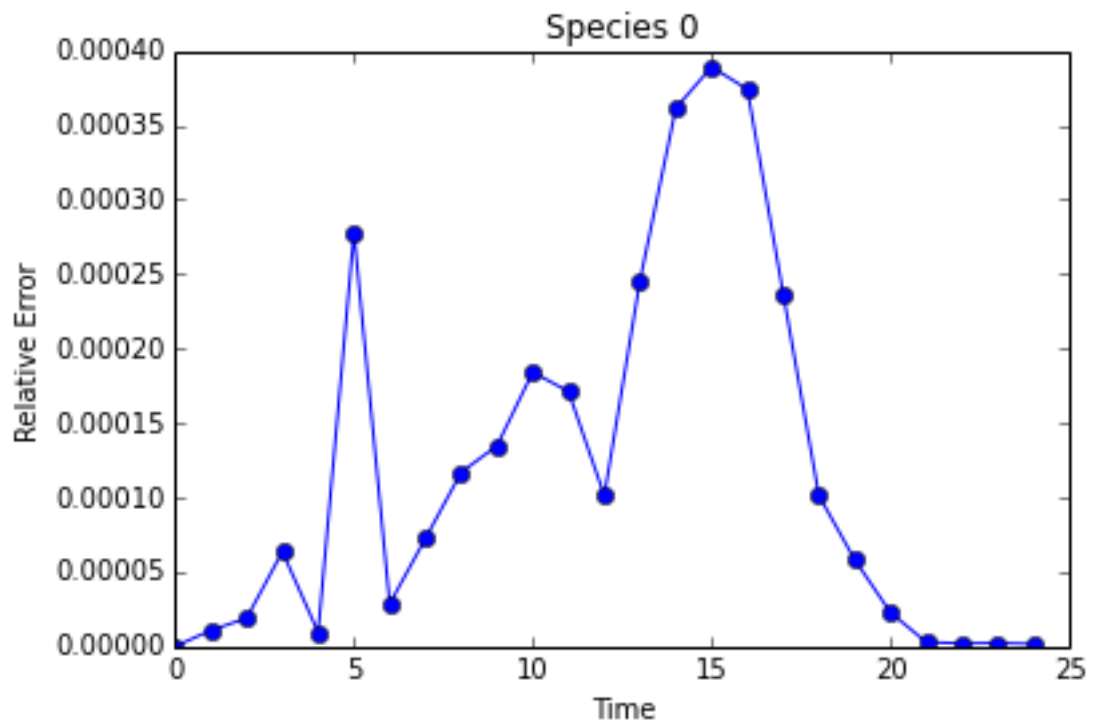

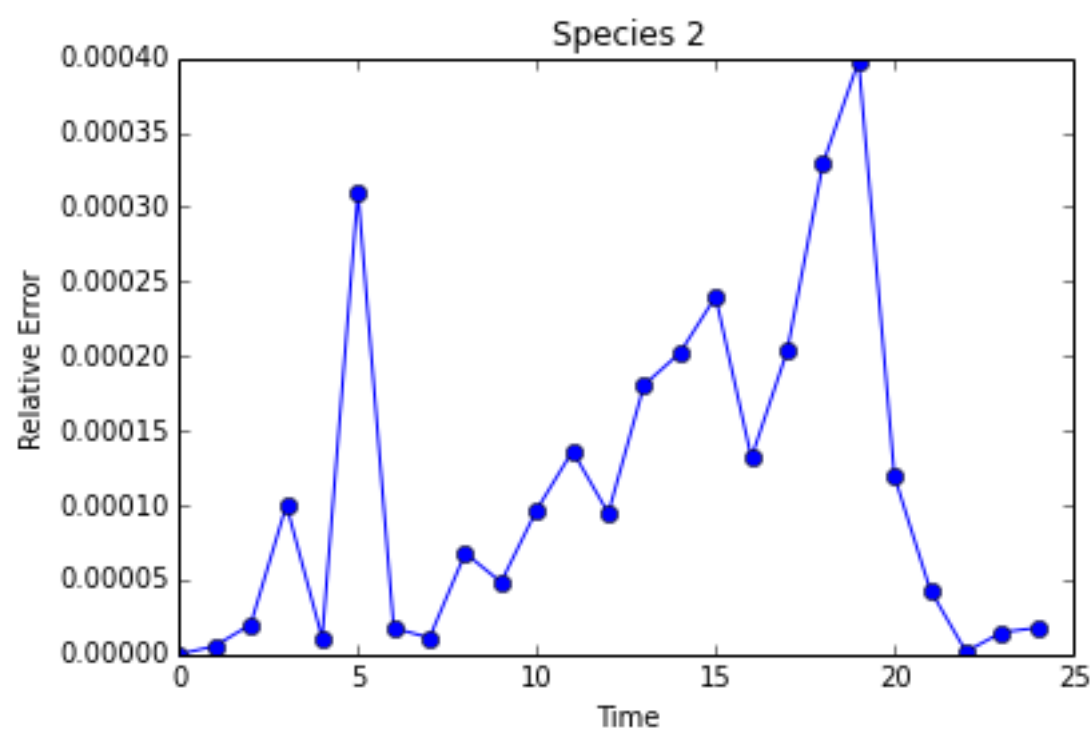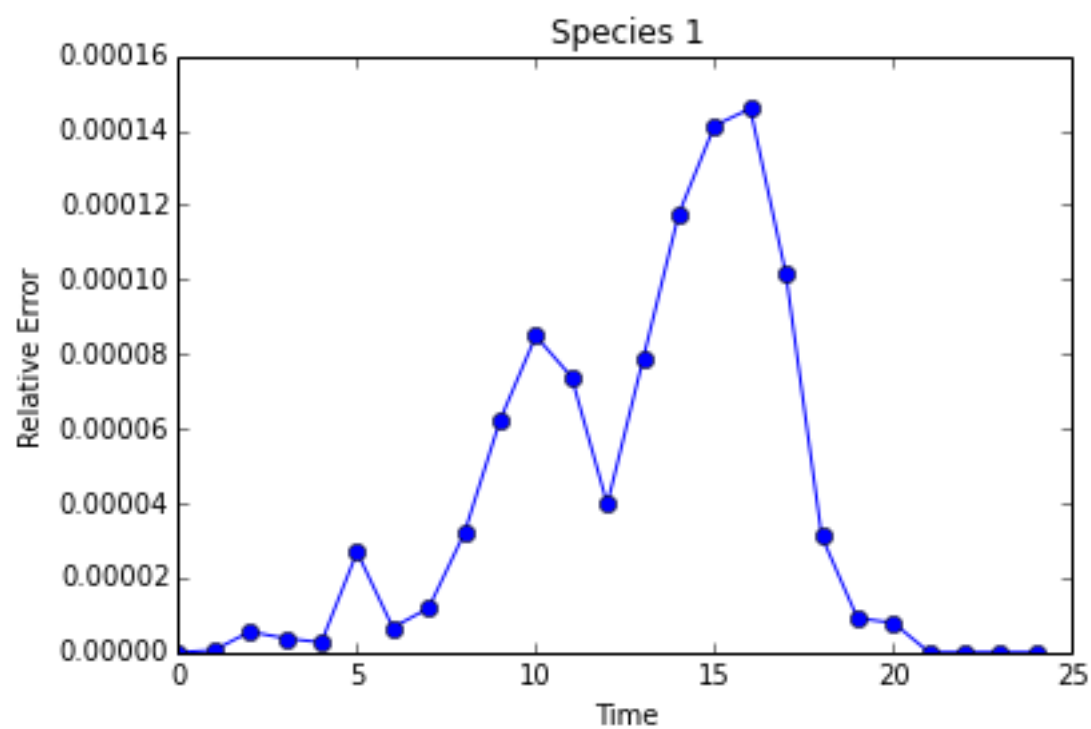

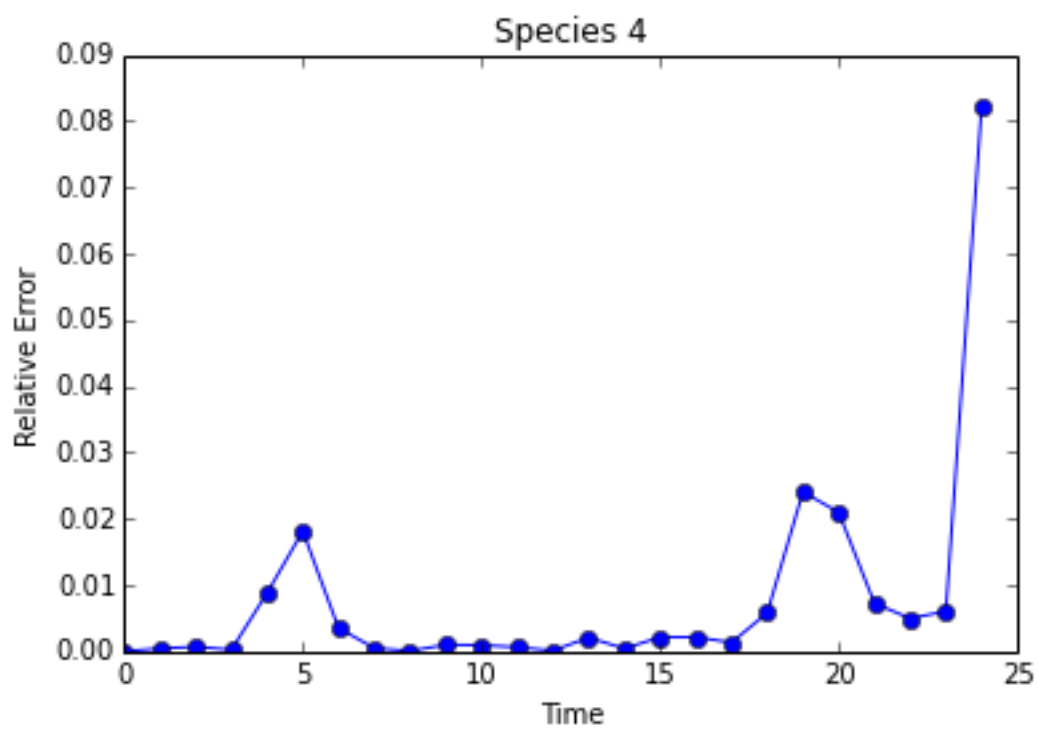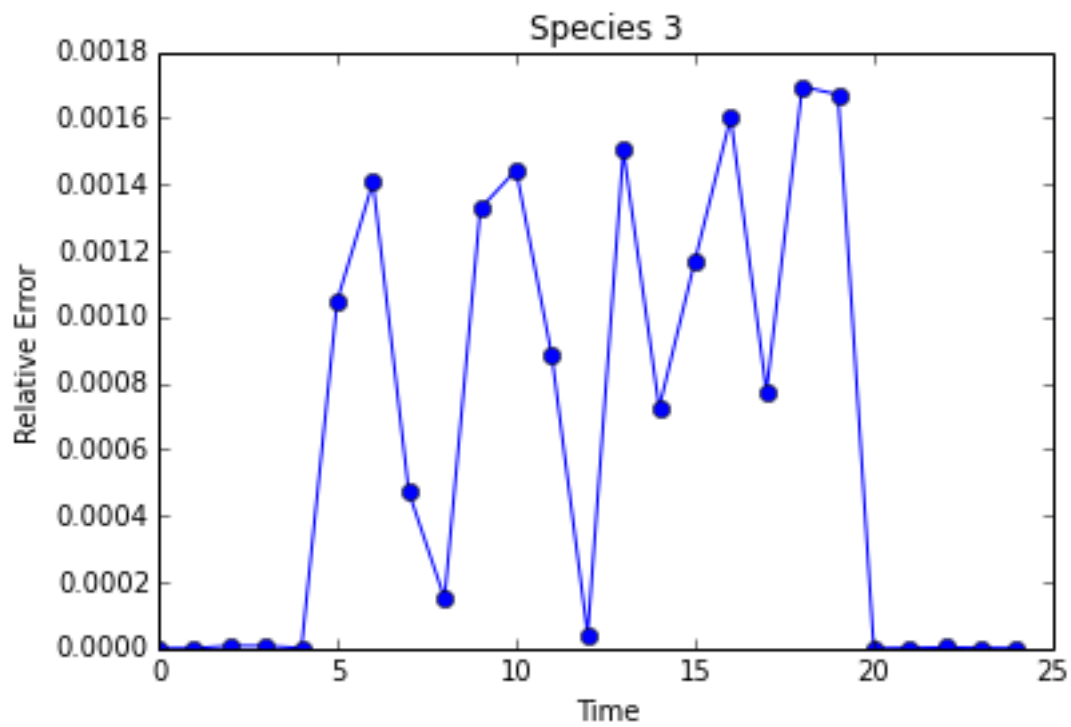

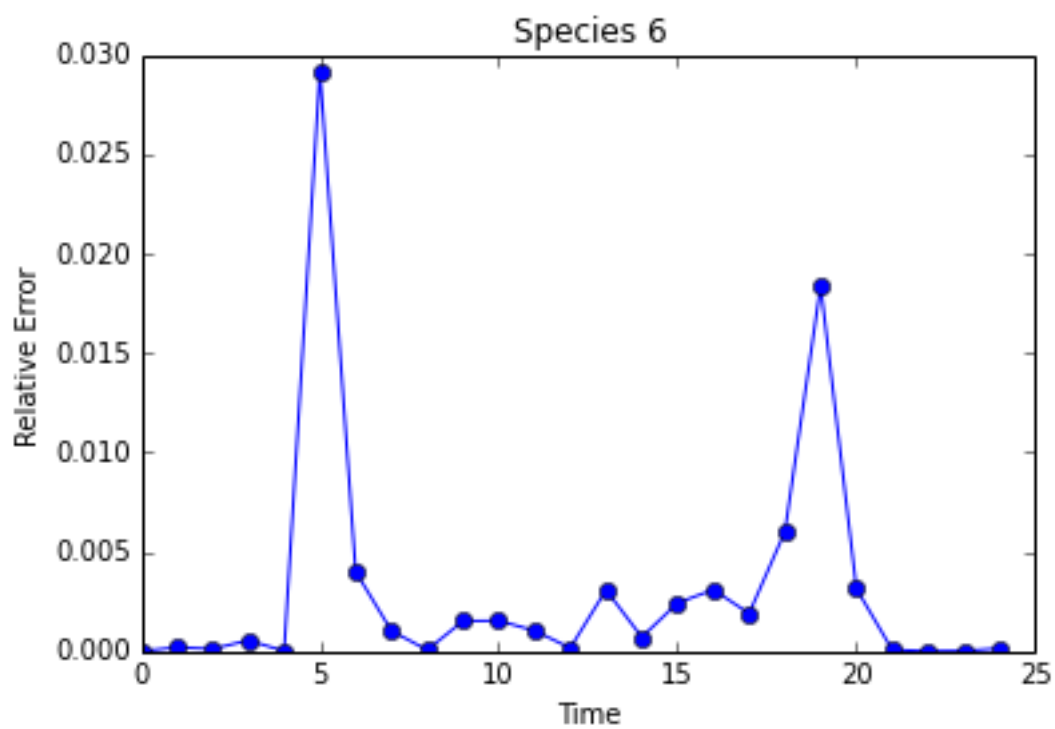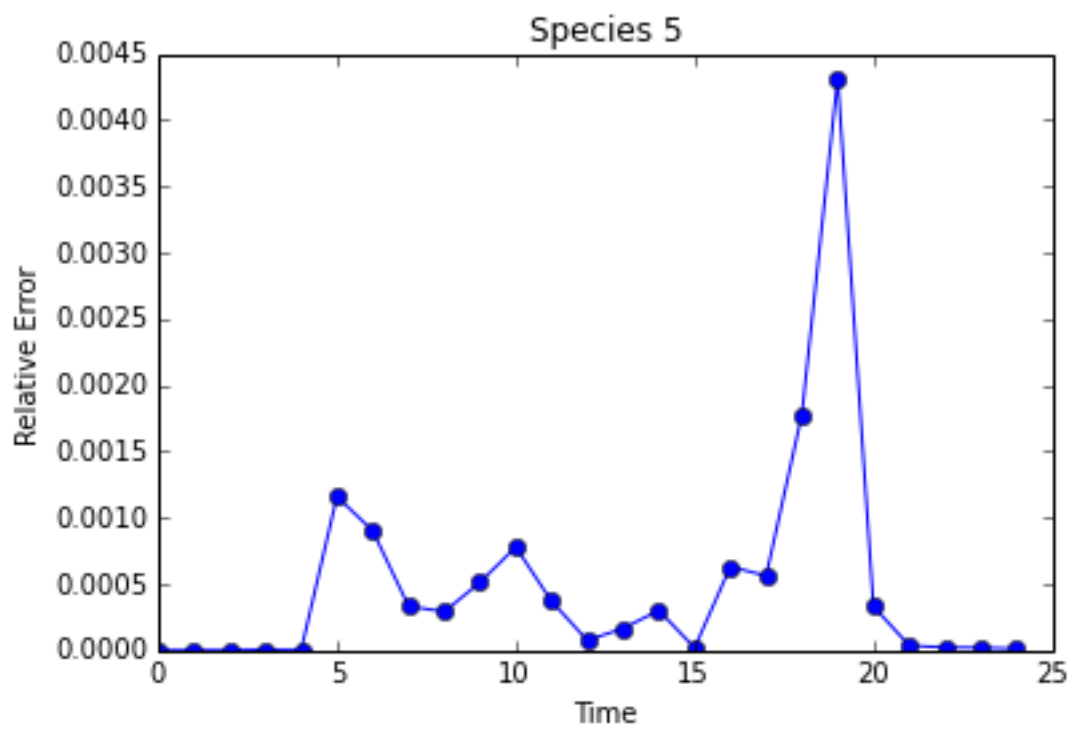

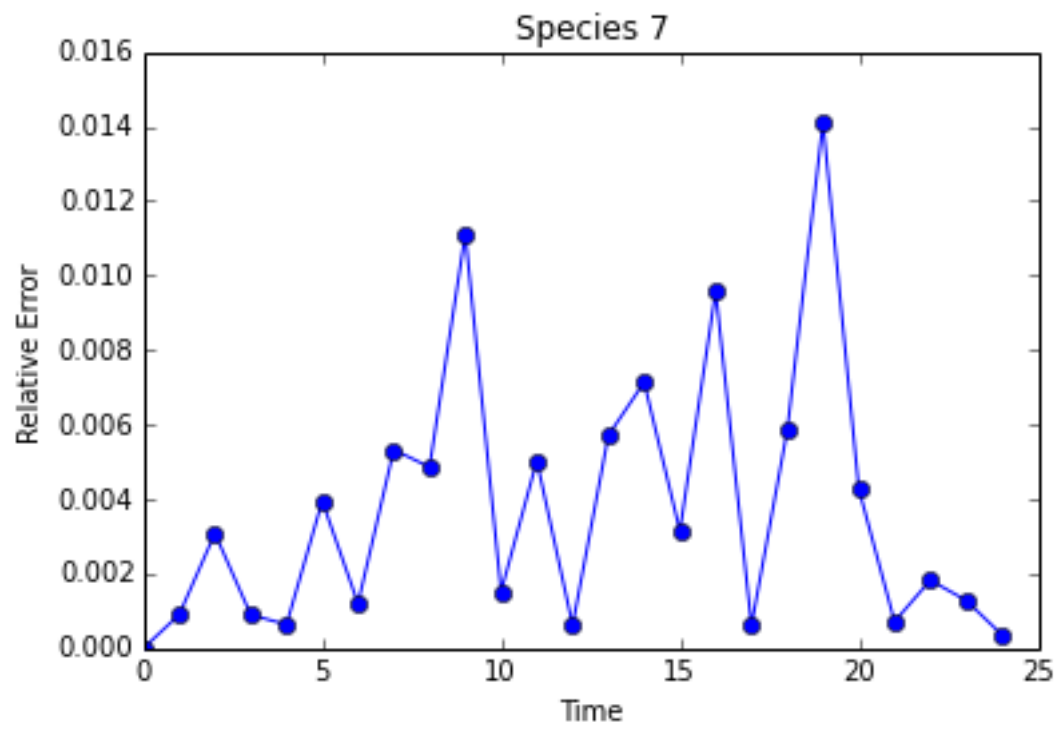

In [30]: