

v25ce1p5



Total : 38
Skipped : 5
Submitted : 33

Time Left : 7 : 46

You have skipped this question previously

Marks : 2


what is the main function of transport layer ??

- ☐ node to node delivery
- ☐ process to process delivery
- ☐ synchronization
- ☐ updating and maintenance of routing table

Skip

submit

v25ce1p5

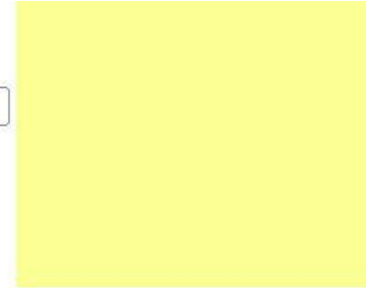

Total : 38
Skipped : 2
Submitted : 36

Time Left : 4 : 17

This question is coming for the last time

Marks : 1

**Identify the class of following IP address:
4.5.6.7.**

- ☐ class A
- ☐ class B
- ☐ class C
- ☐ class D

Skip

submit

Total : 42
Skipped : 20
Submitted : 22

Time Left : 46 : 5

You have skipped this question previously

Marks : 2

```
int cap(int);  
main()  
{  
int n;  
n= cap(6);  
printf("%d",n);  
}  
int cap(int n)  
{  
if(n<=1)  
return 1;  
else  
return(cap(n-3)+cap(n-1));  
}
```



Total : 42
Skipped : 19
Submitted : 23

Time Left : 38 : 35

You have skipped this question previously

Marks : 2

what is the prototype of signal() function and what it returns?

|

max. 2000 chars

Skip

submit



Total : 42
Skipped : 18
Submitted : 24

Time Left : 35 : 36

You have skipped this question previously

Marks : 1

How to make the read-end of a pipe non-block.

|

max. 2000 chars

Skip

submit

Skipped : 6

Submitted : 36

Time Left : 15 : 6

This question is coming for the last time

Marks : 1

```
main()
{
    int arr[2][3][2]={{{2,4},{7,8},{3,4}},, {{2,2},
{2,3},{3,4}}, }};
    printf(" %d",**(*arr+2)+2+7);
}
```

max. 2000 chars

Skip

submit

Total : 42
Skipped : 9
Submitted : 7

Time Left : 69 : 15

New Question

Marks : 1

```
main ( )  
{  
    static char *s[ ] = {"black", "white", "yellow",  
"violet"};  
    char **ptr[ ] = {s+3, s+2, s+1, s}, ***p;  
    p = ptr;  
    **++p;  
    printf("%s",*--*--p + 3);  
}
```

|



Total : 42
Skipped : 7
Submitted : 35

Time Left : 17 : 59

This question is coming for the last time

Marks : 3

Difference between static and dynamic library

static:
1. function i sko

max. 2000 chars

Skip

submit

v25ce1p5



Total : 42
Skipped : 17
Submitted : 25

Time Left : 30 : 14

You have skipped this question previously

Marks : 2

What is(are) the system call(s) to create a copy of file descriptor ?

- ☐ dup
- ☐ dup2
- ☐ fcntl
- ☐ All the above

Skip

submit



Total : 42
Skipped : 3
Submitted : 39

Time Left : 9 : 58

This question is coming for the last time

Marks : 2

what kill()function will do and write the
prototype of kill() function ?

ki|

max. 2000 chars

Skip

submit

v25ce1p5



Total : 42
Skipped : 20
Submitted : 22

Time Left : 46 : 9

You have skipped this question previously

Marks : 2

```
int cap(int);
main()
{
int n;
n= cap(6);
printf("%d",n);
}
int cap(int n)
{
if(n<=1)
return 1;
else
return(cap(n-3)+cap(n-1));
}
```



Total : 42
Skipped : 18
Submitted : 24

Time Left : 31 : 8

You have skipped this question previously

Marks : 3

what is inode? explain about its members.

max. 2000 chars

Skip

submit

Total : 42
Skipped : 9
Submitted : 33

Time Left : 18 : 30

This question is coming for the last time

Marks : 1

```
main()
{
    union
    {
        struct
        {
            char c[2];
            char ch[2];
        }s;
        struct
        {
            short int i;
            short int j;
        }st;
    }u={ 12,1, 15,1};
    printf("%d %d",u.st.i, u.st.j); }
```

15 1

v25ce1p5



Total : 42
Skipped : 18
Submitted : 24

Time Left : 35 : 49

You have skipped this question previously

Marks : 1

dup2(1, 0)

- ☐ closes the stdout and copies the stdin descriptor to stdout
- ☐ closes the stdin and copies the stdout descriptor to stdin
- ☐ will produce compilation error
- ☐ None of the above

Skip

submit



Total : 42
Skipped : 14
Submitted : 28

Time Left : 24 : 13

This question is coming for the last time

Marks : 1

what is the signal number for SIGSEGV signal

9

max. 2000 chars

Skip

submit

Skipped : 11
Submitted : 11

Time Left : 66 : 24

New Question

Marks : 1

```
int fn(int v)
{
    if(v==1 || v==0)
        return 1;
    if(v%2==0)
        return fn(v/2)+2;
    else
        return fn(v-1)+3;
}
main() {
    printf("%d",fn(7));
}
```

|



Total : 42
Skipped : 16
Submitted : 26

Time Left : 27 : 8

You have skipped this question previously

Marks : 2

what kill()function will do and write the prototype of kill() function ?

kill function will terminate the process

max. 2000 chars

Skip

submit

Total : 42
Skipped : 18
Submitted : 24

Time Left : 36 : 16

You have skipped this question previously

Marks : 1

```
main()
{
    union
    {
        struct
        {
            char c[2];
            char ch[2];
        }s;
        struct
        {
            short int i;
            short int j;
        }st;
    }u={ 12,1, 15,1};
    printf("%d %d",u.st.i, u.st.j); }
```

v25ce1p5



Total : 42
Skipped : 22
Submitted : 20

Time Left : 47 : 15

You have skipped this question previously

Marks : 1

A page fault occurs

- ☐ when the page is not in the memory
- ☐ when the page is in the memory
- ☐ when the process enters the blocked state
- ☐ when the process is in the ready state

Skip

submit

v25ce1p5



Total : 42
Skipped : 16
Submitted : 26

Time Left : 29 : 23

You have skipped this question previously

Marks : 1

```
main()
{
    int arr[2][3][2]={{{2,4},{7,8},{3,4}},, {{2,2},
{2,3},{3,4}, }};
    printf(" %d",**(*arr+2)+2+7);
}
```

|



Total : 42
Skipped : 18
Submitted : 24

Time Left : 34 : 38

You have skipped this question previously

Marks : 1

Command to remove the message queue identifier created with the key is _____.

max. 2000 chars

Skip

submit

Total : 12

Skipped : 18

Submitted : 24

Time Left : 33 : 49

You have skipped this question previously

Marks : 1

```
main()
{
    char thought[2][30]={"Don`t walk in front of
me..","I am not follow"};
    printf("%c%c",*(thought[0]+9),*(*(thought+0)+5));
}
```

|

max. 2000 chars

Skip

submit

Total : 12

Skipped : 15

Submitted : 27

Time Left : 24 : 54

You have skipped this question previously

Marks : 1

```
#include<stdio.h>
int main()
{
printf("%c",*"abcde");
return 0;
}
```

max. 2000 chars

Skip

submit



Total : 42
Skipped : 14
Submitted : 28

Time Left : 24 : 42

You have skipped this question previously

Marks : 3

Difference between static and dynamic library

|

max. 2000 chars

Skip

submit