


MongoDB Commands

P.Vedadri Naidu

2520090060

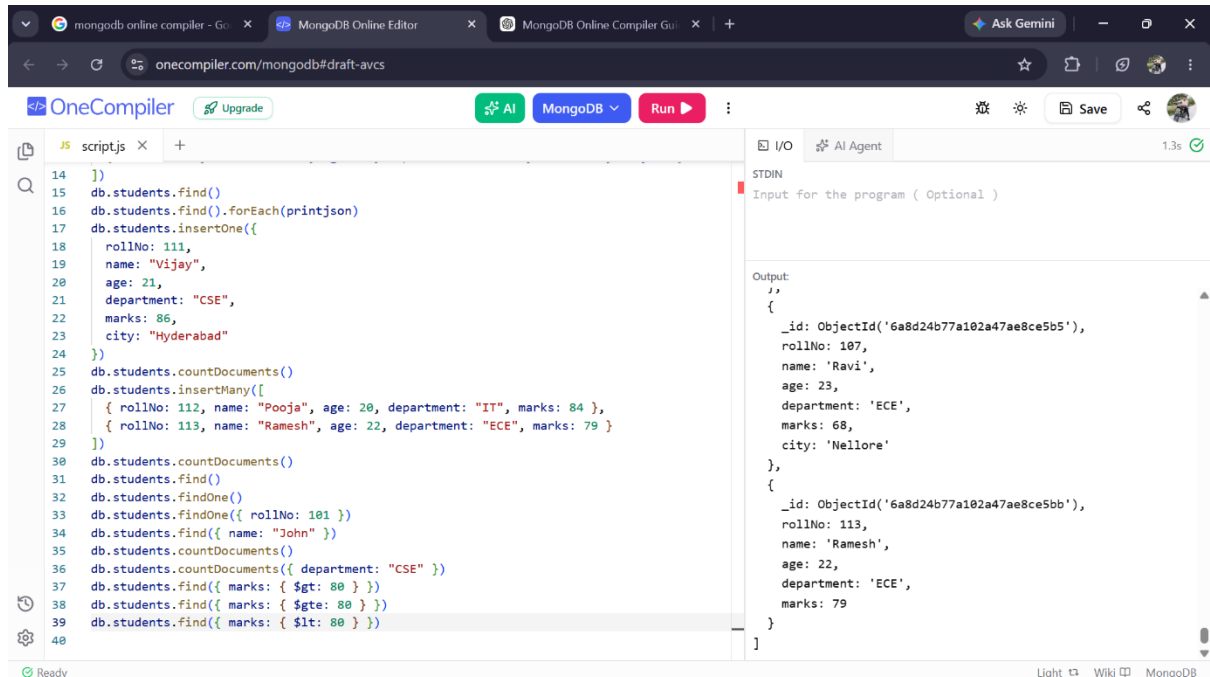


The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which is a JSON array of student documents.

```
14 })
15 db.students.find()
16 db.students.find().forEach(printjson)
17 db.students.insertOne({
18   rollNo: 111,
19   name: "Vijay",
20   age: 21,
21   department: "CSE",
22   marks: 86,
23   city: "Hyderabad"
24 })
25 db.students.countDocuments()
26 db.students.insertMany([
27   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29 ])
30 db.students.countDocuments()
31 db.students.find()
32 db.students.findOne()
33 db.students.findOne({ rollNo: 101 })
34 db.students.find({ name: "John" })
35 db.students.countDocuments()
36 db.students.countDocuments({ department: "CSE" })
37 db.students.find({ marks: { $gt: 80 } })
38 db.students.find({ marks: { $gte: 80 } })
39 db.students.find({ marks: { $lt: 80 } })
40
```

Output:

```
{
  "_id": ObjectId('6a8d24b77a102a47ae8ce5b5'),
  rollNo: 107,
  name: 'Ravi',
  age: 23,
  department: 'ECE',
  marks: 68,
  city: 'Nellore'
},
{
  "_id": ObjectId('6a8d24b77a102a47ae8ce5bb'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79
}
```

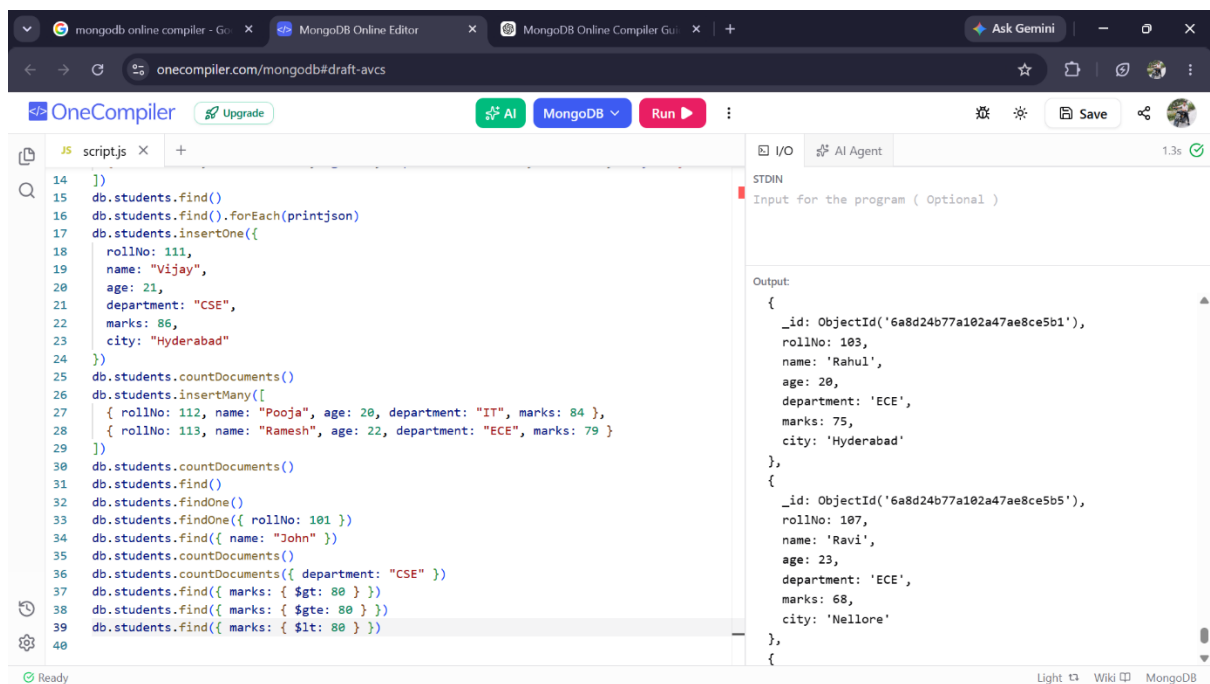

The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which is a JSON array of student documents.

```
14 })
15 db.students.find()
16 db.students.find().forEach(printjson)
17 db.students.insertOne({
18   rollNo: 111,
19   name: "Vijay",
20   age: 21,
21   department: "CSE",
22   marks: 86,
23   city: "Hyderabad"
24 })
25 db.students.countDocuments()
26 db.students.insertMany([
27   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29 ])
30 db.students.countDocuments()
31 db.students.find()
32 db.students.findOne()
33 db.students.findOne({ rollNo: 101 })
34 db.students.find({ name: "John" })
35 db.students.countDocuments()
36 db.students.countDocuments({ department: "CSE" })
37 db.students.find({ marks: { $gt: 80 } })
38 db.students.find({ marks: { $gte: 80 } })
39 db.students.find({ marks: { $lt: 80 } })
40
```


Output:

```
{
  "_id": ObjectId('6a8d24b77a102a47ae8ce5b1'),
  rollNo: 103,
  name: 'Rahul',
  age: 20,
  department: 'ECE',
  marks: 75,
  city: 'Hyderabad'
},
{
  "_id": ObjectId('6a8d24b77a102a47ae8ce5b5'),
  rollNo: 107,
  name: 'Ravi',
  age: 23,
  department: 'ECE',
  marks: 68,
  city: 'Nellore'
},
{
  "_id": ObjectId('6a8d24b77a102a47ae8ce5bb'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79
}
```

MongoDB Commands

P.Vedadri Naidu

2520090060

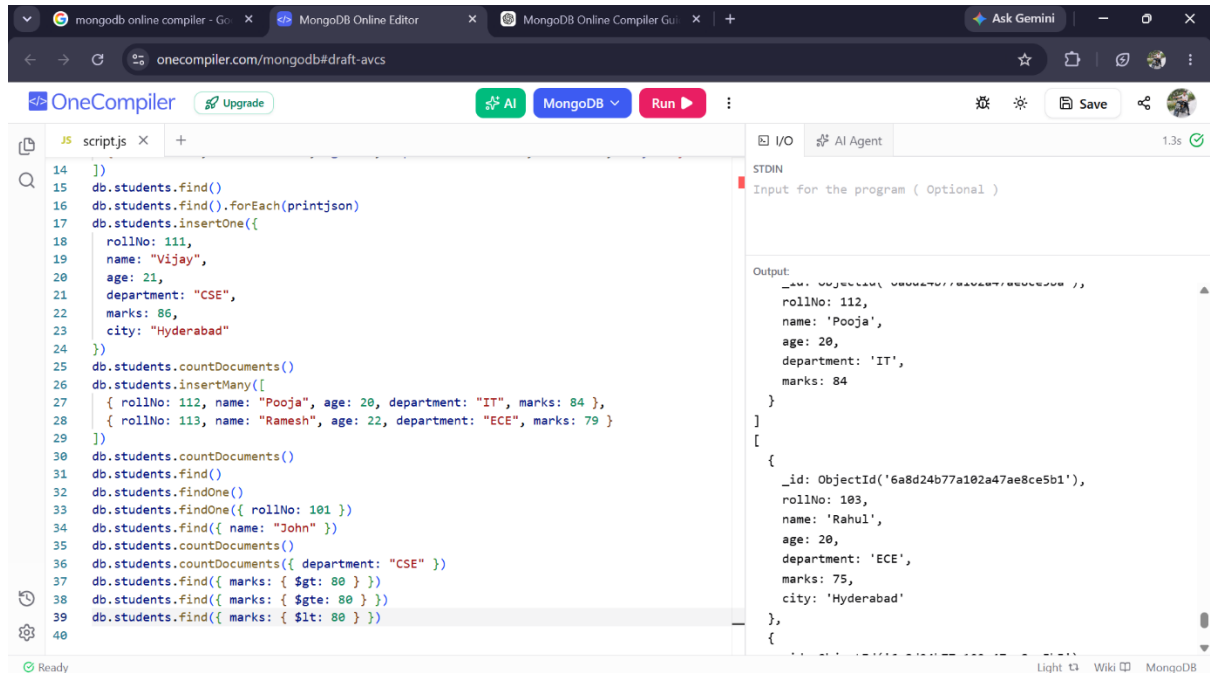


The screenshot shows the MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which includes the results of several database operations.

```
14 })
15 db.students.find()
16 db.students.find().forEach(printjson)
17 db.students.insertOne({
18   rollNo: 111,
19   name: "Vijay",
20   age: 21,
21   department: "CSE",
22   marks: 86,
23   city: "Hyderabad"
24 })
25 db.students.countDocuments()
26 db.students.insertMany([
27   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29 ])
30 db.students.countDocuments()
31 db.students.find()
32 db.students.findOne()
33 db.students.findOne({ rollNo: 101 })
34 db.students.find({ name: "John" })
35 db.students.countDocuments()
36 db.students.countDocuments({ department: "CSE" })
37 db.students.find({ marks: { $gt: 80 } })
38 db.students.find({ marks: { $gte: 80 } })
39 db.students.find({ marks: { $lt: 80 } })
40
```

Output:

```
Law: ObjectID('6a8d24b77a102a47ae8ce5b8') ,
rollNo: 112,
name: 'Pooja',
age: 20,
department: 'IT',
marks: 84
}
[
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b1'),
  rollNo: 103,
  name: 'Rahul',
  age: 20,
  department: 'ECE',
  marks: 75,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b2'),
  rollNo: 104,
  name: 'Sneha',
  age: 21,
  department: 'CSE',
  marks: 88,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b3'),
  rollNo: 105,
  name: 'Arjun',
  age: 22,
  department: 'ECE',
  marks: 78,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b4'),
  rollNo: 106,
  name: 'Priya',
  age: 20,
  department: 'IT',
  marks: 85,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b5'),
  rollNo: 107,
  name: 'Aditya',
  age: 21,
  department: 'CSE',
  marks: 87,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b6'),
  rollNo: 108,
  name: 'Neha',
  age: 22,
  department: 'ECE',
  marks: 77,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b7'),
  rollNo: 109,
  name: 'Vishal',
  age: 20,
  department: 'IT',
  marks: 86,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b8'),
  rollNo: 110,
  name: 'Meena',
  age: 20,
  department: 'AI&DS',
  marks: 93,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b9'),
  rollNo: 111,
  name: 'Vijay',
  age: 21,
  department: 'CSE',
  marks: 86,
  city: 'Hyderabad'
},
{
  id: ObjectID('6a8d24b77a102a47ae8ce5ba'),
  rollNo: 112,
  name: 'Pooja',
  age: 20,
  department: 'IT',
  marks: 84,
  city: 'Hyderabad'
},
{
  id: ObjectID('6a8d24b77a102a47ae8ce5bb'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79,
  city: 'Hyderabad'
}
```

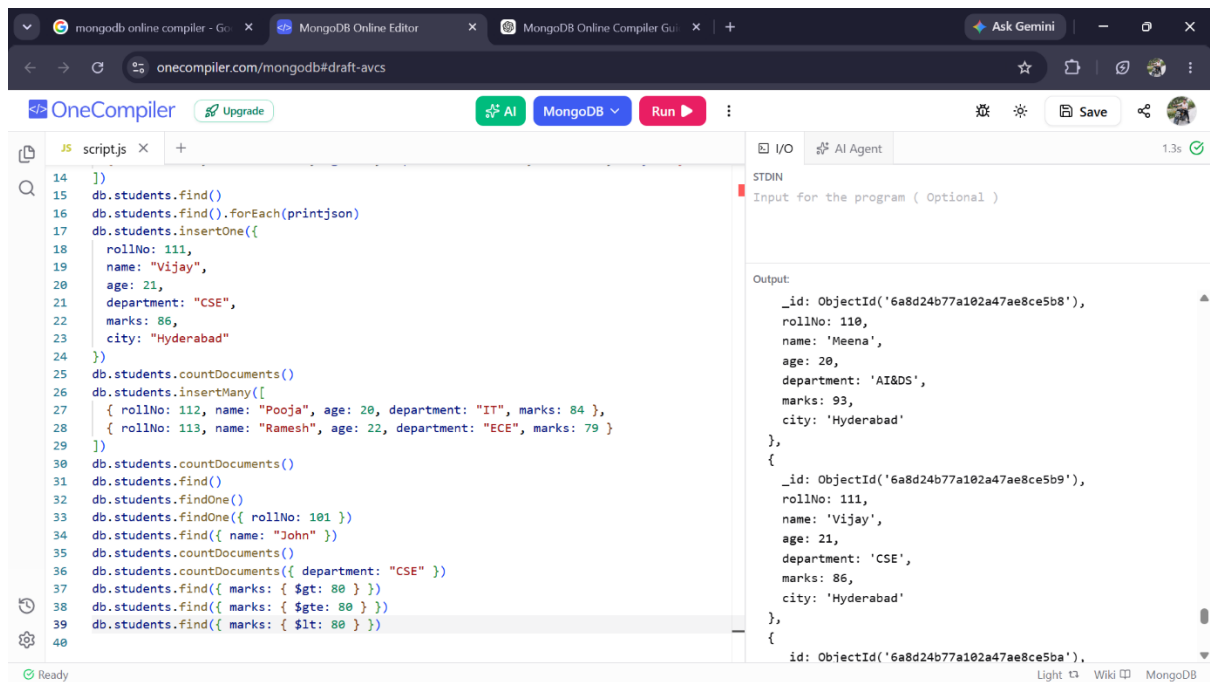

The screenshot shows the MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which includes the results of several database operations.

```
14 })
15 db.students.find()
16 db.students.find().forEach(printjson)
17 db.students.insertOne({
18   rollNo: 111,
19   name: "Vijay",
20   age: 21,
21   department: "CSE",
22   marks: 86,
23   city: "Hyderabad"
24 })
25 db.students.countDocuments()
26 db.students.insertMany([
27   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29 ])
30 db.students.countDocuments()
31 db.students.find()
32 db.students.findOne()
33 db.students.findOne({ rollNo: 101 })
34 db.students.find({ name: "John" })
35 db.students.countDocuments()
36 db.students.countDocuments({ department: "CSE" })
37 db.students.find({ marks: { $gt: 80 } })
38 db.students.find({ marks: { $gte: 80 } })
39 db.students.find({ marks: { $lt: 80 } })
40
```


Output:

```
id: ObjectID('6a8d24b77a102a47ae8ce5ba'),
rollNo: 112,
name: 'Pooja',
age: 20,
department: 'IT',
marks: 84,
city: 'Hyderabad'
},
{
  id: ObjectID('6a8d24b77a102a47ae8ce5bb'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b8'),
  rollNo: 110,
  name: 'Meena',
  age: 20,
  department: 'AI&DS',
  marks: 93,
  city: 'Hyderabad'
},
{
  _id: ObjectID('6a8d24b77a102a47ae8ce5b9'),
  rollNo: 111,
  name: 'Vijay',
  age: 21,
  department: 'CSE',
  marks: 86,
  city: 'Hyderabad'
},
{
  id: ObjectID('6a8d24b77a102a47ae8ce5ba'),
  rollNo: 112,
  name: 'Pooja',
  age: 20,
  department: 'IT',
  marks: 84,
  city: 'Hyderabad'
},
{
  id: ObjectID('6a8d24b77a102a47ae8ce5bb'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79,
  city: 'Hyderabad'
}
```

MongoDB Commands

P.Vedadri Naidu

2520090060

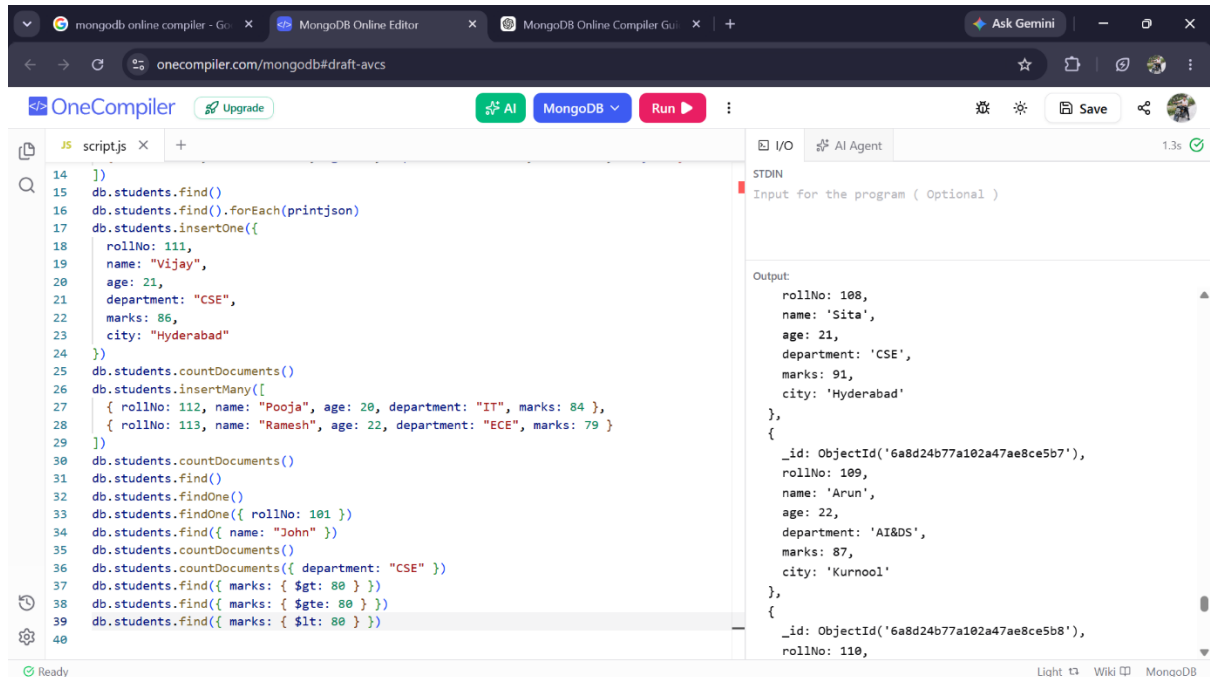


The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which includes the results of several database operations.

```
14  })
15  db.students.find()
16  db.students.find().forEach(printjson)
17  db.students.insertOne({
18    rollNo: 111,
19    name: "Vijay",
20    age: 21,
21    department: "CSE",
22    marks: 86,
23    city: "Hyderabad"
24  })
25  db.students.countDocuments()
26  db.students.insertMany([
27    { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28    { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29  ])
30  db.students.countDocuments()
31  db.students.find()
32  db.students.findOne()
33  db.students.findOne({ rollNo: 101 })
34  db.students.find({ name: "John" })
35  db.students.countDocuments()
36  db.students.countDocuments({ department: "CSE" })
37  db.students.find({ marks: { $gt: 80 } })
38  db.students.find({ marks: { $gte: 80 } })
39  db.students.find({ marks: { $lt: 80 } })
40
```

Output:

```
rollNo: 108,
name: 'Sita',
age: 21,
department: 'CSE',
marks: 91,
city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b7'),
  rollNo: 109,
  name: 'Arun',
  age: 22,
  department: 'AI&DS',
  marks: 87,
  city: 'Kurnool'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b8'),
  rollNo: 110,
```

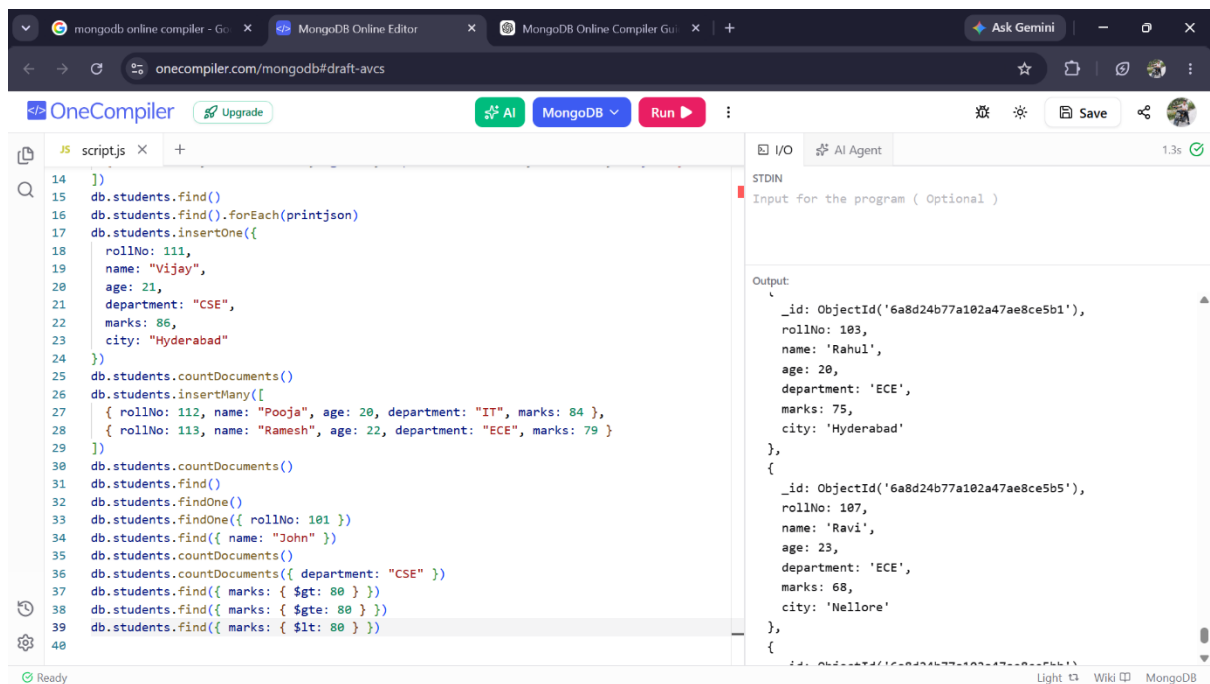

The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which includes the results of several database operations.

```
14  })
15  db.students.find()
16  db.students.find().forEach(printjson)
17  db.students.insertOne({
18    rollNo: 111,
19    name: "Vijay",
20    age: 21,
21    department: "CSE",
22    marks: 86,
23    city: "Hyderabad"
24  })
25  db.students.countDocuments()
26  db.students.insertMany([
27    { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28    { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29  ])
30  db.students.countDocuments()
31  db.students.find()
32  db.students.findOne()
33  db.students.findOne({ rollNo: 101 })
34  db.students.find({ name: "John" })
35  db.students.countDocuments()
36  db.students.countDocuments({ department: "CSE" })
37  db.students.find({ marks: { $gt: 80 } })
38  db.students.find({ marks: { $gte: 80 } })
39  db.students.find({ marks: { $lt: 80 } })
40
```


Output:

```
_id: ObjectId('6a8d24b77a102a47ae8ce5b1'),
rollNo: 103,
name: 'Rahul',
age: 20,
department: 'ECE',
marks: 75,
city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b5'),
  rollNo: 107,
  name: 'Ravi',
  age: 23,
  department: 'ECE',
  marks: 68,
  city: 'Nellore'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b1'),
```

MongoDB Commands

P.Vedadri Naidu

2520090060

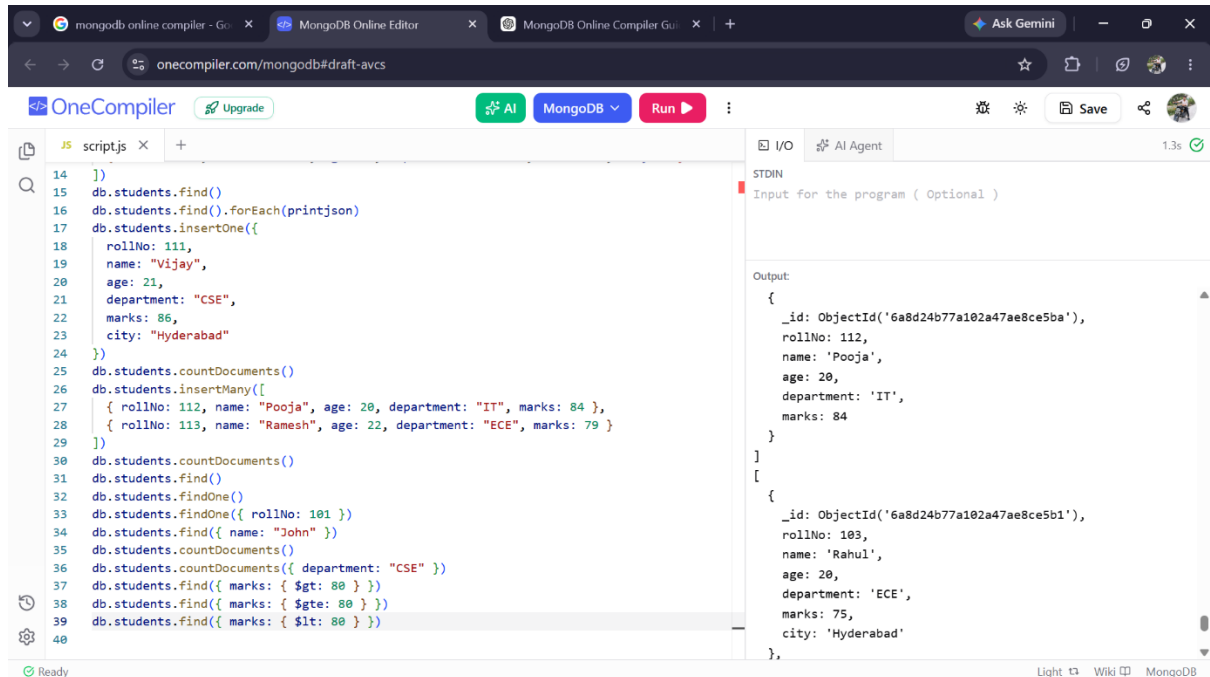


The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which is a JSON array of student documents.

```
14  })
15  db.students.find()
16  db.students.find().forEach(printjson)
17  db.students.insertOne({
18    rollNo: 111,
19    name: "Vijay",
20    age: 21,
21    department: "CSE",
22    marks: 86,
23    city: "Hyderabad"
24  })
25  db.students.countDocuments()
26  db.students.insertMany([
27    { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28    { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29  ])
30  db.students.countDocuments()
31  db.students.find()
32  db.students.findOne()
33  db.students.findOne({ rollNo: 101 })
34  db.students.find({ name: "John" })
35  db.students.countDocuments()
36  db.students.countDocuments({ department: "CSE" })
37  db.students.find({ marks: { $gt: 80 } })
38  db.students.find({ marks: { $gte: 80 } })
39  db.students.find({ marks: { $lt: 80 } })
40
```

Output:

```
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5ba'),
  rollNo: 112,
  name: 'Pooja',
  age: 20,
  department: 'IT',
  marks: 84
}
[
  {
    _id: ObjectId('6a8d24b77a102a47ae8ce5b1'),
    rollNo: 103,
    name: 'Rahul',
    age: 20,
    department: 'ECE',
    marks: 75,
    city: 'Hyderabad'
  },
  {
    _id: ObjectId('6a8d24b77a102a47ae8ce5b8'),
    rollNo: 110,
    name: 'Meena',
    age: 20,
    department: 'AI&DS',
    marks: 93,
    city: 'Hyderabad'
  },
  {
    _id: ObjectId('6a8d24b77a102a47ae8ce5b9'),
    rollNo: 111,
    name: 'Vijay',
    age: 21,
    department: 'CSE',
    marks: 86,
    city: 'Hyderabad'
  },
  {
    _id: ObjectId('6a8d24b77a102a47ae8ce5b1'),
    rollNo: 103,
    name: 'Rahul',
    age: 20,
    department: 'ECE',
    marks: 75,
    city: 'Hyderabad'
  }
]
```

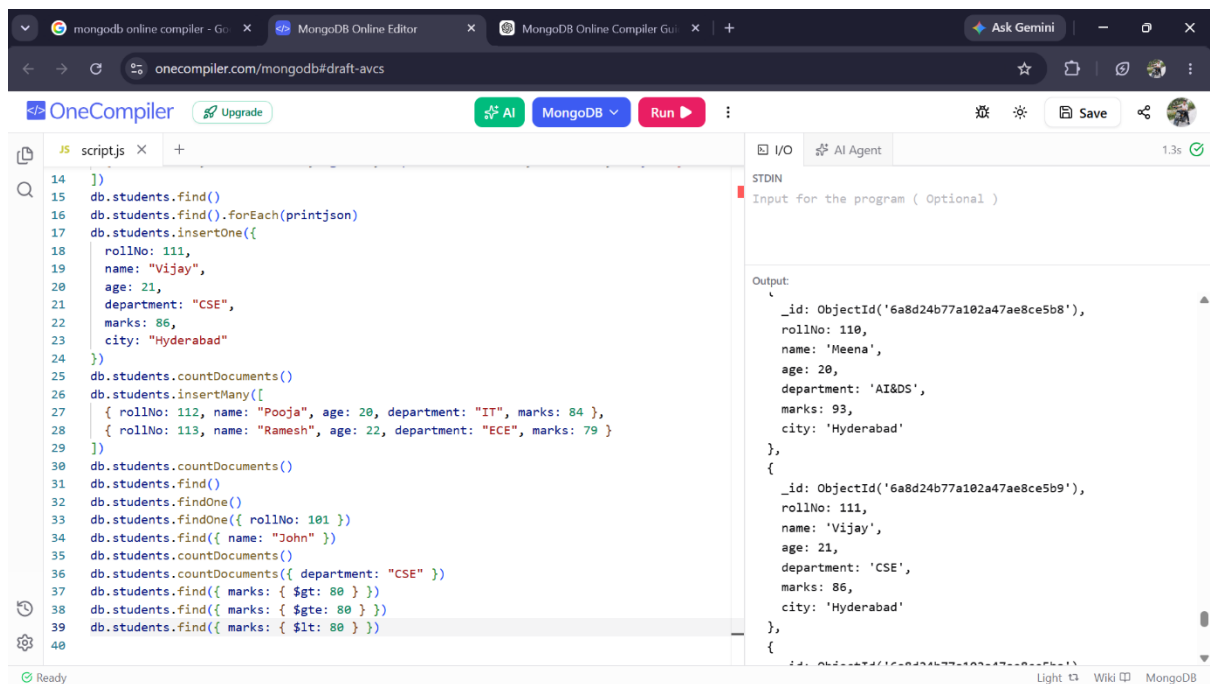

The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script for interacting with a MongoDB database. The right pane shows the output of the script, which is a JSON array of student documents.

```
14  })
15  db.students.find()
16  db.students.find().forEach(printjson)
17  db.students.insertOne({
18    rollNo: 111,
19    name: "Vijay",
20    age: 21,
21    department: "CSE",
22    marks: 86,
23    city: "Hyderabad"
24  })
25  db.students.countDocuments()
26  db.students.insertMany([
27    { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
28    { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
29  ])
30  db.students.countDocuments()
31  db.students.find()
32  db.students.findOne()
33  db.students.findOne({ rollNo: 101 })
34  db.students.find({ name: "John" })
35  db.students.countDocuments()
36  db.students.countDocuments({ department: "CSE" })
37  db.students.find({ marks: { $gt: 80 } })
38  db.students.find({ marks: { $gte: 80 } })
39  db.students.find({ marks: { $lt: 80 } })
40
```


Output:

```
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b8'),
  rollNo: 110,
  name: 'Meena',
  age: 20,
  department: 'AI&DS',
  marks: 93,
  city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b9'),
  rollNo: 111,
  name: 'Vijay',
  age: 21,
  department: 'CSE',
  marks: 86,
  city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5ba'),
  rollNo: 112,
  name: 'Pooja',
  age: 20,
  department: 'IT',
  marks: 84,
  city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d24b77a102a47ae8ce5b1'),
  rollNo: 103,
  name: 'Rahul',
  age: 20,
  department: 'ECE',
  marks: 75,
  city: 'Hyderabad'
}
```

MongoDB Commands

P.Vedadri Naidu

2520090060

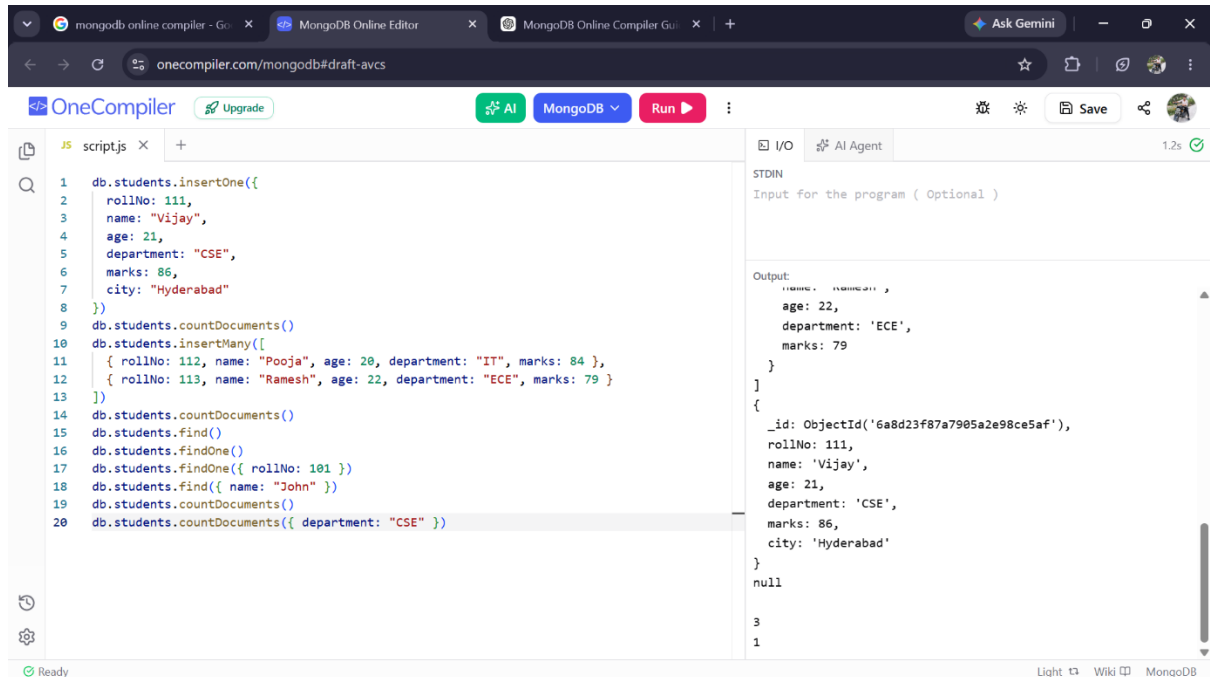


The screenshot shows the OneCompiler MongoDB interface. The left pane contains a JavaScript script with the following commands:

```
1 db.students.insertOne({
2   rollNo: 111,
3   name: "Vijay",
4   age: 21,
5   department: "CSE",
6   marks: 86,
7   city: "Hyderabad"
8 })
9 db.students.countDocuments()
10 db.students.insertMany([
11   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
12   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
13 ])
14 db.students.countDocuments()
15 db.students.find()
16 db.students.findOne()
17 db.students.findOne({ rollNo: 101 })
18 db.students.find({ name: "John" })
19 db.students.countDocuments()
20 db.students.countDocuments({ department: "CSE" })
```

The right pane shows the output of the script:

```
STDIN
Input for the program ( Optional )

Output:
{
  _id: ObjectId('6a8d23f87a7905a2e98ce5af'),
  rollNo: 111,
  name: 'Vijay',
  age: 21,
  department: 'CSE',
  marks: 86,
  city: 'Hyderabad'
}
null
3
1
```

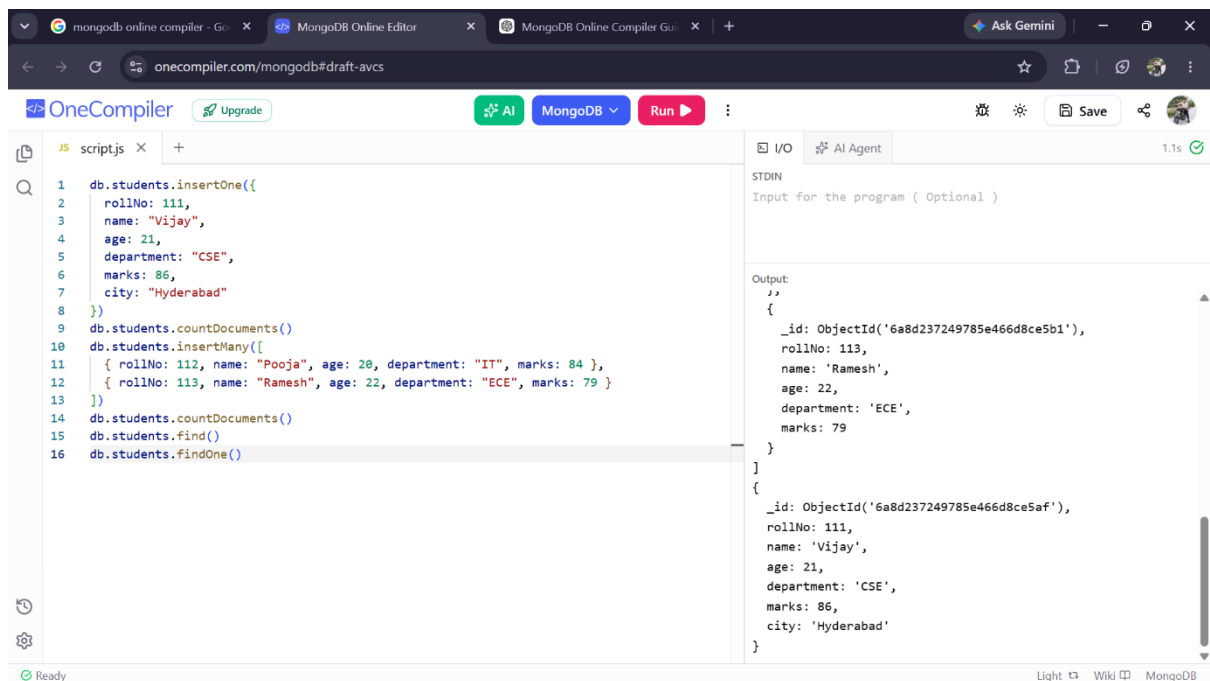

The screenshot shows the OneCompiler MongoDB interface. The left pane contains a JavaScript script with the following commands:

```
1 db.students.insertOne({
2   rollNo: 111,
3   name: "Vijay",
4   age: 21,
5   department: "CSE",
6   marks: 86,
7   city: "Hyderabad"
8 })
9 db.students.countDocuments()
10 db.students.insertMany([
11   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
12   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
13 ])
14 db.students.countDocuments()
15 db.students.find()
16 db.students.findOne()
```

The right pane shows the output of the script:

```
STDIN
Input for the program ( Optional )

Output:
{
  _id: ObjectId('6a8d237249785e466d8ce5b1'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79
}
{
  _id: ObjectId('6a8d237249785e466d8ce5af'),
  rollNo: 111,
  name: 'Vijay',
  age: 21,
  department: 'CSE',
  marks: 86,
  city: 'Hyderabad'
}
```

MongoDB Commands

P.Vedadri Naidu
2520090060

Ask Gemini

—

×

☆

🔍

🌞

Save

I/O

AI Agent

1.1s

✓

ITDIN

Input for the program (Optional)

Output:

```
{
  city: 'Hyderabad',
},
{
  _id: ObjectId('6a8d22fc4fcd0c4fd68ce5b0'),
  rollNo: 112,
  name: 'Pooja',
  age: 20,
  department: 'IT',
  marks: 84
},
{
  _id: ObjectId('6a8d22fc4fcd0c4fd68ce5b1'),
  rollNo: 113,
  name: 'Ramesh',
  age: 22,
  department: 'ECE',
  marks: 79
}
|
```

Light ↺

Wiki 📖

MongoDB


2520090060



MongoDB Commands

P.Vedadri Naidu

2520090060

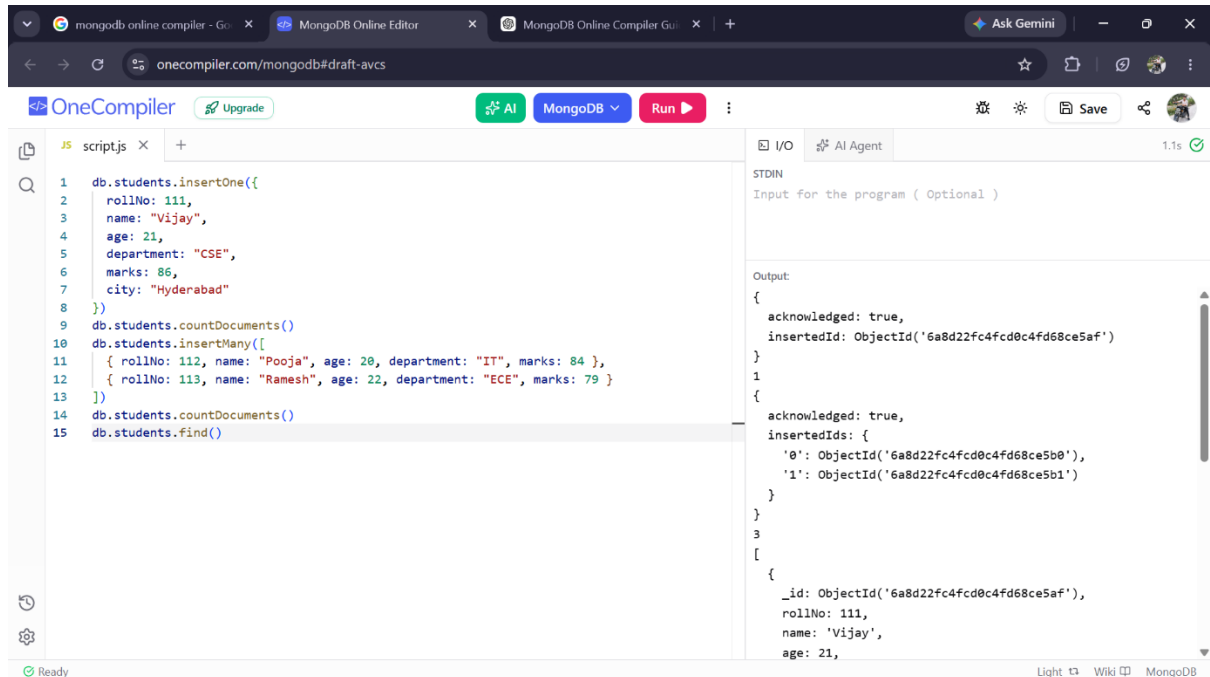


The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script with the following code:

```
1 db.students.insertOne({
2   rollNo: 111,
3   name: "Vijay",
4   age: 21,
5   department: "CSE",
6   marks: 86,
7   city: "Hyderabad"
8 })
9
10 db.students.countDocuments()
11 db.students.insertMany([
12   { rollNo: 112, name: "Pooja", age: 20, department: "IT", marks: 84 },
13   { rollNo: 113, name: "Ramesh", age: 22, department: "ECE", marks: 79 }
14 ])
15 db.students.countDocuments()
16 db.students.find()
```

The right pane shows the output of the script, which is a JSON object:

```
{
  acknowledged: true,
  insertedId: ObjectId('6a8d22fc4fcd0c4fd68ce5af')
}
```

The output is displayed in a scrollable area. The status bar at the bottom indicates 'Ready' and 'MongoDB'.

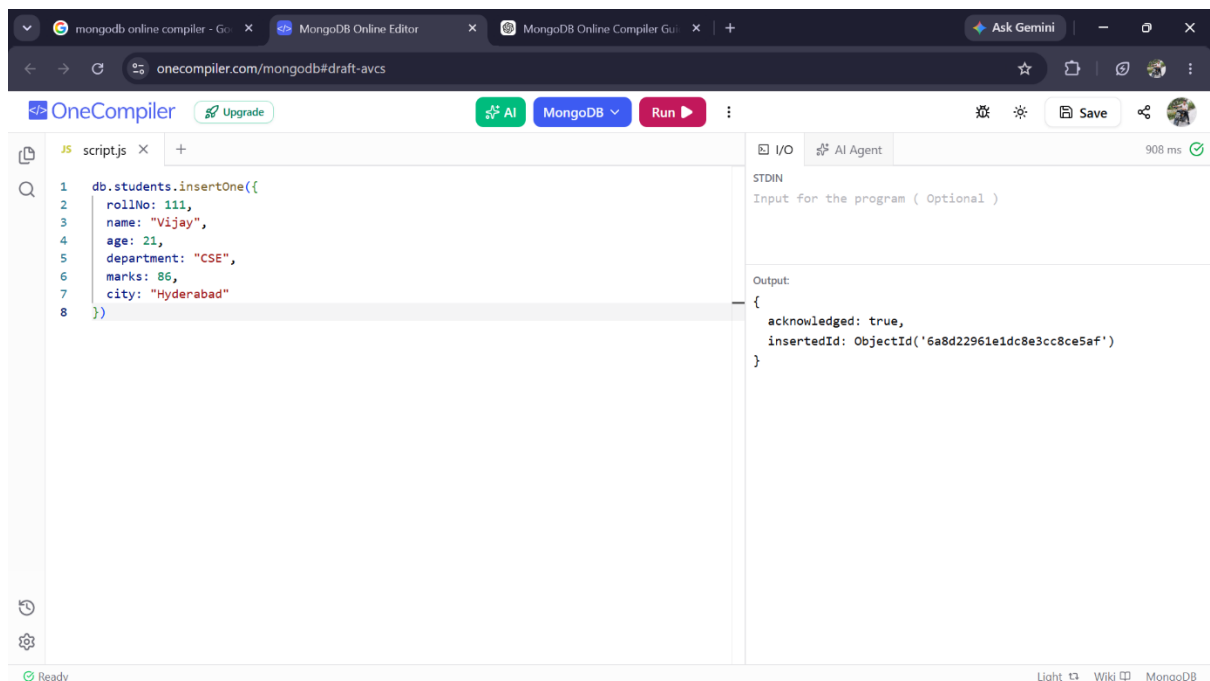

The screenshot shows the OneCompiler MongoDB Online Editor interface. The left pane contains a JavaScript script with the following code:

```
1 db.students.insertOne({
2   rollNo: 111,
3   name: "Vijay",
4   age: 21,
5   department: "CSE",
6   marks: 86,
7   city: "Hyderabad"
8 })
```

The right pane shows the output of the script, which is a JSON object:

```
{
  acknowledged: true,
  insertedId: ObjectId('6a8d22961e1dc8e3cc8ce5af')
}
```

The output is displayed in a scrollable area. The status bar at the bottom indicates 'Ready' and 'MongoDB'.

MongoDB Commands

P.Vedadri Naidu

2520090060

I/O

AI Agent

1.7s 

STDIN

Input for the program (Optional)

Output:

```
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b7'),
  rollNo: 109,
  name: 'Arun',
  age: 22,
  department: 'AI&DS',
  marks: 87,
  city: 'Kurnool'
}
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b8'),
  rollNo: 110,
  name: 'Meena',
  age: 20,
  department: 'AI&DS',
  marks: 93,
  city: 'Hyderabad'
}
```

Light  Wiki  MongoDB

MongoDB Commands

P.Vedadri Naidu

2520090060

I/O

AI Agent

1.7s 

STDIN

Input for the program (Optional)

Output:

```
    age: 20,
    department: 'ECE',
    marks: 75,
    city: 'Hyderabad'
  }
  {
    _id: ObjectId('6a8d221c676b5f4d9f8ce5b2'),
    rollNo: 104,
    name: 'Priya',
    age: 22,
    department: 'IT',
    marks: 88,
    city: 'Warangal'
  }
  {
    _id: ObjectId('6a8d221c676b5f4d9f8ce5b3'),
    rollNo: 105,
    name: 'Kiran',
    age: 21,
```

Light  Wiki  MongoDB



Save



I/O

AI Agent

1.7s



STDIN

Input for the program (Optional)

Output:

```
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b6'),
  rollNo: 108,
  name: 'Sita',
  age: 21,
  department: 'CSE',
  marks: 91,
  city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b7'),
  rollNo: 109,
  name: 'Arun',
  age: 22,
  department: 'AI&DS',
  marks: 87,
  city: 'Kurnool'
},
{
```

Light ↺

Wiki 📖

MongoDB

MongoDB Commands

P.Vedadri Naidu

2520090060

Output:

```
_,
  rollNo: 105,
  name: 'Kiran',
  age: 21,
  department: 'CSE',
  marks: 95,
  city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b4'),
  rollNo: 106,
  name: 'Anu',
  age: 20,
  department: 'IT',
  marks: 82,
  city: 'Guntur'
},
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b5'),
  rollNo: 107,
```

MongoDB Commands

P.Vedadri Naidu

2520090060

I/O

AI Agent

1.7s 

STDIN

Input for the program (Optional)

Output:

```
_id: ObjectId('6a8d221c676b5f4d9f8ce5b1'),
rollNo: 103,
name: 'Rahul',
age: 20,
department: 'ECE',
marks: 75,
city: 'Hyderabad'
},
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b2'),
  rollNo: 104,
  name: 'Priya',
  age: 22,
  department: 'IT',
  marks: 88,
  city: 'Warangal'
},
{
  _id: ObjectId('6a8d221c676b5f4d9f8ce5b3'),
```

Light  Wiki  MongoDB

MongoDB Commands

P.Vedadri Naidu
2520090060

I/O

AI Agent

1.7s 

STDIN

Input for the program (Optional)

Output:

```
[  
  {  
    _id: ObjectId('6a8d221c676b5f4d9f8ce5af'),  
    rollNo: 101,  
    name: 'John',  
    age: 20,  
    department: 'CSE',  
    marks: 85,  
    city: 'Hyderabad'  
  },  
  {  
    _id: ObjectId('6a8d221c676b5f4d9f8ce5b0'),  
    rollNo: 102,  
    name: 'Alice',  
    age: 21,  
    department: 'CSE',  
    marks: 90,  
    city: 'Vijayawada'  
  }  
]
```

Light  Wiki  MongoDB

MongoDB Commands

P.Vedadri Naidu

2520090060

The screenshot shows the OneCompiler MongoDB Online Editor interface. The code editor on the left contains a JavaScript script that creates a collection named 'students' and inserts 10 documents. The output panel on the right shows the result of the 'insertMany' operation, displaying the 'ok' status and the list of inserted document IDs.

```
1 db.createCollection("students")
2 show collections
3 db.students.insertMany([
4   { rollNo: 101, name: "John", age: 20, department: "CSE", marks: 85, city: "Hyderabad" },
5   { rollNo: 102, name: "Alice", age: 21, department: "CSE", marks: 90, city: "Vijayawada" },
6   { rollNo: 103, name: "Rahul", age: 20, department: "ECE", marks: 75, city: "Hyderabad" },
7   { rollNo: 104, name: "Priya", age: 22, department: "IT", marks: 88, city: "Warangal" },
8   { rollNo: 105, name: "Kiran", age: 21, department: "CSE", marks: 80, city: "Hyderabad" },
9   { rollNo: 106, name: "Anu", age: 20, department: "AI&DS", marks: 95, city: "Guntur" },
10  { rollNo: 107, name: "Ravi", age: 23, department: "ECE", marks: 68, city: "Nellore" },
11  { rollNo: 108, name: "Sita", age: 21, department: "CSE", marks: 91, city: "Hyderabad" },
12  { rollNo: 109, name: "Arun", age: 22, department: "AI&DS", marks: 87, city: "Kurnool" },
13  { rollNo: 110, name: "Meena", age: 20, department: "AI&DS", marks: 93, city: "Hyderabad" }
14 ])
15 db.students.find()
16 db.students.find().forEach(printjson)
```

Output:

```
{ ok: 1 }
students
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a8d221c676b5f4d9f8ce5af'),
    '1': ObjectId('6a8d221c676b5f4d9f8ce5b0'),
    '2': ObjectId('6a8d221c676b5f4d9f8ce5b1'),
    '3': ObjectId('6a8d221c676b5f4d9f8ce5b2'),
    '4': ObjectId('6a8d221c676b5f4d9f8ce5b3'),
    '5': ObjectId('6a8d221c676b5f4d9f8ce5b4'),
    '6': ObjectId('6a8d221c676b5f4d9f8ce5b5'),
    '7': ObjectId('6a8d221c676b5f4d9f8ce5b6'),
    '8': ObjectId('6a8d221c676b5f4d9f8ce5b7'),
    '9': ObjectId('6a8d221c676b5f4d9f8ce5b8')
  }
}
```

The screenshot shows the OneCompiler MongoDB Online Editor interface. The code editor on the left contains a JavaScript script that switches to the 'studentDB' database. The output panel on the right shows the result of the 'use' command, indicating that the database has been successfully switched.

```
1 use studentDB
2 db
3 show dbs
4
```

Output:

```
switched to db studentDB
studentDB
```