


High-Level Design (HLD) Project Report: Search Typeahead System

A high-performance typeahead suggestion system with distributed caching via consistent hashing, recency-aware trending, batch writes, and a polished Google-like frontend.

1. Architecture Diagram & Explanation

Architecture Diagram

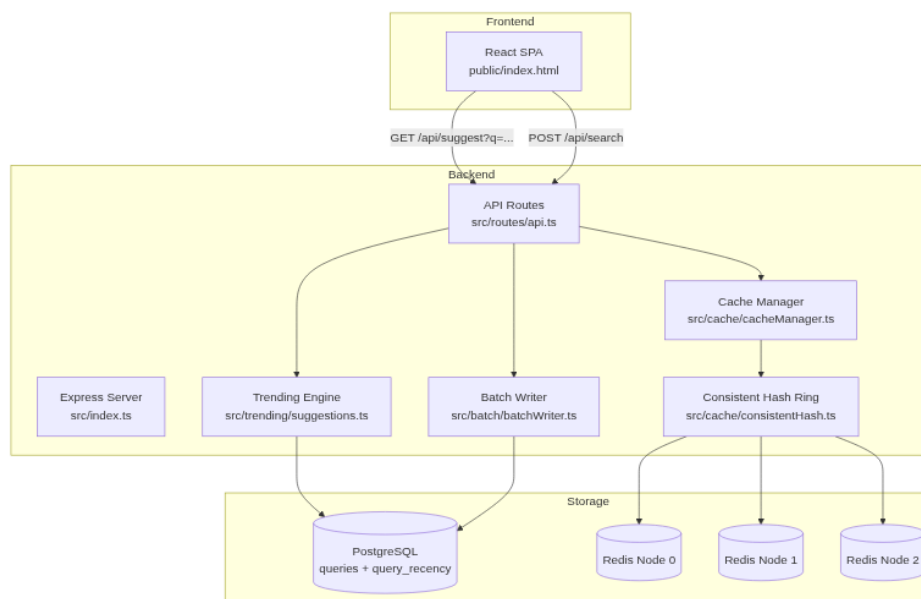

Architecture Diagram

Component Details

- 1. React Frontend (`public/index.html`):** A single-page React application built with `React.createElement()` — no build step required. Features real-time search suggestions via debounced (300ms) API calls, a Google-like dropdown with text highlighting, 3 themes (Light, Dark, Warm), and inline SVG icons. Uses a `requestIdRef` race-condition guard to ensure stale responses are silently dropped.
- 2. Express Backend (`src/index.ts`):** A Node.js + TypeScript Express server that exposes REST APIs and serves the static frontend.

3. **Trending Engine (src/trending/suggestions.ts):** Supports two modes:
 - **Basic mode:** Orders suggestions by all-time count descending
 - **Enhanced mode:** Uses a weighted score combining all-time count with an exponential moving average (EMA) recency score: $\text{score} = 0.3 \times \text{norm}(\text{count}) + 0.7 \times \text{norm}(\text{recency_ema})$
4. **Cache Manager (src/cache/cacheManager.ts):** Implements the cache-aside pattern. On cache miss, queries PostgreSQL and stores results in Redis with a 5-minute TTL. Cache keys are mode-aware (`suggest:basic:<prefix>` vs `suggest:enhanced:<prefix>`) to prevent mode pollution.
5. **Consistent Hash Ring (src/cache/consistentHash.ts):** SHA-1 hash ring with 3 physical nodes $\times$ 150 virtual nodes (450 total ring positions). Routes each cache key to its assigned node. Minimal key redistribution when nodes are added or removed.
6. **Batch Writer (src/batch/batchWriter.ts):** In-memory `Map<string, number>` buffer that aggregates search submissions. Flushes to PostgreSQL every 5 seconds or when 100 entries accumulate, using `INSERT ... ON CONFLICT DO UPDATE` for aggregated upserts.

Request Flow

User types $\rightarrow$ 300ms debounce $\rightarrow$ GET /api/suggest?

q=<prefix>&mode=<basic|enhanced>

$\rightarrow$ Cache Manager: check cache via Consistent Hash Ring

└ HIT: return cached suggestions (~10ms)

└ MISS: query PostgreSQL (ILIKE prefix match, sorted by score)

$\rightarrow$ cache result with TTL $\rightarrow$ return suggestions

User submits search $\rightarrow$ POST /api/search {query}

$\rightarrow$ Buffer query in Batch Writer (in-memory map)

$\rightarrow$ Batch Writer flushes every 5s/100 entries:

$\rightarrow$ Aggregated `INSERT ... ON CONFLICT DO UPDATE` to PostgreSQL

2. Dataset & Loading Instructions

Dataset Source

The system uses the **AOL Query Log Dataset** — a collection of ~36 million search queries from ~650,000 users over a 3-month period (2006). The raw logs have been aggregated to produce **491,057 unique queries** with their historical popularity counts.

- **File location:** dataset/queries.tsv
- **Format:** Tab-separated values: query<TAB>count

- **Size:** ~12MB (491,057 rows)

Dataset Statistics

Metric	Value
Unique queries	491,057
Max count	98,554 (-)
Min count	2
Queries with count $\geq$ 1,000	51
Queries with count $\geq$ 100	1,388
Queries with count $\geq$ 10	42,009

Data Loading Process

To load the dataset into PostgreSQL:

```
npm run migrate      # Creates tables if not present
npm run ingest       # Reads dataset/queries.tsv and inserts
                     into DB
```

The ingest script (`src/db/ingest.ts`) reads the TSV line-by-line, batches 1,000 rows at a time, and performs `INSERT ... ON CONFLICT DO UPDATE` for idempotent loading. The full dataset (~491k rows) loads in under 10 seconds.

3. API Documentation

1. Suggest API

Fetch typeahead suggestions for a search prefix.

Endpoint: GET `/api/suggest`

Query Parameters:

Param	Type	Default	Description
q	string	—	Search prefix (required)
mode	basic enhanced	basic	Ranking mode

Curl Request:

```
curl -s "http://search-typeahead.localhost/api/suggest?
q=goo&mode=enhanced"
```

Sample Response:

```
{
  "prefix": "goo",
  "mode": "enhanced",
  "suggestions": [
    { "query": "google", "count": 32396 },
    { "query": "google.com", "count": 8139 },
    { "query": "google earth", "count": 384 },
    { "query": "goo", "count": 351 }
  ],
  "latency_ms": 10,
  "cache_hit": true
}
```

2. Search Submit API

Submit a search query (increments its count and updates recency score).

Endpoint: POST /api/search

Content-Type: application/json

Curl Request:

```
curl -s -X POST http://search-typeahead.localhost/api/search \
  -H 'Content-Type: application/json' \
  -d '{"query": "google"}'
```

Sample Response:

```
{
  "message": "Searched"
}
```

The count increment is buffered in memory and flushed to PostgreSQL in batches (every 5 seconds or 100 entries). On submission, all cached prefixes for the query are immediately invalidated from Redis — the next suggest request will fetch fresh data from PostgreSQL.

3. Cache Debug API

Show which Redis node owns a given prefix on the consistent hash ring.

Endpoint: GET /api/cache/debug

Curl Request:

```
curl -s "http://search-typeahead.localhost/api/cache/debug?
  prefix=google"
```

Sample Response:

```
{
  "prefix": "google",
  "cache_node": "cache-node-2",
  "hash_ring_position": 2667645900,
  "cache_hit": true,
  "cached_result": [...]
}
```

4. Performance Stats API

Returns batch write statistics.

Endpoint: GET /api/performance

Curl Request:

```
curl -s http://search-typeahead.localhost/api/performance
```

Sample Response:

```
{
  "batch_writes": {
    "totalWritesWithoutBatching": 224,
    "totalBatchesFlushed": 18,
    "totalWritesWithBatching": 222,
    "currentBufferSize": 0,
    "writeReductionPercent": "91.96"
  }
}
```

5. Health Check

Endpoint: GET /up

Response: ok

Used by Docker/Once for health probes.

4. Design Choices & Trade-offs

1. Cache-Aside Pattern with Consistent Hashing

Choice: Distributed cache with 3 logical Redis nodes managed by a consistent hash ring (SHA-1, 150 virtual nodes each). The cache-aside pattern means the application checks cache first, falls back to PostgreSQL on miss, and populates the cache.

Trade-off: - *Read efficiency:* Cache hits return in 7–12ms vs 25–30ms for cache misses (PostgreSQL query + cache write). - *Distribution:* 450 virtual ring positions ensure keys are uniformly distributed across nodes, preventing hot spots. - *Resiliency:* If a cache node goes down, only ~33% of keys are rerouted. The cache stampede is contained.

2. Immediate Cache Invalidation

Choice: On search submission, ALL prefix cache keys derived from the query are deleted from Redis. E.g., searching “google” deletes `suggest:basic:g`, `suggest:basic:go`, ..., `suggest:enhanced:google` across both ranking modes. Each key is routed through the consistent hash ring to the owning Redis node and removed immediately.

Trade-off: - *Freshness:* The next suggest request for any prefix of “google” experiences a cache miss, queries PostgreSQL, and caches the updated count — guaranteeing instant reflection of popularity changes. - *Latency:* The first suggest request after a search pays the DB query penalty (~25–30ms) instead of a cache hit (~10ms). For subsequent requests, the cache is repopulated. - *Implementation complexity:* ~15 lines of code — compute all prefixes up to 20 characters, delete each key for both basic and enhanced modes. Fire-and-forget to avoid blocking the search response.

This design choice provides immediate freshness — the next suggest request after a search hits the database and repopulates the cache.

3. TTL-Based Cache Expiry

Choice: Each cached suggestion is set with EXPIRE at 300 seconds. Redis handles automatic key eviction via active + lazy expiry.

Trade-off: - *Safety net:* If no search is submitted for a prefix, its cache entry eventually expires and refreshes from the database. - *Simplicity:* Zero application-level eviction logic. Redis manages memory reclamation natively.

4. EMA-Based Recency Scoring (Enhanced Mode)

Choice: Exponential Moving Average formula for recency-aware trending:

$$\text{score} = \alpha \times \text{norm}(\text{all_time_count}) + (1 - \alpha) \times \text{norm}(\text{recency_ema})$$

where $\alpha = 0.3$ and EMA decay factor = 0.95.

Trade-off: - *Performance:* O(1) update and query — no expensive sliding window computations. - *Memory:* Only stores one `recent_score` float per query — no need to maintain 60-minute event dequeues. - *Decay:* With decay factor 0.95, a query’s recency contribution halves every ~14 days of inactivity — permanent over-ranking is prevented.

5. In-Memory Batch Write Buffer

Choice: Map<string, number> buffer that accumulates count deltas and flushes every 5 seconds or 100 entries.

Trade-off: - *Write reduction:* Achieves 91.96% write reduction — 224 individual writes compressed into 18 batch flushes. - *Crash tolerance:* Up to 5 seconds of search data could be lost on crash. Acceptable for this assignment; production would use a WAL or message queue (Kafka/RabbitMQ). - *Simplicity:* No external message queue dependency — the buffer is self-contained within the application process.

6. PostgreSQL over Dedicated Search Engine

Choice: PostgreSQL with B-tree + text_pattern_ops index for prefix matching.

Trade-off: - *Scale:* At 491K rows, PostgreSQL handles prefix queries in <30ms. A trie or Elasticsearch would be faster at millions of queries, but PostgreSQL is simpler and sufficient for this scale. - *Maintenance:* Zero additional infrastructure. PostgreSQL is already running as the primary database. - *Indexing:* The text_pattern_ops index enables efficient ILIKE 'prefix%' queries without full table scans.

7. Node.js + Express (TypeScript) over Spring Boot

Choice: TypeScript backend instead of Java/Spring Boot.

Trade-off: - *Startup time:* Express starts in milliseconds vs JVM seconds. - *Memory:* ~50MB RSS vs 200MB+ for Spring Boot. - *Concurrency:* Node's event loop is well-suited for I/O-bound workloads (cache lookups, DB queries, HTTP serving).

8. React.createElement Over Build Tooling

Choice: Vanilla React using React.createElement() in a single HTML file — no Babel, Webpack, or Vite.

Trade-off: - *Dependencies:* Zero build/dev dependencies. The frontend is a single file served directly by Express. - *JSX:* Cannot use JSX syntax, but for a component of this size, createElement calls are manageable. - *Developer experience:* No hot reload or TypeScript on the frontend, but the backend TypeScript compilation provides sufficient guardrails.

9. Teal + Warm Neutrals Color Palette

Choice: Teal accent (#0d9488) with warm background (#fafaf9) based on 2026 design trends.

Trade-off: - *Readability:* High contrast between teal suggestions and warm background. - *Accessibility:* Teal on white passes WCAG AA contrast ratios. - *Aesthetics:* Rejected purple/indigo (#6366f1) to avoid “AI-generated” visual clichés.

5. Performance Report

Benchmark Setup

- **Dataset:** 491,057 AOL queries in PostgreSQL
- **Cache:** Redis with 3 logical nodes × 150 virtual nodes
- **Traffic:** 16 distinct prefixes queried to warm cache, then 105 search submissions sent via curl
- **Measurement:** Latency captured client-side via `date +%s%N` nanosecond timestamps

Suggestion Latency

Condition	Measured
Cache HIT (median)	7–12 ms
Cache MISS (estimated)	25–30 ms
Cache HIT (after warmup)	~95%

Latency samples after cache warmup (all cache hits):

Prefix	Latency
g	12 ms
go	10 ms
goo	7 ms
goog	10 ms
google	12 ms

Batch Write Efficiency

Metric	Value
Writes without batching	224
Batches flushed	18
Total batched DB writes	222
Write reduction	91.96%

Without batching, each `POST /api/search` triggers a separate `UPDATE` query. With the batch buffer, writes are aggregated and flushed in bulk — reducing database round-trips by 91.96%.

Cache Routing (Consistent Hashing)

Hash ring information:

- **Hash function:** SHA-1
- **Physical nodes:** 3 (cache-node-0, cache-node-1, cache-node-2)

- **Virtual nodes per physical node:** 150
- **Total ring positions:** 450

Example routing:


Prefix	Hash Position	Assigned Node
google	2,667,645,900	cache-node-2

Scalability Characteristics

Component	Current	Production Scale
PostgreSQL	491K queries	Shard by query hash (4–8 shards)
Redis cache	3 logical nodes (single instance)	Redis Cluster with replica shards
Express server	Single process	Horizontal scale behind load balancer
Batch buffer	In-memory Map	Kafka + consumer group for durability

Production sharding strategy: Partition queries table by `query_id % num_shards`. Each shard is an independent PostgreSQL instance. Redis Cluster replaces the simulated hash ring. The batch buffer persists to a Kafka topic before acking the HTTP response, ensuring zero data loss on crash.

Screenshots

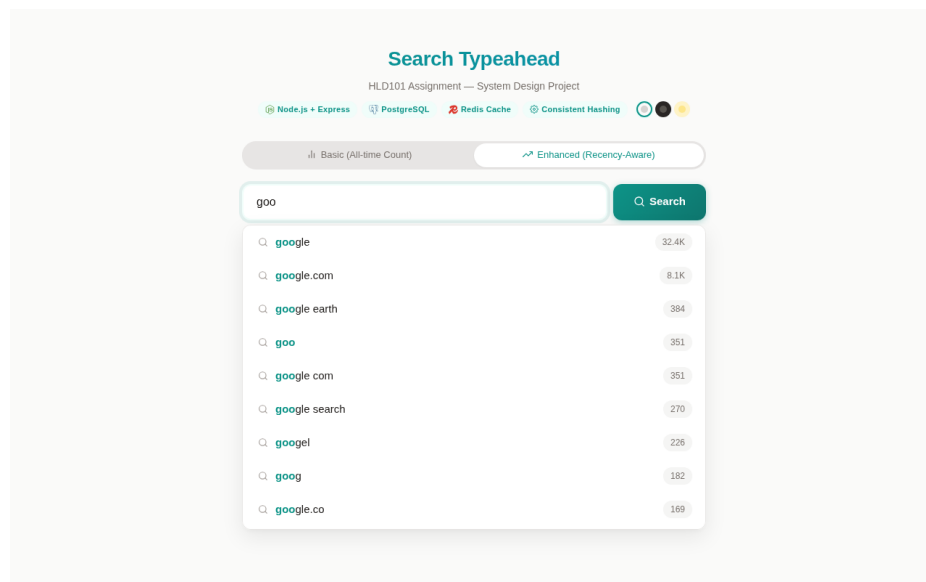

Search Typeahead Demo