
CHAPTER 1: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 1. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

CHAPTER 2: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 2. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

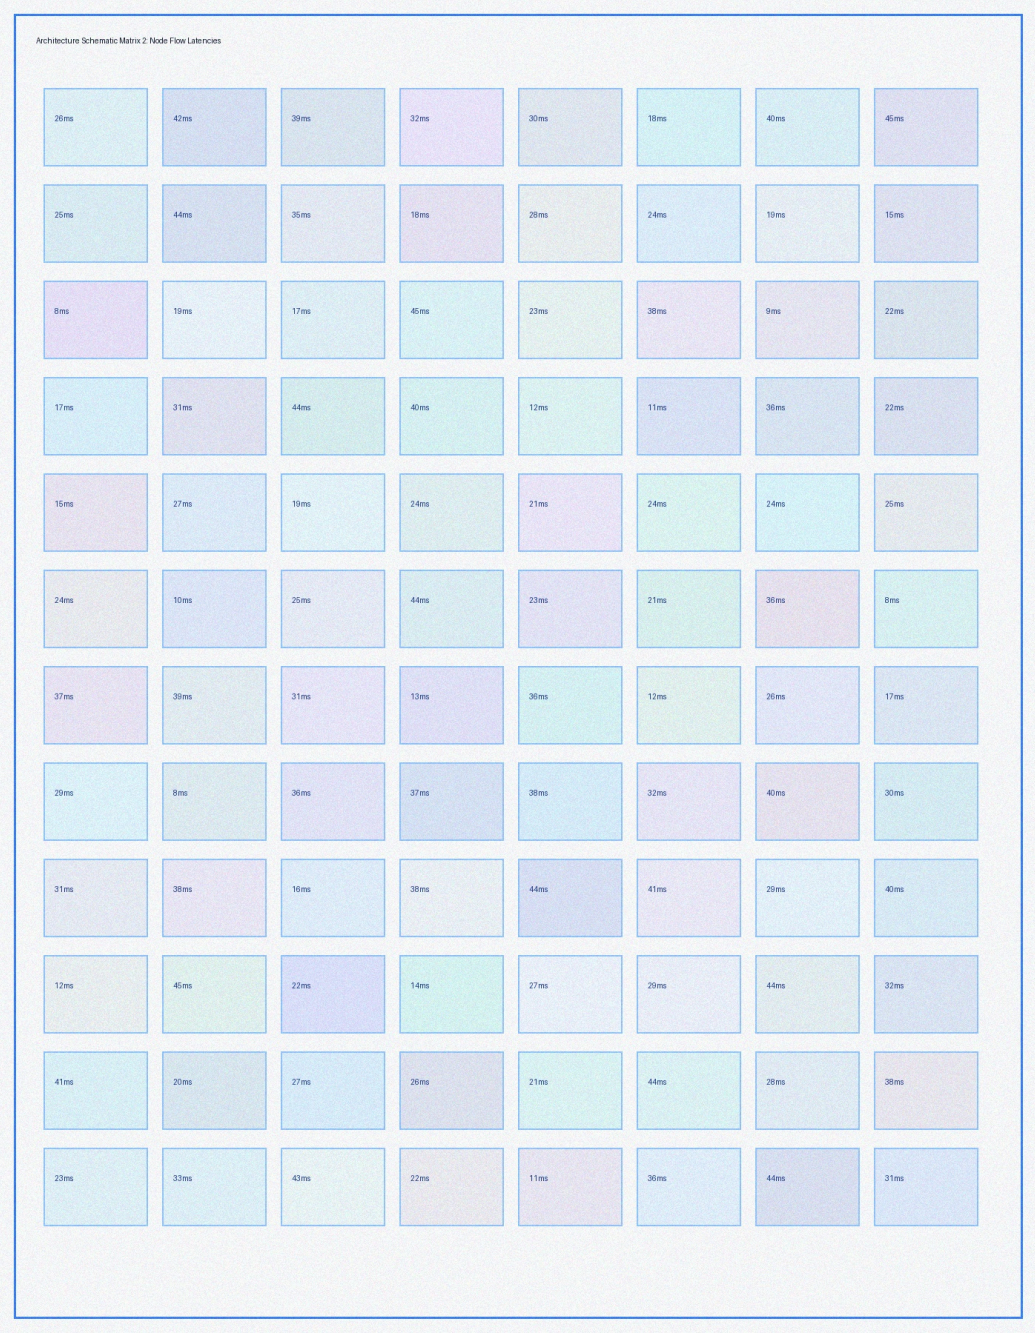


CHAPTER 3: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 3. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

CHAPTER 4: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 4. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

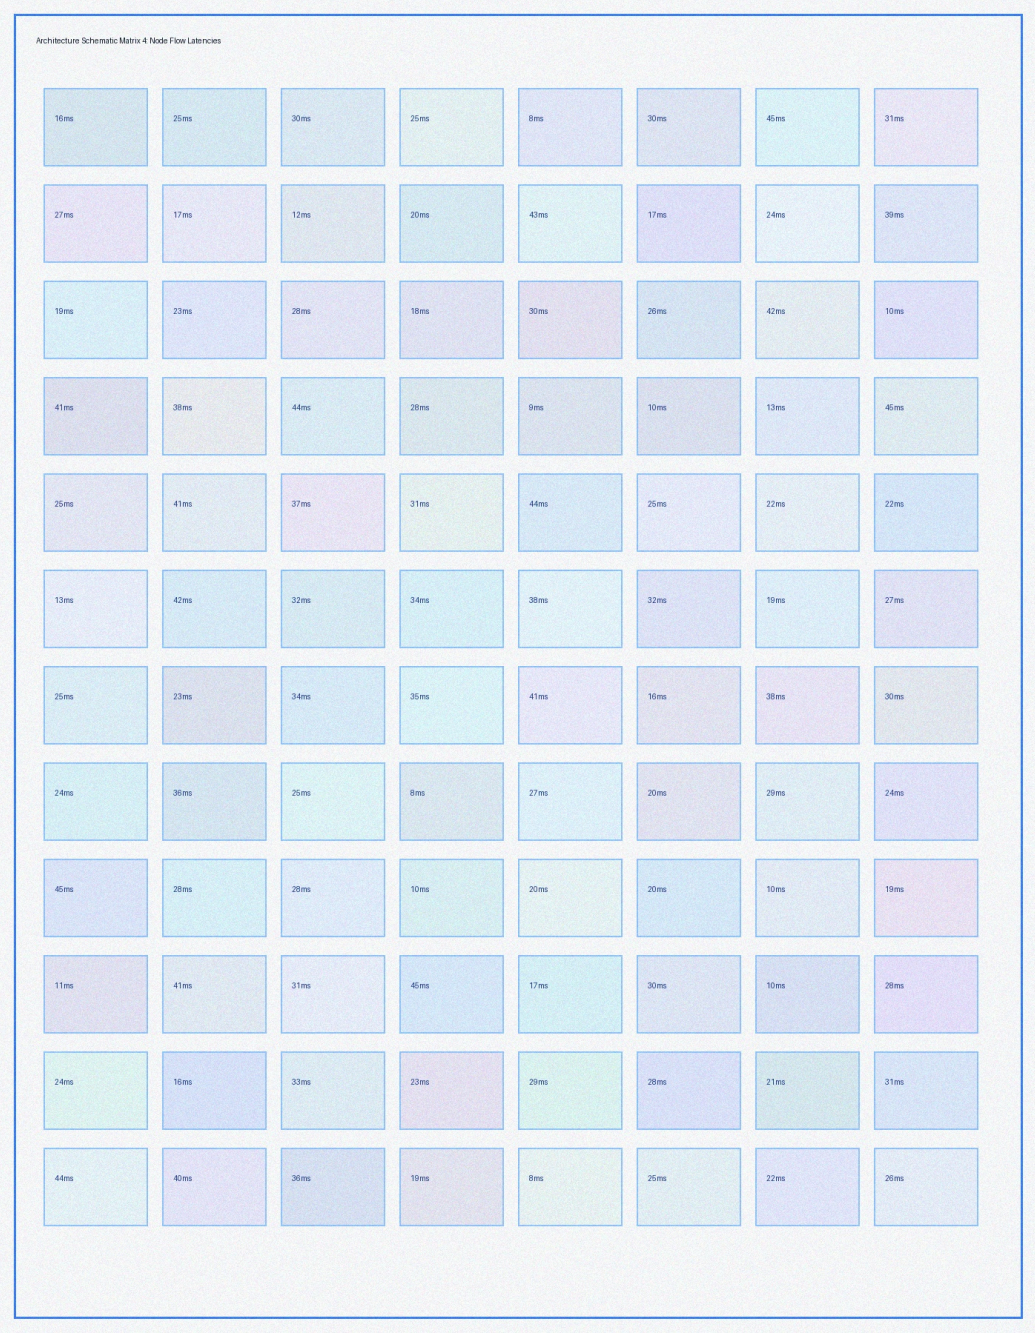


CHAPTER 5: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 5. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

CHAPTER 6: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 6. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

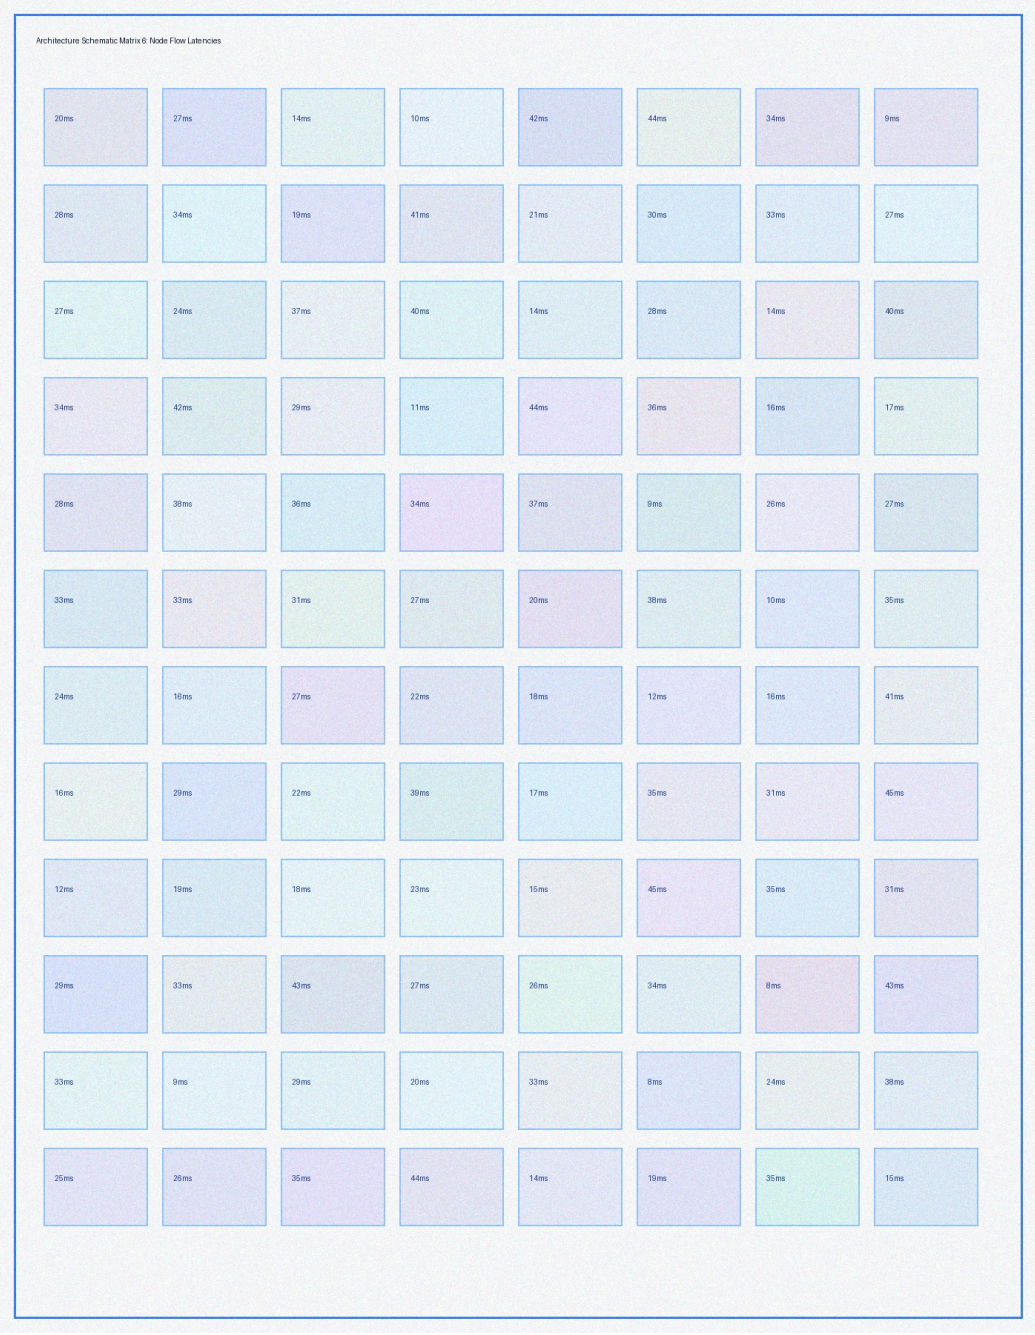


CHAPTER 7: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 7. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

CHAPTER 8: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 8. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

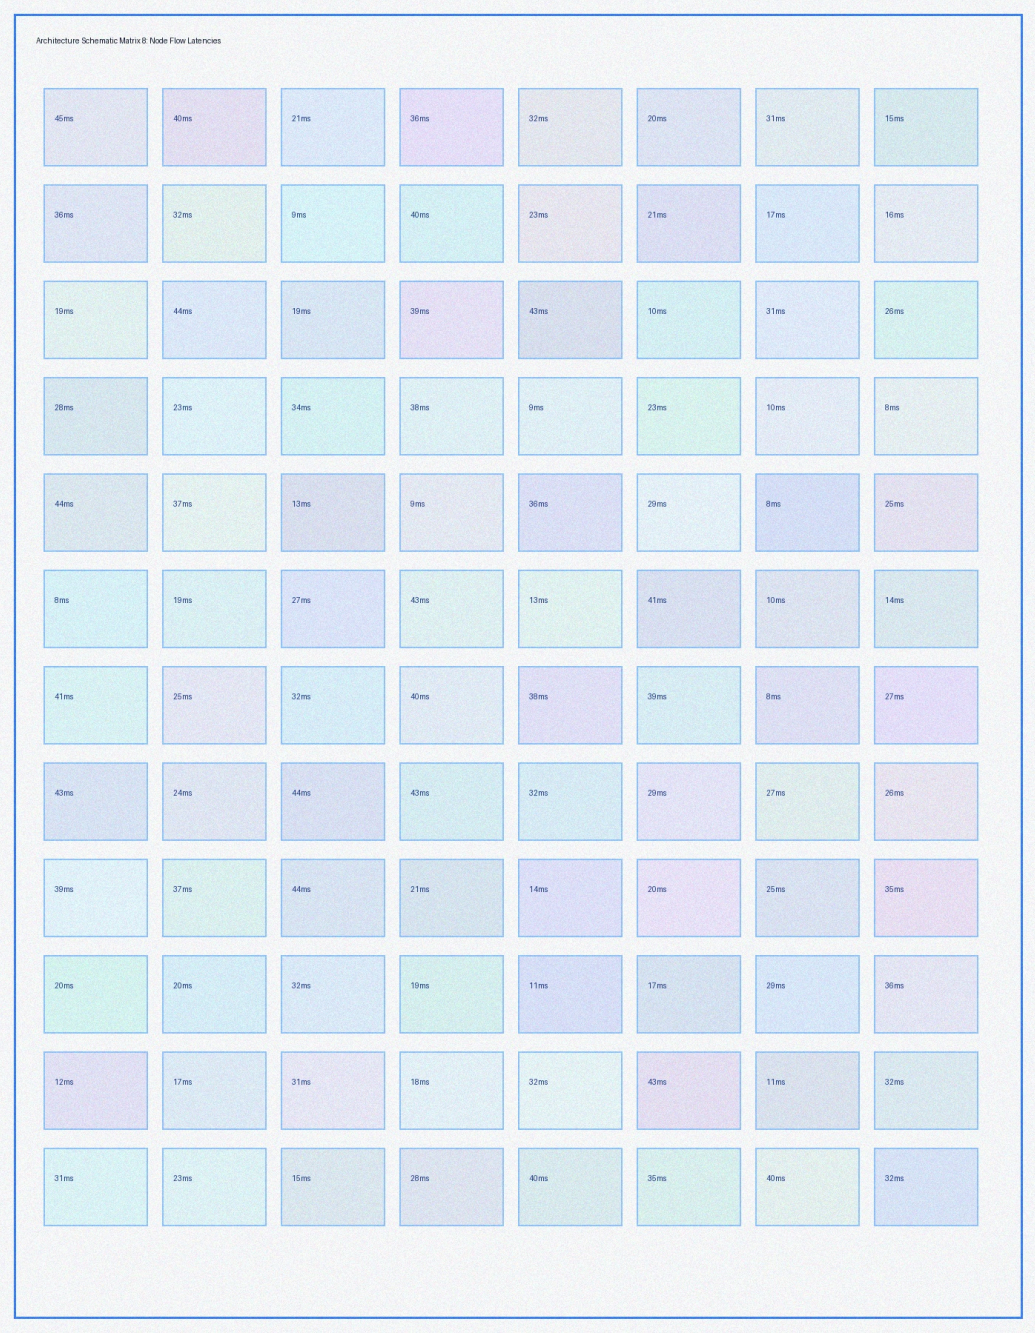


CHAPTER 9: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 9. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.


CHAPTER 10: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 10. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

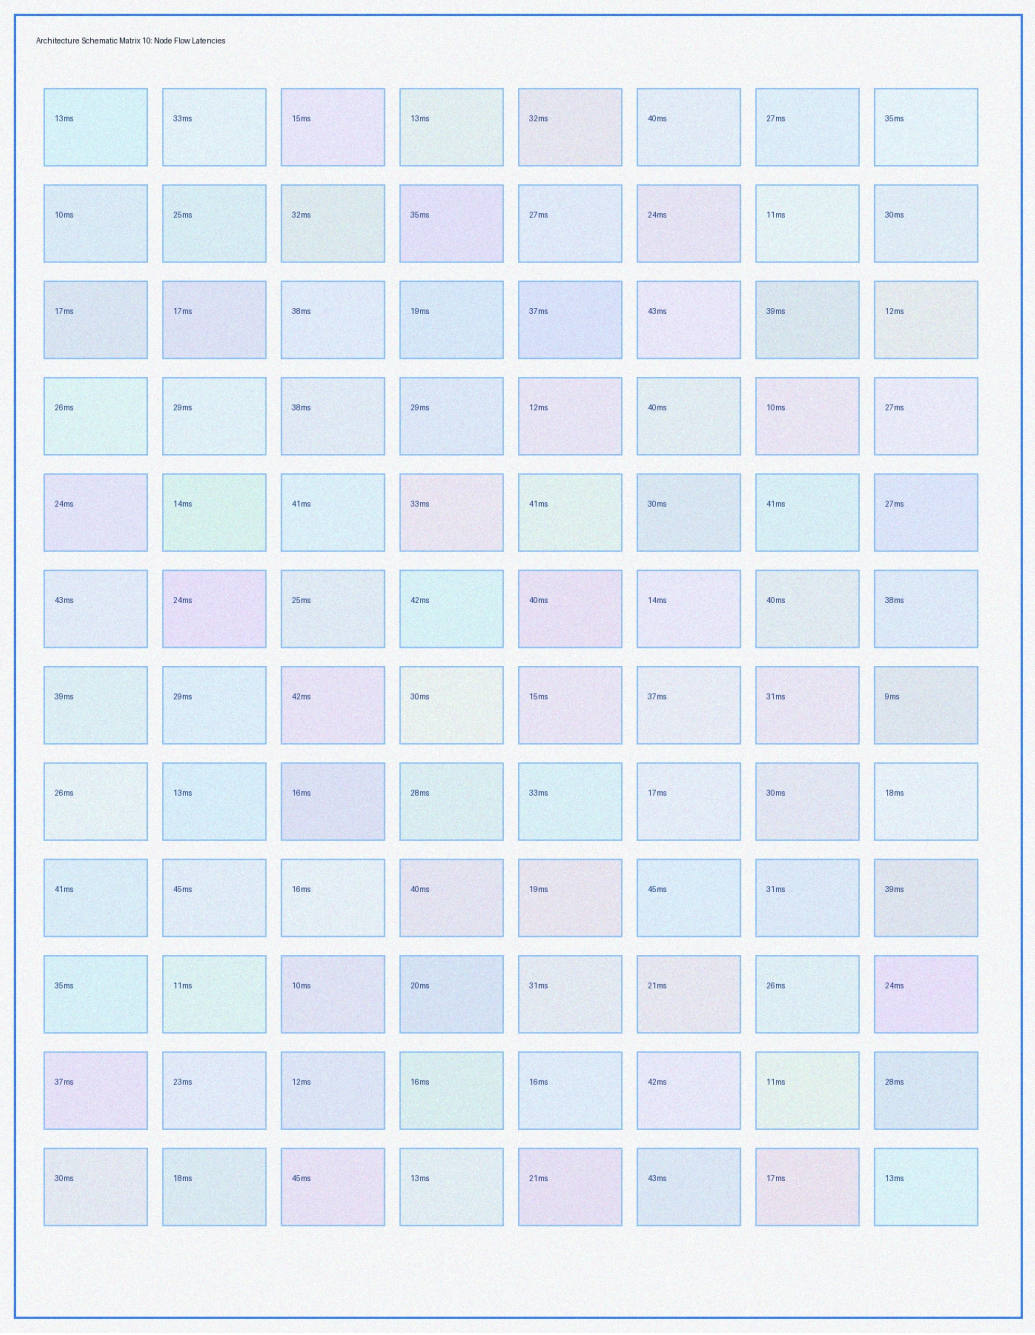


CHAPTER 11: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 11. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

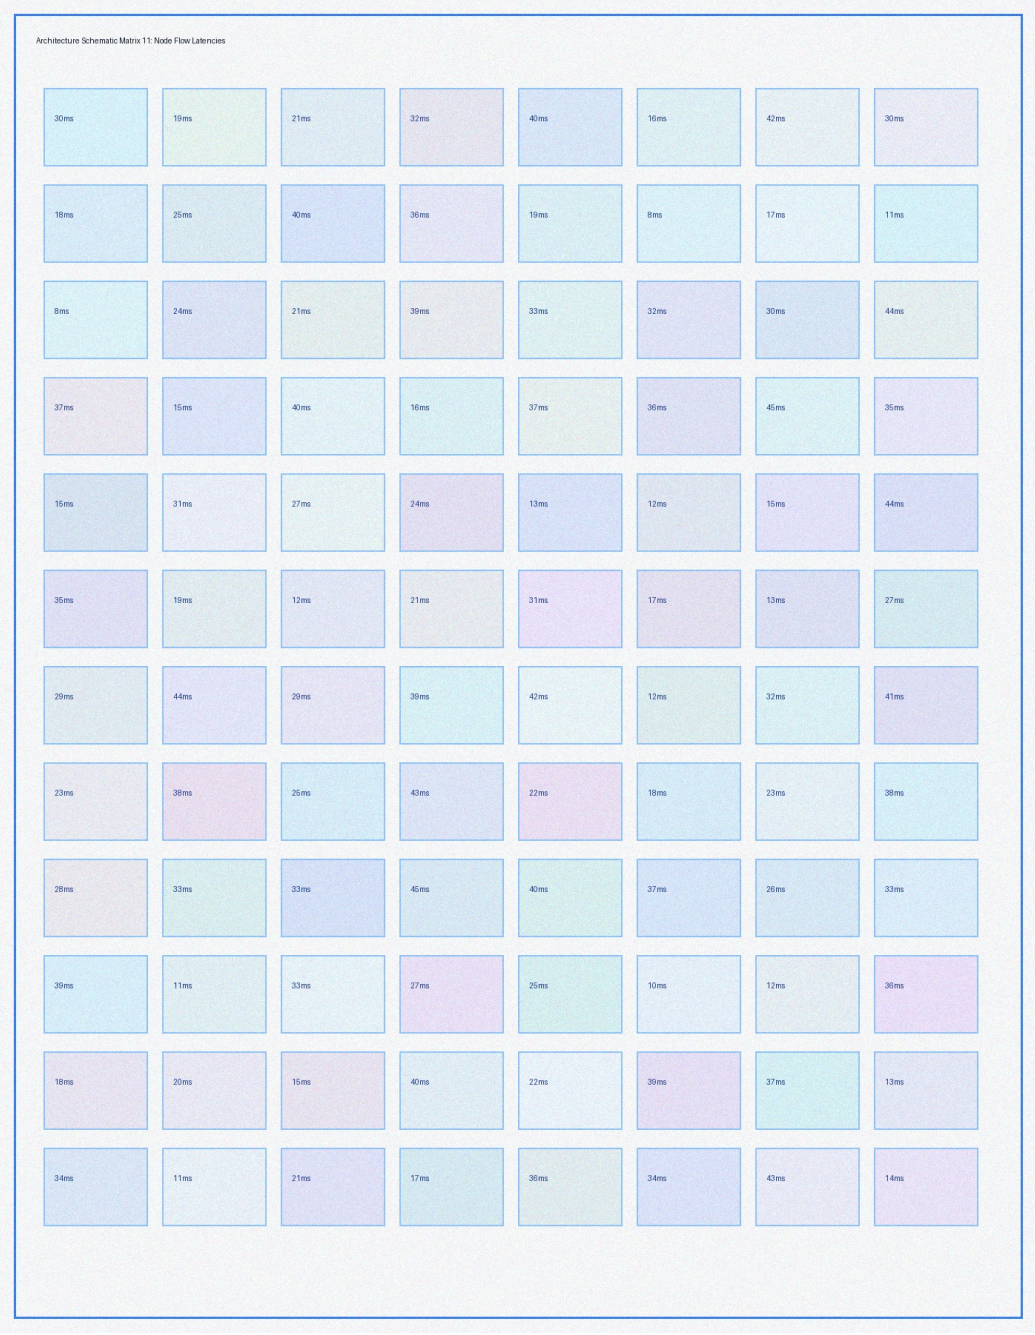


CHAPTER 12: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 12. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

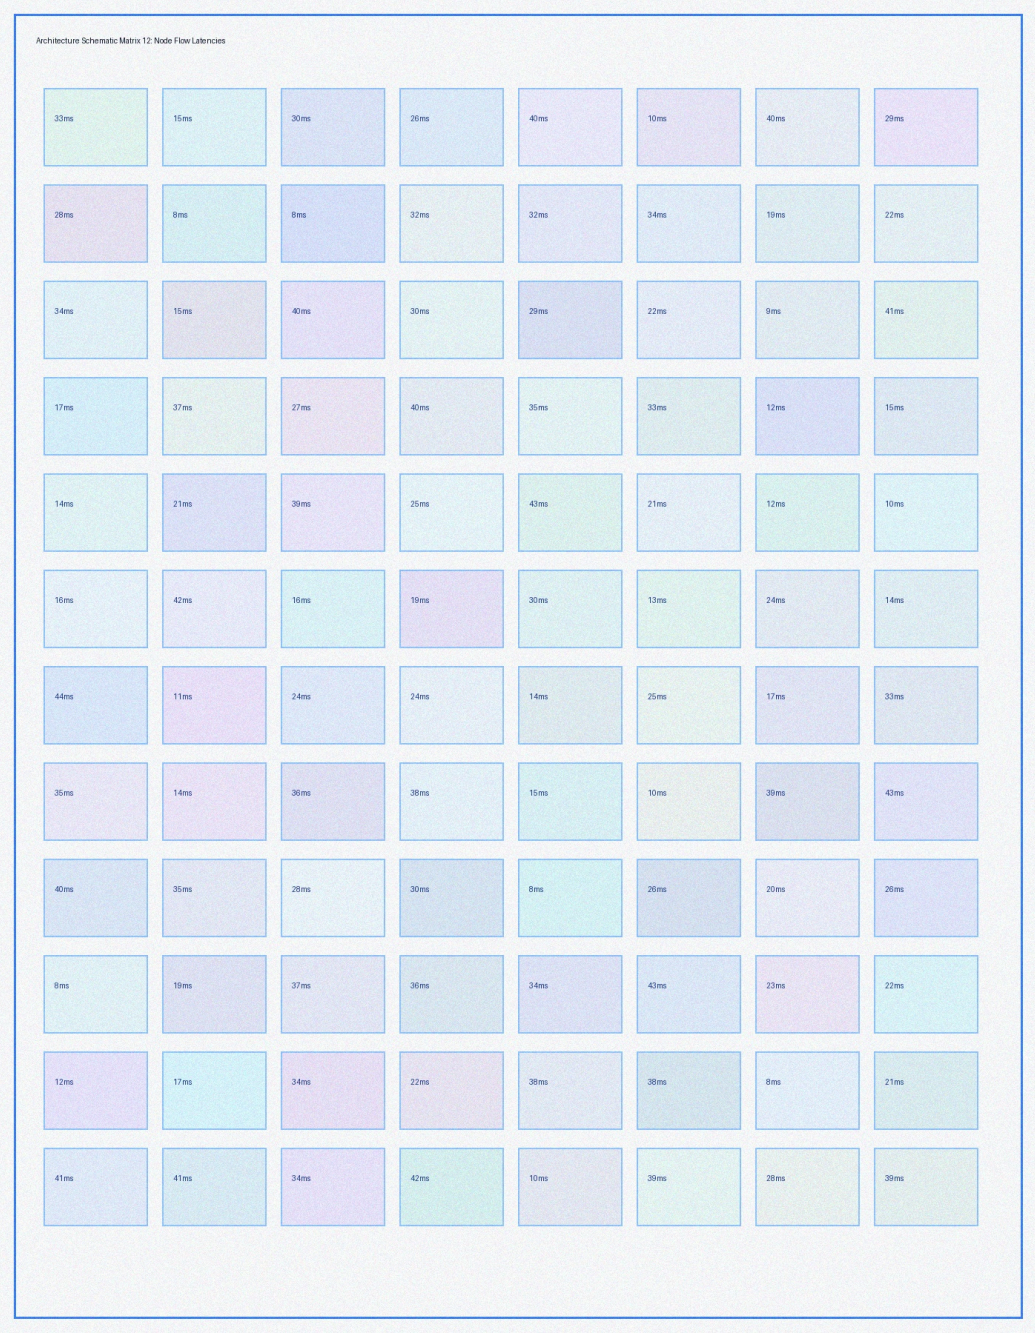


CHAPTER 13: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 13. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

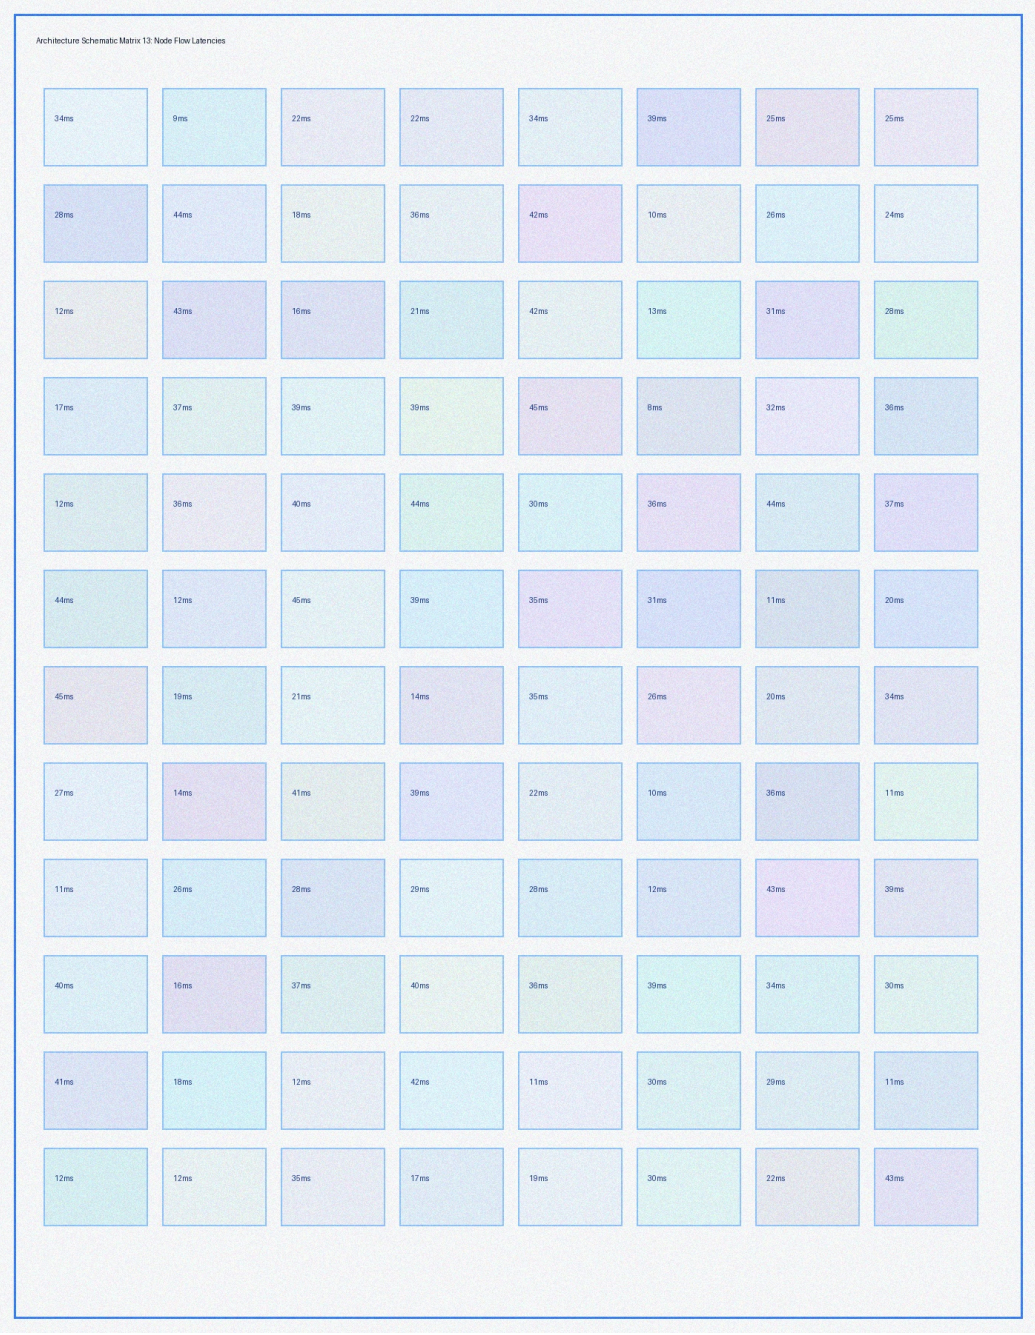


CHAPTER 14: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 14. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

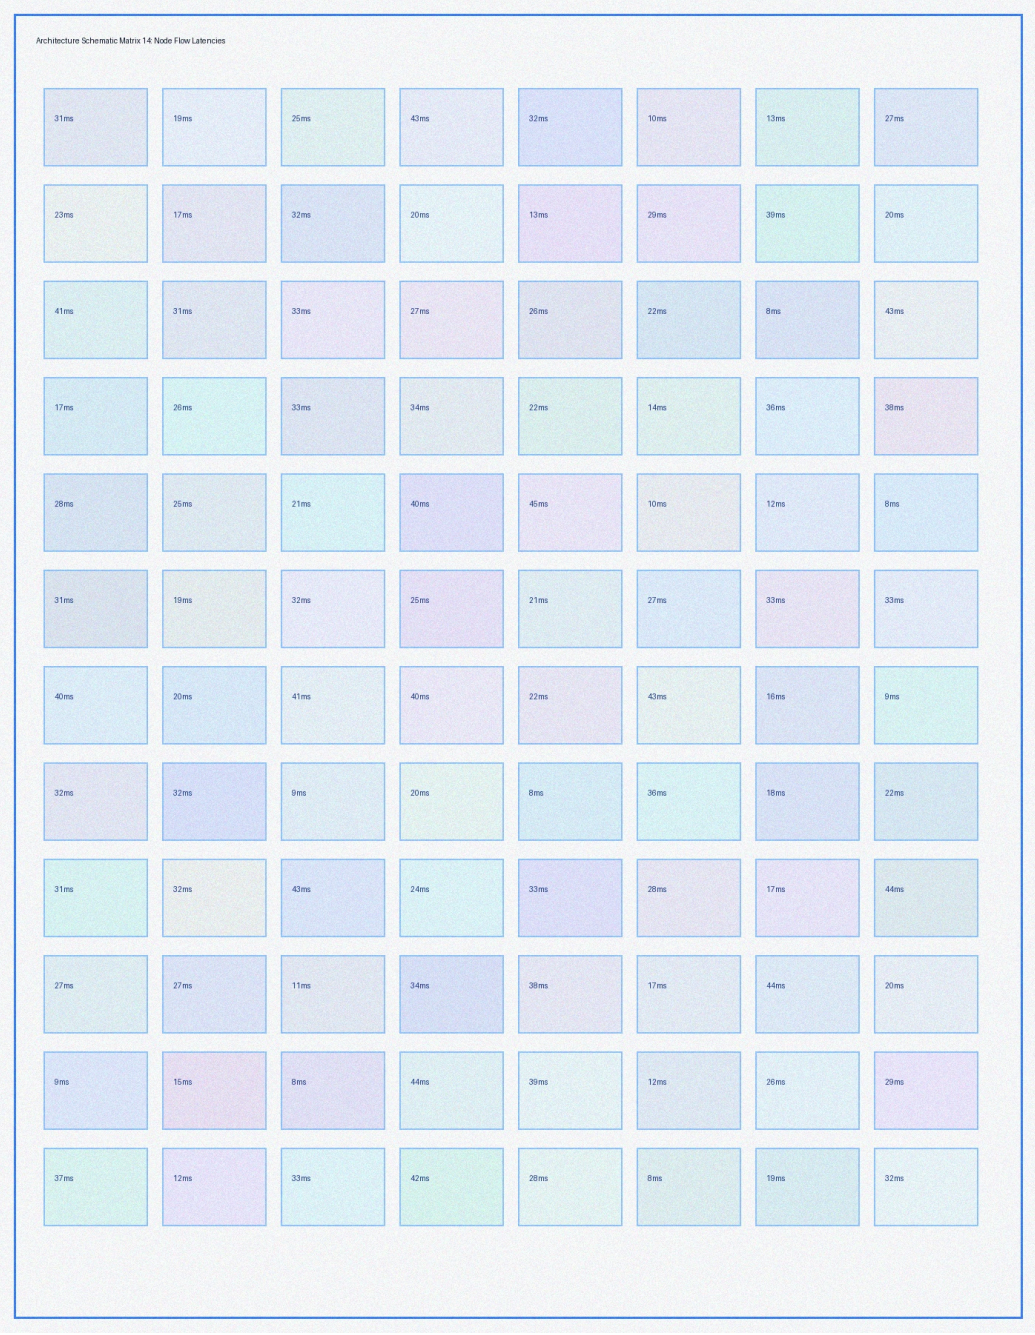


CHAPTER 15: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 15. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

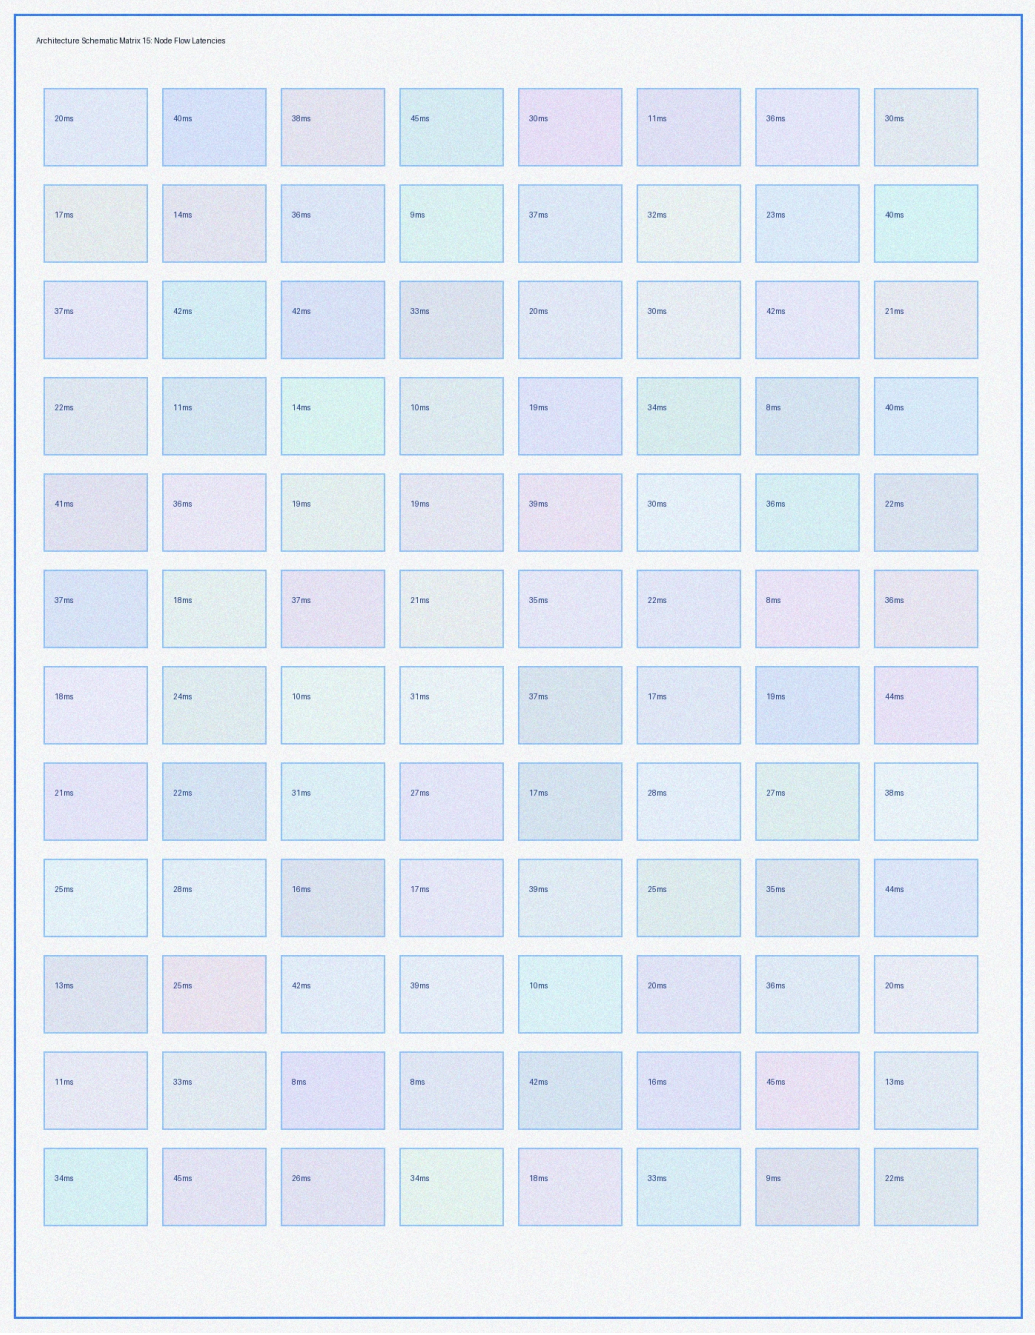


CHAPTER 16: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 16. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

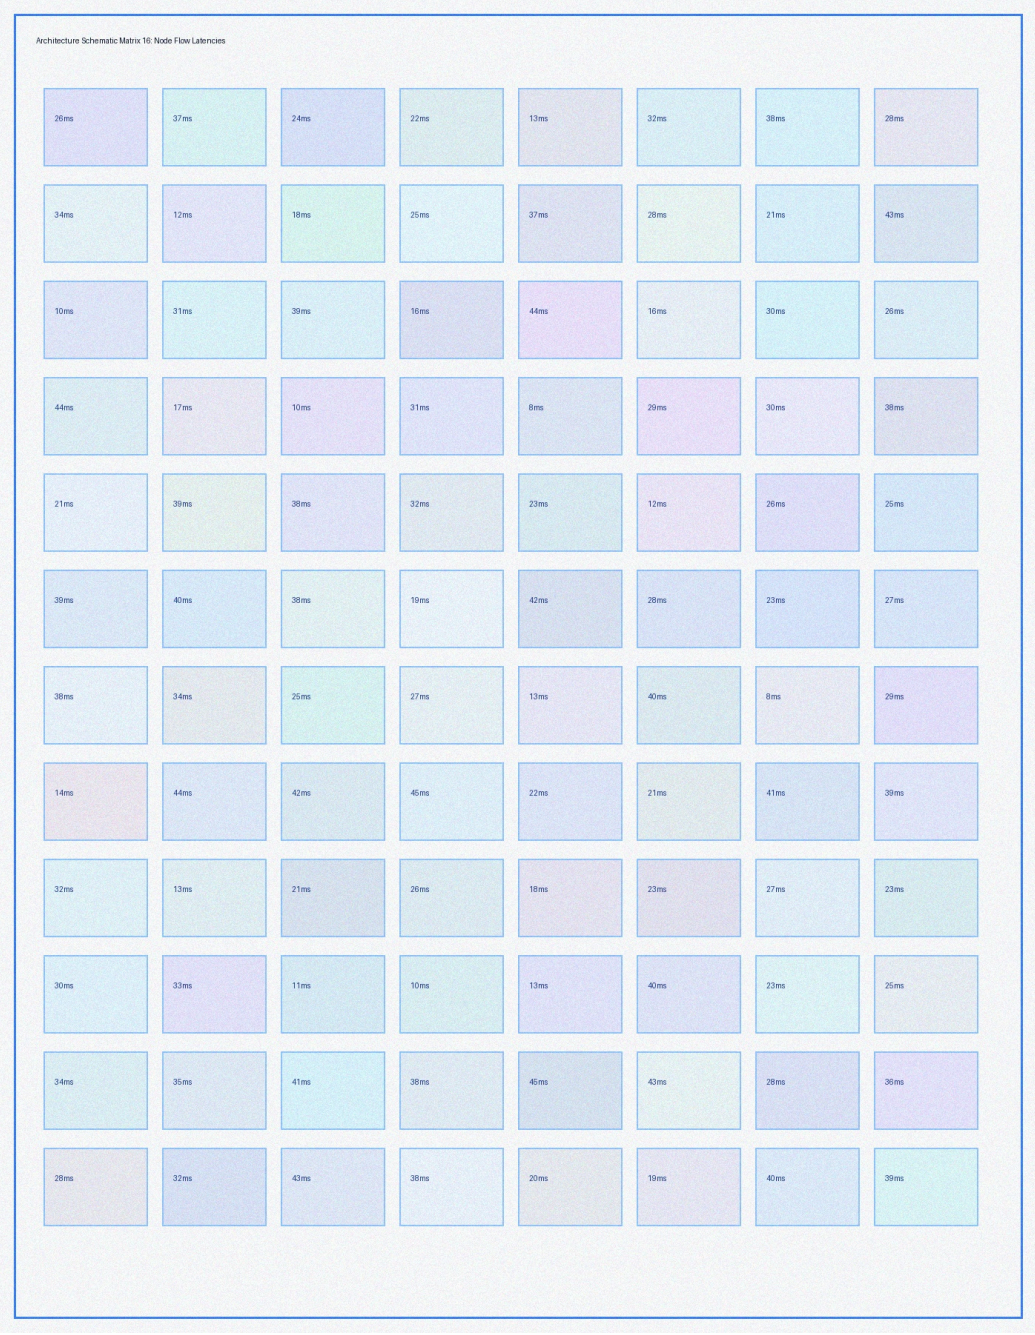

CHAPTER 17: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 17. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

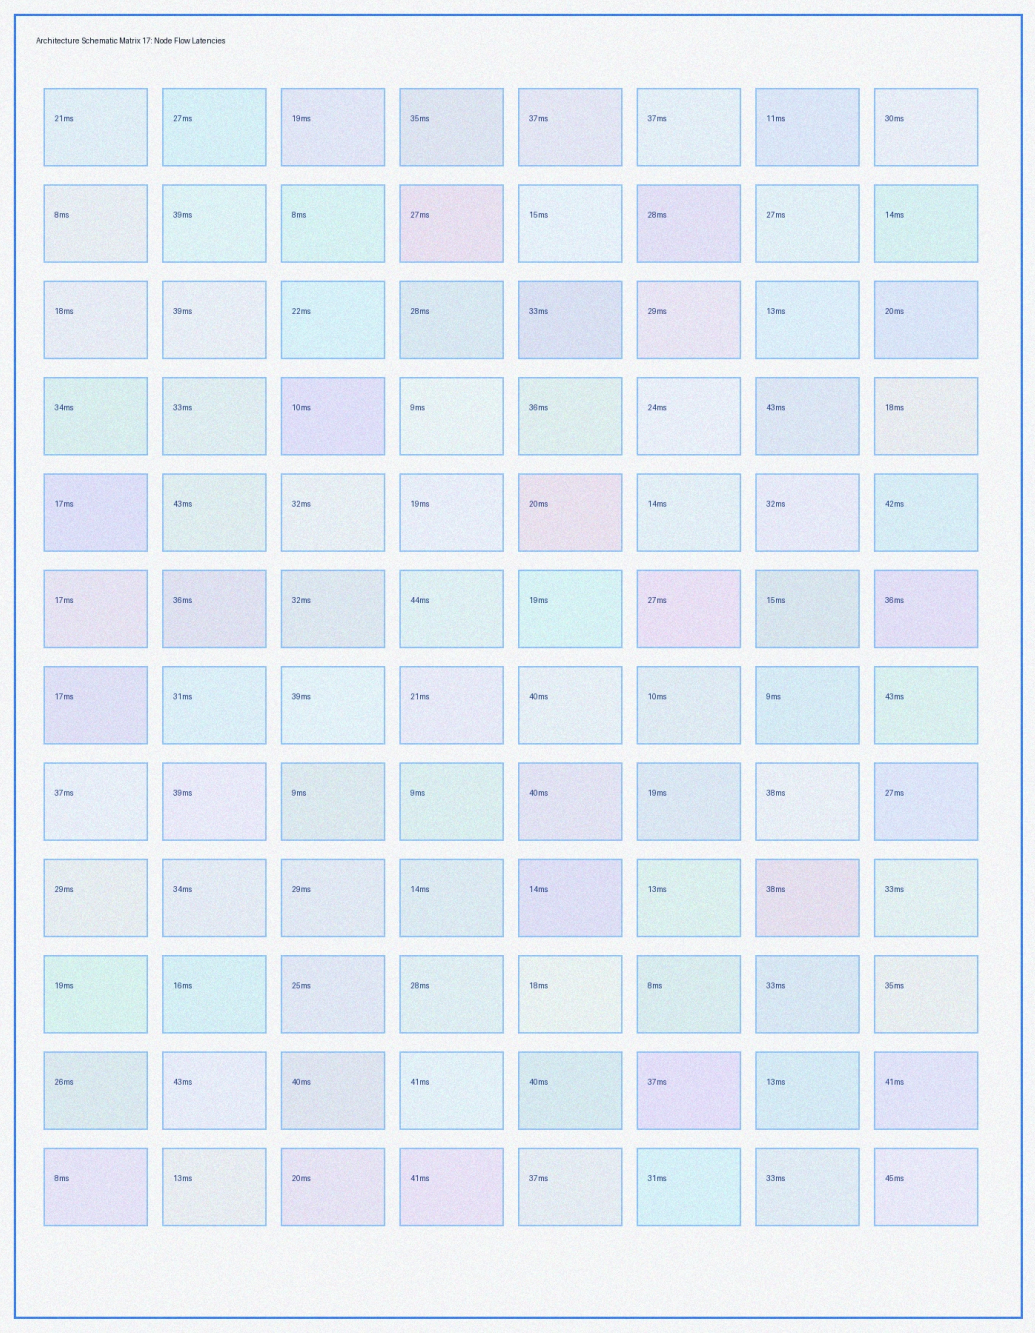

CHAPTER 18: STATEGRAPH DIVERGENCE & VECTOR CONVERGENCE

Detailed engineering specifications for module 18. OmniBrain employs a supervisor router node that dynamically dispatches user intent to SearchAgent, SQLAgent, or VisionAgent. Dense vector embeddings are computed via SentenceTransformers ('all-MiniLM-L6-v2') and upserted into Qdrant vector collections. Cosine distance evaluation enforces a strict confidence threshold of 0.65 with bounded Self-RAG loops.

