

NAME-Vedika Singh

UID-23BCS11465

Sub-Full Stack

Practice1

CODE-

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
  <meta charset="UTF-8">
```

```
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
  <title>Live Character Counter</title>
```

```
  <style>    body {    font-
```

```
family: Arial, sans-serif;
```

```
margin: 20px;
```

```
    }
```

```
    .counter-box {
```

```
border: 1px solid #000;
```

```
padding: 15px;
```

```
margin-bottom: 20px;
```

```
    }    h2 {    margin:
```

```
0 0 10px 0;
```

```
    }    textarea {
```

```
width: 100%;
```

```
height: 100px;
```

```
font-size: 14px;
```

```
padding: 8px;
```

```
margin-bottom:
```

```
10px;    resize:
```

```
none;
```

```



    }
    .char-count {      font-
weight: bold;
    }
</style>
</head>
<body>
  <div class="counter-box">
    <h2>Live Character Counter</h2>
    <textarea id="textInput" placeholder="Start typing..."></textarea>
    <p>Characters: <span id="charCount">0</span></p>
  </div>

  <script>    const textarea =
document.getElementById("textInput");    const charCount =
document.getElementById("charCount");

    textarea.addEventListener("input", () => {
charCount.textContent = textarea.value.length;
    });
  </script>
</body>
</html>

```

OUTPUT

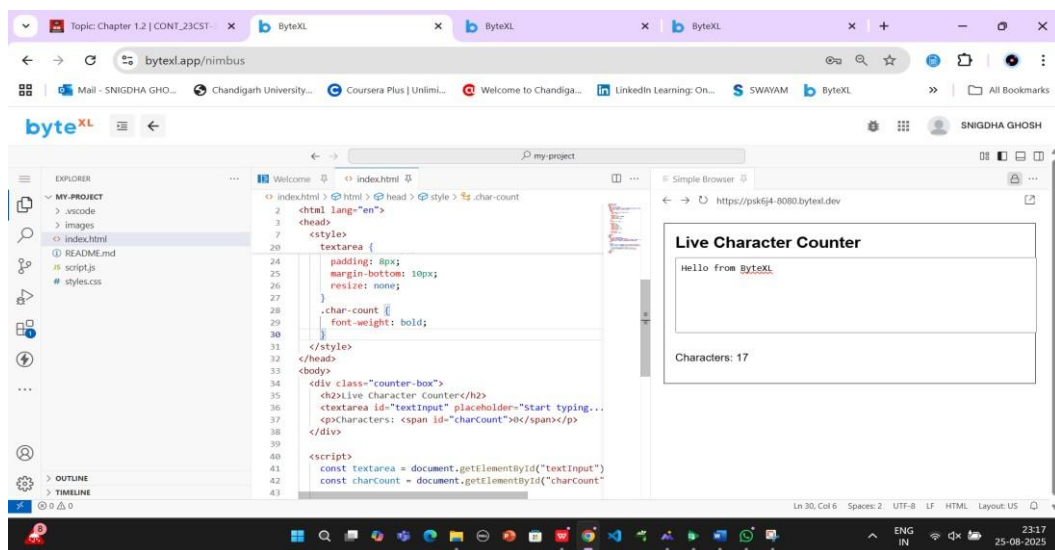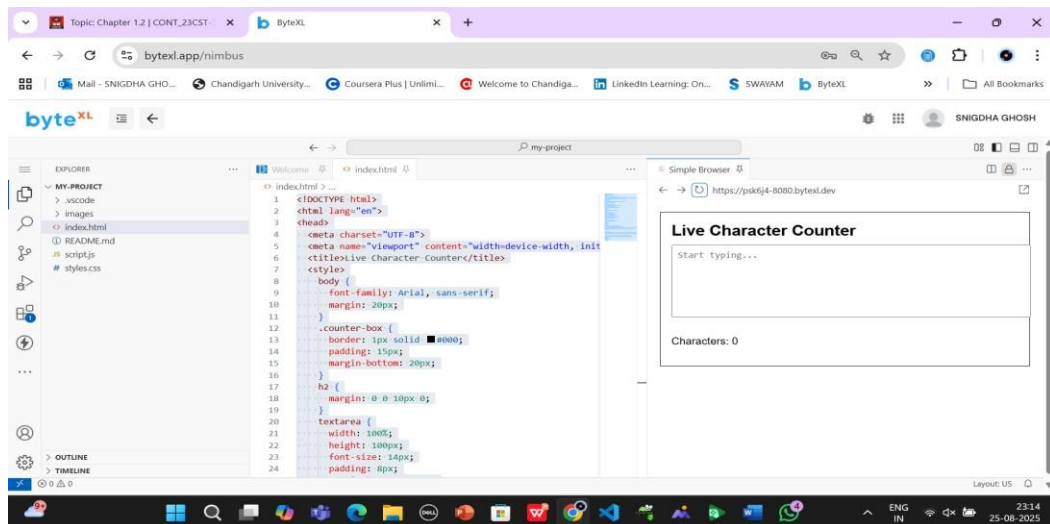

Practice2

CODE-

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
  <meta charset="UTF-8">
```

```
  <meta name="viewport" content="width=device-width, initial-scale=1.0">
```

```
  <title>Dynamic Product Filter</title>
```

```
<style>
```

```
body {
```

```
  font-family:
```

```
  Arial, sans-
```

```

    serif;
margin: 20px;
}
.container {
border:
1px solid #333;
padding: 15px;
margin-bottom: 20px;
}
h2 {
margin-bottom: 10px;
}
select {
margin-bottom: 15px;
padding: 5px;
}
ul {
list-style-type: none;
padding: 0;
}
li {
border: 1px solid #ddd;
padding: 8px;
margin: 4px 0;
border-radius: 5px;
}
</style>
</head>
<body>

<div class="container">
  <h2>Product List</h2>
  <label for="category">Filter by Category: </label>
  <select id="category">

```

```
<option value="all">All</option>
<option value="clothing">Clothing</option>
<option value="electronics">Electronics</option>
<option value="books">Books</option>
</select>
```

```
<ul id="product-list">
  <li data-category="clothing">T-Shirt</li>
  <li data-category="clothing">Jeans</li>
  <li data-category="electronics">Headphones</li>
  <li data-category="electronics">Smartphone</li>
  <li data-category="books">Novel</li>
  <li data-category="books">Cookbook</li>
</ul>
</div>
```

```
<script>  const dropdown =
document.getElementById("category");  const products =
document.querySelectorAll("#product-list li");
```

```
  dropdown.addEventListener("change", () => {
const selected = dropdown.value;
```



```
    products.forEach(product => {      const category =
product.getAttribute("data-category");      if (selected ===
"all" || selected === category) {        product.style.display
= "block";
      } else {
product.style.display = "none";
```


```
}  
});  
});  
</script>
```

```
</body>
```

```
</html>
```

OUTPUT

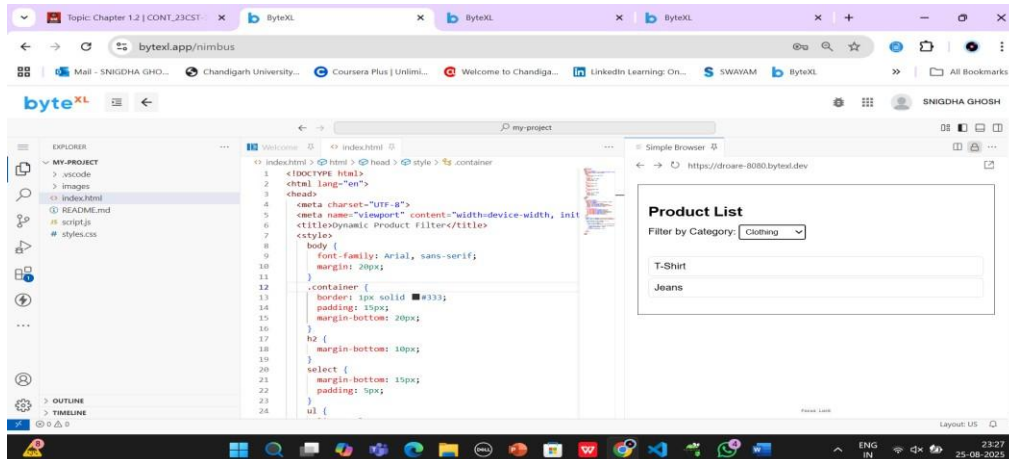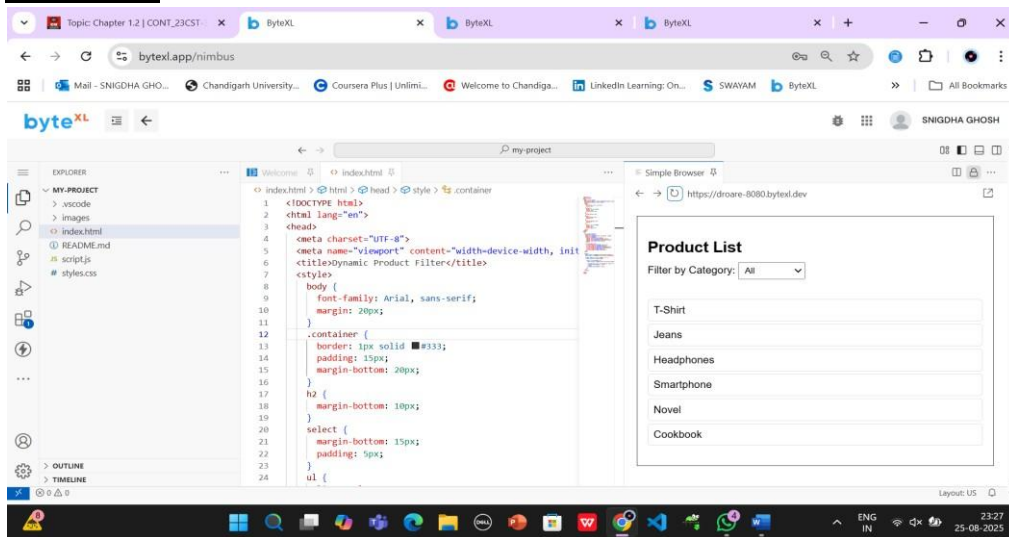

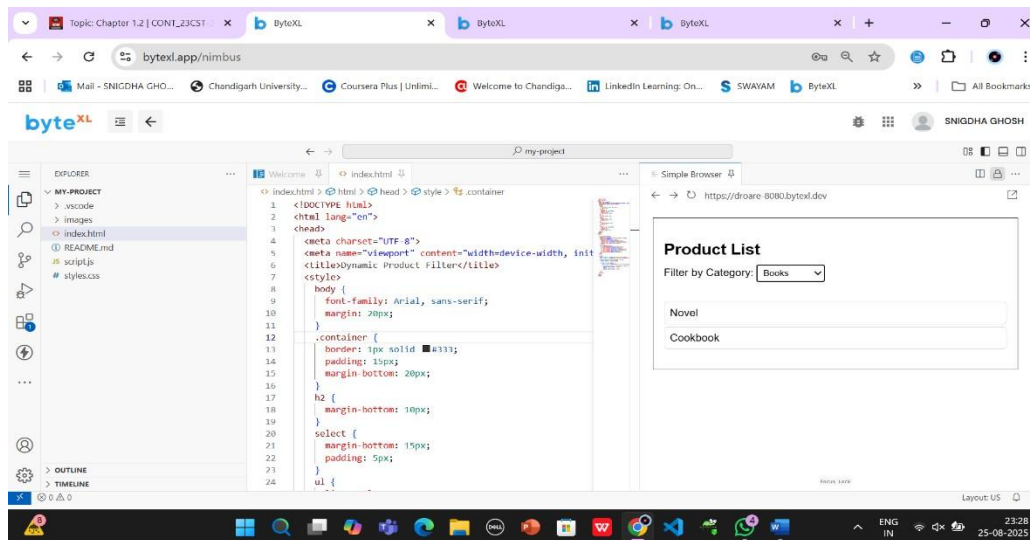

Practice3

CODE-

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
<meta charset="UTF-8">
```

```
<title>SVG Drawing Tool</title>
```

```
<style>  body { font-family: Arial, sans-serif;
padding: 20px; }
```

```
  .container {    border:
1px solid #333;
```

```
padding: 10px;
```

```
display: inline-block;
```

```
}
```

```
.title { font-weight: bold; margin-bottom: 8px; }
```

```
svg {    border: 1px solid #333;    background:
#f9f9f9;    cursor: crosshair;
```

```
}
```

```
</style>
```

```
</head>
```

```

<body>

  <div class="container">

    <div class="title">SVG Drawing Tool</div>

    <svg id="drawingArea" width="600" height="400"></svg>

  </div>


  <script>    const svg =
document.getElementById("drawingArea");    let drawing
= false;    let currentPath = null;


    // Convert mouse coords to SVG coords
function getMousePosition(evt) {    const
rect = svg.getBoundingClientRect();
return {    x: evt.clientX - rect.left,    y:
evt.clientY - rect.top

    };

  }


    svg.addEventListener("mousedown", (e) => {    drawing = true;    const pos =
getMousePosition(e);    currentPath =
document.createElementNS("http://www.w3.org/2000/svg", "path");
currentPath.setAttribute("stroke", "blue");    currentPath.setAttribute("stroke-width",
"2");    currentPath.setAttribute("fill", "none");

    currentPath.setAttribute("d", M ${pos.x} ${pos.y});
svg.appendChild(currentPath);

    });


    svg.addEventListener("mousemove", (e) => {
if (!drawing) return;    const pos =

```



```
getMousePosition(e);    let d =
currentPath.getAttribute("d");    d += ` L
${pos.x} ${pos.y}`;
currentPath.setAttribute("d", d);

});

svg.addEventListener("mouseup", () => {
drawing = false;    currentPath = null;

});

svg.addEventListener("mouseleave", () => {
drawing = false;    currentPath = null;

});
</script>
</body>
</html>
```

OUTPUT

