

NAME-Vedika

UID-23BCS11465

Sub-Full Stack

Practice1

CODE-

```
<!DOCTYPE html>

<html lang="en">

  <head>

    <meta charset="UTF-8" />

    <title>Product Card</title>

    <script src="https://unpkg.com/react@18/umd/react.development.js"
crossorigin></script>

    <script src="https://unpkg.com/react-dom@18/umd/react-dom.development.js"
crossorigin></script>

    <script src="https://unpkg.com/@babel/standalone/babel.min.js"></script>

    <style>      .container {
border: 2px solid #333;
padding: 20px;      text-
align: center;      width:
80%;      margin: 20px
auto;

      }

      .product-list {
display: flex;      justify-
content: center;      gap:
20px;      flex-wrap:
wrap;

      }
```

```

        .card {
            border: 1px solid #ddd;
border-radius: 10px;        padding: 15px;
width: 200px;        text-align: center;
margin: 10px;        box-shadow: 0 2px 5px
rgba(0, 0, 0, 0.1);
        }

```

```

        .in-stock {
color: green;        font-
weight: bold;
        }

```

```

        .out-stock {
color: red;        font-
weight: bold;
        }

```

```

</style>

```

```

</head>

```

```

<body>

```

```

<div id="root"></div>

```

```

<script type="text/babel">    const ProductCard =
({ name, price, status }) => {
    return (
        <div className="card">
            <h3>{name}</h3>
            <p>Price: ${price}</p>
            <p className={status === "In Stock" ? "in-stock" : "out-stock"}>
                Status: {status}
            </p>

```

```

        </div>

    );

};

function App() {
return (
    <div className="container">

        <h2>Products List</h2>

        <div className="product-list">

            <ProductCard name="Wireless Mouse" price="25.99" status="In Stock" />

            <ProductCard name="Keyboard" price="45.5" status="Out of Stock" />

            <ProductCard name="Monitor" price="199.99" status="In Stock" />

        </div>

    </div>

    );

}

```

```

const root = ReactDOM.createRoot(document.getElementById("root"));
root.render(<App />);

```

```


</script>

</body>

</html>

```

OUTPUT

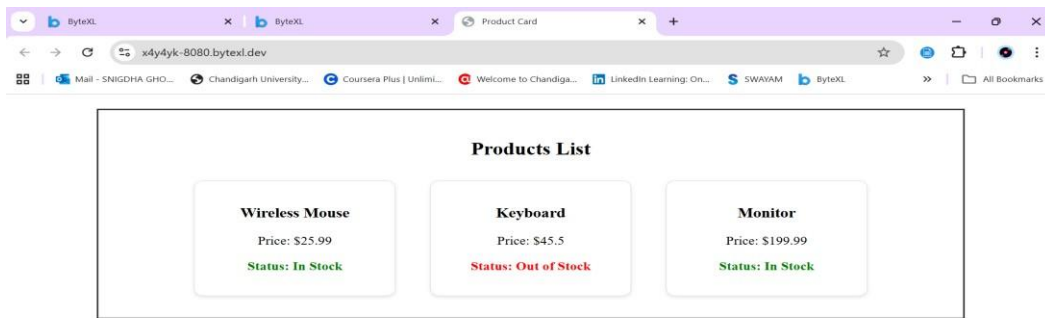

Practice2

CODE-

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <meta name="viewport" content="width=device-width, initial-scale=1.0" />
    <title>Library Management</title>

    <!-- React, ReactDOM, and Babel -->
    <script src="https://unpkg.com/react@18/umd/react.development.js"></script>
    <script src="https://unpkg.com/react-dom@18/umd/reactdom.development.js"></script>
    <script src="https://unpkg.com/@babel/standalone/babel.min.js"></script>
  </head>
  <body>
    <div id="root"></div>

    <script type="text/babel">
const { useState } = React;

function Library() {
  const
[books, setBooks] = useState([
  { title: "1984", author: "George Orwell" },
  { title: "The Great Gatsby", author: "F. Scott Fitzgerald" },
  { title: "To Kill a Mockingbird", author: "Harper Lee" },
]);

  const [search, setSearch] = useState("");
  const [newTitle, setNewTitle] = useState("");
  const [newAuthor, setNewAuthor] = useState("");
```

```

    const addBook = () => {      if (newTitle.trim() &&
newAuthor.trim()) {      setBooks([...books, { title: newTitle,
author: newAuthor }]);      setNewTitle("");
setNewAuthor("");
    }
  };

```

```

    const removeBook = (index) => {
setBooks(books.filter((_, i) => i !== index));
    };

```

```

    const filteredBooks = books.filter(
      (book) =>
book.title.toLowerCase().includes(search.toLowerCase()) ||
book.author.toLowerCase().includes(search.toLowerCase())
    );

```

```

    return (
      <div style={styles.container}>
        <h2>Library Management</h2>
        <input
          type="text"
placeholder="Search by title or author"
value={search}      onChange={(e) =>
setSearch(e.target.value)}
style={styles.input}
        />
        <div style={styles.addBookSection}>
          <input
            type="text"
placeholder="New book title"
value={newTitle}      onChange={(e) =>
setNewTitle(e.target.value)}
style={styles.inputSmall}
          />
          <input
            type="text"
placeholder="New book author"
value={newAuthor}      onChange={(e) =>
setNewAuthor(e.target.value)}
style={styles.inputSmall}
          />
          <button onClick={addBook} style={styles.button}>
            Add Book
          </button>
        </div>

        <ul style={styles.bookList}>
          {filteredBooks.map((book, index) => (
            <li key={index} style={styles.bookItem}>

```

```

        <span>
          <strong>{book.title}</strong> by {book.author}
        </span>
        <button
          onClick={() =>
removeBook(index)}
style={styles.removeBtn}
        >
          Remove
        </button>
      </li>
    ))}
  </ul>
</div>
);
}

```

```

const styles = {
  container: {
    border: "2px
solid #333",
padding:
"20px",
width: "80%",
margin: "20px auto",
  },
  input: {
width: "100%",
padding:
"8px",
marginBottom:
"10px",
border: "1px
solid #ccc",
  },
  addBookSection: {
display: "flex",
gap:
"10px",
marginBottom:
"15px",
  },
  inputSmall: {
flex:
1,
padding: "8px",
border: "1px solid #ccc",
  },
  button: {
padding: "8px 12px",
background: "#333",
color: "#fff",
border: "none",
cursor: "pointer",
  },
  bookList: {
listStyle: "none",
padding: 0,
  },

```

```

        bookItem: {
            display: "flex",
            justifyContent: "space-between",
            padding: "8px",
            border: "1px solid #ddd",
            marginBottom: "5px",
            borderRadius: "5px",
        },
        removeBtn: {
            background: "#f44336",
            color: "white",
            border: "none",
            padding: "5px 10px",
            cursor: "pointer",
            borderRadius: "4px",
        },
    };


```


```

    ReactDOM.createRoot(document.getElementById("root")).render(<Library />);
</script>
</body>
</html>

```

OUTPUT

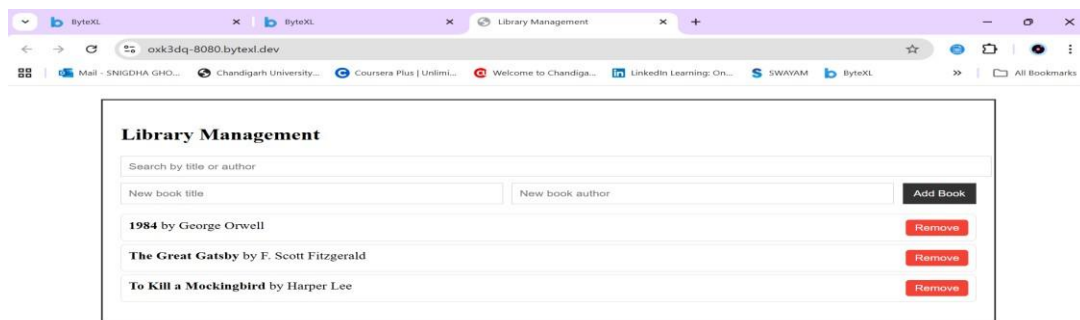

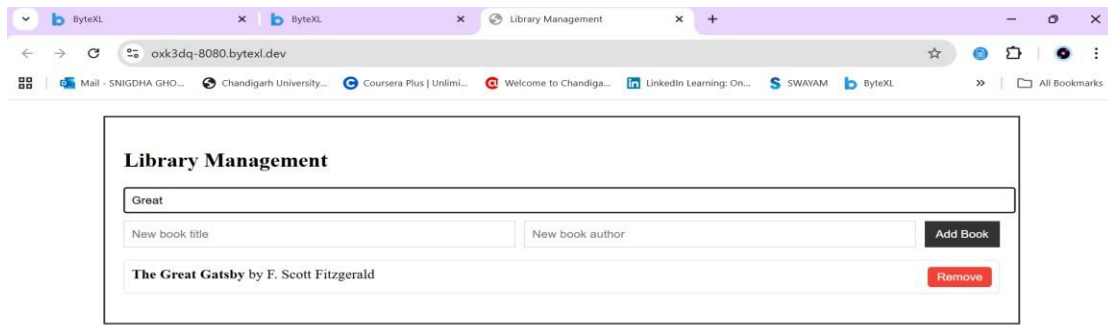

Practice3

CODE-

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <title>Person / Student / Teacher Demo</title>
  <meta name="viewport" content="width=device-width,initial-scale=1" />
  <style>
    body { font-family: system-ui, -apple-system, "Segoe UI", Roboto, Arial; padding:
20px; }    h1 { margin-
bottom: 8px; }
    pre { background:#f6f8fa; border:1px solid #e1e4e8; padding:12px; white-
space:pre-wrap; }
    .log { margin-top:12px; color:#444; }
  </style>
</head>
<body>
  <h1>Person / Student / Teacher Demo</h1>
  <p>This page runs the ES6 classes and prints results below (also logged to
console).</p>
  <div>
```



```
<strong>Output:</strong>
<pre id="output">(running...)</pre>
</div>
```

```
<script>
```

```
    // --- Person base class
```

```
class Person {
  constructor(name, age) {
    this.name = name;
    this.age = age;
  }

  displayInfo() {    return `Name:
${this.name}, Age: ${this.age}`;
  }
}
```

```
    // --- Student subclass    class
```

```
Student extends Person {
  constructor(name, age, course) {
    super(name, age);    this.course =
course;
  }
}
```

```
    // override    displayInfo() {    return
`${super.displayInfo()}, Course: ${this.course}`;
  }
}
```

```
    // --- Teacher subclass
```

```
class Teacher extends Person {
  constructor(name, age, subject) {
```

```

super(name, age);    this.subject =
subject;
    }

    // override    displayInfo() {    return
`${super.displayInfo()}, Subject: ${this.subject}`;
    }
}

// --- create instances and display results    const student1 = new
Student("Alice", 20, "Computer Science");    const teacher1 = new
Teacher("Mr. Smith", 45, "Mathematics");


const outText = [
student1.displayInfo(),
teacher1.displayInfo()
].join("\n");

// show on page
document.getElementById("output").textContent = outText;

// also log to console (open devtools to see)
console.log(outText);
</script>
</body>
</html>

```

OUTPUT



Person / Student / Teacher Demo

This page runs the ES6 classes and prints results below (also logged to console).

Output:

```
Name: Alice, Age: 20, Course: Computer Science  
Name: Mr. Smith, Age: 45, Subject: Mathematics
```

