Name=Ved Khode

EXPERIMENT - 7

7.1.2] Possible Combinations from three Digits

Step 1: Start

Step 2: Read three space-separated digits a, b, and c

Step 3: Store the digits as strings

Step 4: Print a + b + c

Step 5: Print a + c + b

Step 6: Print b + a + c

Step 7: Print b + c + a

Step 8: Print c + a + b

Step G: Print c + b + a

Step 10: Stop

B) PYTHON CODE

```
a, b, c = input().split()

print(a + b + c)
print(a + c + b)
print(b + a + c)
print(b + c + a)
print(c + a + b)
print(c + b + a)
```

C) FLOWCHART

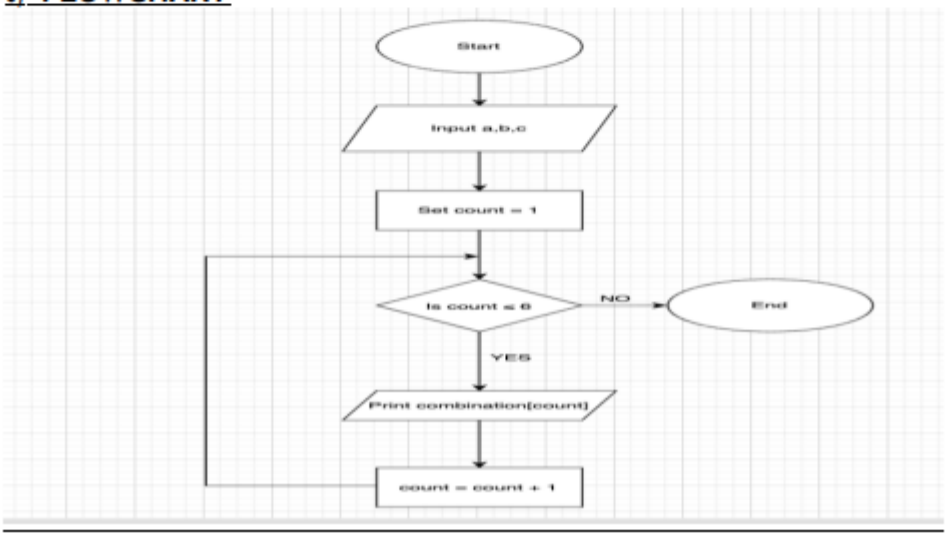

Course

sitnagpur.codetantra.com/secure/course.jsp?eucId=693fa60b79739f1e1d81ca43#/contents/693fa6ec79739f1e1d81ccb8/693fa76f79739f1e1d81ce42/6943943a445cb709597ba51a

CODETANTRA Home

ved.khode.batch2025@sitnagpur.siu.edu.in Support Logout

7.1.2. Possible Combinations from Three Digits

00:49

Write a Python program to accept three digits and print all possible 3-digit combinations that can be formed using those three digits. Each digit should be used exactly once in each combination.

For three digits a, b, and c, there are 6 possible arrangements based on their indices: abc, acb, bac, bca, cab, cba.

Input Format:

- Single line contains three space-separated non-negative integers, a, b, and c, representing the three digits

Output Format:

- Print all possible 3-digit combinations
- Each combination should be printed as a 3-digit number on a separate line
- Print combinations as they appear (maintain leading zeros if first digit is 0)

Constraints:

- $0 \leq \text{each digit} \leq 9$
- Digits can be same or different

Sample Test Cases +

Explorer

combinat...

Submit

```python

a, b, c = input().split()


print(a + b + c)
print(a + c + b)
print(b + a + c)
print(b + c + a)
print(c + a + b)
print(c + b + a)
```

Debugger

Terminal Test cases

‹ Prev Reset Submit Next ›

Search

ENG IN 10:19 AM 06-04-2026