EXPERIMENT - 7

Name : Ved Khode
PRN : 25070521176

7.1.1] Inverted Star Pattern

A) ALGORITHM

Step 1: Start

Step 2: Read an integer n (number of rows).

Step 3: Initialize a loop from i = n down to 1 (decrement by 1 each time).

Step 4: For each value of i, print i stars (*) in the same line without spaces.

Step 5: Move to the next line after printing stars.

Step 6: Repeat Steps 3 to 5 until i becomes 0.

Step 7: Stop

B) PYTHON CODE

```
n = int(input())

for i in range(n, 0, -1):

   print("*" * i)
```

C) FLOWCHART

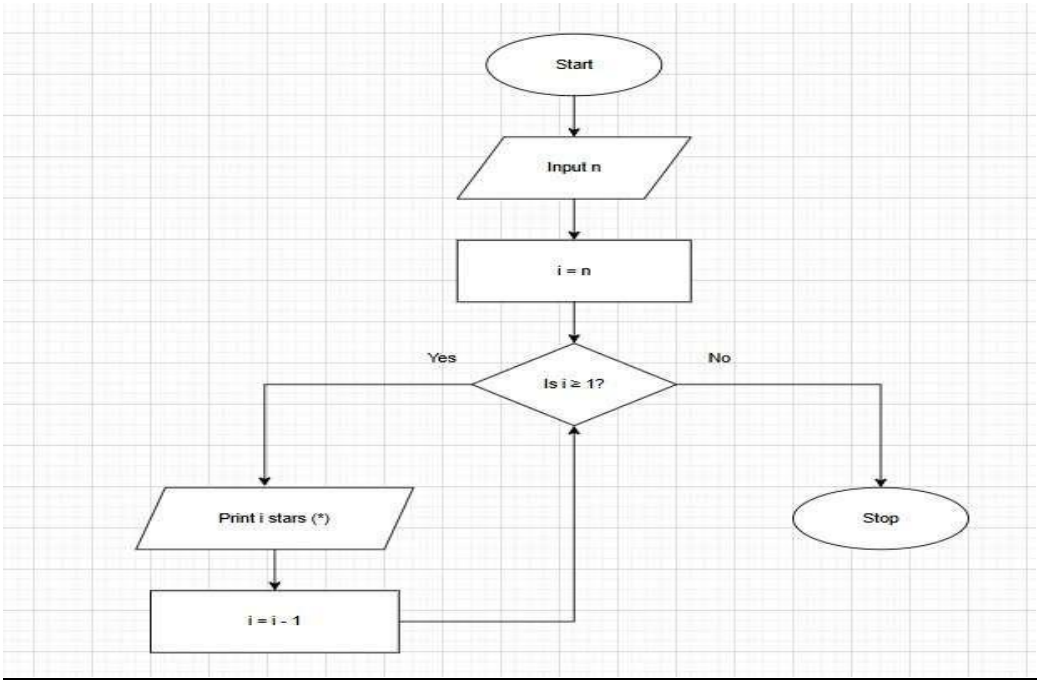

Course

sitnagpur.codetantra.com/secure/course.jsp?eucId=693fa60b79739f1e1d81ca43#/contents/693fa6ec79739f1e1d81ccb8/693fa76f79739f1e1d81ce42/6942edc3aaa2a24bbe4263be

CODETANTRA Home

ved.khode.batch2025@sitnagpur.siu.edu.in Support Logout

7.1.1. Inverted Star Pattern

00:52

Write a Python program to print an inverted right-angled triangle star pattern.

For a given number n, the program should print n rows of stars where the first row contains n stars, the second row contains $n-1$ stars, and each subsequent row has one less star than the previous row, ending with 1 star in the last row.

All rows should be left-aligned with no spaces between the stars.

Input Format:

- Single line contains an integer n representing the number of rows

Output Format:

- Print an inverted right-angled triangle star pattern with n rows

Note:

- Refer to sample test cases for better understanding.

Sample Test Cases +

Explorer

starPrint.py

Submit

```
n = int(input())


for i in range(n, 0, -1):
    print('*' * i)
```

Debugger

Average time 0.007 s 6.83 ms

Maximum time 0.017 s 17.00 ms

3 out of 3 shown test case(s) passed

3 out of 3 hidden test case(s) passed

Test case 1 17 ms Debug

Expected output	Actual output
3	3
***	***
**	**
*	*

Terminal Test cases

‹ Prev Reset Submit Next ›

Search

ENG IN 10:14 AM 06-04-2026