EXPERIMENT 15 PPS: Car dealership sales system

A] ALGORITHM:

Step 1: Start

Step 2: Define a base class Car

- Declare attributes: brand, price, model, color

Step 3: Define constructor _init_()

- Initialize all attributes using input values

Step 4: Define method display_details()

- Print brand, price, model, and color (each on separate line)

Step 5: Define derived class Car1

- Inherit from class Car
- Override method display_details() to print details

Step 6: Define derived class Car2

- Inherit from class Car
- Override method display_details() to print details

Step 7: Read input for first car

- Store values: brand1, price1, model1, color1

Step 8: Read input for second car

- Store values: brand2, price2, model2, color2

Step 9: Create object car1 of class Car1

- Pass first car details

Step 10: Create object car2 of class Car2

- Pass second car details

Step 11: Call display_details() for car1

- Print first car details

Step 12: Call display_details() for car2

- Print second car details

Step 13: Stop

B]FLOWCHART:

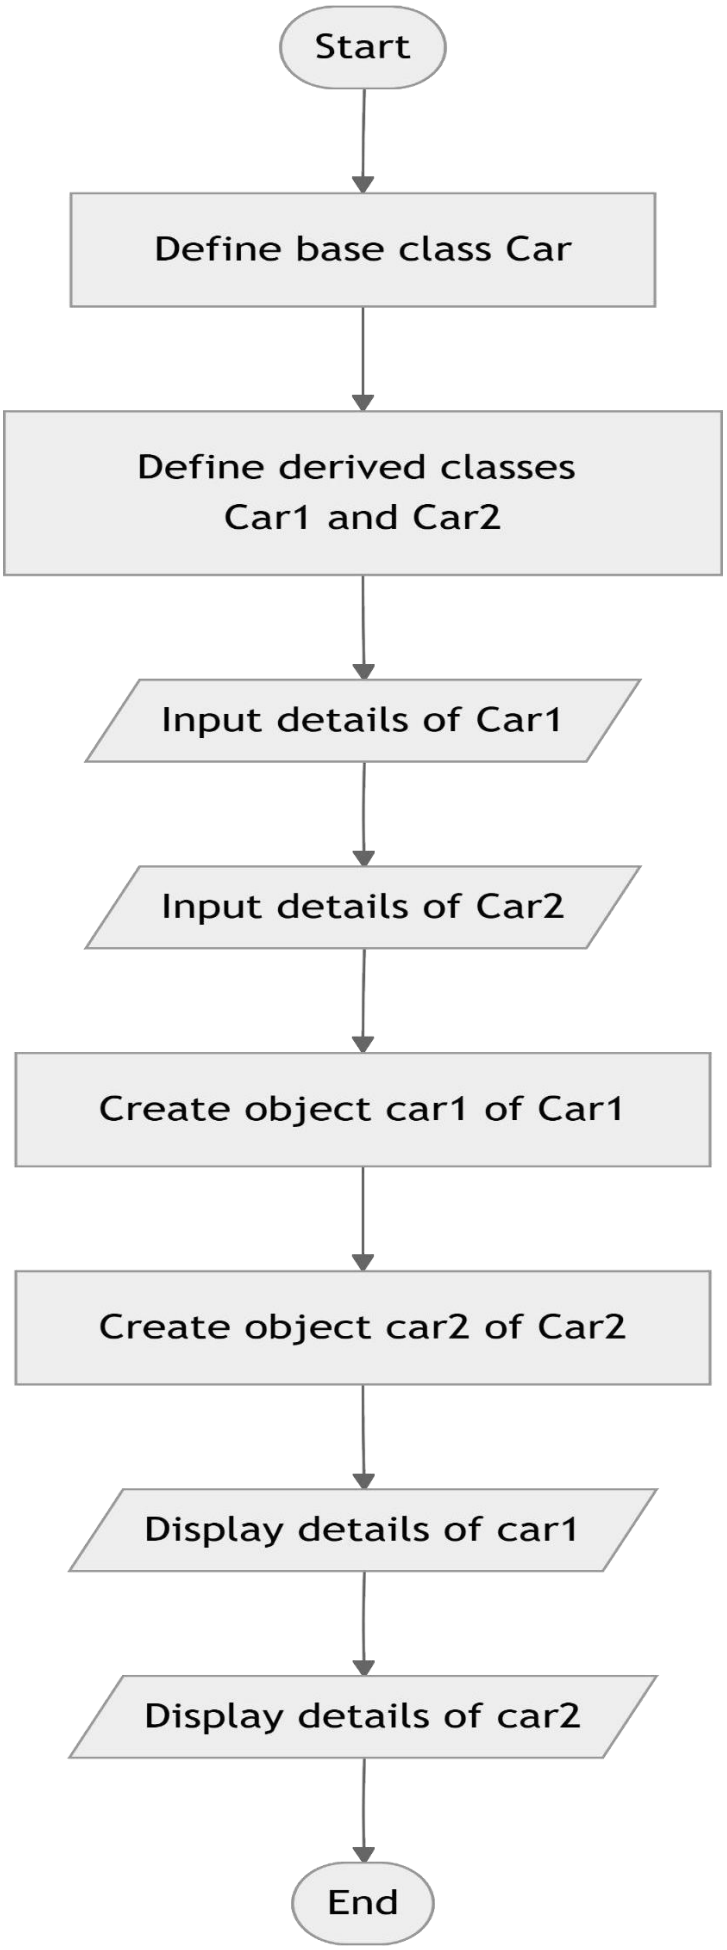

C]CODETANTRA:

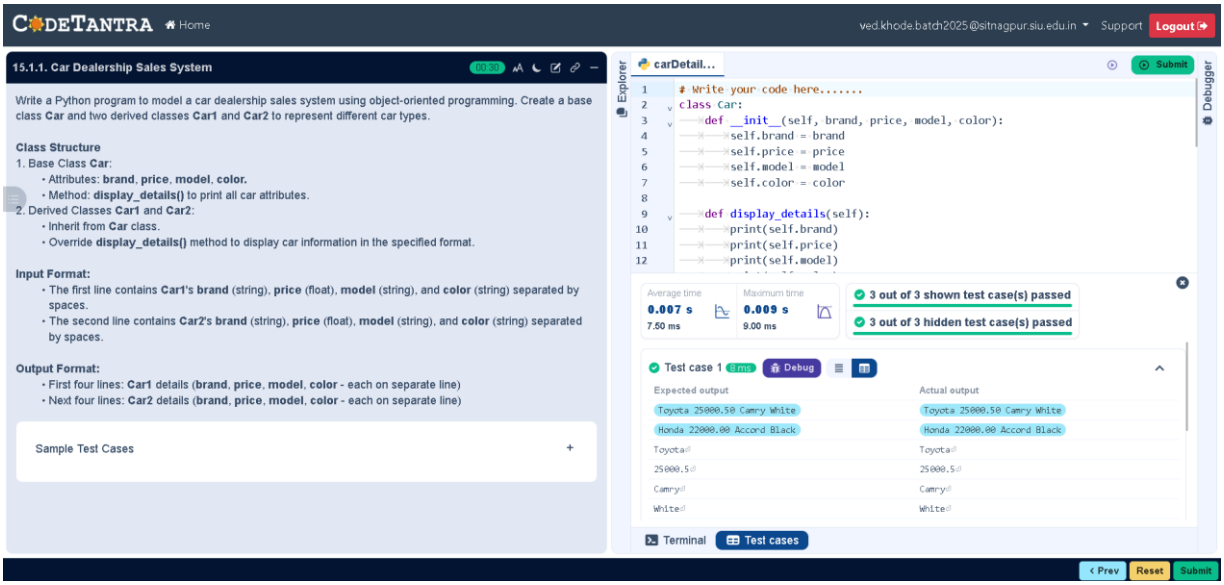

D] code: class

Car:

```
    def _init_(self, brand, price, model, color):
        self.brand  =  brand
        self.price   =   price
        self.model = model
        self.color = color


    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)



# Derived Class Car1
class Car1(Car):
    def display_details(self):
```

```
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)



# Derived Class Car2
class Car2(Car):
    def display_details(self):
        print(self.brand)
        print(self.price)
        print(self.model)
        print(self.color)       #
Read  input  car1_data  =
input().split()
brand1, price1, model1, color1 = car1_data[0], float(car1_data[1]), car1_data[2], car1_data[3]

car2_data = input().split()
brand2, price2, model2, color2 = car2_data[0], float(car2_data[1]), car2_data[2], car2_data[3]

# Create objects car1 = Car1(brand1, price1,
model1, color1) car2 = Car2(brand2, price2,
model2, color2)

# Display details
car1.display_details()
car2.display_details()
```