


SOLANA DEVELOPER TOOLING

Solana Debugger

From transaction's signature → to the exact spot of a bug.



PROBLEM

Debugovanje na Solani je crna kutija

— “Transaction failed.”

Developer dobije grešku, ali ne zna gde je tačno nastala.

— Ručno povezivanje slojeva

tx → program → instrukcija → bytecode → izvorni kod.

— Low-level SBF bytecode

Izvršavanje je teško pratiti i razumeti bez iskustva.

— Barijera za početnike

Sporiji razvoj, više grešaka, duže učenje.

Solana Debugger

Kompleksna Solana transakcija -> razumljiv debugging process

Signature transakcija -> info

PRE


Transaction failed.
Good luck.



POSLE

Transaction → Instruction
→ Program → SBF → Source line
→ Tačan uzrok greške

Kako naš sistem radi

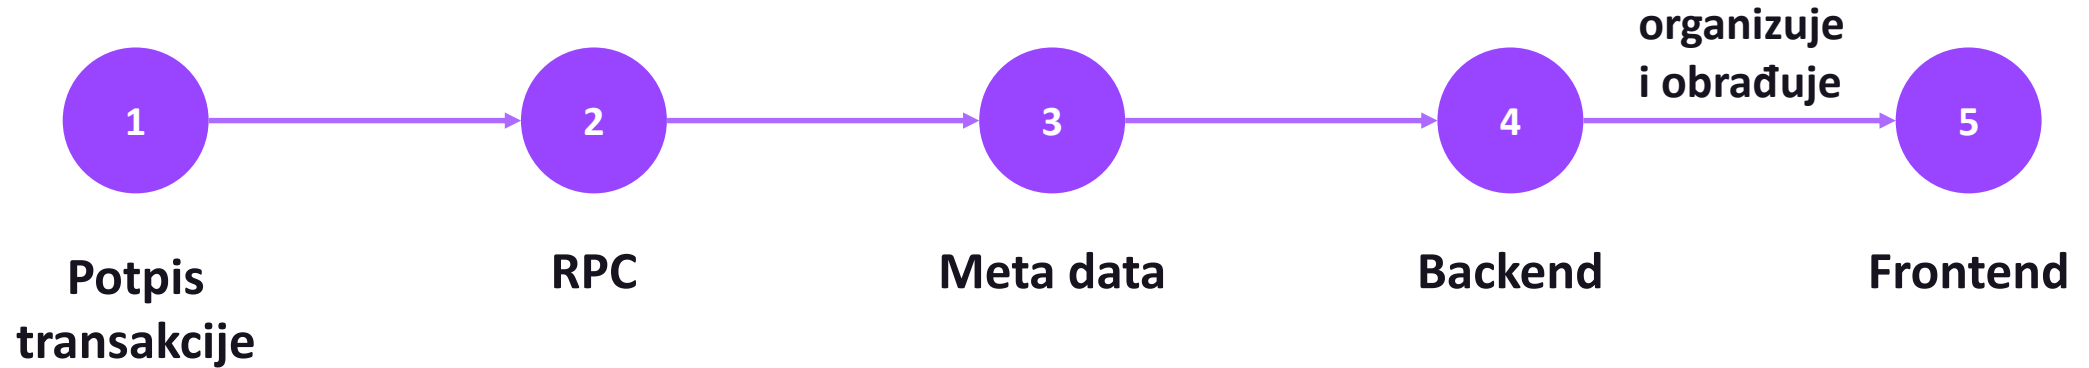

PRIMER MAPIRANJA

PC: 0x1A42

↓

transfer.rs : 87

↓

transfer_tokens()

Developer odmah vidi gde tačno da traži problem - bez ručnog pretraživanja logova i bytecode-a.

Za koga gradimo

PRIMARNA GRUPA

- Solana developer
(1.9 miliona aktivnih adresa dnevno na Solani,
78 miliona tx dnevno)
- Hackathon učesnici
- Rust / Anchor developeri
- Web3 startup timovi

SEKUNDARNA GRUPA

- Security researchers
- Auditori
- Protocol timovi
- Bootcamp / edukacija

Put proizvoda



PHASE 1 - Transaction inspector

- Učitavanje tx
- Logovi i greške
- Web UI

PHASE 2 - Structured Debugging

- Neupešna instrukcija
- CP analiza
- IDL tumačenje

PHASE 3 - AI ASISTENT

- AI debugging assistant
- Automatska detekcija bagova
- Predloženi fix-evi

Naš tim



Jovana Perić
RAF

Vedran Bajić
FTN

Jovan Tomović
FIR

Anas Alarabi
ETF

Stop debugging transactions.

Start debugging code.



From transaction's signature → to the exact spot of a bug.

