

Tenant Management at a glance



Reltio Entity Resolution




Reltio Multidomain MDM



Reltio Intelligent 360

Tenant Management is an application in **Console** that allows you to view tenant statistics, execute tenant management jobs, and monitor internal and external queues

When you select the Tenant Management Console application, the following screen appears:

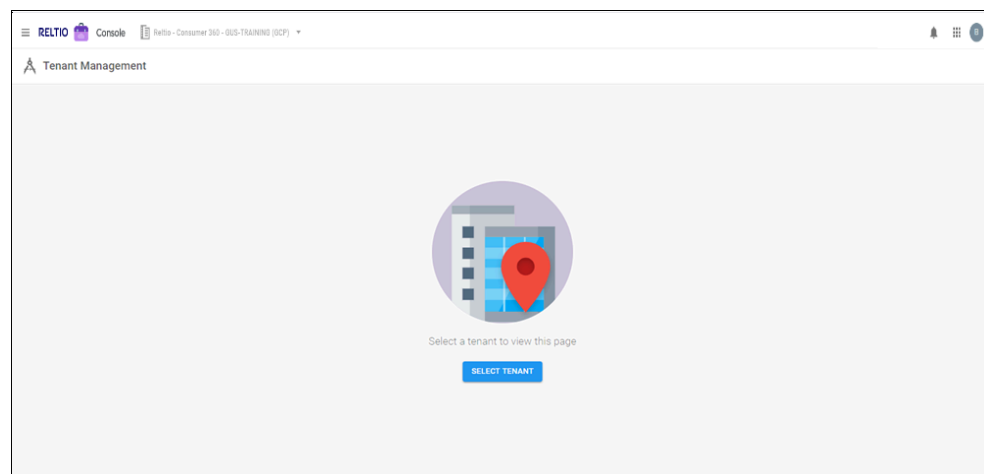

Click the **Select Tenant** button. For more information, see [Select a tenant](#).

Match Analysis at a glance

The number of match token phrases generated for match groups is very important for the matching process. The number of match token phrases generated has a direct impact on the performance of a match rule. The **Analyze Match Rules** job analyzes the generation of match token phrases and the performance of the match rules configured in your tenant.

For the generation of match token phrases, the **Analyze Match Rules** job checks for the following:

- If too many tokens are generated by a subset of the processed entities than the specified threshold for the specified match groups.
- If too few tokens are generated by a subset of the processed entities than the specified threshold for the specified match groups.

To analyze the performance of match rules, this job checks the number of match pairs generated for the specified set of entities.

You can use this information to improve your tokenization scheme or tune your match rules to ensure that matching in your tenant produces the desired results.

View Summary of Match Analysis

1. In **Console**, select the **Tenant Management** application.

Match Analysis at a glance

The number of match token phrases generated for match groups is very important for the matching process. The number of match token phrases generated has a direct impact on the performance of a match rule. The **Analyze Match Rules** job analyzes the generation of match token phrases and the performance of the match rules configured in your tenant.

For the generation of match token phrases, the **Analyze Match Rules** job checks for the following:

- If too many tokens are generated by a subset of the processed entities than the specified threshold for the specified match groups.
- If too few tokens are generated by a subset of the processed entities than the specified threshold for the specified match groups.


To analyze the performance of match rules, this job checks the number of match pairs generated for the specified set of entities.

You can use this information to improve your tokenization



2. Select **Match Analysis** on the left navigation bar.
- The summary shows the latest results for:
- **Match token phrases analysis** - reviews the distribution of token phrases

Match precision score measures the accuracy of match rules based on reviewed matches.

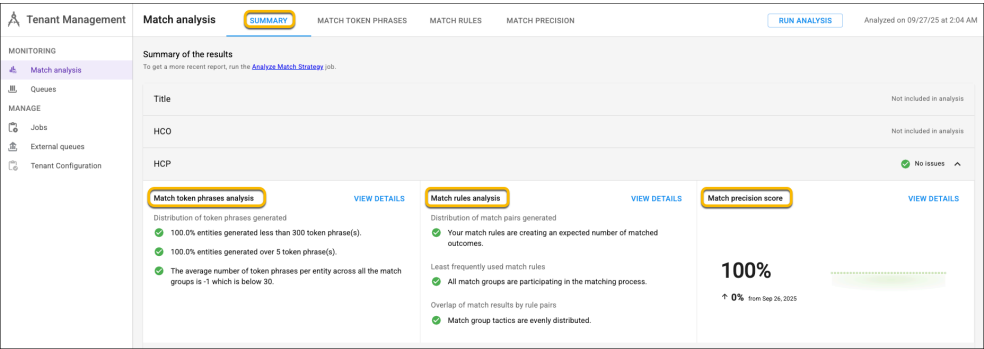

The image above shows the **HCP** entity type summary when you click the corresponding down arrow on the right.


To view detailed information, select **VIEW DETAILS** in the **Match token phrases analysis**, **Match rules analysis**, or **Match precision score** section.

Alternatively, select a tab at the top:

- **MATCH TOKEN PHRASES**
- **MATCH RULES**
- **MATCH PRECISION**

The **RUN ANALYSIS** button is available in the upper-right corner of the **Match Analysis** page, regardless of the tab you select. The date displayed next to this button shows when the job was last run.

Select **RUN ANALYSIS** to launch a new job if the current results are from an earlier run. This provides a quick way to initiate a new **Analyze Match Strategy** job and refresh the results.

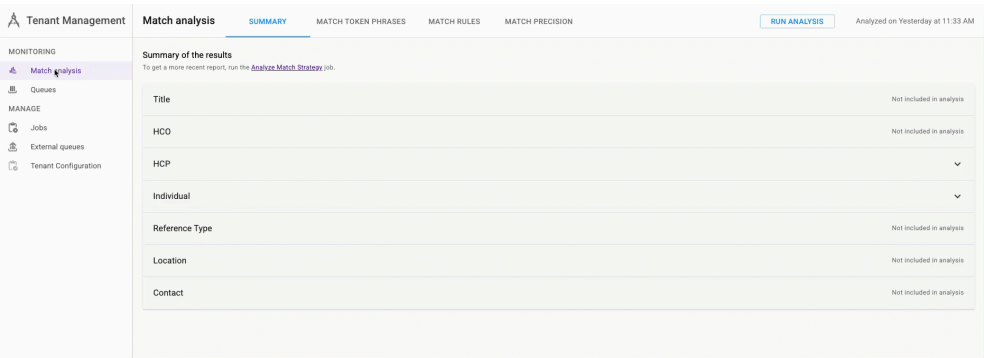

For more information, see [Create an Analyze match strategy job](#).

View Match token phrases analysis

When you select to view the **Match token phrases analysis**, the following page appears:


scheme or tune your match rules to ensure that matching in your tenant produces the

Match Analysis

1. In **Console**, select the **Tenant Management** application.
2. Select **Match Analysis** on the left navigation bar.

The summary shows the latest results for:

- **Match token phrases analysis** - reviews the distribution of token phrases generated.
- **Match rules analysis** - reviews the number of match pairs generated.
- **Match precision score** - measures the accuracy of match rules based on reviewed matches.




The image above shows the **HCP** entity type summary when you click the corresponding down arrow on the right.

To view detailed information, select **VIEW DETAILS** in the **Match token phrases analysis**, **Match rules analysis**, or **Match precision score** section.

Alternatively, select a tab at the top:

- **MATCH TOKEN PHRASES**
- **MATCH RULES**
- **MATCH PRECISION**

The **RUN ANALYSIS** button is available in the upper-right corner

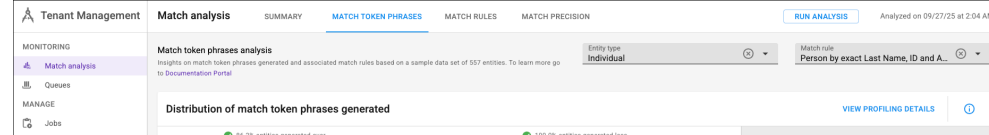

[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) [Applications](#) [Objectives](#)



This page provides information about the distribution of token phrases generated between the too few and too many ranges.

You can use the **Entity Type** and **Match Rule** filters to view the results of different entity types and match rule combinations.

Select the downward facing arrow under the **What the results mean** section to view a detailed explanation for each item. This section is not displayed if enough data is not available from the analysis.



Select the **VIEW PROFILE DETAILS** button above the results section to view profiling information as shown below.


✕ Match token phrases profiling details	
Analysis	Value
Min Minimum amount of token phrases generated by an entity	1
Max Maximum amount of token phrases generated by an entity	2151
Range Range of generated token phrases from Min - Max	2151
Total Total amount of token phrases generated for all analyzed entities	249998
Mode The most frequent amount of token phrases for all analyzed entities	1
Mean The average number of token phrases generated for all analyzed entities	29.648719
Standard deviation The measure of the spread of data analyzed from the Mean (average)	98.492805
Standard error Measures how well the sample of data analyzed represents all data in the tenant. The smaller the sample error (closer to 0), the more representative the sample is to the population.	1.072603
Skewness Measure of symmetry or lack of symmetry of the data set. Symmetric data should have a skewness near zero. Negative	12.406528

★ **Tip:** You can also **VIEW PROFILING DETAILS** for **MATCH RULES**.

Scroll down to view the list of match token phrases that contain the most entities.

of the **Match Analysis** page, regardless of the tab you select. The date displayed next to this

Select **RUN ANALYSIS** to launch a new job if the current results are from an earlier run. This provides a quick way to initiate a new **Analyze Match Strategy** job and refresh the results.



For more information, see [Create an Analyze match strategy job](#).

View Match token phrases analysis

When you select to view the **Match token phrases analysis**, the following page appears:



This page provides information about the distribution of token phrases generated between the too few and too many ranges.

You can use the **Entity Type** and **Match Rule** filters to view the results of different entity types and match rule combinations.

Select the downward facing arrow under the **What the results mean** section to view a detailed explanation for each item. This section is not displayed if enough data is not available from the analysis.



X Match taken phrases profiling details	
Analysis	Value
Min	1
Minimum amount of taken phrases generated for all analysis	
Max	2131
Maximum amount of taken phrases generated for all analysis	
Range	2131
Range of generated taken phrases from Min - Max	
Total	26996
Total amount of taken phrases generated for all analysis and min	
Usage	29.6471%
The most required amount of taken phrases for all analysis profiles	
Mean	26.9471%
The average number of taken phrases generated for all analysis profiles	
Standard deviation	56.4023%
The standard deviation of the total number of taken phrases for all analysis profiles	
Standard error	1.0723%
The standard error of the average of taken phrases for all analysis in the profile. The smaller the sample size (close to 1), the more representative the sample is to the population.	
Discussion	
The analysis of the taken phrases for all analysis profiles is based on the analysis of the taken phrases for all analysis profiles. The analysis of the taken phrases for all analysis profiles is based on the analysis of the taken phrases for all analysis profiles.	

 **Tip:** You can also **VIEW PROFILING DETAILS** for **MATCH RULES**.

Scroll down to view the list of match token phrases that contain the most entities.

The screenshot shows the AWS IAM console 'Groups' page. On the left, the 'Groups' list shows 'group1' selected. The main pane displays the 'Permissions summary' for 'group1', showing it has no permissions attached. The 'Permissions summary' table lists the group name, the number of permissions, and the number of policies. The 'Permissions summary' table shows 1 group, 0 permissions, and 0 policies. The 'Permissions summary' table is empty.

The image above shows five sample entities for each token phrase. To view all entities, select **VIEW MORE**. A dialog appears, similar to this:

[illegible]

Select **Download entity IDs** to download a list of entities in a text file.




View Match rules analysis

When you select to view **Match rules analysis**, the following page appears:

You can change the entity type by using the **Entity Type** filter on the top right-hand corner.

Click the down arrow under the **What the results mean** section to view a

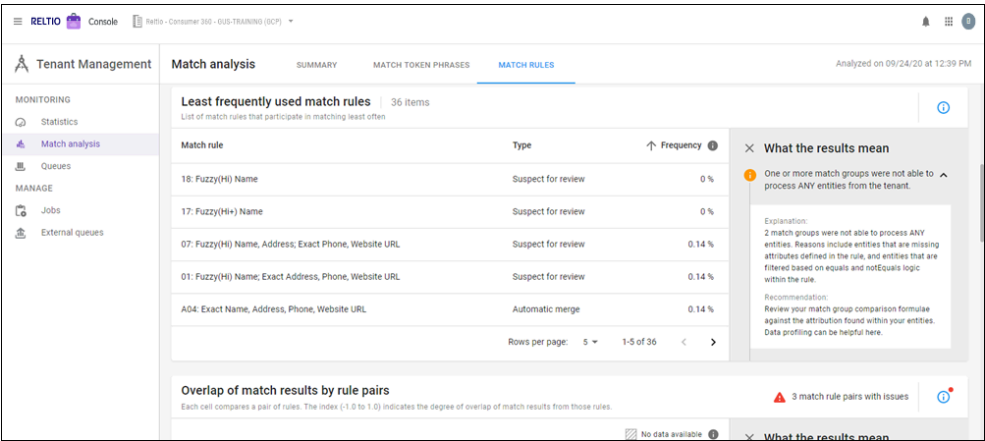


number of match pairs corresponding to the number of entities. Hover your mouse over the graph to view the exact number at that point.


You can change the entity type by using the **Entity Type** filter on the top right-hand corner.

When you scroll down further, the information about the overlap of match results by rule pairs is also available at the bottom as shown below.

Click the down arrow under the **What the results mean** section to view a detailed explanation about the results.


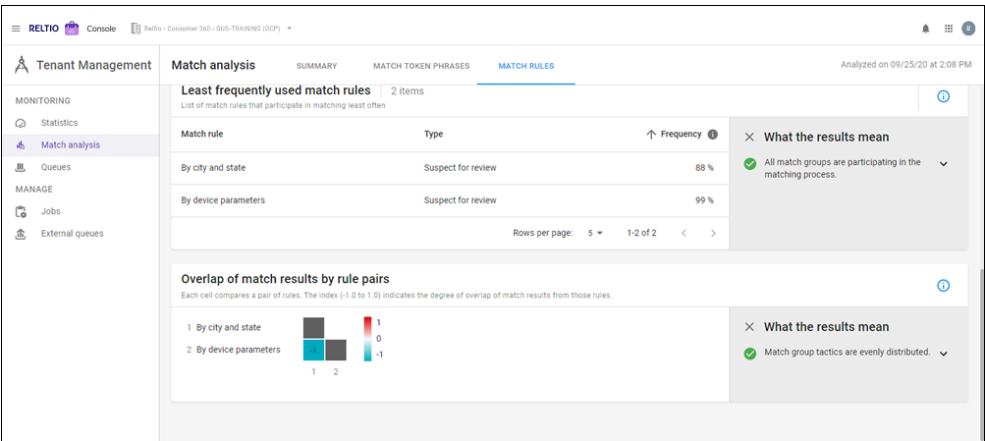


Scroll to view the list of least frequently used match rules.



If you are viewing Match analysis for an individual entity type and if it's **FERN-enabled**, the page appears as follows:

When you scroll down further, the information about the overlap of match results by rule pairs is also available at the bottom as shown below.

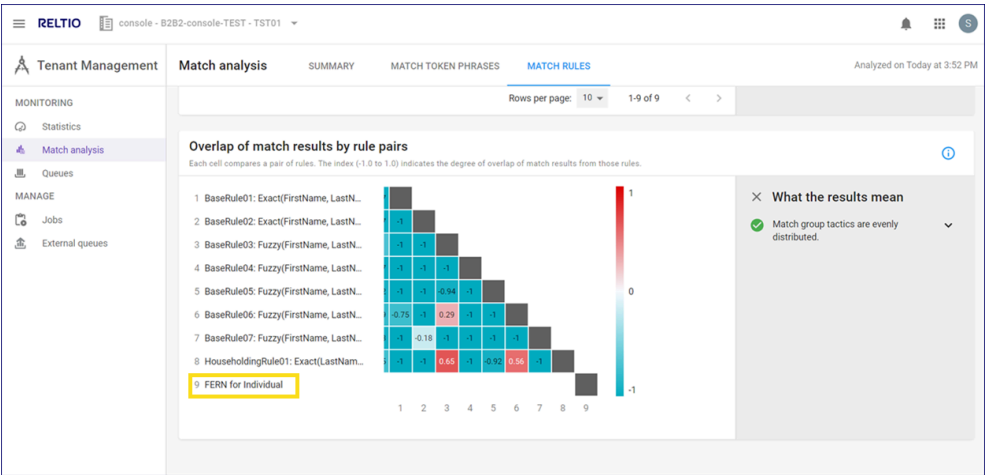


If you are viewing Match analysis for an individual entity type and if it's **FERN-enabled**, the page appears as follows:

View Match precision score




Important: To calculate match precision, tenants must have labeled data. For details on labeling data, see [Match precision labeling APIs](#).



View Match precision score

When you select to view **Match precision score**, the following page appears:



Important:
To calculate
match

Reltio Products Developer resources Roles Applications Objectives



Precision Score Breakdown				
Match Strategy	Precision Score	True Positive No. of correct matches identified	False Positive No. of incorrect matches identified	False Negative No. of correct matches missed
ByFirstNameandLastName	100%	7	6	0
BaseRule03	100%	7	0	0
ByNames	100%	7	0	0

This page provides information about how accurately the system identifies true matches versus false matches when comparing entity records. Hover over the graph to view precision values at each point.

You can change the entity type by using the **Entity Type** filter on the top right-hand corner.

Scroll to the **Precision Score Breakdown** table to see precision scores by **Match Strategy**, including the number of true positives, false positives, and false negatives. You can also type a match strategy in the search box to filter the results.

When you select to view **Match precision score**, the following page appears:

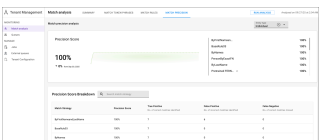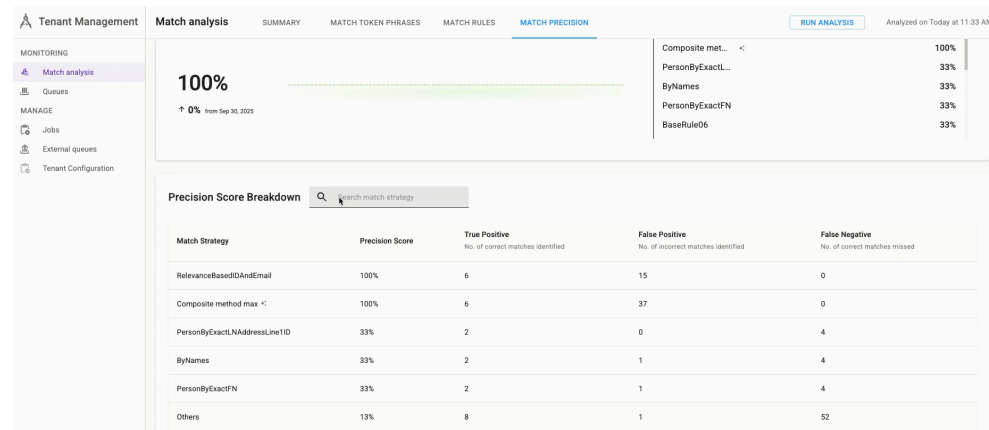

This page provides information about how accurately the system identifies true matches versus false matches when comparing entity records. Hover over the graph to view precision values at each point.

Queues at a glance


Your tenant has internal and external queues that you can monitor for performance using this application.

The internal queues are used to process data internally within Reltio. The external queue is used for real-time integration with systems external to Reltio. The internal queues are further classified into the following queues:

- **CRUD Queue** - When data, such as entities, relationships, groups, activities, and interactions are loaded into the tenant, this data is stored in the database. The API service then creates events, such as ENTITY_CREATED, RELATIONSHIP_CREATED, RELATIONSHIP_CHANGED, GROUP_CHANGED, and so on that are processed by a set of processors in the CRUD queue to update the tenant's index. After the tenant's index is updated, the loaded data is available to users of the Reltio UI.

You can change the entity type by using the **Entity Type** filter on the top right-hand corner.

Scroll to the **Precision Score Breakdown** table to see precision scores by **Match Strategy**, including the number of true positives, false positives, and false negatives. You can also type a match strategy in the search box to filter the results.

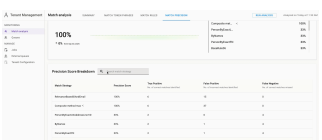

- **Match queue** - When entities are loaded into the tenant, the loaded entities are matched against the entities that already exist in the tenant. As part of the matching process, events, such as ENTITY_UPDATED, ENTITY_REMOVED POTENTIAL MATCHES FOUND


entities and then, merge entities for automatic rules, identify potential matches for suspect rules, or mark entities as not a match. For example, the ENTITY_UPDATED event indicates that a CRUD queue processor has regenerated the match tokens and the match document and has sent match events to the match queue to match this entity based on the changes. The information about match results is sent to the CRUD queue to update the tenant's index. After the tenant's index is updated, match results information is available to users of the Reltio UI.

The Queues page allows you to view and monitor the queues and take actions accordingly. The following sections explain the information provided graphically about the internal queues:

Queue Size

The Queue size indicates the number of events in the crud and match queues. The queue performance can be visualized from the trend chart. If the queue size remains the same or decreases as events are added to the queue, then the queue is processing the events. If the queue size remains constant without any new events or if the queue size does not decrease, then the queue may have performance issues. Refer to the Queue Troubleshooting guidelines for the next steps.

The following image shows the queue size of the internal queue:

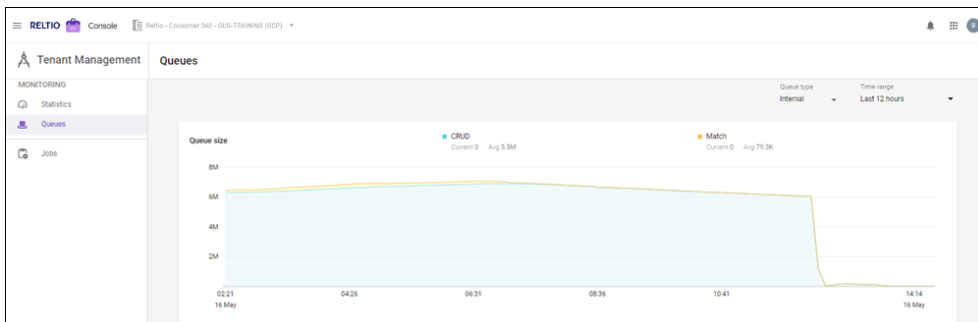


CRUD Queue Processing Speed

The CRUD Queue Processing Speed graph shows the speed at which events are processed in the CRUD queue. If the number of events is high and the processing speed is slow, then the CRUD queue is not performing properly and needs to be examined.

Match Queue Processing Speed

The Match Queue Processing Speed graph shows the speed at which events are processed in the Match queue. If the number of events is high and the processing speed is slow, then the Match queue is not performing properly and needs to be examined.


The following image shows the processing speed of the CRUD and Match queue:

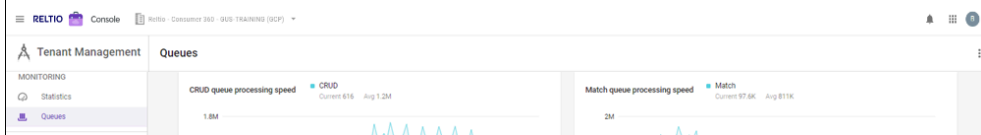

[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) **[Applications](#)** [Objectives](#)

Time Event Spent in Queue

The Time Event Spent in Queue graph shows the amount of time the events remained in the queue before being processed and moved out of the queue. If the events remain in the queue for a long time, then it indicates that the queue processing is slow. At the same time, if the number of events continues to increase, then the queue might have stopped processing. The following image shows the details of the time spent by events in the queue:

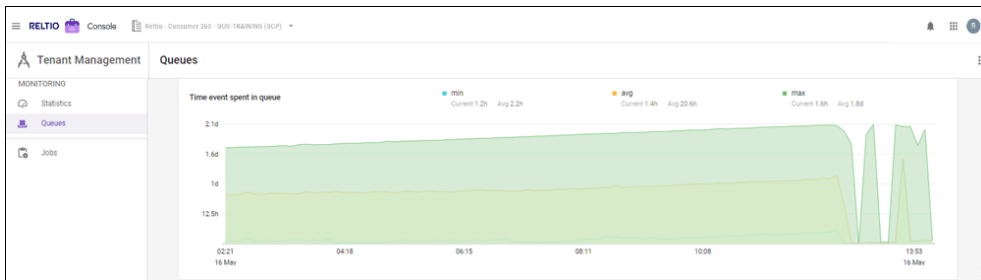


Failed Messages Count


The Failed Messages Count graph shows the number of failures encountered during queue processing. If the number is small, then the system retries processing. A maximum of 200 attempts is made to process a failed message. If a message is not processed after all retry attempts, then the failed message is added to the DeadLetter queue. If messages are failing, it indicates that there are issues in the processing of the internal queues. The following processors might appear when you hover over the graph:

- crud_search_entities
- crud_search_activities
- crud_search_others
- crud_streaming
- crud_history
- crud_merge
- crud_internal_match
- crud_analytics
- match_analytics
- match_incremental
- match_streaming

For example, if a failure occurs and **crud_search_entities processor** appears when you hover over the graph, then there is an issue with the indexing of entities. The following image shows the number of messages that failed:

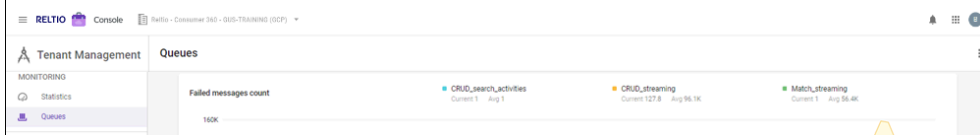


[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) **[Applications](#)** [Objectives](#)




DeadLetter Queue Size

If an event could not be processed after several retries, then the event is placed into the Deadletter Queue. This graph shows the number of messages in the DeadLetter queue. If the number of messages is high in this queue, it indicates that there are issues in the processing of internal queues. The following image shows the size of the DeadLetter queue:

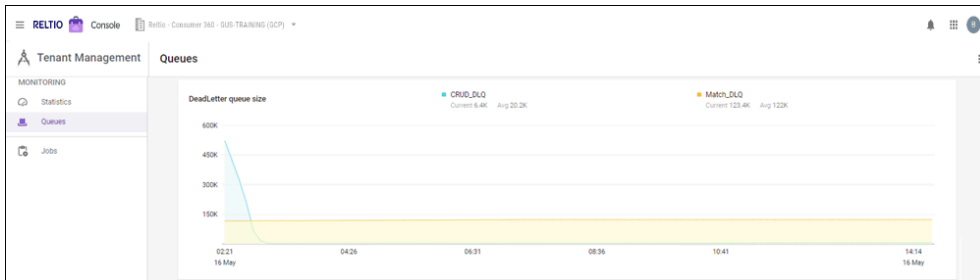

Monitoring the External Queue

The external queue has events that are sent from Reltio for real-time integration with systems external to Reltio. The External queue dashboard displays the number of events or messages sent to the external queue.

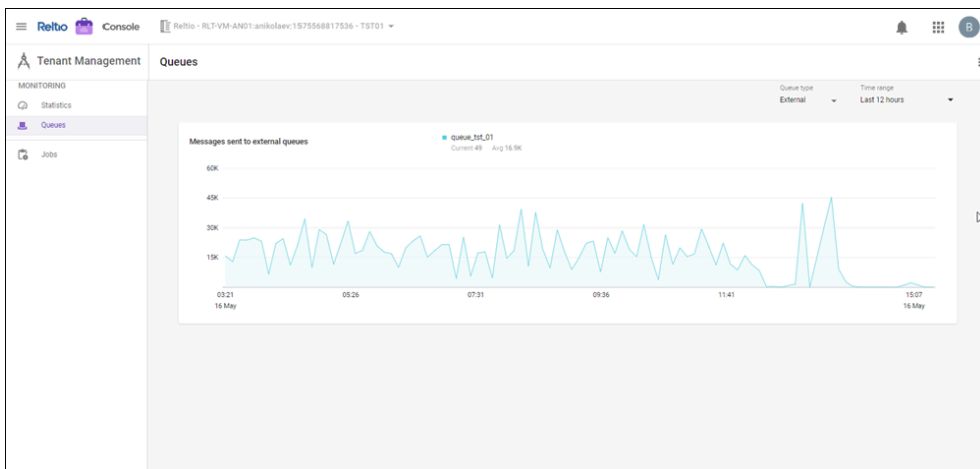

Queues Troubleshooting

If there is an abrupt drop in the processing speed of the CRUD or MATCH queue and the failed messages count is high and constantly increasing, then the queue might have stopped processing. In this case, check for recent changes in your L3 configuration that might have impacted queue processing. For example, change in match configuration or change of an attribute type. If there are no changes in your L3 configuration or you are not able to diagnose the issue, contact Reltio Customer Support.


Cleaning the Match Queue

If you clean the match queue, all the matching events part of the queue will not be processed. This can result in matching inconsistencies, such as under-matches, incorrect matches (in case of match rules changes), and so on. Therefore, clean the match queue only if there is an issue in the match


rules configuration, match rules implementation, or product code. After you clean the queue, you might be required to run the rebuild match tables task.

`env.queues.clean` resource under the Console Service.

1. In the Tenant Management application, click **Queues** on the left navigation bar.
2. Click on more options on the top right as highlighted in the following image:

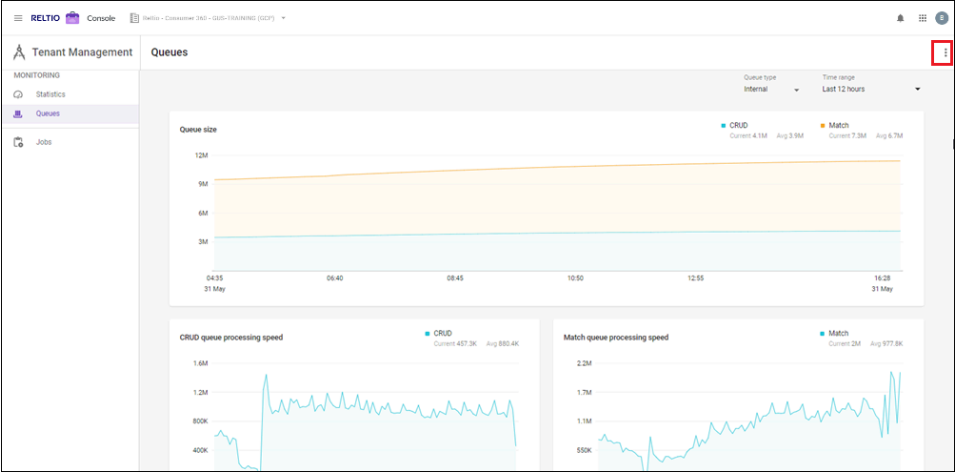

3. Click **Clean match queue** as shown below:

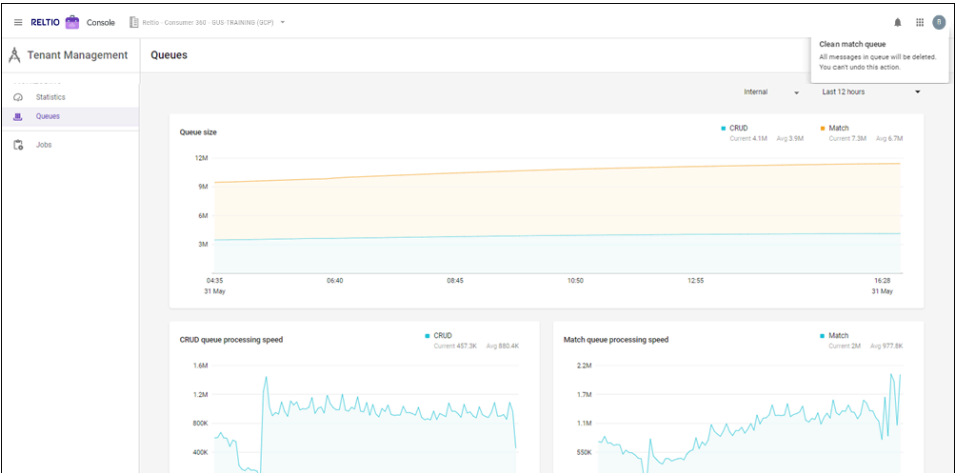

All messages in the Match queue are deleted.

Note: You cannot undo the cleaning of the queue.

Jobs at a glance

Create and run jobs to manage your tenant data in the **Jobs** page of the **Tenant Management** application.

Creating a Consistency Check Job


This job performs background comparison of primary and secondary storages to find inconsistencies. If any entities are found in the primary storage that are not present in the secondary storage, this job will try to re-index such entities. If any entities are missing from the primary storage

but present in the secondary storage, this job will remove such entities from the secondary storage.

To run the **Consistency Check** job, perform the following steps:


2. Click **NEW JOB**.

The **Create new job** screen displays all the jobs that the user can run as shown below:

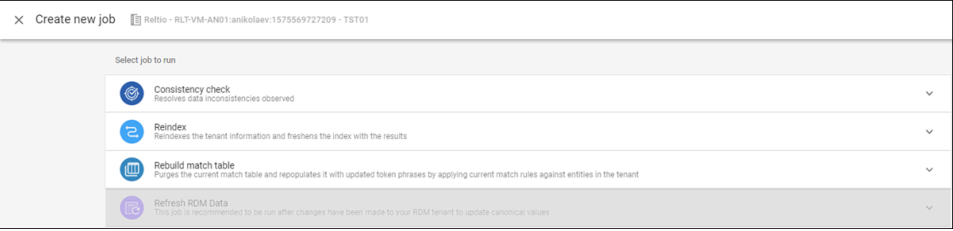

3. Click on **Consistency check** job.

The job parameters appear as follows:

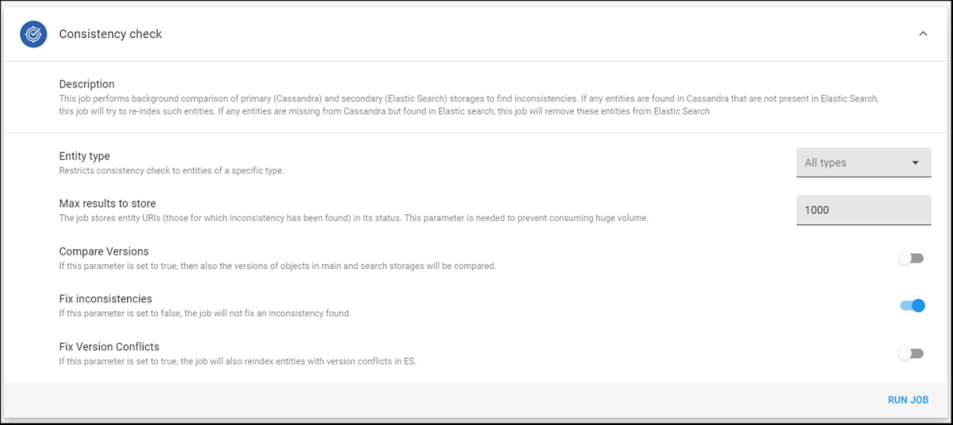

Note: If the **Compare Versions** and **Fix Version Conflicts** parameters are not enabled, then this job checks/fixes only those cases where objects are available in one of the storages. The job does not fix those cases where objects with different content are available in both the storages. These parameters are very useful during investigations.

4. Specify values for the job parameters based on your requirement.


5. Click **RUN JOB**.

Creating a Reindex Data Job

1. In Console, click on the **Tenant Management** application.

2. Click **NEW JOB**.

The **Create new job** screen displays all the jobs that the user can run as shown below:

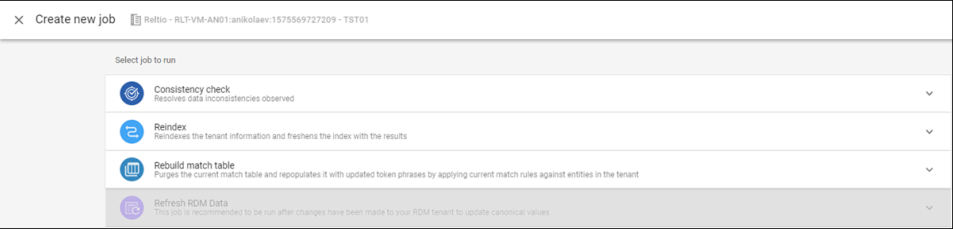

3. Click on **Reindex** job.

The job parameters appear as follows:

Reltio

Products

Developer resources

Roles

API

Skip entities count

Number of entities which will be skipped during the operation.

0

Entities limit

Number of entities which will be processed during the operation. If blank, all entities will be processed.

Updated since

All entities that have an update date/timestamp greater or equal to the provided value will be processed.

Update entities

If set to true, initiates update for Search, Match/alias, History. If set to false, then no reindexing, no history changes, only ES structures are updated.

Check crosswalk consistency

If true, this will start a task to check if all crosswalks are unique before reindexing data. Please note, if entitiesLimit or distributed parameters have any value other than default, this parameter will be unavailable

URI list

You can provide one or more entity URIs (separated by a comma) that you would like to process. For example: entities=rd1::entities=rd2::

Ignore streaming events

If set to true, no streaming events will be generated until after the reindex job has completed.

Distributed

If set to true, the job will be run in distributed mode.

Jobs parts count

A number of jobs that will be created for distributed mode, each job will work on its own part of objects, and all of them may be executed on different API nodes in parallel. Recommended value: count of API nodes that can execute the jobs.

1

4. Specify values for the job parameters based on your requirement.

5. Click **RUN JOB**.

Creating a Rebuild Match Tables Job

1. In Console, click on the **Tenant Management** application.

2. Click **NEW JOB**.

The **Create new job** screen displays all the jobs that the user can run as shown below:

×

Create new job

 Reltio - RLT-VM-AN01:anikolaev:1575569727209 - TST01

Select job to run



Consistency check

Resolves data inconsistencies observed

▼



Reindex

Reindexes the tenant information and freshens the index with the results

▼



Rebuild match table

Purges the current match table and repopulates it with updated token phrases by applying current match rules against entities in the tenant

▼



Refresh RDM Data

This job is recommended to be run after changes have been made to your RDM tenant to update canonical values.

▼

3. Click on **Rebuild match table** job.

The job parameters appear as follows:

Rebuild match table

Description

Rebuilding match tables job is recommended to be run after loading the data or changing match rules as they both result in changed matchgroups. Re-building match tables ensures all new / changed data is considered when doing matching

Entity type

Restricts consistency check to entities of a specific type.

All types

Skip entities count

Number of entities which will be skipped during the operation.

0

Entities limit

Number of entities which will be processed during the operation. If blank, all entities will be processed.

Delete Old Column Families

This parameter when turned on will delete all Column Families.

☐

Rebuild in background

Allow users to continue their activities in Reltio Cloud without waiting for the end of the job.

☐

Distributed

If set to true, the job will be run in distributed mode.

☐

Job parts count

A number of jobs that will be created for distributed mode, each job will work its own part of objects, and all of them may be executed on different API nodes in parallel. Recommended value: count of API nodes that can execute the jobs.

2

RUN JOB

4. Specify values for the job parameters based on your requirement.

5. Click **RUN JOB**.

Create an Analyze match strategy job

This job analyzes the match strategy using sample match pairs from your tenant. The analysis generates key statistics and actionable recommendations to improve match accuracy and effectiveness.

Prerequisites


To calculate match precision, tenants must have labeled data. For details on labeling data, see [Match precision labeling APIs](#).

[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) [Applications](#) [Objectives](#)

1. In **Console**, select the **Tenant Management** application.


2. Select **+ SELECT A JOB**.

The **Create new job** screen displays all the jobs that you can run, as shown below.

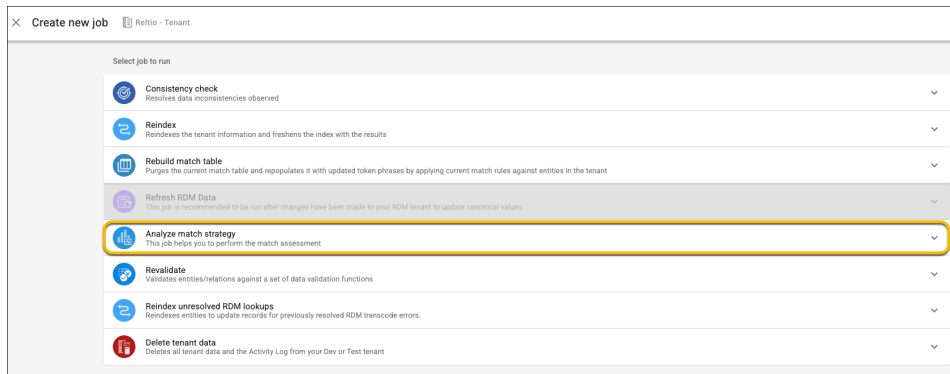


3. Select the **Analyze match strategy** job.

This job's parameters appear as follows:

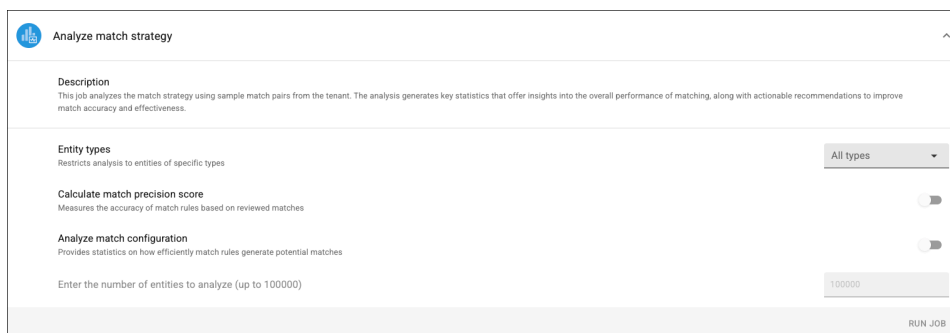

You can select multiple entity types as shown in the following image:

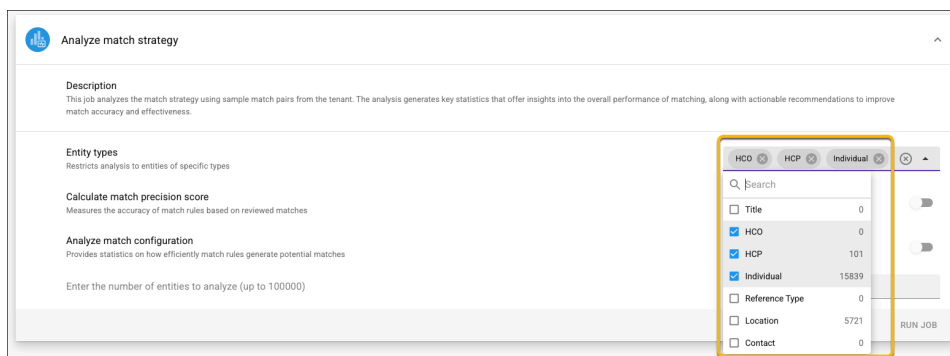


Note: Entity types without configured match rules do not appear in the list.

4. Enable at least one option:


- Calculate match precision score** — measures the accuracy of match rules based on reviewed matches.
- Analyze match configuration** — provides statistics on how efficiently match rules generate potential matches. To use this option, enter the number of entities to analyze (up to 100,000).

5. Select **RUN JOB**.

A notification appears indicating that an email will be sent once the job is completed.

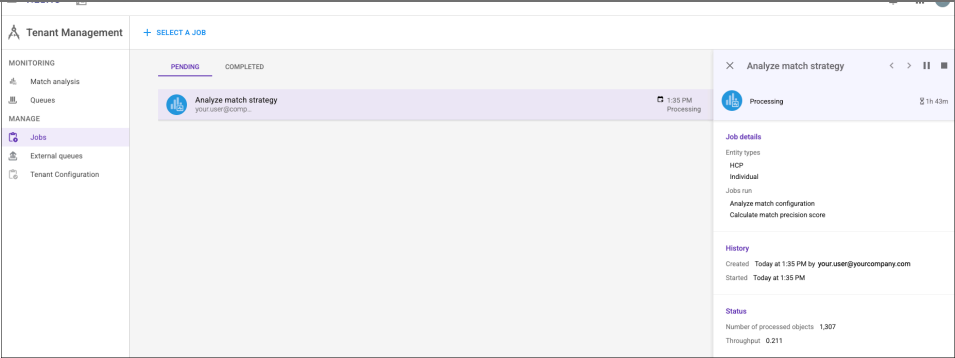

7. Select on a job under the **Completed** tab to view job details as follows:

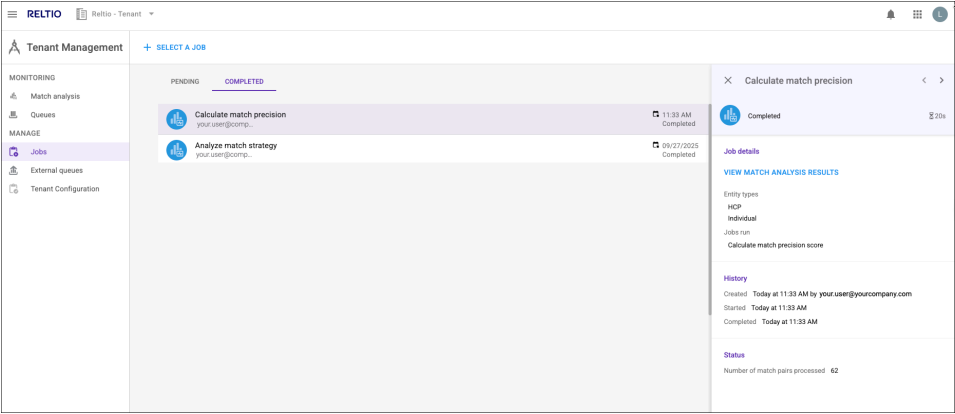


Create a revalidate job

Before you create a revalidate job, you must create data validation functions for the job to analyze. For more information, see topic [Create DVF's in the Data Modeler](#).

After you create or edit Data Validation Functions, use the **Tenant Management** to run a revalidate job for existing data in your tenant. This job runs the DVFs for all entities and relationships of the specified type.

To create and run a revalidate job:

1. In Console, select the **Tenant Management** application.
2. In the **Tenant Management** navigation panel, select **Jobs**.
3. Select **Select a job**.
4. In the **Create new job** page, select **Revalidate** job.

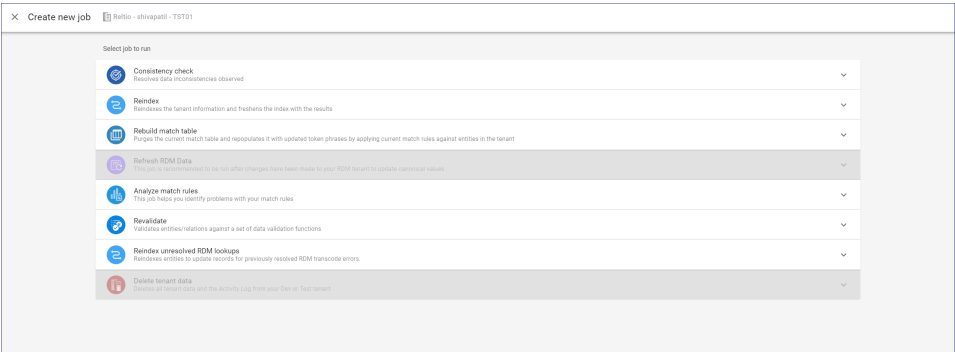

5. In the **Revalidate** menu, specify one or more of the following fields:

- **Entity type::** From this drop-down menu, select an entity type to run all the Data Validation Functions for all entities of this type.

Note: If you specify both **Entity type** and **Entity URI list** fields, then Data Validation Functions run only on the URI list and ignore other Entity types in the request.

- **Relationship type:** From this drop-down menu, select a relationship type to run all the Data Validation Functions for all relationships of this type.
- **Relationship URI list:** Enter the URI list of only selected relationships that you want to run all data validation functions for.

Note: If you select both **Relationship type** and **Relationship URI list** fields, Data Validation Functions run only on the URI list and ignore other Relationship types in the request.

Create new job

Rebuild match table

Refresh RDM Data

Analyze match rules

Revalidate

Reindex unresolved RDM lookups

Description

Validates entities/relations against a set of data validation functions. This task is recommended to be run after any edits are made to the validation function. Separate revalidate jobs are submitted for entities and relationships.

Entity type

Associates consistency check to entities of a specific type.

Select entity

Entity URI list

You can provide one or more entity URIs (separated by a comma) that you would like to process. For example: entities/rd1*, entities/rd2*

Relationship type

Associates consistency check to relationships of a specific type.

Select relation

Relationship URI list

You can provide one or more relation URIs (separated by a comma) that you would like to process. For example: relations/rd1*, relations/rd2*

Distributed

If set to true, the job will be run in distributed mode.

Job parts count

A number of jobs that will be created for distributed mode, each job will work its own part of objects, and all of them may be executed on different API routes in parallel. Recommended value: count of API routes that can execute the jobs.

1

RUN JOB

Reindex unresolved RDM lookups

Reindexes entities to update records for previously resolved RDM transcoded errors.

If you run the revalidate job on entities and relationships at the same time, the **Jobs** page displays two separated job entries.

6. Select **Run Job**. A notification appears indicating that an email will be sent once the job is completed.

7. While the job is processing, it appears in the **Pending** tab. To pause or stop the revalidate job, at the top of the **Revalidate** panel on the right, select the **pause** or **stop** icon.

RELTIOConsole

Reltio - doc_tenant-tst-01-M - TST01HF

Tenant Management

MONITORING

MANAGE

SELECT A JOB

PENDING

COMPLETED

Revalidate

Processing

Revalidate

Job details

Entity types: Location


History

Created: Today at 10:18 PM by raj.marques@relio.com

Started: Today at 10:18 PM

Revalidate job has started.

8. Select the **Completed** tab to view the details of the completed revalidate jobs.

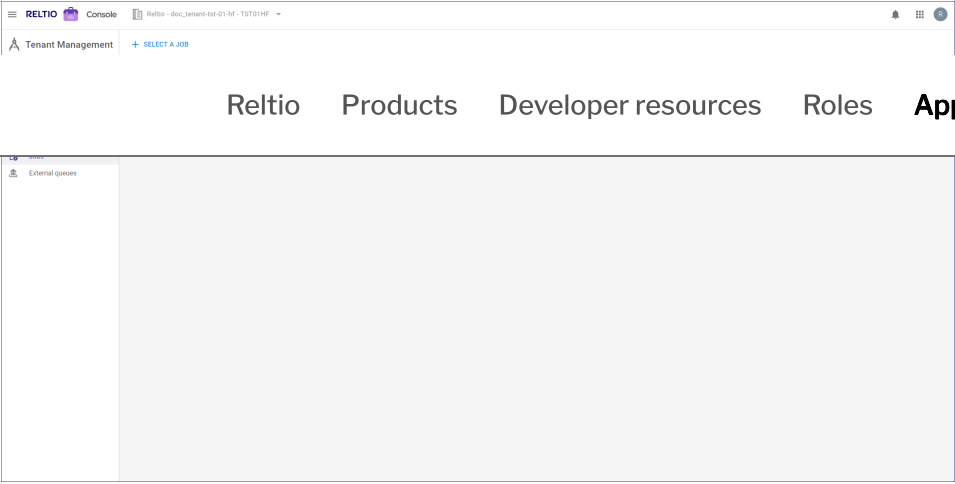

Reindex unresolved RDM lookups


Reindexing prevents the display of resolved entities in searches for entities with RDM transcode errors. Use the Console in the Hub. To add a new job in **Tenant Management**:

1. From the **Applications** menu, select **Console** application. For more information, see topic [Console](#).



2. From the **Tenant Management** section, select the **Tenant Management** application.
3. At the top of the page, from the **Select tenant** drop-down menu, select the tenant you want to work with. For more information, see topic [Selecting a tenant](#).
4. On the left navigation bar, select **Jobs**.
5. Select **Create New Job**.

The **Create new job** page displays all the jobs that you can run.

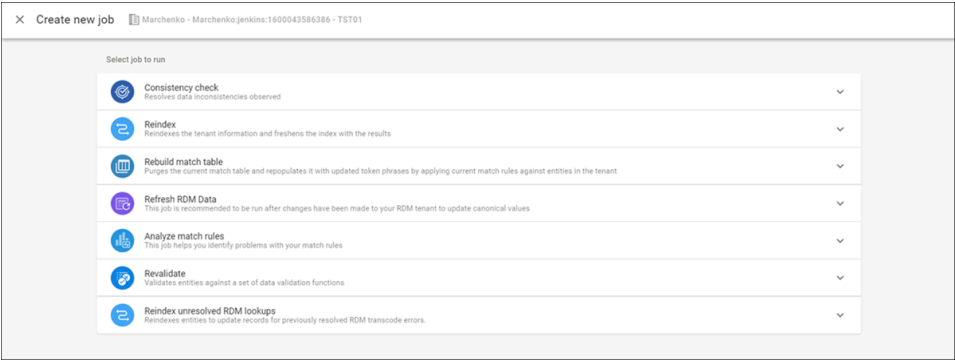

6. Select **Reindex Unresolved RDM lookups**.

Select job to run

 Consistency check
Resolves data inconsistencies observed

▼

Refresh RDM Data
This job is recommended to be run after changes have been made to your RDM tenant to update canonical values

▼

Analyze match rules
This job helps you identify problems with your match rules

▼

Revalidate
Validates entities against a set of data validation functions

▼

Reindex unresolved RDM lookups
Reindexes entities to update records for previously resolved RDM transcoded errors

RUN JOB

▼

7. Specify values for the job parameters based on your requirement.

You can see the job parameters as follows:

By default, the **All Entities** option is selected.

Or

You can reindex only selected entities. You can select a specific entity or list of entities using their URIs.

Reindex unresolved RDM lookups

▲

Description

Run this job to reindex entities for which Search returns previously resolved RDM transcoded errors.

☒ All Entities
Reindex all entities

☐ Selected entities
Reindex only these entities. (list one or more comma-separated URIs, for example: entities/<id1>;entities/<id2>)

RUN JOB

8. Select **Run Job**.

For more information about the underlying APIs, see topic [Resolve Mapping Errors API](#).

When the job is under processing, you can see the job under the **PENDING** tab.

RELIO Console

Marchenko - Marchenko-jenkins:1600043586386 - TST01

🔔 ⚙️ ⓘ

Tenant Management

+ NEW JOB

MONITORING

Statistics

Match analysis

Queues

MANAGE

Jobs

External queues

PENDING

COMPLETED

 brinda.ghosh@reltio... Reindex unresolved rdm lookups task Scheduled 0s Not started

9. To view the details of a completed job, select the job in the **COMPLETED** tab.

RELIO Console

Marchenko - Marchenko-jenkins:1600043586386 - TST01

🔔 ⚙️ ⓘ

Tenant Management

+ NEW JOB

MONITORING

Statistics

Match analysis

Queues

MANAGE

Jobs

External queues

PENDING

COMPLETED

 brinda.ghosh@reltio... Reindex unresolved rdm lookups task Completed 20s 3:45 PM

 brinda.ghosh@reltio... Reindex unresolved rdm lookups task Completed 20s 3:42 PM

 brinda.ghosh@reltio... Reindex unresolved rdm lookups task Completed 21s 3:40 PM

 ezhilvanan Potential matches reindex task Completed 23s 08/01/2022

 ezhilvanan Potential matches remove task Completed 23s 08/01/2022

 ezhilvanan Reindex Completed 22s 08/01/2022


 workflow-adaptor Analyze match rules Completed 21s 07/26/2022

 workflow-adaptor Refresh RDM Data Completed 20s 07/25/2022


 workflow-adaptor Refresh RDM Data Completed 22s 07/25/2022

 ezhilvanan Revalidate Completed 20s 07/22/2022


10. Select the completed job. Now, you can view the details.



[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) **[Applications](#)** [Objectives](#)

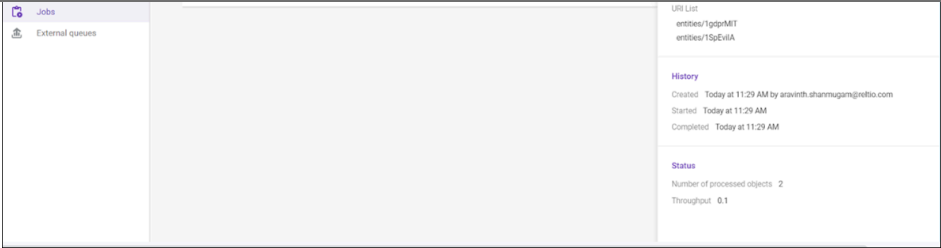

After the reindex job is completed, you can see the correct set or list of entities when you search for the entities with RDM transcode errors.

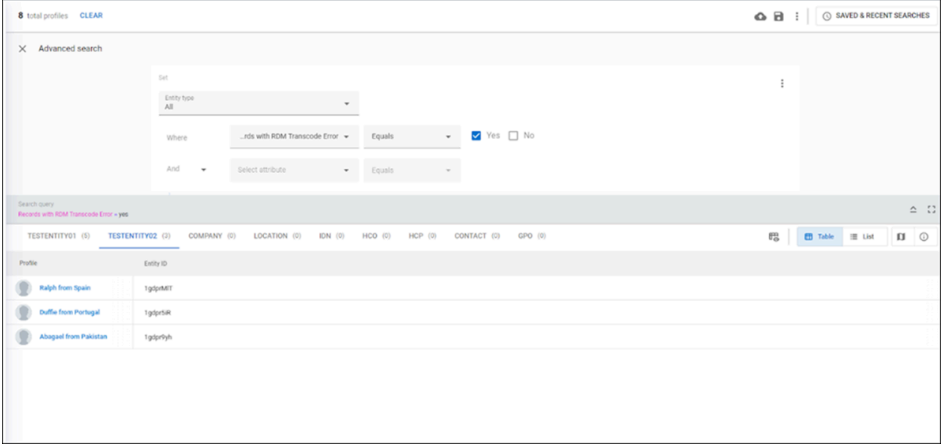

Delete tenant data

As a tenant administrator, have you ever secretly wished to have greater control over how quickly your organization’s tenant data is deleted? Sure, your data delete request is taken care of without any delay and it's all going fine, but sometimes you’re just left wanting more.

If you’ve ever wanted to delete your data, so you can load brand new data or reload the data to test your configurations any time you want, you’ve come to the right place!

Exercise your right to get rid of old data in a development or test tenant and replace it with new data using the **Delete tenant data** job in the **Console Tenant Management** application. You can delete from your tenant just its data or both its data and activity log.

The **Delete tenant data** job runs only on development or testing tenants. If you want to delete data from a Production tenants, contact Reltio Customer Engineering for assistance (for further information, see topic [Get help in Support Portal](#)).

Ensure no other jobs are running before you start a **Delete tenant data** job. Once you start this job, all other tenant management jobs are locked, so you cannot run them until this job is complete. You can run only one **Delete tenant data** job at a time. If you try to run another **Delete tenant data** job before the current job is completed, you receive a notification to either wait for the job to complete or stop that job to run a new **Delete tenant data** job.



Currently some other job is running for this tenant. You can wait for the job to complete or stop the job to perform tenant delete tenant data job

Details			
Tenant type	Tenant name	Tenant ID	Entities (number)
Test	guk-test	8aahRSBZ5anOoek	10,000,000

Permissions to delete tenant data

You don't want just anyone to be able to delete data from your organization's tenants. The [Reltio Security model](#) keeps you in control of who can access and manage your tenant data by defining roles and specifying their permissions:

System roles

Reltio provides these default roles for managing your organization's tenants:

- **ROLE_ADMIN_TENANT:** This Tenant Administrator role is associated with a tenant. It provides permissions to access and manage tenant services and data.This role is automatically assigned to each tenant in your organization's Reltio Data Cloud. For more information, see topic [Tenant Administrator Role Across all Services](#).
- **ROLE_ADMIN_CUSTOMER:** This Customer Administrator role is associated with a user. It provides permissions to manage tenants and their users. This role is automatically assigned to users identified as your organization's tenant administrators. For more information, see topic [Customer Administrator Role Across all Services](#).

For more information, see topic [Managing Roles, Users and Tenants](#)

Custom roles

As a Customer Administrator with the **ROLE_ADMIN_CUSTOMER** role assigned, you can create custom roles to meet your organization's needs instead of depending on various Reltio system roles. associate permissions, and assign them to users

To enable other users to delete data from a tenant, in the **Console User Management** application, create a new role or update an existing one. Select the appropriate access privileges for this service and the tenant. Then assign this role to a user with access to the tenant. For more information, see topics [Managing Roles, Users and Tenants](#) and [Managing Role Definitions](#) .

Run a Delete tenant data job

You must have a role with access to the tenant and the appropriate permissions to delete data. For details, see [Delete tenant data](#). The **Delete tenant data** job runs only on development or test tenants. If you want to delete data from a production tenant, [request Support](#).

If you want to delete data in a development or testing tenant and replace it with new data, run the **Delete tenant data** job in the **Console Tenant Management** application.

Ensure no other jobs are running before you start a **Delete tenant data** job. Once you start this job, all other tenant management jobs are locked, so you cannot run them until this job is complete. You can run only one **Delete tenant data** job at a time. If you try to run another **Delete tenant data** job before the current job is completed, you receive a notification to either wait for the job to complete or stop that job to run a new **Delete tenant data** job.



Delete tenant data


Currently some other job is running for this tenant. You can wait for the job to complete or stop the job to perform tenant delete tenant data job

Details

Tenant type	Tenant name	Tenant ID	Entities (number)
Test	guk-test	8aahRSBZ5anOoek	10,000,000

To run a delete tenant data job:

1. From the **Applications** menu, select **Console** application. For more information, see [Console](#).
2. From the **Tenant Management** section, select the **Tenant Management** application.
3. At the top of the page, from the **Select tenant** drop-down menu, select the tenant you want to work with. For more information, see [Selecting a tenant](#).
4. On the left navigation bar, select **Jobs**.
5. In the right pane, select **SELECT A JOB**.

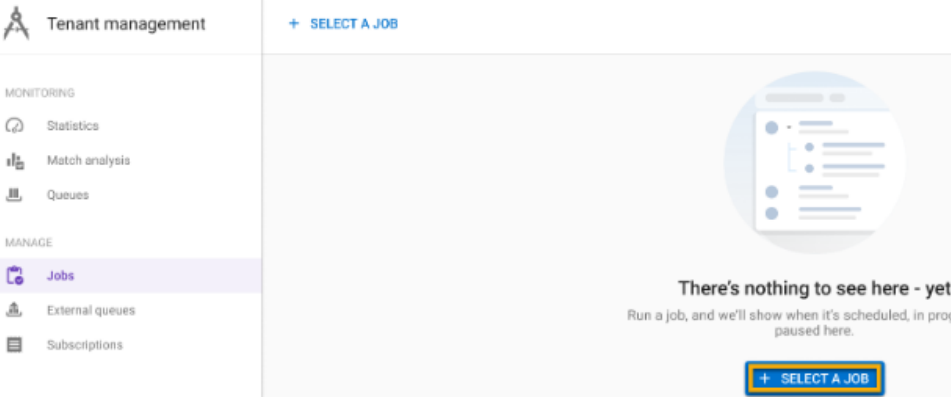

6. In the **Create new job** page, select the **Delete Tenant data** job.

7. In the displayed **Delete Tenant data** pane:

- a. Select one or both of the following options:

Reltio Products Developer resources Roles **Applications** Objectives

compliance reasons, you must delete the data before you can delete the Activity Log from the tenant, so this option is enabled only if you select the **Tenant data** option.

- b. Select **DELETE DATA**, which is enabled only after you select the **Tenant data** option.



Delete tenant data

Description

Deletes all tenant data and the Activity Log from your Dev or Test tenant.

Details

Tenant type	Tenant name	Tenant ID	Entities (number)
Test	guk-test	BaahRSBZ5anOock	10,000,000

Select the data to remove

To remove the Activity log, Tenant data must be selected

☐

Tenant data

Deletes all entities, sources, relationships and interactions from this tenant.

☐

Activity Log

Deletes the Activity Log for this tenant data. Clear this checkbox to retain history for audit purposes.

8. In the displayed confirmation window:

- a. In the entry field type **DELETE**.
- b. Select the confirmation check box.
- c. Select **CONTINUE TO DELETE**.

Good to go?

Delete the following data from **guk-test** tenant:

- Tenant data - 10,000,000 entities
- Activity log

Once you delete this data, it's gone for good.

If you're sure you want to permanently delete this data, type DELETE in the field below

DELETE

- ☒ I confirm that I want to remove all selected data from this tenant. I understand that once started, this job can't be canceled.

CANCEL **CONTINUE TO DELETE**

9. In the **PENDING** tab in the **+ SELECT A JOB** page, select your user name to view the status of your job:

- **Not started:** The job hasn't started yet.
- **Processing:** The job has started.

10. In the **COMPLETED** tab, select your user name to view the status of your completed job:

- **Completed:** The job completed successfully.

[Reltio](#) [Products](#) [Developer resources](#) [Roles](#) **[Applications](#)** [Objectives](#)

more information, see [Get help in Support Portal](#)).

04:10 PM
Completed

03:30 PM
Failed

Failed

Tenant details
Tenant type: Test
Tenant name: guk-test
Tenant ID: 8aahRSBZ5anOoek
Entities (number): 10,000,000

Data to be deleted

- Tenant data
- Activity log

This data delete isn't complete

It looks like this job was rudely interrupted before it finished. Please contact Reltio Support at [support@relt.io](#).

Limiting Display of Parameter Values

When you select a job, the right side panel displays details about the job. Some of the parameters of the job can contain a long list of values. If the list of values is more than five, then the **Download full list** link is visible allowing users to download the full list of parameter values into a text file as shown below:

REL TIO Console

Reltio - Consistent 360 - GUS TRAINING (ICP)

Env. Management

+ NEW JOB

Statistics

Jobs

PENDING

COMPLETED

Update attributes task
dpryadin

08/14/2018
Completed

Potential matches reindex task
workflow-adapter

08/10/2018
Completed

Reindex
workflow-adapter

08/10/2018
Completed

Cassandra crosswalks consistency task
workflow-adapter

08/10/2018
Completed

Reindex
workflow-adapter

08/08/2018
Completed

Load prepared file task
shashidhar.vuthpal...

07/31/2018
Completed

Update attributes task
anton.artemyev

07/31/2018
Completed

Update attributes task
anton.artemyev

07/31/2018
Completed

Update attributes task
anton.artemyev

07/31/2018
Completed

Update attributes task
anton.artemyev

07/31/2018
Completed

Load prepared file task
shashidhar.vuthpal...

07/30/2018
Completed

Load prepared file task
shashidhar.vuthpal...

07/30/2018
Completed

Load prepared file task
shashidhar.vuthpal...

07/27/2018
Completed

Update attributes task
afedorov

07/26/2018
Completed

Reindex

Completed

1m 45s

Job details

Entity types: All types
Skip entities count: 0
Update entities: True
Updated since: 0
Ignore version conflicts: True
URI list
entities/15072m5W
entities/15022K44
entities/15029H05
entities/15026JEU
entities/15022AVC

Download full list

Enable separate indexing: False
Force ignore in streaming: False

History

Created: 08/08/18 at 12:49 PM by workflow-adapter
Started: 08/08/18 at 12:49 PM
Completed: 08/08/18 at 12:51 PM

Status

Number of processed objects: 45358
Throughput: 431.981

The naming convention of the file is: **task-< task-id>-<parameter-id>.txt**

An example name of the downloaded file is - **task-04c9bf8f-8c16-498d-9095-2e64536ca560-uriList.txt**

The downloaded text file provides users the flexibility to view the long list of values in a more user-friendly format or use it for in file search in Hub – Advanced Search panel as follows:

Reltio Products Developer resources Roles **Applications** Objectives

The screenshot shows the 'Advanced Search' interface. On the left, under 'Entity Types', 'All Entity Types' is selected. The main search area has several sections: 'Sources' with fields for 'Source System Name', 'ID Value', and 'Crosswalk Count'; 'Potential Matches' with a 'Potential Matches' field; and 'Entity ID' with an 'Entity ID' field set to 'in file'. A dropdown menu is open for the 'Entity ID' field, showing a file path: 'task-04c9bf8f-8c16-498d-9095-2e64536ca560-uriList.txt'. The 'Entity ID' field is highlighted with a red box.

To view all entities in the file, under **Entity ID**, the user must select the **in file** option as shown above, load the file, and click **Search**. For more information, see [Advanced Searching by Entity ID](#).

External queues at a glance

Do you need to stream data between the Reltio platform and your external systems in near real time? If so, use the **External queue** in the **Tenant Management** application to transmit your data automatically as Reltio processes it.

Note: Alternatively, you can export data using batch jobs or APIs to obtain the mastered, cleansed, and enriched data from Reltio. For more information, see topic [Events API](#).

Use the Reltio event streaming (or message streaming) service to process Match and CRUD (Create/Read/Update/Delete) events from internal to external queues or topics in JSON format. For more information on supported CRUD and MATCH events, see topic [Message Streaming Format](#).

Use these key features to configure event streaming using **External queues**:

- Multiple cloud providers:
 - Amazon SQS/SNS
 - Google Cloud Pub/Sub (Publisher/Subscriber)
 - Microsoft Azure Service Bus
- Message filters:
 - Filter by Event type - Receive messages only for selected events.
 - Filter Objects - Receive messages only for objects that meet the filter criteria.

- Different message payload types:

- Full Snapshot (all fields)
- Snapshot with selected fields

- Snapshot combined with Delta changes

- Different Payload formats:

- JSON
- zipped JSON

- Destination flexibility:


- Configure multiple queues to the same destination.
- Configure the same events to multiple destinations.

- Selective external streaming control:

- Disable event delivery to external queues while keeping internal pipelines (such as Grouping and DataPipeline) active.

The topics in this section explain the External Queues application. For guidance on working with external queues, see topic [Data streaming at a glance](#).


External queues navigation

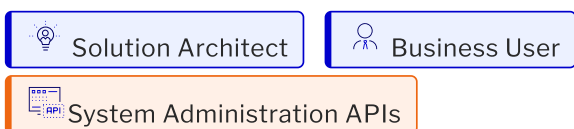

Let's look at how the user can receive the mastered data from Reltio for all the applications. You can use this as an alternative to the data export feature.


To access the External queues page:

1. From the Applications menu, select **Console** application. For more information, see topic [Console](#).

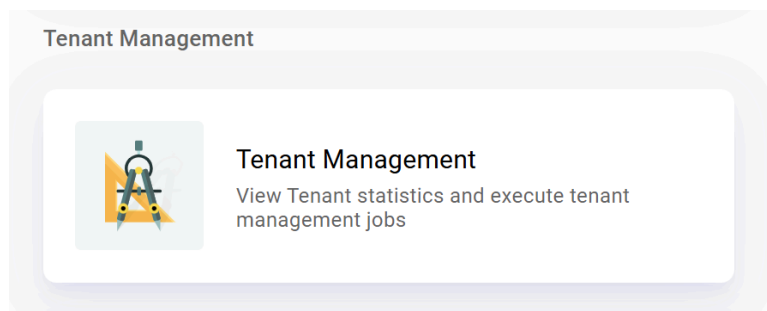


2. From the **Tenant Management** section, select the **Tenant Management** application.
3. At the top of the page, from the **Select tenant** drop-down menu, select the tenant you want to work with. For more information, see topic [Selecting a tenant](#).

4. On the left navigation bar, select **External queues**.

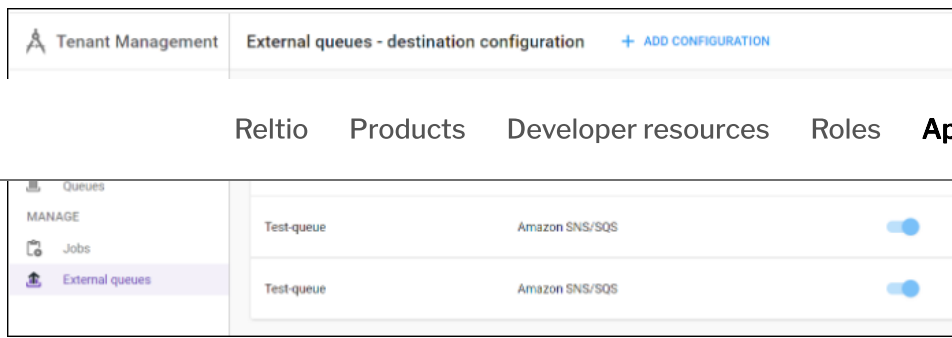

You use these key sections in the external queues page to determine the data to display the page:

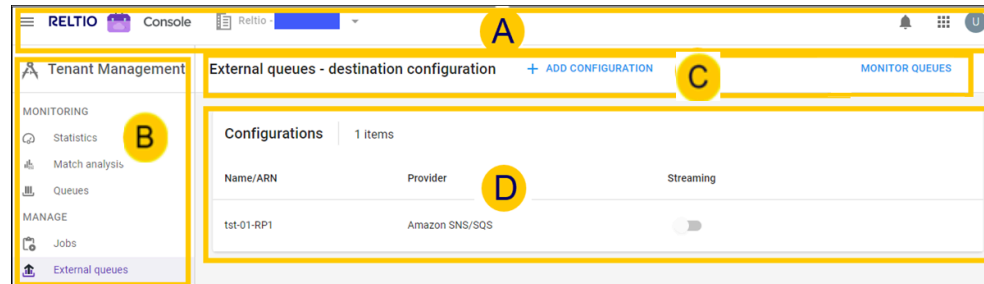

A Select tenant:

A drop-down menu at the top of the Console page that provides a list of available tenants. For more information, see topic [Select a tenant](#).

B Navigation Pane

The pane that displays the different menus that you can view in tenant management:

- **Statistics:** Select this menu to monitor your tenant. For more information, see topic [Statistics at a glance](#).
- **Match analysis:** Select this menu to analyze the match rules used in your tenant. For more information, see topic [Match Analysis at a glance](#).
- **Queues:** Select this menu to monitor the internal queues used in Reltio. For more information, see topic [Queues at a glance](#).
- **Jobs:** Select this menu to create a job that you can use to manage your tenant's data.
- **External queues:** Select this menu to manage data between Reltio and an external queue. For more information, see topic [Data streaming operation](#).

C Title bar:

The bar across the top of the external queues page displays the following buttons:

- **ADD CONFIGURATION:** Select this button to add an external queue configuration. For more information, see topic [Add an external queue configuration](#).
- **MONITOR QUEUES:** Select this button to monitor an existing queue configuration. For more information, see topic [Queues at a glance](#).

D Configurations Area

The area below the title bar and on the right of the navigation pane that displays the external queue data. For more information, see topic [Data streaming operation](#).

Outbound streaming scenarios


Reltio supports a unique queue for each configuration, multiple configurations on a single queue, and the same configuration on multiple queues for optimal use.

Multiple configurations on a single queue

Each configuration can have different object and event type filters or have different payload types. Events are streamed to the selected queue for each configuration.

Note: Events are not differentiated on the basis of the configuration while streaming. The downstream system can differentiate between these events during consumption.

The events flow is as shown:

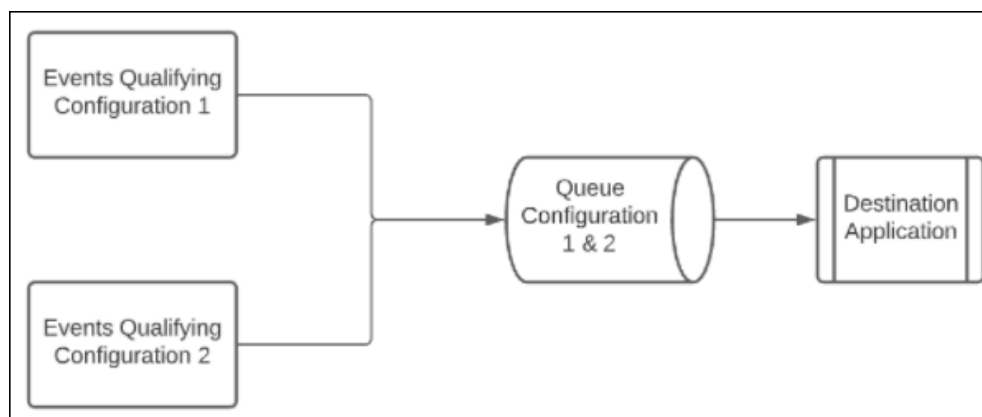

For example, two different configurations are defined on the **Test-queue** external queue. Events qualifying for configuration 1 and configuration 2 are streamed to **Test-queue**.

Configuration 1 - This configuration has no object or event filters and the Payload type is **Delta**.

The screenshot shows the configuration interface for Amazon SNS/SQS. The 'Provider' is set to 'Amazon SNS/SQS'. The 'Key' is 'AKIAWMJARRCBQI2BVZ4X' and the 'Secret' is masked. The 'Queue name' is 'Test-queue' and the 'Type' is 'SQS'. The 'Region' is 'us-east1'. The 'Format' is 'JSON_ZIP_BASE64'. The 'Object filter' is empty. The 'Type filter' is empty. The 'Payload type' is set to 'Delta' (Selected fields). The 'Enable streaming' checkbox is checked.

Configuration 2 - This configuration has event filters and the Payload type is **Snapshot** (Selected fields).

Provider
Amazon SNS/SQS

☐ Authenticate using role

Reltio
Products
Developer resources
Roles
Applications
Objectives

Queue name *
Test-queue

Type *
SQS

Region *
us-east1

Format
JSON_ZIP_BASE64

Object filter

Type filter
ENTITY_CREATED
ENTITY_REMOVED
ENTITY_LOST_MERGE

Collection of event types name to stream. Events of different types will be ignored.

Payload type
Specifies the content payload type to your destination, which can be either Snapshot or Delta. Select Snapshot to add a partial snapshot of the data object to the streaming messages or Delta to add only information about the changed part of the object in a before-after format very similar to the activity log. For more details, please refer to the [Reltio Documentation Portal](#).

☐ Snapshot All fields
☒ **Snapshot Selected fields**
☐ Delta
☐ Snapshot with delta

Event payload fields
uri
type
createdTime
createdBy
objectVersion

uri, type and objectVersion are mandatory event payload fields

☒ Enable streaming
When selected, the events are published to the above queue destination.

Configuration 3 - This configuration has event filters and the Payload type is **Snapshot with delta**.

Add configuration

Provider
Amazon SNS/SQS

☐ Authenticate using role

Key *
yourname@yourcompany.com

Secret *
.....

☐ Use ARN
When selected queue configuration will be using the ARN of your aws queue

Queue name *
Test-queue

Type *
SQS

Region *
us-east1

Format
JSON_ZIP_BASE64

Object filter

Type filter
Collection of event types name to stream. Events of different types will be ignored.

☐ Transmit OV only
When selected, only operational values are published to the queue destination.

Payload type
Specifies the content payload type to your destination, which can be either Snapshot or Delta. Select Snapshot to add a partial snapshot of the data object to the streaming messages or Delta to add only information about the changed part of the object in a before-after format very similar to the activity log. For more details, please refer to the [Reltio Documentation Portal](#).

☐ Snapshot All fields
☐ Snapshot Selected fields
☒ **Snapshot with delta**

Event payload fields
uri
type
createdTime
createdBy
objectVersion
commitTime

uri, type, objectVersion and commitTime are mandatory event payload fields

☒ Enable streaming
When selected, the events are published to the above queue destination.


CANCEL
SAVE

Once you save the queue configuration, the queue name appears in your UI.

Tenant Management MONITORING Statistics Match analysis Queues MANAGE Jobs External queues	External queues - destination configuration Configurations 2 items <table> <tr> <th>Name/ARN</th><th>Provider</th><th>Streaming</th></tr> <tr> <td>Test-queue</td><td>Amazon SNS/SQS</td><td>☒</td></tr> <tr> <td>Test-queue</td><td>Amazon SNS/SQS</td><td>☒</td></tr> </table>	Name/ARN	Provider	Streaming	Test-queue	Amazon SNS/SQS	☒	Test-queue	Amazon SNS/SQS	☒
Name/ARN	Provider	Streaming								
Test-queue	Amazon SNS/SQS	☒								
Test-queue	Amazon SNS/SQS	☒								

Same configuration on multiple queues

Defining the same configuration for multiple queues ensures that qualifying events are streamed to all queues that have the selected configuration. The events flow is as shown:

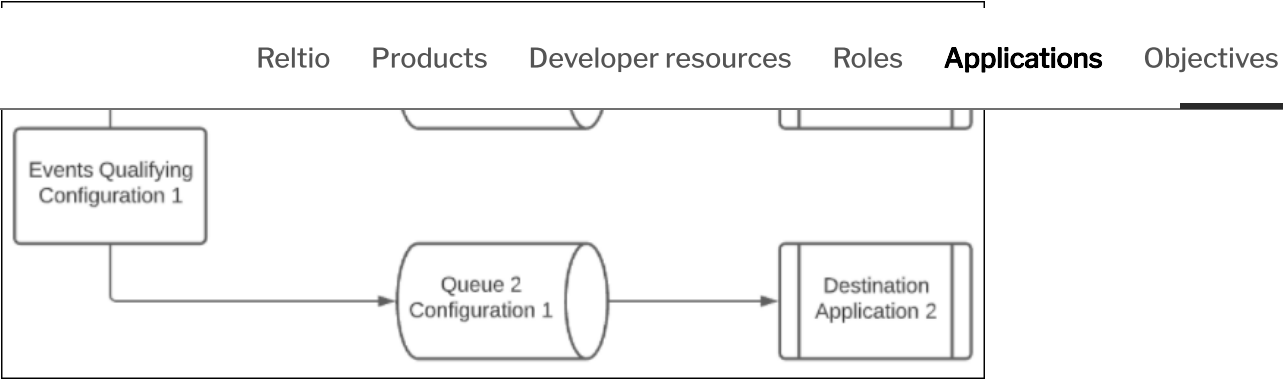

For example, the same configuration is defined in **Test-queue1** and **Test-queue2** external queues. Events qualifying for configuration 1 and configuration 2 are streamed to both **Test-queue1** and **Test-queue2**.

Configuration 1 - This configuration is defined in **Test-queue1**, has no object or event filters, and has the Payload type **Snapshot** (All fields).

Provider
Amazon SNS/SQS

☐ Authenticate using role

Key * AKIAWMJARRCBQI2BVZ4XSecret *

☐ Use ARN
When selected queue configuration will be using the ARN of your aws queue

Queue name * Test-queue1Type * SQS

Region * us-east1

Format JSON_ZIP_BASE64Object filter

Type filter

Collection of event types name to stream. Events of different types will be ignored.

Payload type
Specifies the content payload type to your destination, which can be either Snapshot or Delta. Select Snapshot to add a partial snapshot of the data object to the streaming messages or Delta to add only information about the changed part of the object in a before-after format very similar to the activity log. For more details, please refer to the [Reltio Documentation Portal](#).

☒ Snapshot
All fields☐ Snapshot
Selected fields☐ Delta☐ Snapshot with delta

☒ Enable streaming
When selected, the events are published to the above queue destination.

Configuration 2 - This configuration is defined in **Test-queue2**, has no object or event filters, and has the Payload type **Delta**.

Provider

Amazon SNS/SQS

☐ Authenticate using role

Key *

Secret *

Reltio

Products

Developer resources

Roles

Applications

Objectives

Queue name

Test-queue2

Provider

SQS

Region *

us-east1

Format

JSON_ZIP_BASE64

Object filter

Filter expression for event object. Event won't be sent to the destination if it's object does not match the filter.

Type filter

Collection of event types name to stream. Events of different types will be ignored.

Payload type

Specifies the content payload type to your destination, which can be either Snapshot or Delta. Select Snapshot to add a partial snapshot of the data object to the streaming messages or Delta to add only information about the changed part of the object in a before-after format very similar to the activity log. For more details, please refer to the [Reltio Documentation Portal](#).

☒ Snapshot
All fields

☐ Snapshot
Selected fields

☐ Delta

☐ Snapshot with delta

☒ Enable streaming
When selected, the events are published to the above queue destination.

Once you save the queue configuration, the queue name appears in the UI.

Tenant Management	External queues - destination configuration	+ ADD CONFIGURATION
MONITORING	Configurations 2 items	
Statistics		
Match analysis		
Queues		
MANAGE		
Jobs		
External queues		
	Name/ARN	Provider Streaming
	Test-queue1	Amazon SNS/SQS ☒
	Test-queue2	Amazon SNS/SQS ☒

Tenant Configuration at a glance

Our support team is always happy to connect with you, and always has your back! But, let's face it, when it comes to this straightforward process of configuring your tenant – you're probably eager to dive in and get it done yourself. Use the **Tenant configuration** page in the Console Tenant Management application for self-service.

Do you have [ROLE_ADMIN_TENANT Access permissions](#)? If so, dive into this topic, specifically designed with your Tenant Configuration needs in mind! For more information, see topic [View and edit tenant configuration](#).

Here's a rundown of the parameters you can customize in the Tenant configuration page:

Cleanse configurations

Explore the Cleanse configurations to tailor how addresses are cleansed, verified, and processed, ensuring they meet your specific needs:

Parameter	Description	Default value	Allowed Values	Additional Info
-----------	-------------	---------------	----------------	-----------------

Reltio Products Developer resources Roles **Applications** Objectives

licensed country	cleansing is supported based on your current license. Contact your Reltio Account Manager to update your license. Note: View only mode	(license-dependent)		Properties	
Address cleanser process	List of applicable address cleanser processes supported based on your current license. Contact your Reltio Account Manager to include CASS2 or SERP, and Reltio Support for other processes. For more information, see topic Get help in Support Portal Note: View only mode	Active values (license-dependent)	Verified Geocoding Enhanced CASS2 SERP Preprocessing	Address Cleansing Properties	

Parameter	Description	Default value	Allowed Values	Additional Info
-----------	-------------	---------------	----------------	-----------------

Reltio Products Developer resources Roles **Applications** Objectives

Mapping	How closely an input address matches reference data. AVC mapping and status offer flexibility in managing the verified status of standardized addresses returned by the address cleansing function. Contact Reltio support to update the configuration. For more information, see topic Get help in Support Portal Note: View only mode	(license-dependent)	Verified Unverified Ambiguous Conflict Reverted	Verification Code Using AVC to set Address Verified Status	
Address cleanser default country	If you don't specify a country in your request, the system uses the United States (USA) as the default country for Loqate verification. A 3-char ISO country code is preferred.	USA	Country code defined in your configuration	Address Cleansing Properties	
Return unverified status	Enable this option to return only status fields for Unverified addresses in address cleansing.	Disabled	Disabled Enabled	Address Cleansing Properties	

Parameter	Description	Default value	Allowed Values	Additional Info
-----------	-------------	---------------	----------------	-----------------

Reltio
Products
Developer resources
Roles
Applications
Objectives

status	address cleanser should return results. Note: You have the option to select multiple values.		d Ambiguous Conflict Reverted	Verification Code	
Ignore unverified results	Unverified results are not returned when this parameter is enabled. Applicable only for SERP and CASS2.	Enabled	Enabled Disabled	Address Cleansing Properties	
Handle duplicate data	Enable to eliminate duplicate values in address fields in preprocessing.	Disabled	Disabled Enabled	Address cleanse options	
Output casing	Select the casing format for address cleanser output fields.	Title	Title Upper Lower	Address cleanse options	
Output language	Specify the ISO 15924 code for the output encoding. Use 'Native' for the language of the country in the input address, or 'Latn' for English.	Native	Native Latn	Address cleanse options	
Suppress address fields in output	Specify a comma-separated list of fields to exclude from the Address field output.	n/a	Address fields (user input)	Address cleanse options	

Parameter	Description	Default value	Allowed Values	Additional Info
Reltio Products Developer resources Roles Applications Objectives				
default when lookup fails	Cleanse input when the lookup value is not found.			raw value when lookup fails
Enforce certified results	Enable to ensure the platform returns certified results - CASS for US address and SERP for Canadian address - regardless of the verificaiton score.	False	True False	Address cleanse options

Nested partial override

Parameter	Description	Default value	Allowed Values	Additional Info
Nested partial override	A partial override for nested attributes lets you update specific parts of an entity or a relationship. Enable to allow partial override in nested attributes.	Disabled	Disabled Enabled	enableNestedPartialOverride option

Resolve lookup code

Parameter	Description	Default value	Allowed Values	Additional Info
-----------	-------------	---------------	----------------	-----------------

Reltio Products Developer resources Roles **Applications** Objectives

code	lookup value. E.g., using "AS" to identify the lookup value "Abdominal Surgery". Enable to resolve and store lookup codes corresponding to raw values in the data. If enabled, raw values will be lost.		Enabled	or tenant lookups
------	---	--	---------	-------------------

Tenant per role security

Parameter	Description	Default value	Allowed Values	Additional Info
Tenant per role security	Enable to reuse the same role names and definitions across tenants. Note: Grant users different rights for different tenants.	Enabled	Enabled Disabled	Role assignments behavior

Export file compression

Parameter	Description	Default value	Allowed Values	Additional Info
Export file compression	Choose a compression format for your exported files. We recommend using GZIP.	GZIP	GZIP ZIP	What compression file types does export support?

Match strategy

Parameter	Description	Default value	Allowed Values	Additional Info
Reltio Products Developer resources Roles Applications Objectives				
access control (RBAC)	product available on the Reltio Data Cloud that enables you to define and maintain reference data for your MDM tenants and your enterprise in general. Enable RBAC to restrict access to RDM lookup values based on RBAC permissions configured in your linked RDM tenant. This ensures that MDM users only see and access RDM data they are authorized for, according to their roles. ! Important: Before enabling, ensure that RBAC permissions are properly configured in RDM. If RBAC permissions are not set, users may lose access to RDM lookup values.		Message streamingEnabled	access control (RBAC) for RDM

Message streaming

Parameter	Description	Default value	Allowed Values	Additional Info
-----------	-------------	---------------	----------------	-----------------

	platform to process events from an internal queue into an external queue or topic in JSON format. Enable or disable messaging on all queues, including hidden ones like GBQ (Google BigQuery) and SFDC (Salesforce).		Disabled	
Message Streaming API	Controls whether events triggered by REST API operations such as data loads or reindex requests are delivered to external streaming destinations. When this setting is disabled, external delivery is paused, but internal pipelines such as Grouping and DataPipeline continue to operate if message streaming remains enabled. This setting takes effect only when Message Streaming is enabled.	Enabled	Enabled Disabled	Message streaming

View and edit tenant configuration

You need:


- [ROLE_API Access permissions](#) - to view your tenant's configuration settings, or
- [ROLE_ADMIN_TENANT Access permissions](#) - to edit your tenant's configuration settings.

Manage your tenant configuration parameters. For more information, see topic [Tenant Configuration at a glance](#).


Watch this video to learn how to view and edit your tenant configuration, or follow the steps below for detailed guidance:

01:06

1. On the **Console** application, select **Tenant management**.

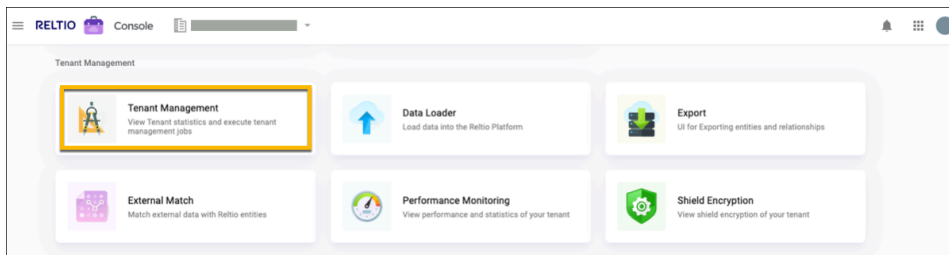


2. Navigate to **Tenant Configuration**.

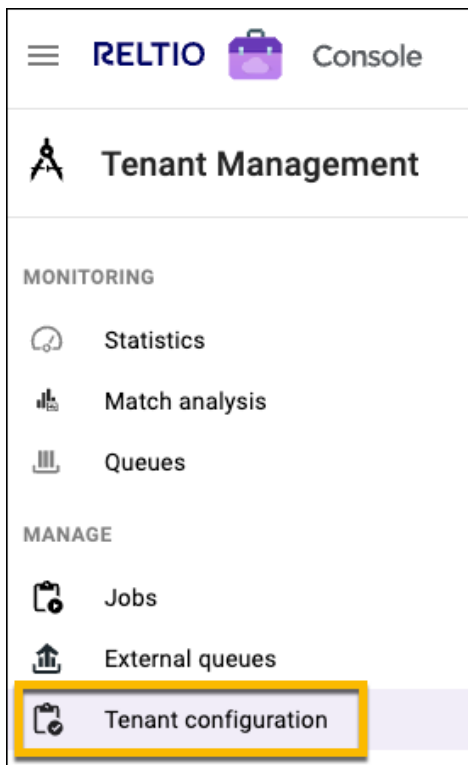

3. **Note:** On the **Cleanse configurations** the **Address cleanser licensed country**, the **Address cleanser process**, and the


included in your license, you may need to contact Reltio Support to update them.

By default, you'll be in **VIEWING** mode. Select **EDITING** from the top-right corner to change your tenant's parameter settings.

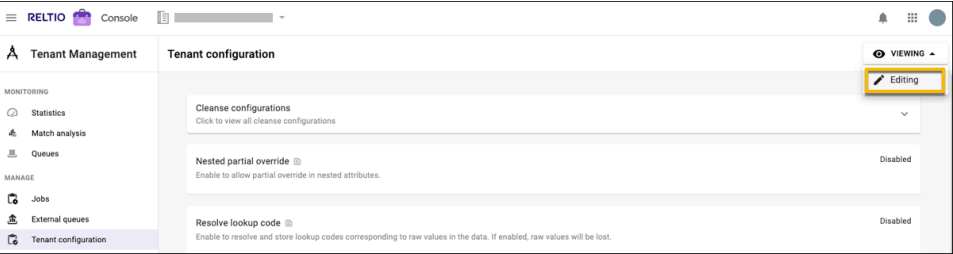


4. **Note:**
- Some changes require additional actions. Refer to each parameter's description for details.
 - The **streamingAPIEnabled** parameter in the **MessageStreaming** section controls whether events are delivered to external destinations. If you set this value to **false** while external queues are still configured, the UI displays a warning. Internal pipelines like Grouping and Data Pipeline are not affected.

Locate the parameter(s) you want to edit and update them as needed.

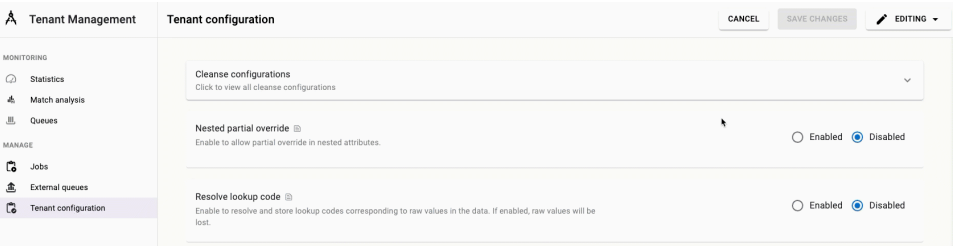

5. Save your changes.

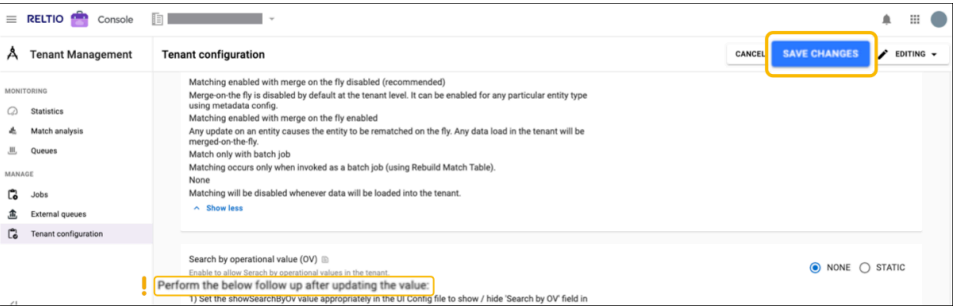

Your tenant configurations have been successfully updated based on your saved changes.

