Successfully emptied bucket "veeebucket"
View details below. If you want to delete this bucket, use the delete bucket configuration.

Empty bucket: status

Cancel Exit

The details below are no longer available after you navigate away from this page.

Summary

Source	Successfully deleted	Failed to delete
s3://veeebucket	1 object, 1.1 MB	0 objects

Failed to delete (0)

Find objects by name

Name	Prefix	Version ID	Type	Last modified	Size	Error

No failed object deletions

Successfully emptied bucket "veeebucket"
View details below. If you want to delete this bucket, use the delete bucket configuration.

Empty bucket: status

Cancel Exit

The details below are no longer available after you navigate away from this page.

Summary

Source	Successfully deleted	Failed to delete
s3://veeebucket	1 object, 1.1 MB	0 objects

Failed to delete (0)

Find objects by name

Name	Prefix	Version ID	Type	Last modified	Size	Error

No failed object deletions

Amazon S3 > Buckets > veeebucket > Empty bucket

Empty bucket Info

- Emptying the bucket deletes all objects in the bucket and cannot be undone.
- Objects added to the bucket while the empty bucket action is in progress might be deleted.
- To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket.

Learn more

If your bucket contains a large number of objects, creating a lifecycle rule to delete all objects in the bucket might be a more efficient way of emptying your bucket. Learn more

Go to lifecycle rule configuration

Permanently delete all objects in bucket "veeebucket"?

To confirm deletion, type *permanently delete* in the text input field.

permanently delete

Cancel Empty

Amazon S3 > Buckets > veeebucket > Empty bucket

Empty bucket Info

- Emptying the bucket deletes all objects in the bucket and cannot be undone.
- Objects added to the bucket while the empty bucket action is in progress might be deleted.
- To prevent new objects from being added to this bucket while the empty bucket action is in progress, you might need to update your bucket policy to stop objects from being added to the bucket.

Learn more

If your bucket contains a large number of objects, creating a lifecycle rule to delete all objects in the bucket might be a more efficient way of emptying your bucket. Learn more

Go to lifecycle rule configuration

Permanently delete all objects in bucket "veeebucket"?

To confirm deletion, type *permanently delete* in the text input field.

permanently delete

Cancel Empty

Amazon S3 > Buckets > veeebucket > Lifecycle configuration

The rule "lifecyclerule1" has been successfully added and the lifecycle configuration has been updated
It may take some time for the configuration to be updated. Refresh the lifecycle rules list if changes to the configuration aren't displayed.

Lifecycle configuration

To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.

Default minimum object size for transitions
All storage classes 128K

Lifecycle rules (1)

View details | Edit | Delete | Actions | Create lifecycle rule

Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. Learn more

Find lifecycle rules by name

Lifecycle rule name	Status	Scope	Current version acti...	Noncurrent versions...	Expired object delet...	Incomplete multipa...
lifecyclerule1	Enabled	Entire bucket	Transition to Standard-IA, th	-	-	Permanently delete

Amazon S3 > Buckets > veeebucket > Lifecycle configuration > Create lifecycle rule

Integer must be greater than 0.

Review transition and expiration actions

Current version actions

Day 0
- Objects uploaded

↓

Day 30
- Objects move to Standard-IA

↓

Day 60
- Objects move to Glacier Flexible Retrieval (formerly Glacier)

Noncurrent versions actions

Day 0
No actions defined.

Cancel | Create rule

Amazon S3 > Buckets > veeebucket > Lifecycle configuration > Create lifecycle rule

Transition current versions of objects between storage classes

Choose transitions to move current versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects are created and are consecutively applied. Learn more

Choose storage class transitions	Days after object creation	
Standard-IA	30	Remove
One Zone-IA	Number of days (A valid integer value is required.)	Remove
Glacier Flexible Retrieval (formerly Glacier)	60	Remove
Glacier Deep Archive	Number of days (A valid integer value is required.)	Remove

Add transition

Expire current versions of objects

For version-enabled buckets, Amazon S3 adds a delete marker and the current version of an object is retained as a noncurrent version. For non-versioned buckets, Amazon S3 permanently removes the object. Learn more

Amazon S3 > Buckets > veeebucket > Lifecycle configuration > Create lifecycle rule

We don't recommend transitioning objects less than 128 KB because the transition costs can outweigh the storage savings. If your use case requires transitioning objects less than 128 KB, specify a minimum object size filter for each applicable lifecycle rule with a transition action.

Transition current versions of objects between storage classes

Choose transitions to move current versions of objects between storage classes based on your use case scenario and performance access requirements. These transitions start from when the objects are created and are consecutively applied. Learn more

Choose storage class transitions	Days after object creation	
Standard-IA	Number of days (A valid integer value is required.)	Remove
One Zone-IA	Number of days (A valid integer value is required.)	Remove
Glacier Flexible Retrieval (formerly Glacier)	Number of days (A valid integer value is required.)	Remove
Glacier Deep Archive	Number of days (A valid integer value is required.)	Remove

Add transition

CloudShell Feedback © 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

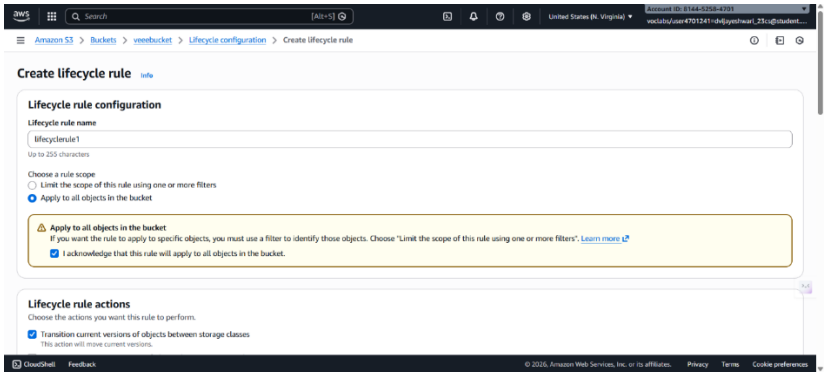
Amazon S3 > Buckets > veeebucket > Lifecycle configuration > Create lifecycle rule
Create lifecycle rule Info
Lifecycle rule configuration
Lifecycle rule name
lifecyclerule1
Up to 255 characters
Choose a rule scope
Limit the scope of this rule using one or more filters
Apply to all objects in the bucket
Apply to all objects in the bucket
If you want the rule to apply to specific objects, you must use a filter to identify those objects. Choose "Limit the scope of this rule using one or more filters". Learn more
I acknowledge that this rule will apply to all objects in the bucket.
Lifecycle rule actions
Choose the actions you want this rule to perform.
Transition current versions of objects between storage classes
This action will move current versions.

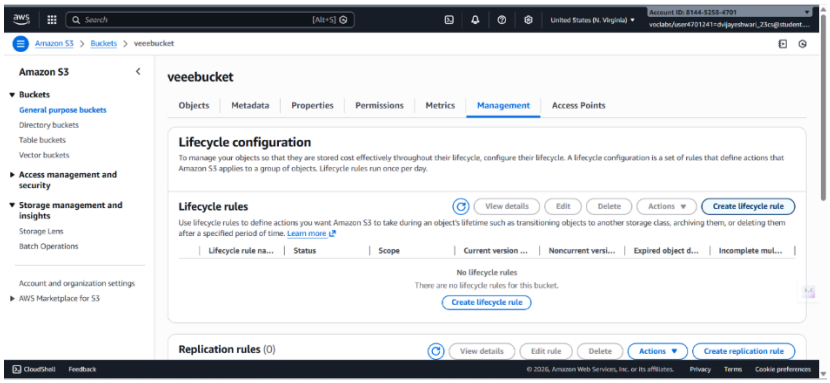
Amazon S3 > Buckets > veeebucket
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Access management and security
Storage management and insights
Storage Lens
Batch Operations
Account and organization settings
AWS Marketplace for S3
veeebucket
Objects
Metadata
Properties
Permissions
Metrics
Management
Access Points
Lifecycle configuration
To manage your objects so that they are stored cost effectively throughout their lifecycle, configure their lifecycle. A lifecycle configuration is a set of rules that define actions that Amazon S3 applies to a group of objects. Lifecycle rules run once per day.
Lifecycle rules
View details
Edit
Delete
Actions
Create lifecycle rule
Use lifecycle rules to define actions you want Amazon S3 to take during an object's lifetime such as transitioning objects to another storage class, archiving them, or deleting them after a specified period of time. Learn more
Lifecycle rule na...
Status
Scope
Current version ...
Noncurrent versi...
Expired object d...
Incomplete mul...
No lifecycle rules
There are no lifecycle rules for this bucket.
Create lifecycle rule
Replication rules (0)
View details
Edit rule
Delete
Actions
Create replication rule

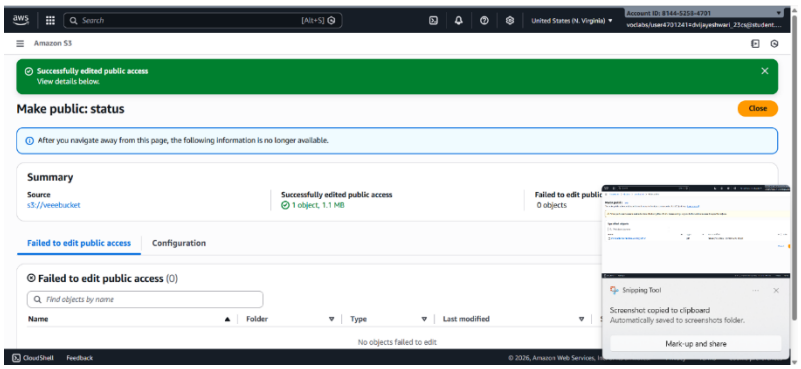
Amazon S3
Successfully edited public access
View details below.
Make public: status
Close
After you navigate away from this page, the following information is no longer available.
Summary
Source
s3://veeebucket
Successfully edited public access
1 object, 1.1 MB
Failed to edit public
0 objects
Failed to edit public access
Configuration
Failed to edit public access (0)
Find objects by name
Name
Folder
Type
Last modified
No objects failed to edit
Snipping Tool
Screenshot copied to clipboard
Automatically saved to screenshots folder.
Mark-up and share

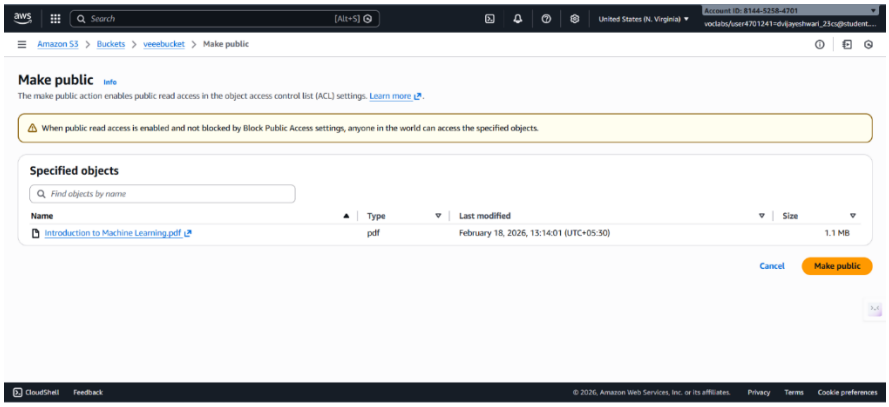
Amazon S3 > Buckets > veeebucket > Make public
Make public Info
The make public action enables public read access in the object access control list (ACL) settings. Learn more.
When public read access is enabled and not blocked by Block Public Access settings, anyone in the world can access the specified objects.
Specified objects
Find objects by name
Name
Type
Last modified
Size
Introduction to Machine Learning.pdf
pdf
February 18, 2026, 13:14:01 (UTC+05:30)
1.1 MB
Cancel
Make public

Amazon S3 > Buckets > veeebucket > Introduction to Machine Learning.pdf

Introduction to Machine Learning.pdf

Copy S3 URI | Download | Open | Object actions

Properties | Permissions | Versions

Object overview

Owner
c3246d3e7ea39e02b2cc362f3b4b3edc447a3b4eddc47748885c95aa1f1b181c

AWS Region
US East (N. Virginia) us-east-1

Last modified
February 18, 2026, 13:14:01 (UTC+05:30)

Size
1.1 MB

Type
pdf

Key
Introduction to Machine Learning.pdf

S3 URI
s3:://veeebucket/Introduction to Machine Learnin

Amazon Resource Name (ARN)
arn:aws:s3:::veeebucket/Introduction to Machine L

Entity tag (Etag)
08dd58263ca1b6dc262ac8f7ce5d315d

Object URL
https://veeebucket.s3.us-east-1.amazonaws.com/
ng.pdf

Download as
Share with a presigned URL
Calculate total size
Copy
Move
Initiate restore
Query with S3 Select
Edit actions
Rename object
Edit storage class
Edit server-side encryption
Edit tags
Make public using ACL

Amazon S3 > Buckets > veeebucket > Introduction to Machine Learning.pdf

Introduction to Machine Learning.pdf

Copy S3 URI | Download | Open | Object actions

Properties | Permissions | Versions

Object overview

Owner
c3246d3e7ea39e02b2cc362f3b4b3edc447a3b4eddc47748885c95aa1f1b181c

AWS Region
US East (N. Virginia) us-east-1

Last modified
February 18, 2026, 13:14:01 (UTC+05:30)

Size
1.1 MB

Type
pdf

Key
Introduction to Machine Learning.pdf

S3 URI
s3:://veeebucket/Introduction to Machine Learning.pdf

Amazon Resource Name (ARN)
arn:aws:s3:::veeebucket/Introduction to Machine Learning.pdf

Entity tag (Etag)
08dd58263ca1b6dc262ac8f7ce5d315d

Object URL
https://veeebucket.s3.us-east-1.amazonaws.com/Introduction+to+Machine+Learni
ng.pdf

Amazon S3

Upload succeeded
For more information, see the **Files and folders** table.

After you navigate away from this page, the following information is no longer available.

Summary

Destination
s3://veeebucket

Succeeded
1 file, 1.1 MB (100.00%)

Failed
0 files, 0 B (0%)

Files and folders | Configuration

Files and folders (1 total, 1.1 MB)

Find by name

Name	Folder	Type	Size	Status	Error
Introduction to Machine Learnin...	-	application/pdf	1.1 MB	Succeeded	-

Amazon S3 > Buckets > veeebucket > Upload

Files and folders (1 total, 1.1 MB)

Remove | Add files | Add folder

All files and folders in this table will be uploaded.

Find by name

Name	Folder	Type	Size
Introduction to Machine Learning.pdf	-	application/pdf	1.1 MB

Destination

Destination
s3://veeebucket

Destination details
Bucket settings that impact new objects stored in the specified destination.

Permissions
Grant public access and access to other AWS accounts.

Properties
Specify storage class, encryption settings, tags, and more.

Cancel | Upload

Amazon S3 > Buckets > veeebucket

veeebucket Info

Objects | Metadata | Properties | Permissions | Metrics | Management | Access Points

Objects (0)

Copy S3 URI | Copy URL | Download | Open | Delete | Actions | Create folder | Upload

Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more

Find objects by prefix | Show versions

Name	Type	Last modified	Size	Storage class

No objects

You don't have any objects in this bucket.

Upload

Amazon S3 > Buckets

Successfully created bucket "veeebucket"
To upload files and folders, or to configure additional bucket settings, choose View details.

View details

General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (1) Info

Buckets are containers for data stored in S3.

Copy ARN | Empty | Delete | Create bucket

Find buckets by name

Name	AWS Region	Creation date
veeebucket	US East (N. Virginia) us-east-1	February 18, 2026, 13:12:42 (UTC+05:30)

Account snapshot Info

View dashboard

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

External access summary Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Bucket Versioning

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more

Bucket Versioning

- Disable
- Enable

Tags - *optional*

You can use bucket tags to analyze, manage and specify permissions for a bucket. Learn more

You can use s3:ListTagsForResource, s3:TagResource, and s3:UntagResource APIs to manage tags on S3 general purpose buckets for access control in addition to cost allocation and resource organization. To ensure a seamless transition, please provide permissions to s3:ListTagsForResource, s3:TagResource, and s3:UntagResource actions. Learn more

No tags associated with this bucket.

Add new tag

Amazon S3 > Buckets > Create bucket

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more

- [ ] **Block *all* public access**
  Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
  - [ ] **Block public access to buckets and objects granted through *new* access control lists (ACLs)**
    S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
  - [ ] **Block public access to buckets and objects granted through *any* access control lists (ACLs)**
    S3 will ignore all ACLs that grant public access to buckets and objects.
  - [ ] **Block public access to buckets and objects granted through *new* public bucket or access point policies**
    S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
  - [ ] **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**
    S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

Open Merlin Ctrl+M

- [x] I acknowledge that the current settings might result in this bucket and the objects within becoming public.

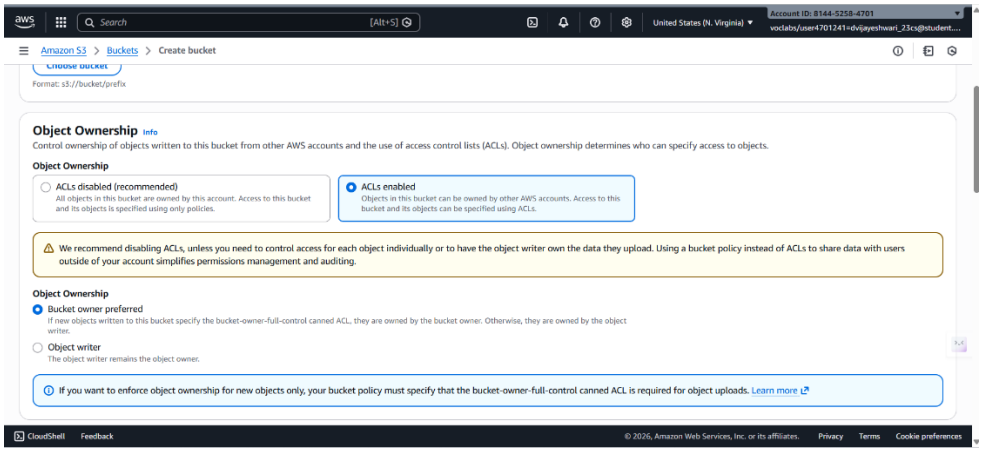
Amazon S3 > Buckets > Create bucket
Object Ownership Info
Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.
Object Ownership
ACLs disabled (recommended)
All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
ACLs enabled
Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.
We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.
Object Ownership
Bucket owner preferred
If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
Object writer
The object writer remains the object owner.
If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more

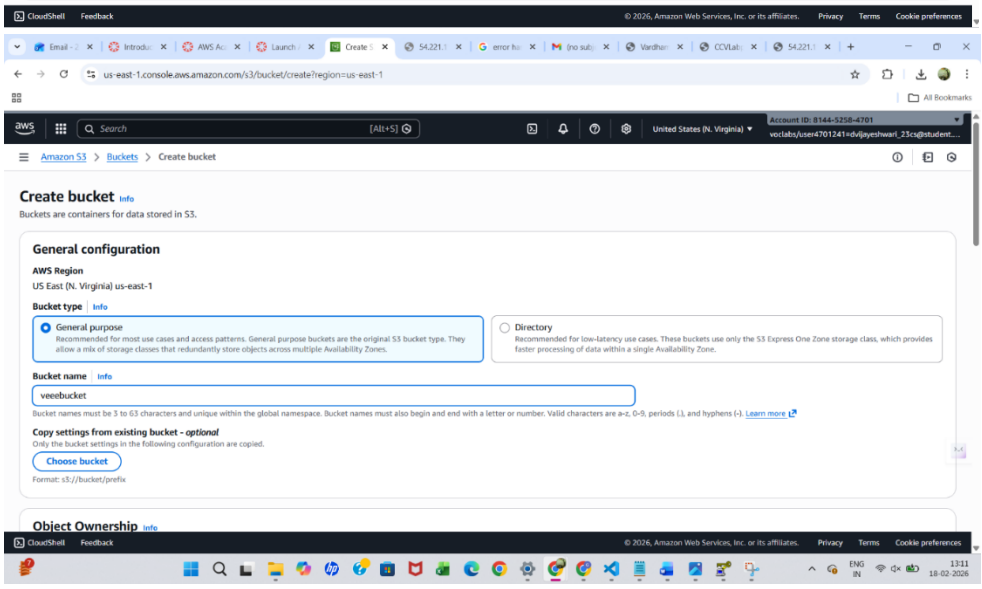
us-east-1.console.aws.amazon.com/s3/bucket/create?region=us-east-1
Amazon S3 > Buckets > Create bucket
Create bucket Info
Buckets are containers for data stored in S3.
General configuration
AWS Region
US East (N. Virginia) us-east-1
Bucket type Info
General purpose
Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
Directory
Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.
Bucket name Info
veeebucket
Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more
Copy settings from existing bucket - optional
Only the bucket settings in the following configuration are copied.
Choose bucket
Format: s3://bucket/prefix
Object Ownership Info

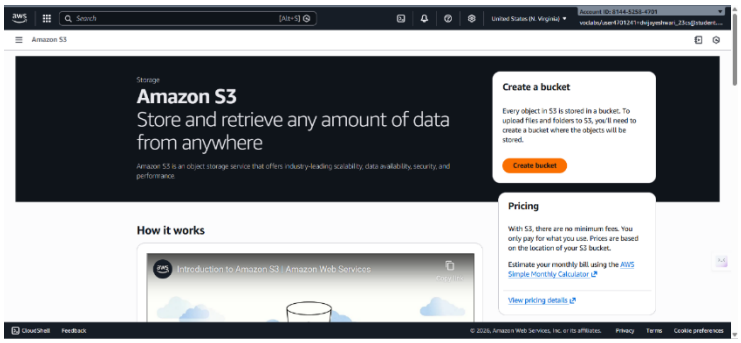
Amazon S3
Storage
Amazon S3
Store and retrieve any amount of data from anywhere
Create a bucket
Every object in S3 is stored in a bucket. To upload files and folders to S3, you'll need to create a bucket where the objects will be stored.
Create bucket
How it works
Introduction to Amazon S3 | Amazon Web Services
Pricing
With S3, there are no minimum fees. You only pay for what you use. Prices are based on the location of your S3 bucket.
Estimate your monthly bill using the AWS Simple Monthly Calculator
View pricing details

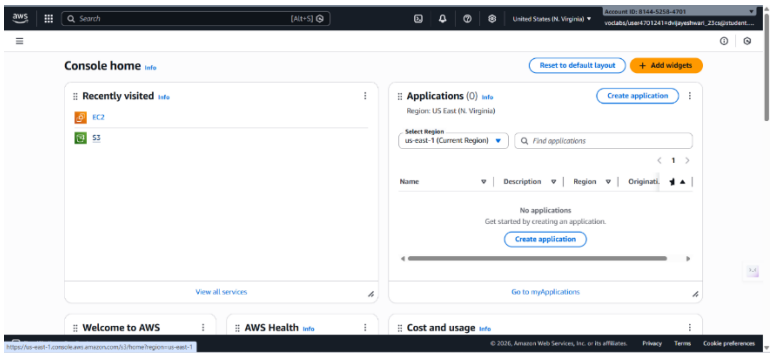
Console home Info
Reset to default layout
+ Add widgets
Recently visited Info
EC2
S3
View all services
Applications (0) Info
Region: US East (N. Virginia)
Create application
Select Region
us-east-1 (Current Region)
Find applications
Name
Description
Region
No applications
Get started by creating an application.
Create application
Go to myApplications
Welcome to AWS
AWS Health Info
Cost and usage Info