Amazon S3 > Buckets > Create bucket

Object Ownership Info

Control ownership of objects written to this bucket from other AWS accounts and the use of access control lists (ACLs). Object ownership determines who can specify access to objects.

Object Ownership

- ACLs disabled (recommended) — All objects in this bucket are owned by this account. Access to this bucket and its objects is specified using only policies.
- ACLs enabled — Objects in this bucket can be owned by other AWS accounts. Access to this bucket and its objects can be specified using ACLs.

We recommend disabling ACLs, unless you need to control access for each object individually or to have the object writer own the data they upload. Using a bucket policy instead of ACLs to share data with users outside of your account simplifies permissions management and auditing.

Object Ownership

- Bucket owner preferred — If new objects written to this bucket specify the bucket-owner-full-control canned ACL, they are owned by the bucket owner. Otherwise, they are owned by the object writer.
- Object writer — The object writer remains the object owner.

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public

Amazon S3 > Buckets > Create bucket

Create bucket Info

Buckets are containers for data stored in S3.

General configuration

AWS Region

US East (N. Virginia) us-east-1

Bucket type Info

- General purpose — Recommended for most use cases and access patterns. General purpose buckets are the original S3 bucket type. They allow a mix of storage classes that redundantly store objects across multiple Availability Zones.
- Directory — Recommended for low-latency use cases. These buckets use only the S3 Express One Zone storage class, which provides faster processing of data within a single Availability Zone.

Bucket name Info

bucketvee5d9

Bucket names must be 3 to 63 characters and unique within the global namespace. Bucket names must also begin and end with a letter or number. Valid characters are a-z, 0-9, periods (.), and hyphens (-). Learn more

Copy settings from existing bucket - *optional*

Only the bucket settings in the following configuration are copied.

Choose bucket

Format: s3://bucket/prefix

Object Ownership Info

Console home Info

Reset to default layout | + Add widgets

Recently visited Info

- EC2
- S3
- DynamoDB

View all services

Applications (0) Info — Create application

Region: US East (N. Virginia)

Select Region: us-east-1 (Current Region) | Find applications

Name	Description	Region	Originati.

No applications

Get started by creating an application.

Create application

Go to myApplications

Welcome to AWS | **AWS Health** Info | **Cost and usage** Info

Amazon S3 > Buckets > bucketvee5d9

bucketvee5d9 Info

Objects | Metadata | Properties | Permissions | Metrics | Management | Access Points

Objects (1)

Copy S3 URI | Copy URL | Download | Open | Delete | Actions | Create folder | Upload

Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more

Find objects by prefix | Show versions

Name	Type	Version ID	Last modified	Size	Storage class
sample.txt	txt	null	February 18, 2026, 23:48:51 (UTC+05:30)	23.0 B	Standard

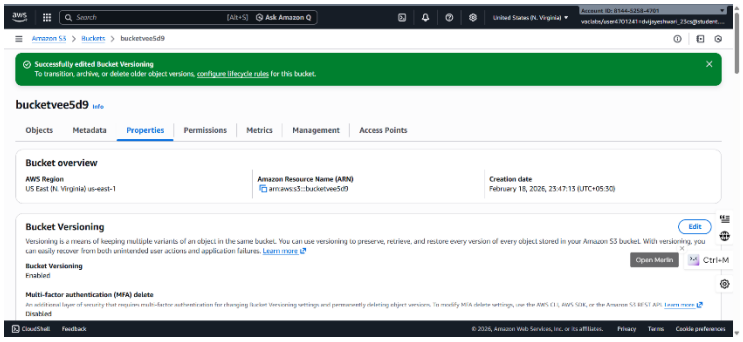
Successfully edited Bucket Versioning
To transition, archive, or delete older object versions, configure lifecycle rules for this bucket.
bucketvee5d9
Objects
Metadata
Properties
Permissions
Metrics
Management
Access Points
Bucket overview
AWS Region
US East (N. Virginia) us-east-1
Amazon Resource Name (ARN)
arn:aws:s3:::bucketvee5d9
Creation date
February 18, 2026, 23:47:13 (UTC+05:30)
Bucket Versioning
Edit
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Enabled
Multi-factor authentication (MFA) delete
Disabled

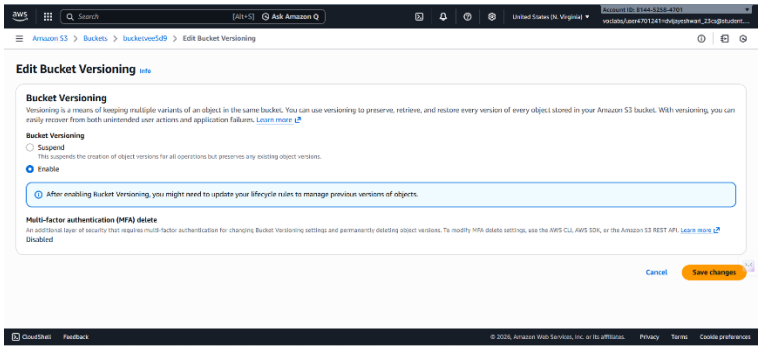
Edit Bucket Versioning
Bucket Versioning
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Suspend
This suspends the creation of object versions for all operations but preserves any existing object versions.
Enable
After enabling Bucket Versioning, you might need to update your lifecycle rules to manage previous versions of objects.
Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. Learn more
Disabled
Cancel
Save changes

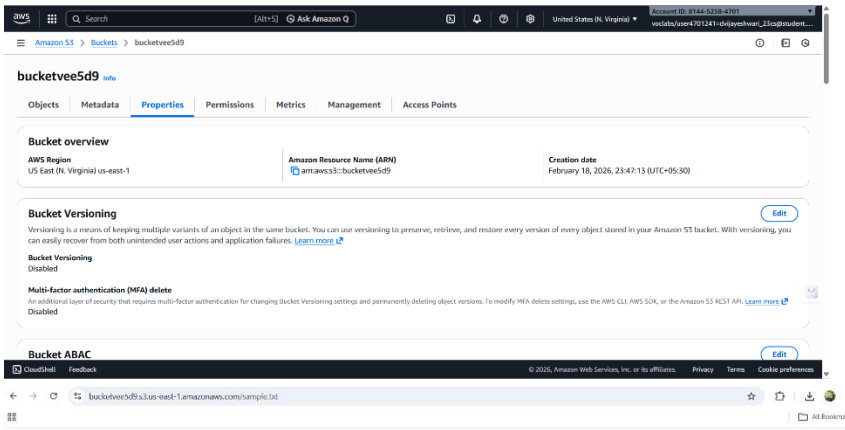
bucketvee5d9
Objects
Metadata
Properties
Permissions
Metrics
Management
Access Points
Bucket overview
AWS Region
US East (N. Virginia) us-east-1
Amazon Resource Name (ARN)
arn:aws:s3:::bucketvee5d9
Creation date
February 18, 2026, 23:47:13 (UTC+05:30)
Bucket Versioning
Edit
Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. Learn more
Bucket Versioning
Disabled
Multi-factor authentication (MFA) delete
An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. Learn more
Disabled
Bucket ABAC
Edit

bucketvee5d9.s3.us-east-1.amazonaws.com/sample.txt
This XML file does not appear to have any style information associated with it. The document tree is shown below.
<Error>
<Code>AccessDenied</Code>
<Message>Access Denied</Message>
<RequestId>6P/NM2024K1WBJ9</RequestId>
<HostId>ret19rubWFruK/L15CC4Ky/erE1Ge8cI1s8/5KA8oPSWPcyawQZgHEun1WJHoGwUFzSeaffYJ5hhxOenpVPm55eYmsdAKB3Q</HostId>
</Error>

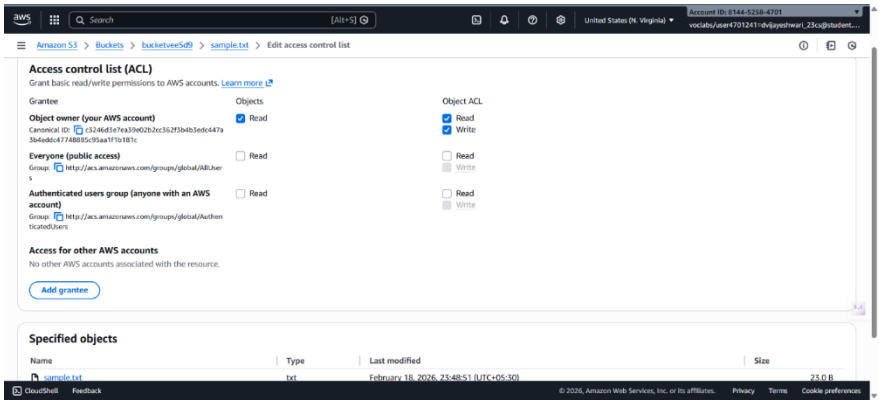



Hello from local server

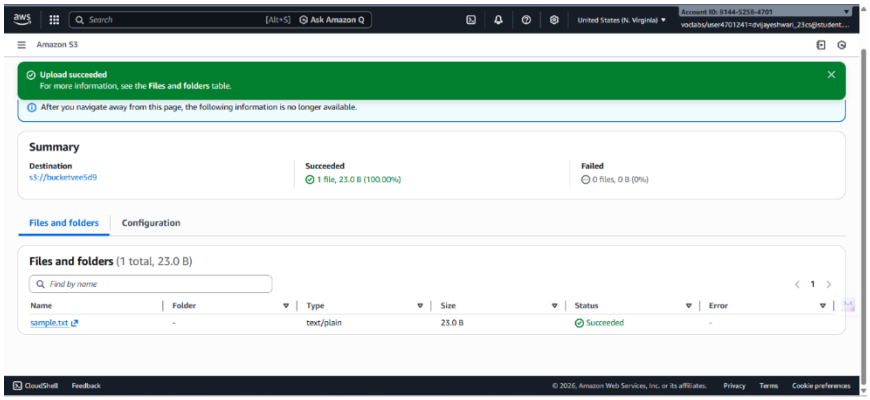

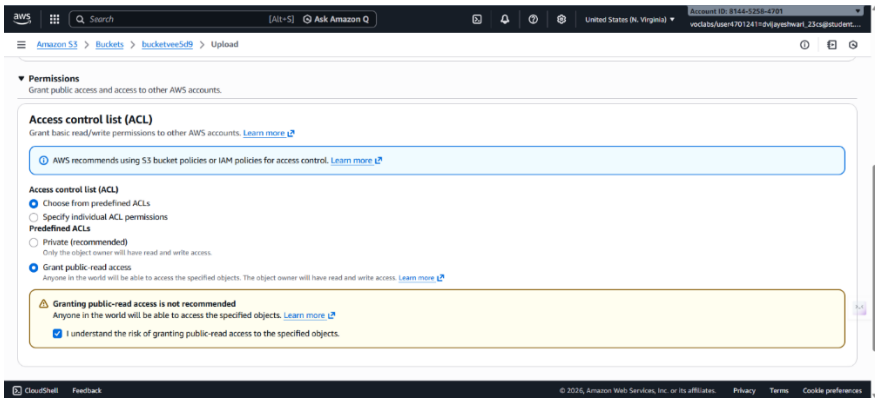

Amazon S3 > Buckets > bucketvee5d9 > Upload

Upload Info

Add the files and folders you want to upload to S3. To upload a file larger than 160GB, use the AWS CLI, AWS SDKs or Amazon S3 REST API. Learn more

Drag and drop files and folders you want to upload here, or choose **Add files** or **Add folder**.

Files and folders (1 total, 23.0 B)

All files and folders in this table will be uploaded.

Remove | Add files | Add folder

Find by name

Name	Folder	Type	Size
sample.txt	-	text/plain	23.0 B

Destination Info

Destination
s3://bucketvee5d9

▸ **Destination details**
Bucket settings that impact new objects stored in the specified destination.

Amazon S3 > Buckets

Successfully created bucket "bucketvee5d9"
To upload files and folders, or to configure additional bucket settings, choose **View details**.

View details

General purpose buckets | All AWS Regions | Directory buckets

General purpose buckets (2) Info

Buckets are containers for data stored in S3.

Copy ARN | Empty | Delete | Create bucket

Find buckets by name

Name	AWS Region	Creation date
bucketvee5d9	US East (N. Virginia) us-east-1	February 18, 2026, 23:47:13 (UTC+05:30)
veeebucket	US East (N. Virginia) us-east-1	February 18, 2026, 13:12:42 (UTC+05:30)

Account snapshot Info

View dashboard

Updated daily

Storage Lens provides visibility into storage usage and activity trends.

External access summary Info

Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Amazon S3 > Buckets > Create bucket

Default encryption Info

Server-side encryption is automatically applied to new objects stored in this bucket.

Encryption type Info

Secure your objects with two separate layers of encryption. For details on pricing, see **DSSE-KMS pricing** on the **Storage** tab of the Amazon S3 pricing page.

- (●) Server-side encryption with Amazon S3 managed keys (SSE-S3)
- ( ) Server-side encryption with AWS Key Management Service keys (SSE-KMS)
- ( ) Dual-layer server-side encryption with AWS Key Management Service keys (DSSE-KMS)

Bucket Key

Using an S3 Bucket Key for SSE-KMS reduces encryption costs by lowering calls to AWS KMS. S3 Bucket Keys aren't supported for DSSE-KMS. Learn more

- ( ) Disable
- (●) Enable

▸ **Advanced settings**

After creating the bucket, you can upload files and folders to the bucket, and configure additional bucket settings.

Cancel | Create bucket

Amazon S3 > Buckets > Create bucket

If you want to enforce object ownership for new objects only, your bucket policy must specify that the bucket-owner-full-control canned ACL is required for object uploads. Learn more

Block Public Access settings for this bucket

Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. Learn more

- [ ] **Block *all* public access**
  Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
  - [ ] **Block public access to buckets and objects granted through *new* access control lists (ACLs)**
    S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
  - [ ] **Block public access to buckets and objects granted through *any* access control lists (ACLs)**
    S3 will ignore all ACLs that grant public access to buckets and objects.
  - [ ] **Block public access to buckets and objects granted through *new* public bucket or access point policies**
    S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
  - [ ] **Block public and cross-account access to buckets and objects through *any* public bucket or access point policies**
    S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

⚠ **Turning off block all public access might result in this bucket and the objects within becoming public**
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.

[x] I acknowledge that the current settings might result in this bucket and the objects within becoming public.

© 2026, Amazon Web Services, Inc. or its affiliates. Privacy Terms Cookie preferences

Successfully deleted bucket "bucketvee5d9"

General purpose buckets | Directory buckets

General purpose buckets (1) Info

Buckets are containers for data stored in S3.

Name	AWS Region	Creation date
veeebucket	US East (N. Virginia) us-east-1	February 18, 2026, 13:12:42 (UTC+05:30)

Account snapshot Info — Updated daily

Storage Lens provides visibility into storage usage and activity trends.

External access summary Info — Updated daily

External access findings help you identify bucket permissions that allow public access or access from other AWS accounts.

Amazon S3 > Buckets > bucketvee5d9 > Delete bucket

Delete bucket Info

- Deleting a bucket cannot be undone.
- Bucket names are unique. If you delete a bucket, another AWS user can use the name.
- If this bucket is used with a Multi-Region Access Point in an external account, initiate failover before deleting the bucket.
- If this bucket is used with an access point in an external account, the requests made through those access points will fail after you delete this bucket.

Learn more

Delete bucket "bucketvee5d9"?

To confirm deletion, enter the name of the bucket in the text input field.

bucketvee5d9

Cancel | Delete bucket

Amazon S3 > Buckets > bucketvee5d9

bucketvee5d9 Info

Objects | Metadata | Properties | Permissions | Metrics | Management | Access Points

Objects (1)

Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 Inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more

Name	Type	Version ID	Last modified	Size	Storage class
sample.txt	txt	null	Febuary 18, 2026, 23:48:51 (UTC+05:30)	23.0 B	Standard

Amazon S3 > Buckets > bucketvee5d9 > Delete objects

- If a folder is selected for deletion, all objects in the folder will be deleted, and any new objects added while the delete action is in progress might also be deleted. If an object is selected for deletion, any new objects with the same name that are uploaded before the delete action is completed will also be deleted.
- Deleting the specified objects can't be undone.

Learn more

Specified objects

Name	Version ID	Type	Last modified	Size
sample.txt	_iFiXp.P_oGFMBQAGa.U1syfhwbszuH9G	txt	February 18, 2026, 23:57:00 (UTC+05:30)	45.0 B

Permanently delete objects?

To confirm deletion, type *permanently delete* in the text input field.

permanently delete

Cancel | Delete objects

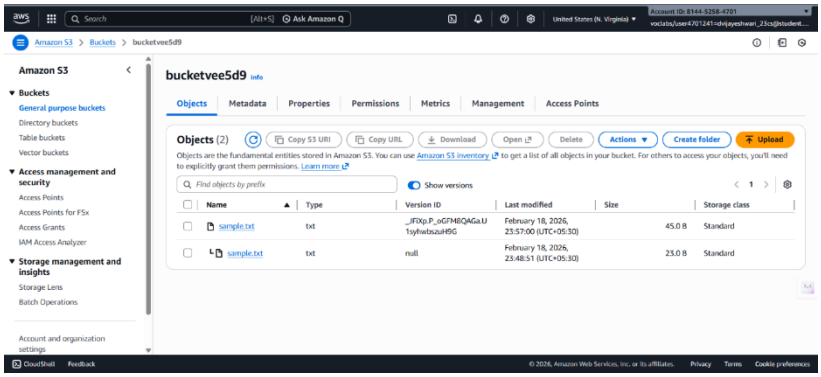
Amazon S3 > Buckets > bucketvee5d9
Amazon S3
Buckets
General purpose buckets
Directory buckets
Table buckets
Vector buckets
Access management and security
Access Points
Access Points for FSx
Access Grants
IAM Access Analyzer
Storage management and insights
Storage Lens
Batch Operations
Account and organization settings
bucketvee5d9 Info
Objects
Metadata
Properties
Permissions
Metrics
Management
Access Points
Objects (2)
Copy S3 URI
Copy URL
Download
Open
Delete
Actions
Create folder
Upload
Objects are the fundamental entities stored in Amazon S3. You can use Amazon S3 inventory to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. Learn more
Find objects by prefix
Show versions
Name
Type
Version ID
Last modified
Size
Storage class
sample.txt
txt
_jFIXp.P_oGFM8QAGa.U1sylwbszuH9G
February 18, 2026, 23:57:00 (UTC+05:30)
45.0 B
Standard
sample.txt
txt
null
February 18, 2026, 23:48:51 (UTC+05:30)
23.0 B
Standard
CloudShell
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences

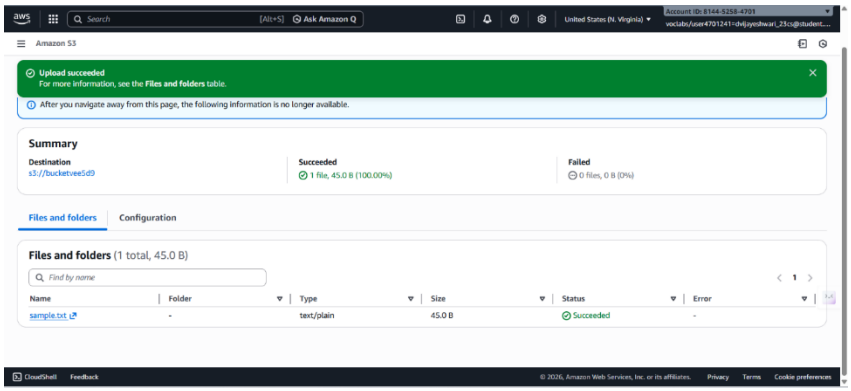
Amazon S3
Upload succeeded
For more information, see the Files and folders table.
After you navigate away from this page, the following information is no longer available.
Summary
Destination
s3://bucketvee5d9
Succeeded
1 file, 45.0 B (100.00%)
Failed
0 files, 0 B (0%)
Files and folders
Configuration
Files and folders (1 total, 45.0 B)
Find by name
Name
Folder
Type
Size
Status
Error
sample.txt
-
text/plain
45.0 B
Succeeded
-
CloudShell
Feedback
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences