

Cucumber Report

31 Jan, 2024 10:04:41 PM

Start : Jan 31, 10:04:39.858 PM

End : Jan 31, 10:04:39.908 PM

Duration : 0.050 s

Features




Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 0
SKIPPED - 3

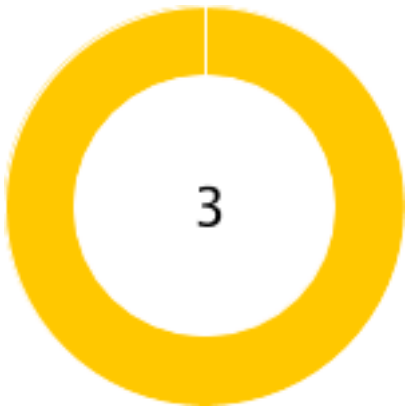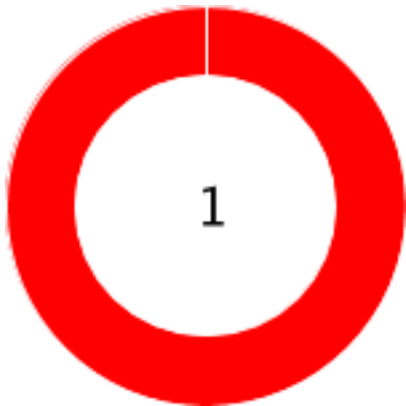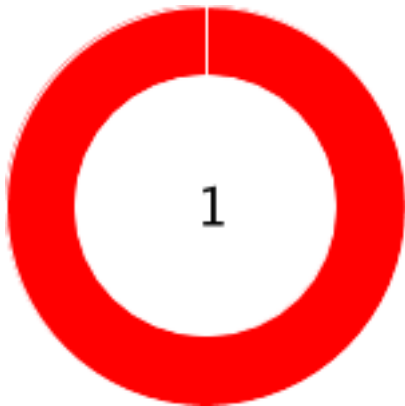


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>contact app</u>	0.050 s	1	0	1	0	3	0	0	3

<i>Tag</i>	<i>Scenario</i>				<i>Feature</i>			
<i>Name</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@smoke	1	0	1	0	1	0	1	0

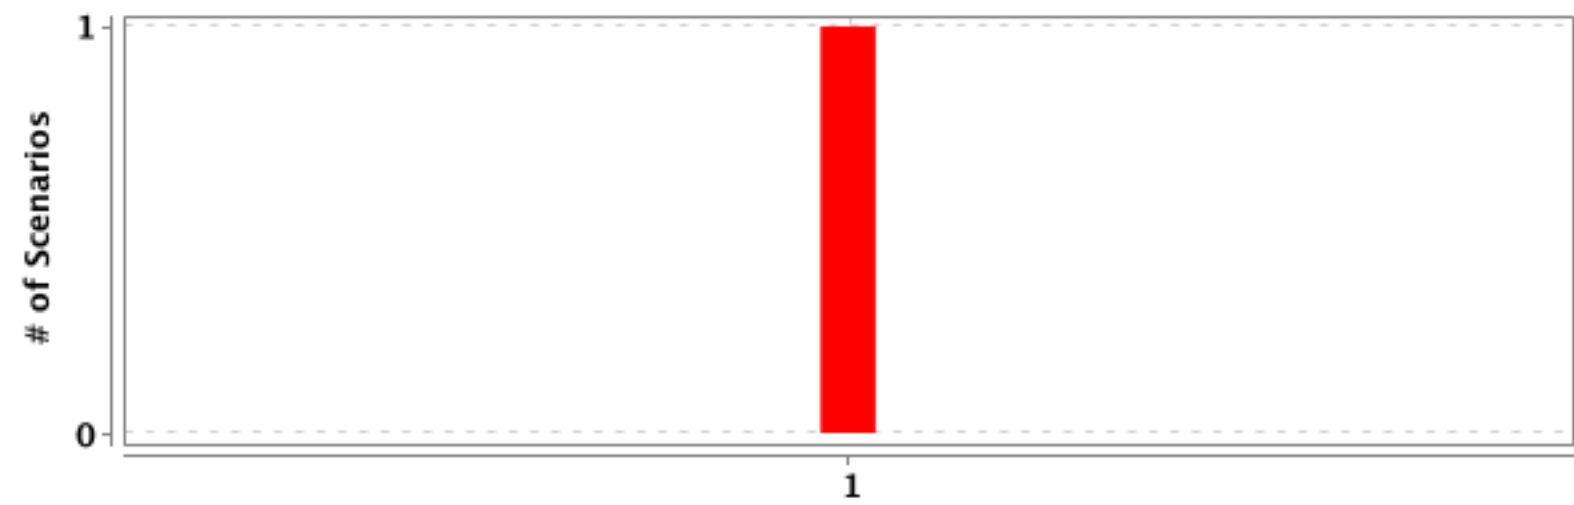

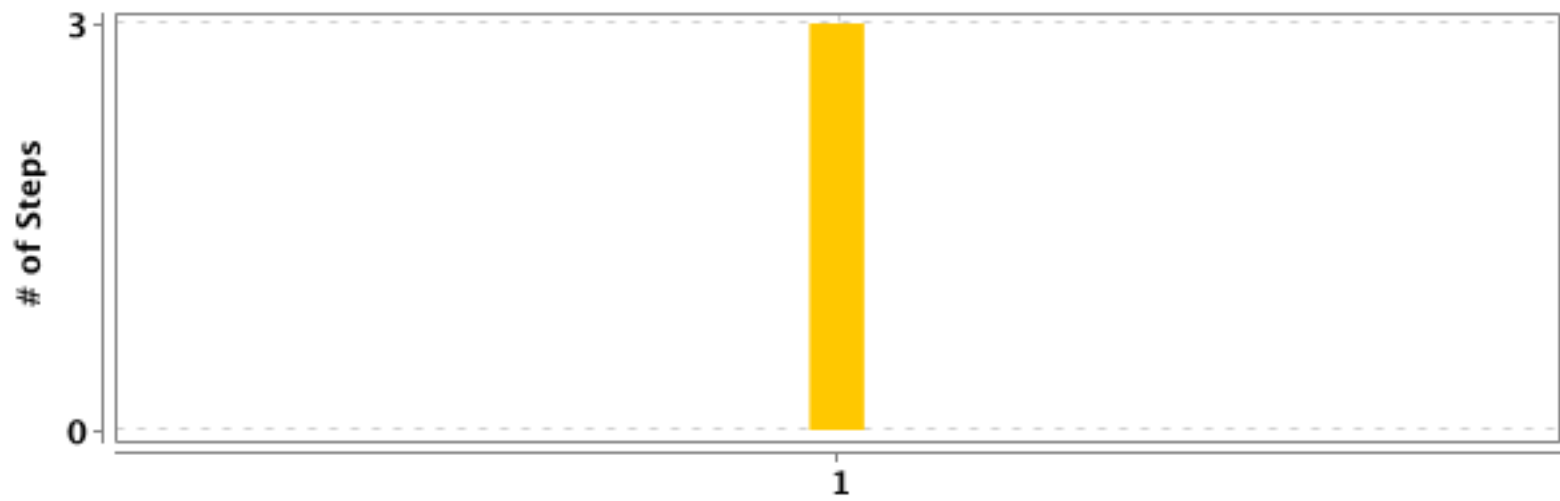

#	Feature Name	T	P	F	S	Duration
1	<u>contact app</u>	1	0	1	0	0.050 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>contact app</u>	<u>Save the contact</u>	3	0	0	3	0.043 s

contact app

FAILED	DURATION - 0.050 s	Scenarios		Steps	
/ 10:04:39.858 PM // 10:04:39.908 PM /		Total - 1		Total - 3	
		Pass - 0		Pass - 0	
		Fail - 1		Fail - 0	
		Skip - 0		Skip - 3	

Save the contact
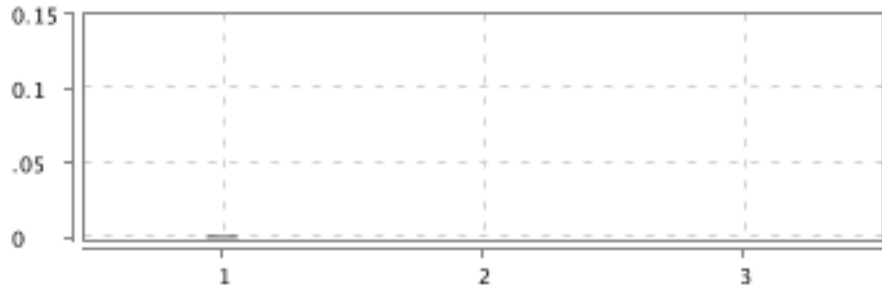
<div>FAILED</div>	<div>DURATION - 0.043 s</div>		Steps	
<div>/ 10:04:39.865 PM // 10:04:39.908 PM /</div>			Total - 3	
<div>contact app</div>			Pass - 0	
<div>@smoke</div>			Fail - 0	
			Skip - 3	

#	Step / Hook Details	Status	Duration
	BEFORE - com.qt.stepdefinitions.Hooks.setUp()	FAILED	0.008 s
	java.lang.NullPointerException at com.qt.stepdefinitions.Hooks.setUp(Hooks.java:55)		
1	Given I have installed the application	SKIPPED	0.001 s
2	When I have to do the operation"krushna","krushna@gmail.com","97872662626"	SKIPPED	0.000 s
3	Then I have to see the result	SKIPPED	0.000 s
	AFTER - com.qt.stepdefinitions.Hooks.tearDown()	FAILED	0.013 s
	java.lang.NullPointerException at com.qt.stepdefinitions.Hooks.tearDown(Hooks.java:182)		