


veer-pm-system: system map

2026-07-15


Legend: main session subagent (cheaper model) external service repo file gate dashed = conditional

1. Every session: the lifecycle

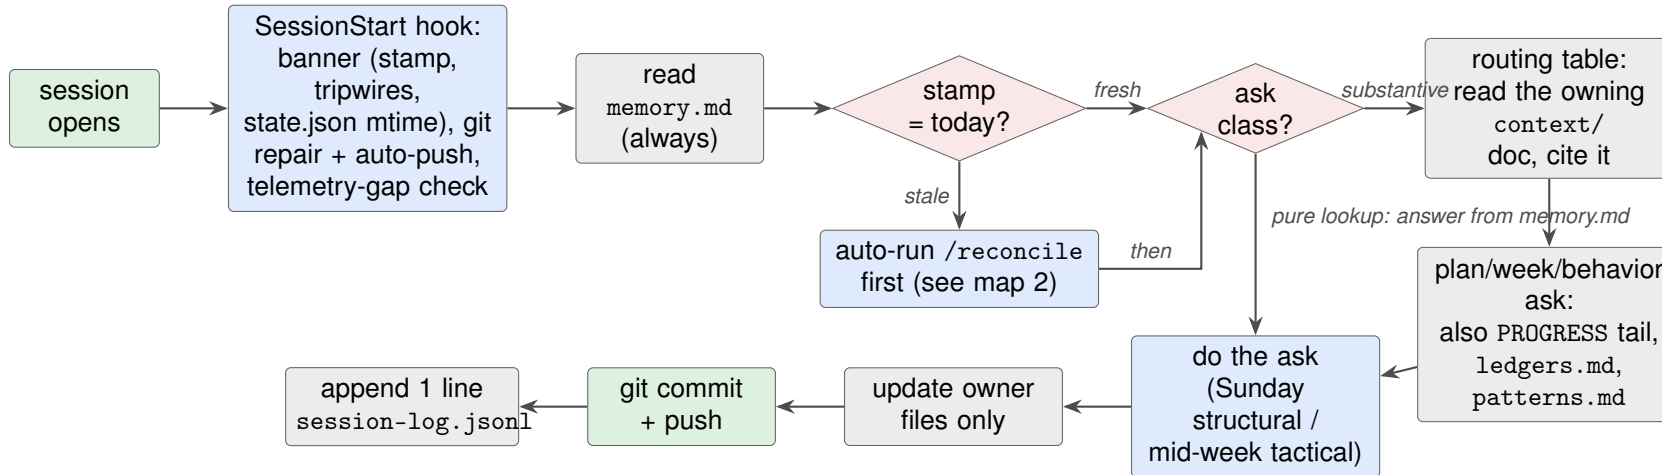



The only fixed context cost every session pays is the hook banner plus `memory.md` (~100 lines). Everything else is gated by the ask.

2. /reconcile: the one workflow that spawns subagents

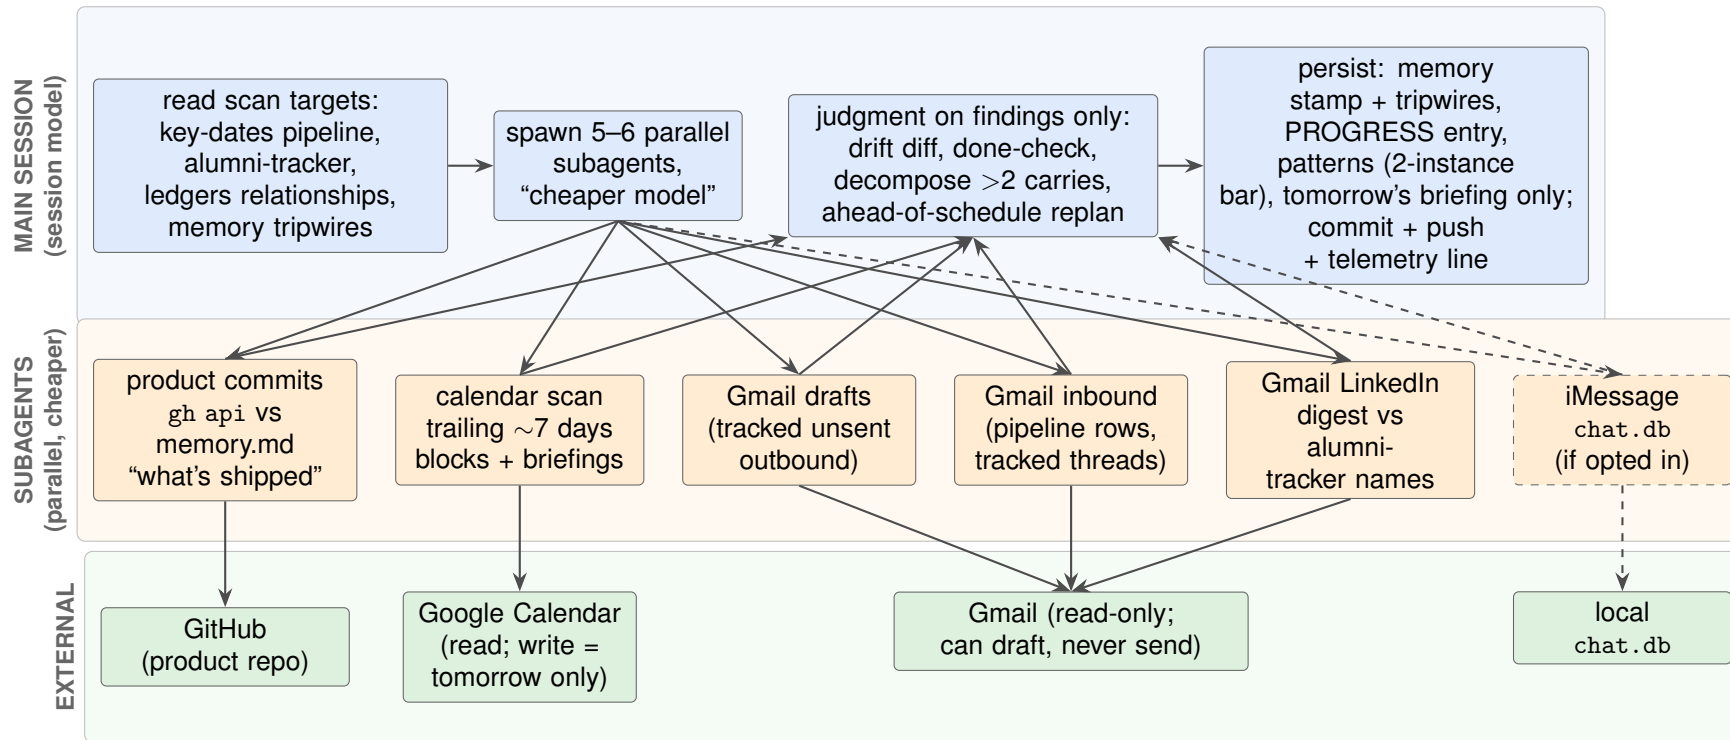

Scans are noisy; only findings return to the main lane, which does judgment and persistence, never raw digests. No other command spawns subagents directly; /initialize and /sunday inherit this fan-out by nesting /reconcile. No model is pinned anywhere; "cheaper model" is the only instruction (audit item Q1).

3. Command nesting and deferred protocol docs

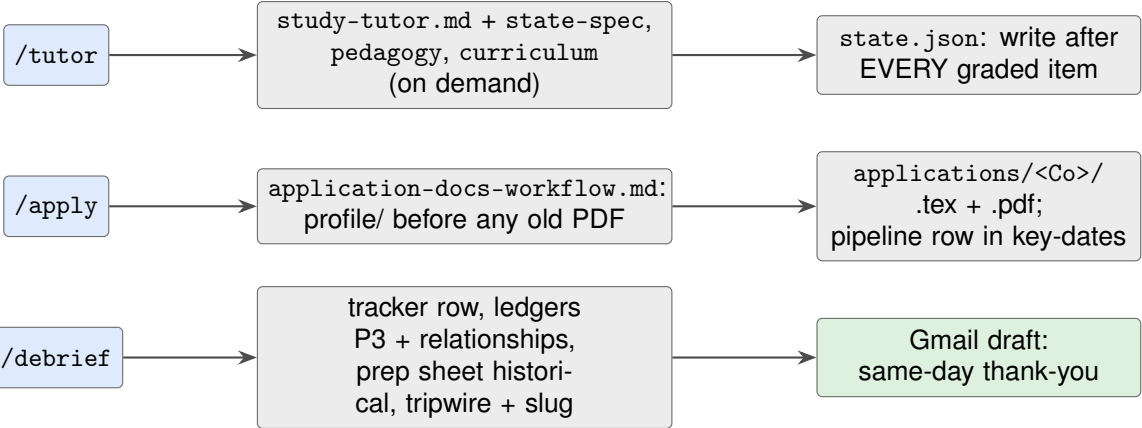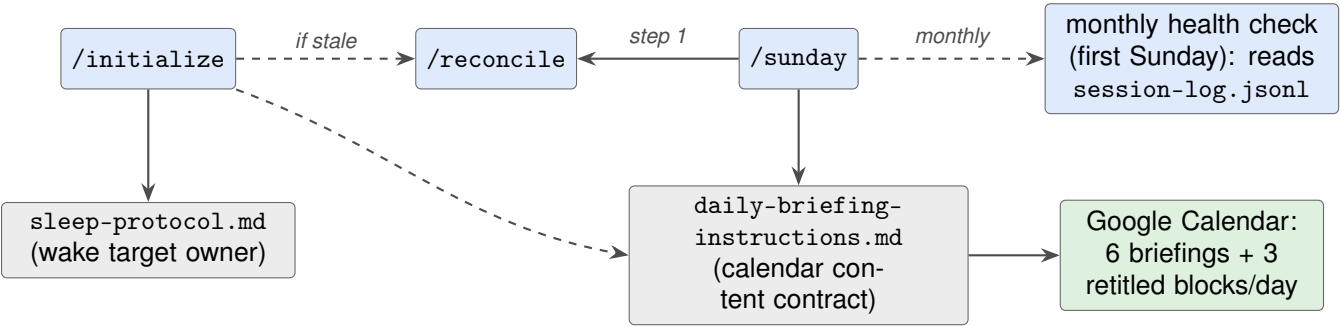

4. What the usage record shows (telemetry Jul 3–15, git Jun 9–Jul 15)

Workflow	Logged uses	Subagents observed	Note
/reconcile	5	yes (3 of 5, post Jul-8 upgrade)	near-daily in W28, then 4 dark days
system (audit/upgrade)	2	varies	Jul 3 migration, Jul 8 upgrade
/sunday	1	via nested reconcile	Jul 12 Sunday MISSED (1 of 2 hit)
/debrief	1	none	Anicito, loop closed latency 0
quick / ad-hoc	1	none	a backfilled reconstruction line
/tutor	0 logged	none	4 sessions exist in state.json, pre-telemetry
/apply	0 logged	none	15 application folders predate telemetry
/initialize	0 (not in schema enum)	—	schema gap, audit item Q3

Cadence: 10 sessions over 13 days, 5 days dark (38%); 187 commits in 37 days, batch-committed at session end. Highest-yield drift sensor in practice: Veer's own screenshots (3 of the last 4 reconciles), covering exactly the channels the scans cannot read (iMessage, WhatsApp). Full findings and the ranked improvement list: <specs/2026-07-15-system-audit.md>.