


ABC Technologies – Footprinting Practical

Sample screenshots for Kali Linux practical work

Important: These are demonstration/sample screenshots generated using example.com. They are not actual evidence collected from ABC Technologies. For a real submission, replace them with screenshots captured from your authorized target.

1. Domain Registration – RDAP

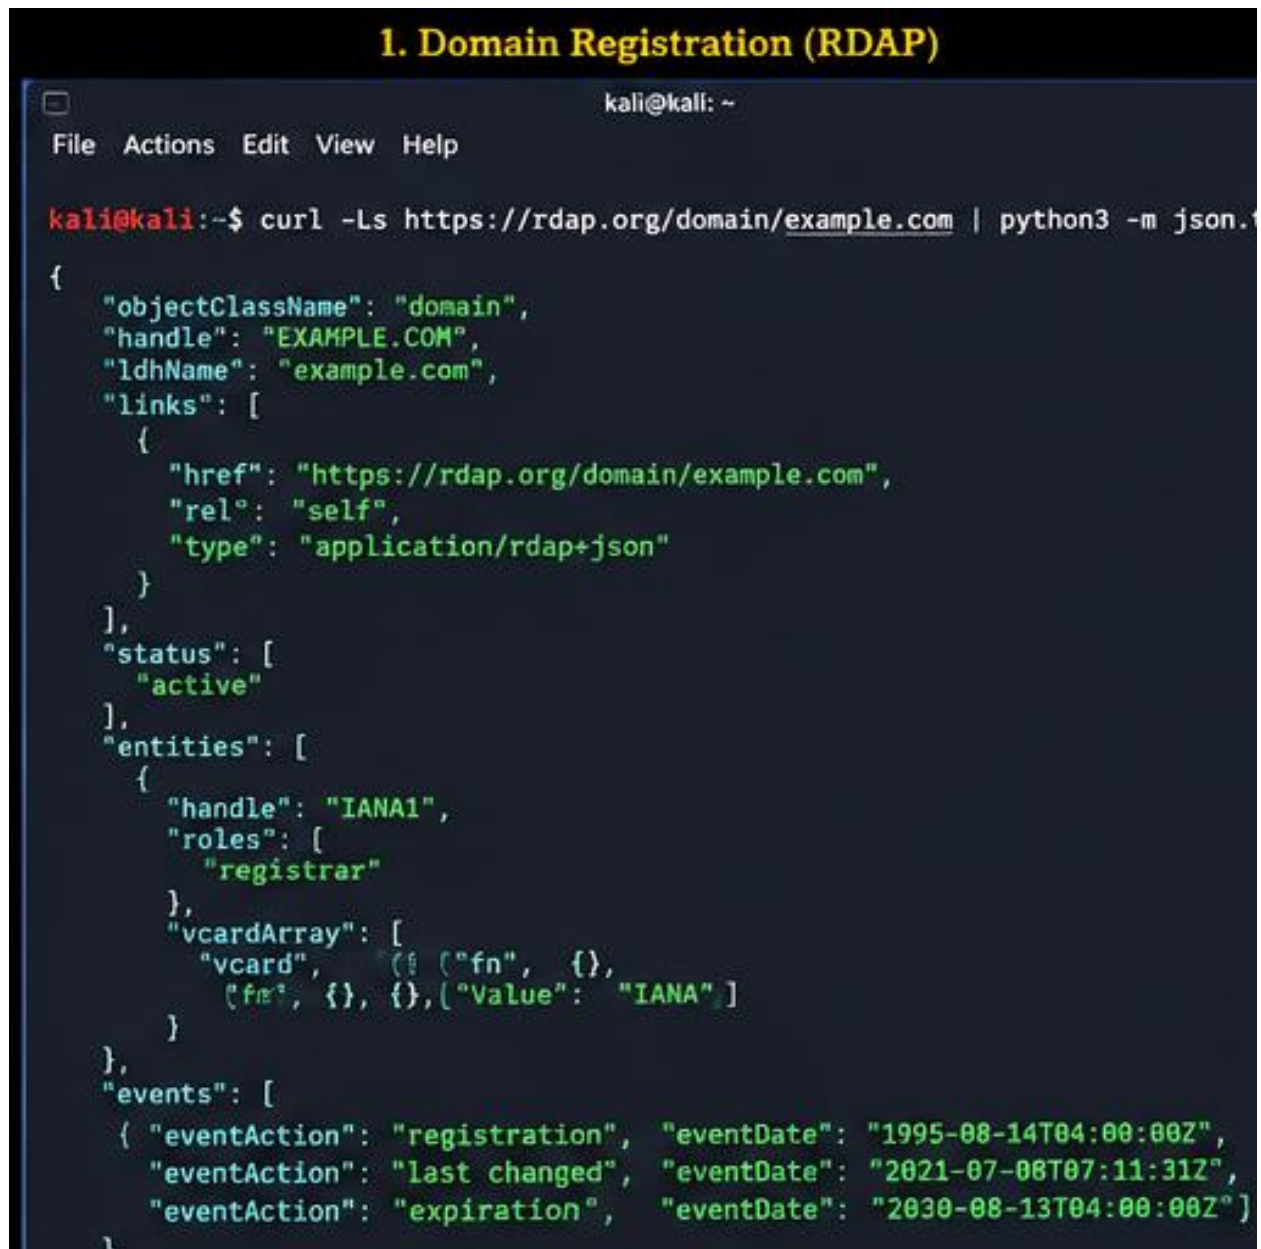

The screenshot shows a terminal window titled "1. Domain Registration (RDAP)" with a menu bar (File, Actions, Edit, View, Help) and a prompt "kali@kali: ~". The command executed is `curl -Ls https://rdap.org/domain/example.com | python3 -m json.tool`. The output is a JSON object representing the RDAP response for example.com.

```
{
  "objectClassName": "domain",
  "handle": "EXAMPLE.COM",
  "ldhName": "example.com",
  "links": [
    {
      "href": "https://rdap.org/domain/example.com",
      "rel": "self",
      "type": "application/rdap+json"
    }
  ],
  "status": [
    "active"
  ],
  "entities": [
    {
      "handle": "IANA1",
      "roles": [
        "registrar"
      ],
      "vcardArray": [
        {
          "vcard": {
            "fn": {},
            "fn": {},
            "Value": "IANA"
          }
        }
      ],
      "events": [
        {
          "eventAction": "registration",
          "eventDate": "1995-08-14T04:00:00Z",
          "eventAction": "last changed",
          "eventDate": "2021-07-08T07:11:31Z",
          "eventAction": "expiration",
          "eventDate": "2030-08-13T04:00:00Z"
        }
      ]
    }
  ]
}
```

2. Employee Email Addresses – theHarvester


```
2. Employee Emails (theHarvester)

kali@kali: ~
File Actions Edit View Help
kali@kali:~$ theHarvester -d example.com -b crtsh,duckduckgo

theHarvester v4.6.0
| Coded by Christian Martorella
| Edge-Security Research

[*] Target: example.com
[*] Searching in crtsh.
[*] Searching in duckduckgo.
=====
[*] Emails found: 8
abuse@example.com
admin@example.com
hostmaster@example.com
info@example.com
it-support@example.com
john.doe@example.com
sales@example.com
support@example.com
```

3. Public Subdomains – Subfinder

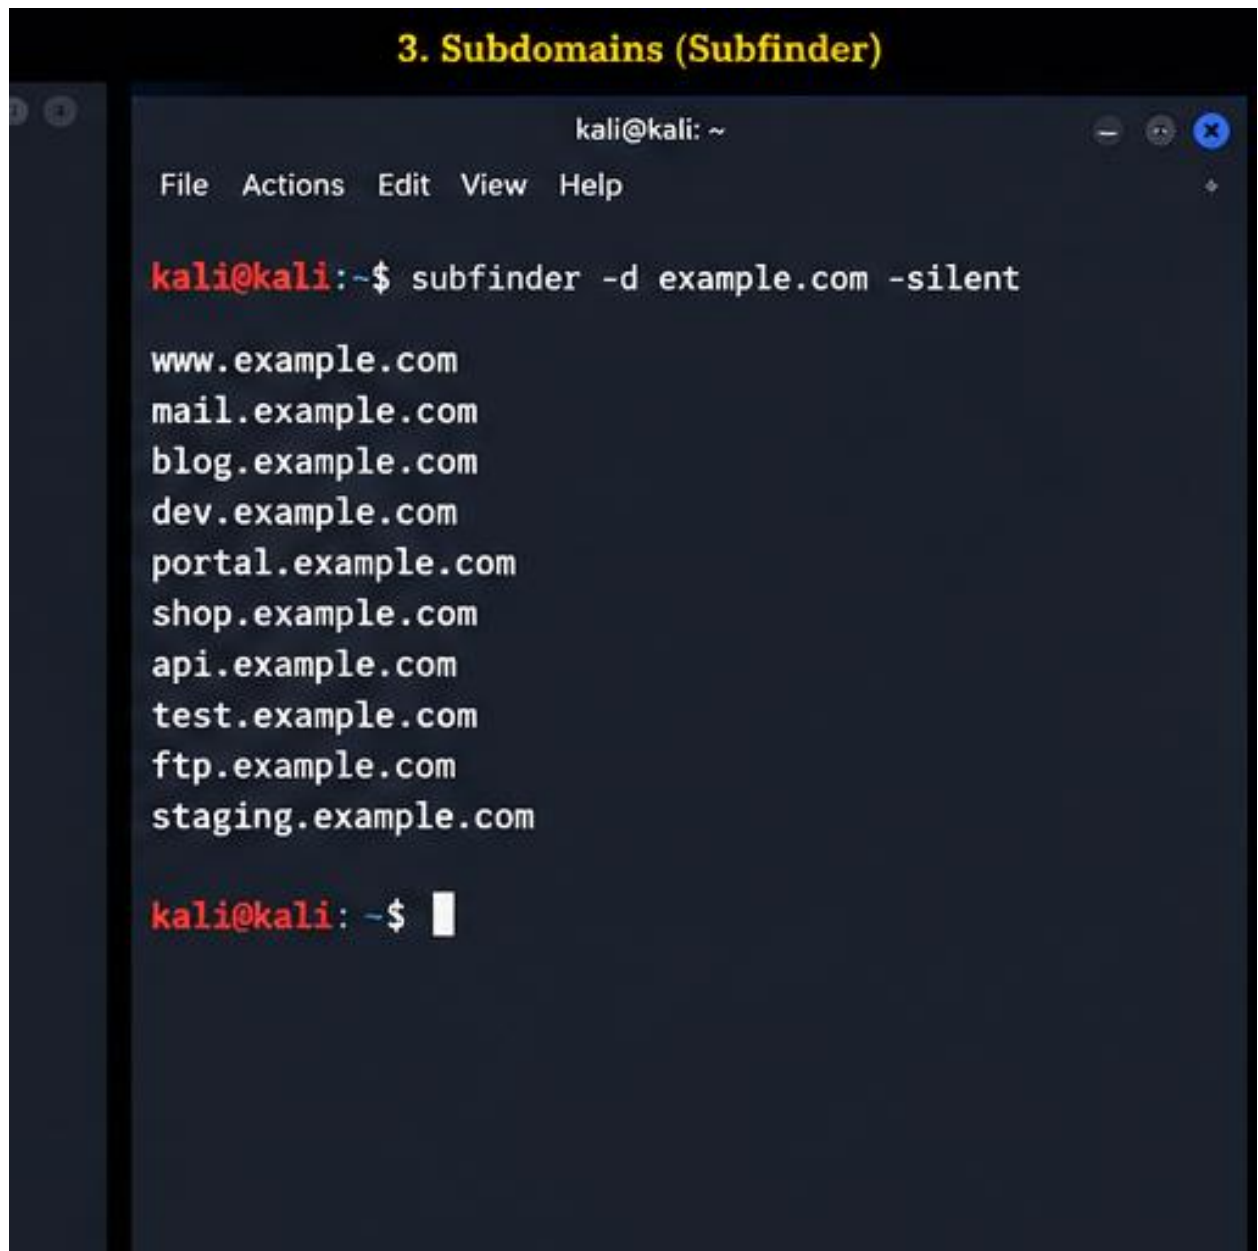

The screenshot shows a Kali Linux terminal window titled "3. Subdomains (Subfinder)". The terminal has a menu bar with "File", "Actions", "Edit", "View", and "Help". The user is at the prompt "kali@kali: ~". They have entered the command "subfinder -d example.com -silent". The output lists ten subdomains: "www.example.com", "mail.example.com", "blog.example.com", "dev.example.com", "portal.example.com", "shop.example.com", "api.example.com", "test.example.com", "ftp.example.com", and "staging.example.com". The prompt "kali@kali: ~\$" is shown again at the bottom with a cursor.

```
kali@kali: ~  
File Actions Edit View Help  
  
kali@kali:~$ subfinder -d example.com -silent  
  
www.example.com  
mail.example.com  
blog.example.com  
dev.example.com  
portal.example.com  
shop.example.com  
api.example.com  
test.example.com  
ftp.example.com  
staging.example.com  
  
kali@kali: ~$
```

4. Technology Stack – Wappalyzer

```
    "nameservers": [ "A.IANA-SERVERS.NET",  
    "A.IANA-SERVERS.NET" ]  
  }  
}
```

4. Technology Stack (Wappalyzer)

Example Domain

This domain is for use in documentation examples without needing permission.

[More information...](#)

Wappalyzer

Web servers

-  [Apache](#) 2.4.62

Programming languages

-  [PHP](#) 7.4.33

Databases

-  [MySQL](#)

Miscellaneous

-  [OpenSSL](#) 1.1.1k

CDN

-  [Cloudflare](#)

5. DNS Servers – dig NS

```
kali@kali: ~$
```

5. DNS Servers (dig NS)

```
kali@kali: ~$ dig NS example.com
```

```
; <<>> DiG 9.18.28-1-kali1-Debian <<>> NS example.com
;; global options: +cmd
;; Got answer:
;; ->>HEADER<<- opcode: QUERY, status: NOERROR, id: 53020
;; flags: qr rd ra; QUERY: 1, ANSWER: 2, AUTHORITY: 0, ADDITIONAL:
1
;; OPT PSEUDOSECTION:
; EDNS: version: 0, flags:; udp: 1232
;; QUESTION SECTION:
;example.com.          IN      NS

;; ANSWER SECTION:
example.com.          3600    IN      NS      ns1.iana-servers.net.
example.com.          3600    IN      NS      ns2.iana-servers.net.

;; Query time: 24 msec
;; SERVER: 192.168.1.1#53 (192.168.1.1) (UDP)
;; WHEN: Fri May 24 10:15:42 IST 2024
;; MSG SIZE rcvd: 90

kali@kali: ~$
```


6. DNS Zone Transfer – dig AXFR

6. Zone Transfer (dig AXFR)

```
kali@kali: ~  
File Actions Edit View Help  
  
kali@kali:~$ dig AXFR example.com @ns1.iana-servers.net  
  
; <<>> DiG 9.18.28-1-kali1-Debian <<>> AXFR example.com @ns1.  
iana-servers.net  
;; global options: +cmd  
; Transfer failed.  
  
kali@kali: ~$ █
```

Note: If zone transfer is allowed, DNS records of the domain will be listed here, including hosts, mail servers, subdomains, etc.