


WSLC-499 ETHICAL HACKING BOOTCAMP (COHORT-17)

NAME-> Veer Pratap Singh Rathore

DATE->30/03/26

TASK 1: Identify Machines

(a) Linux terminal

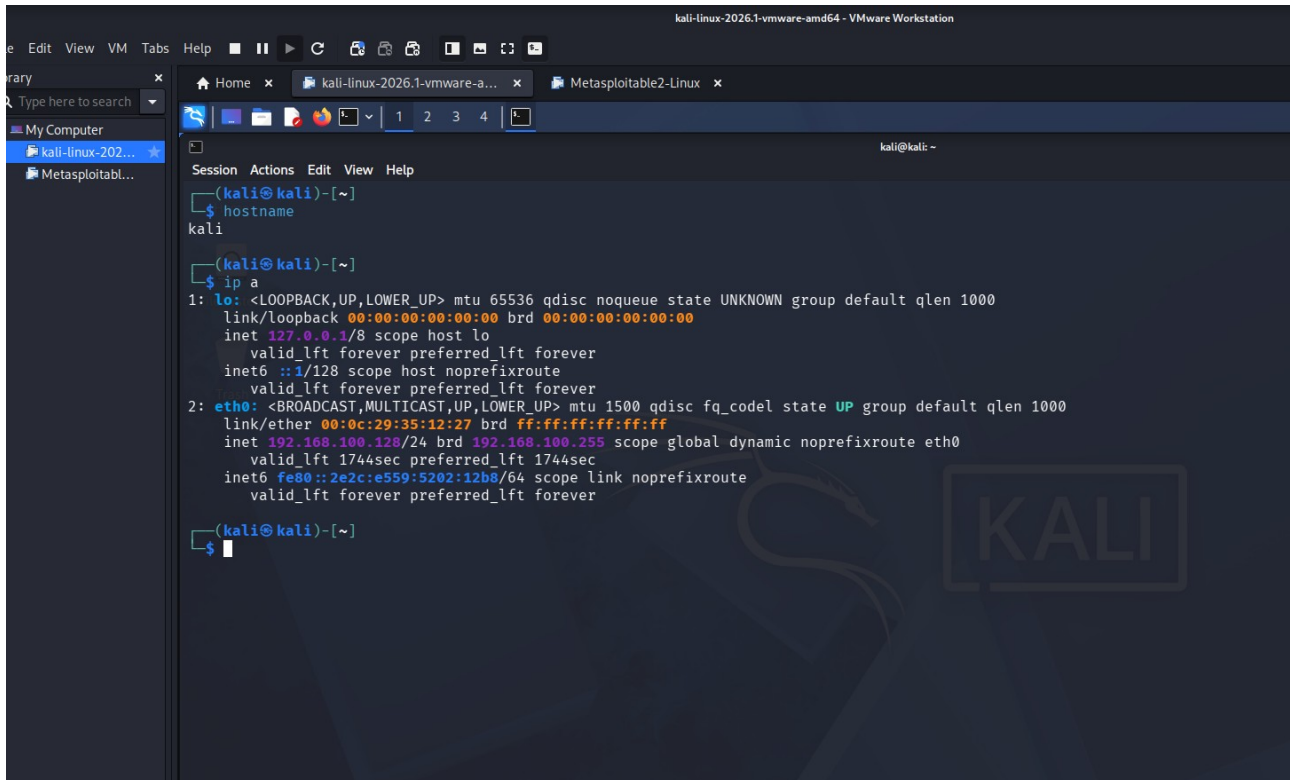A screenshot of a Kali Linux terminal window. The terminal shows the command 'ip a' being executed, which displays network interface details for 'lo' and 'eth0'. The 'lo' interface has IP 127.0.0.1. The 'eth0' interface has IP 192.168.100.128. The terminal window is titled 'kali-linux-2026.1-vmware-amd64 - VMware Workstation'.

```
kali@kali:~$ ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: eth0: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:35:12:27 brd ff:ff:ff:ff:ff:ff
    inet 192.168.100.128/24 brd 192.168.100.255 scope global dynamic noprefixroute eth0
        valid_lft 1744sec preferred_lft 1744sec
    inet6 fe80::2e2c:e559:5202:12b8/64 scope link noprefixroute
        valid_lft forever preferred_lft forever
```

Hostname: Kali

Ip address: 192.168.100.128

- The hostname is Kali and Ip address is 192.168.100.128 . This indicates that the Kali machine is properly connected to the configured virtual network.

WSLC-499 ETHICAL HACKING BOOTCAMP (COHORT-17)

NAME-> Veer Pratap Singh Rathore

DATE->30/03/26

(b) Metasploitable

```
http://help.ubuntu.com/
No mail.
msfadmin@metasploitable:~$ hostname
metasploitable
msfadmin@metasploitable:~$ ifconfig
eth0      Link encap:Ethernet  HWaddr 00:0c:29:80:46:f0
          inet addr:192.168.100.129  Bcast:192.168.100.255  Mask:255.255.255.0
          inet6 addr: fe80::20c:29ff:fe80:46f0/64 Scope:Link
          UP BROADCAST RUNNING MULTICAST  MTU:1500  Metric:1
          RX packets:32 errors:0 dropped:0 overruns:0 frame:0
          TX packets:59 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:1000
          RX bytes:3546 (3.4 KB)  TX bytes:6362 (6.2 KB)
          Interrupt:17 Base address:0x2000

lo        Link encap:Local Loopback
          inet addr:127.0.0.1  Mask:255.0.0.0
          inet6 addr: ::1/128 Scope:Host
          UP LOOPBACK RUNNING  MTU:16436  Metric:1
          RX packets:91 errors:0 dropped:0 overruns:0 frame:0
          TX packets:91 errors:0 dropped:0 overruns:0 carrier:0
          collisions:0 txqueuelen:0
          RX bytes:19301 (18.8 KB)  TX bytes:19301 (18.8 KB)

msfadmin@metasploitable:~$ _
```

Hostname: metasploitable

Ifconfig: 192.168.100.129

- The hostname is metasploitable and ifconfig is 192.168.100.129 . This shows that Metasploitable is connected to the network. Both machines are connected to the same network range.


WSLC-499 ETHICAL HACKING BOOTCAMP (COHORT-17)

NAME-> Veer Pratap Singh Rathore

DATE->30/03/26

Task 2: Connectivity check

Linux terminal:

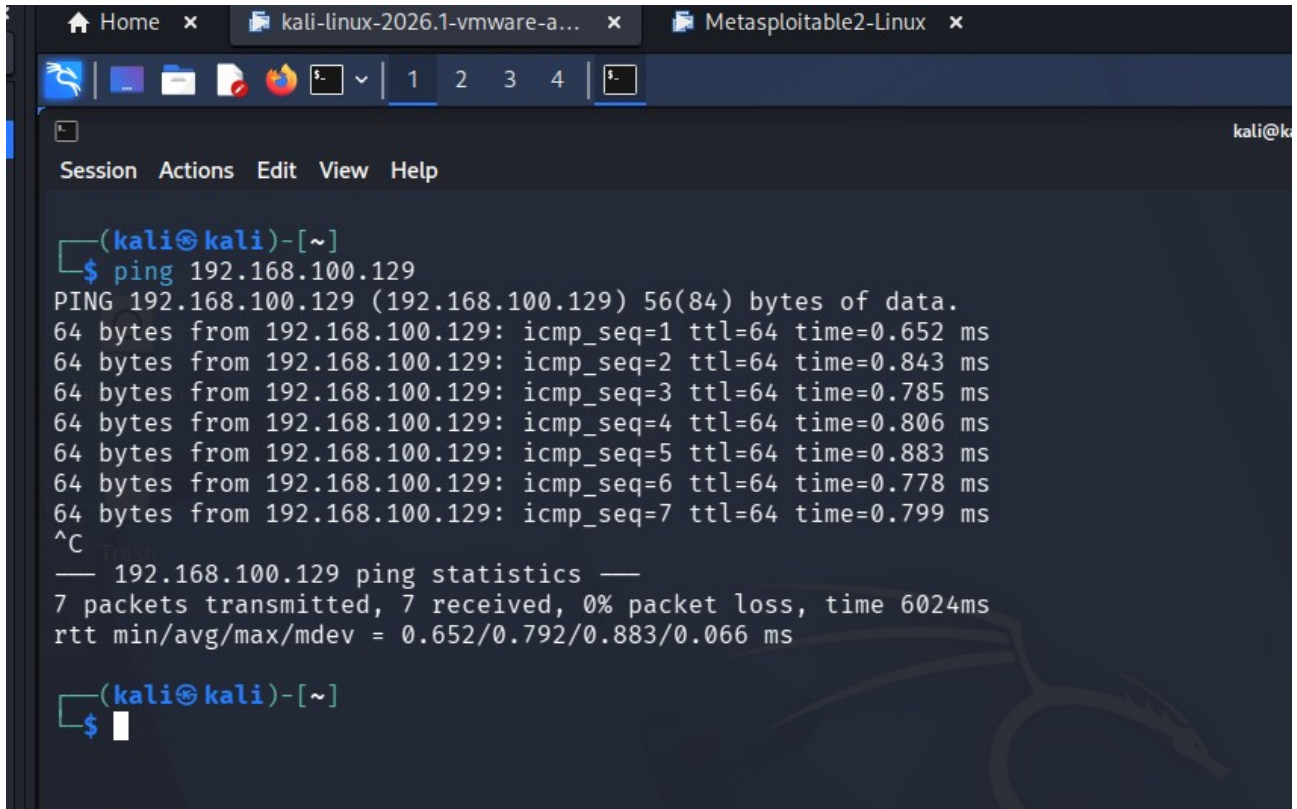A screenshot of a Linux terminal window. The window has a title bar with three tabs: 'Home', 'kali-linux-2026.1-vmware-a...', and 'Metasploitable2-Linux'. The terminal shows a user at the 'kali' prompt running a 'ping' command to the IP address '192.168.100.129'. The output shows seven successful ping requests with varying response times. After the ping command, the user presses the Ctrl-C key (indicated by '^C'), and the terminal displays the 'ping statistics' for the command, showing 7 packets transmitted, 7 received, and 0% packet loss. The terminal window also shows a menu bar with 'Session', 'Actions', 'Edit', 'View', and 'Help'.

```
(kali@kali)-[~]
$ ping 192.168.100.129
PING 192.168.100.129 (192.168.100.129) 56(84) bytes of data.
64 bytes from 192.168.100.129: icmp_seq=1 ttl=64 time=0.652 ms
64 bytes from 192.168.100.129: icmp_seq=2 ttl=64 time=0.843 ms
64 bytes from 192.168.100.129: icmp_seq=3 ttl=64 time=0.785 ms
64 bytes from 192.168.100.129: icmp_seq=4 ttl=64 time=0.806 ms
64 bytes from 192.168.100.129: icmp_seq=5 ttl=64 time=0.883 ms
64 bytes from 192.168.100.129: icmp_seq=6 ttl=64 time=0.778 ms
64 bytes from 192.168.100.129: icmp_seq=7 ttl=64 time=0.799 ms
^C
— 192.168.100.129 ping statistics —
7 packets transmitted, 7 received, 0% packet loss, time 6024ms
rtt min/avg/max/mdev = 0.652/0.792/0.883/0.066 ms
(kali@kali)-[~]
$
```

Ping result : 7 packets transmitted , 7 received, 0% packet loss

- 7 packets were sent and received with 0% packet loss . This shows the connection between machines is working properly.


WSLC-499 ETHICAL HACKING BOOTCAMP (COHORT-17)

NAME-> Veer Pratap Singh Rathore

DATE->30/03/26

Task 3: (Explore VMware network adapter settings)

(a) Kali linux

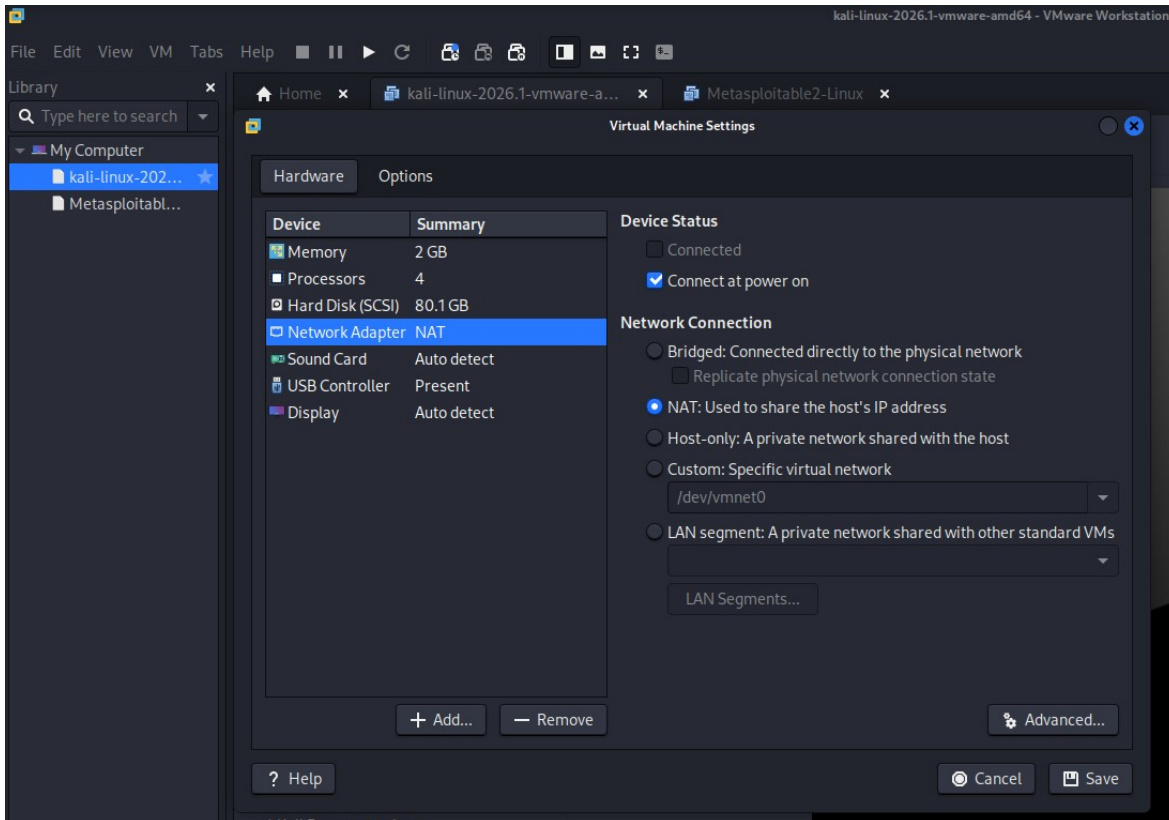

Network type: NAT



- The network type used in kali linux is NAT . This means the virtual machine is using the network connection of host system.

WSLC-499 ETHICAL HACKING BOOTCAMP (COHORT-17)

NAME-> Veer Pratap Singh Rathore

DATE->30/03/26

(b) metasploitable

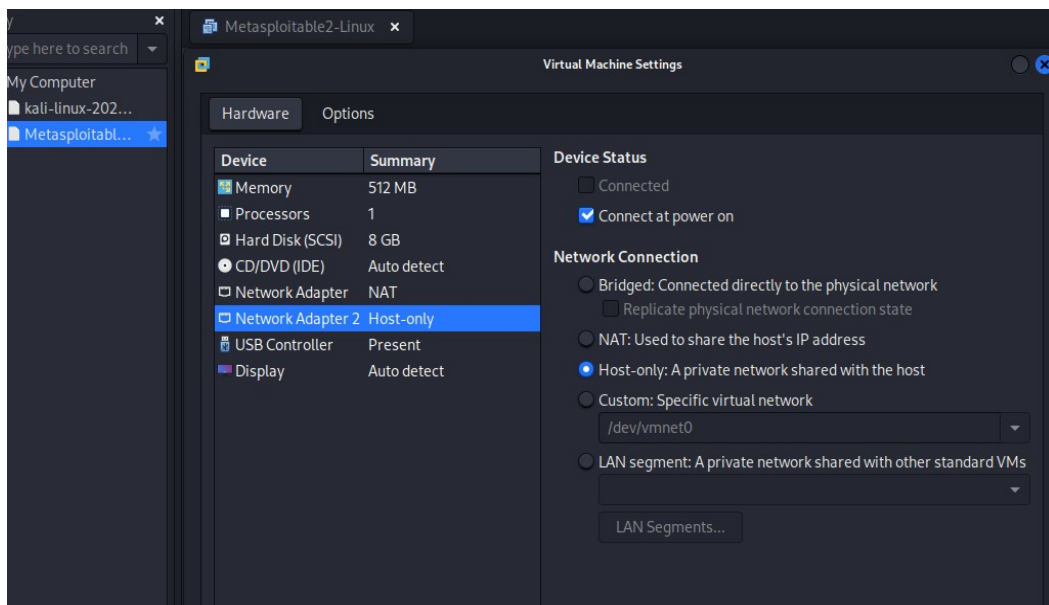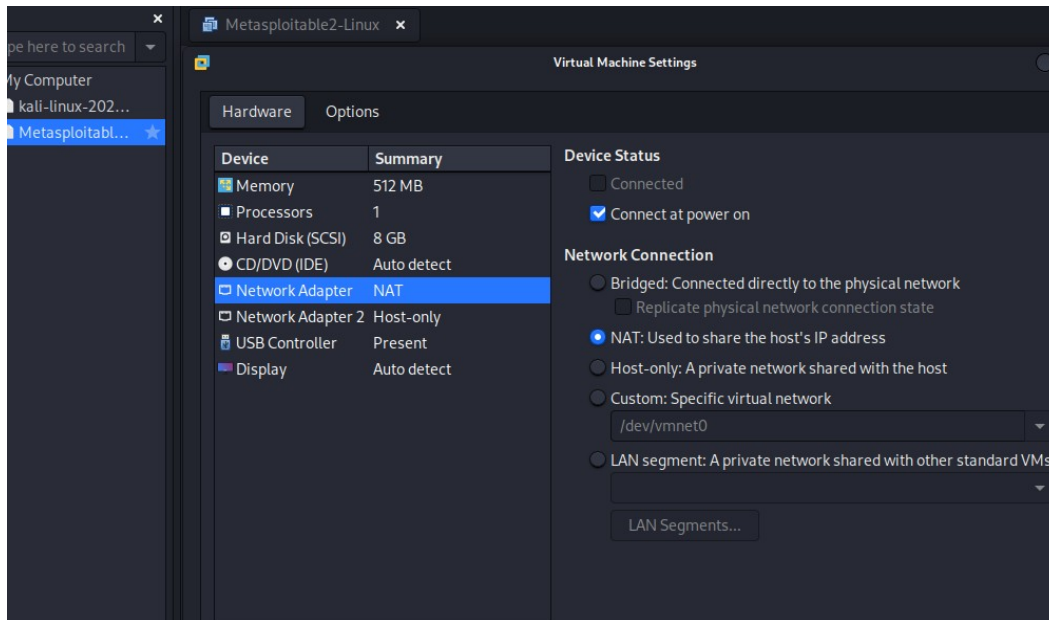

Network type: NAT and Host-only

- The network uses NAT and Host-only. NAT provides internet access and Host-only allows communication between both machines

Conclusion:

Both machines are successfully connected to the same network. The ping result confirms that lab setup is working properly.