

🔍 Search extensions

Developer mode 

Pack extension

Update

Keyboard shortcuts

Discover more extensions and themes on the [Chrome Web Store](#)

ID: afldojajiogafhpdbknfilmfikomdli
Inspect views [service worker](#) (Inactive)

Details

Remove



ID: gighmmpiobklfepjocnamgkkbiglidom
Inspect views [service worker](#)

Details

Remove



ID: chdkkkccnlfncngelccgbgfmjebmkmce
Inspect views [service worker \(Inactive\)](#)

Details

Remove



ID: bnjjngeaknajbdcgpfkgnonkmififhfo
Inspect views [service worker \(Inactive\)](#)

Details

Remove



Inspect views [service worker](#) (Inactive)

Details

Remove



Inspect views [service worker \(Inactive\)](#).

Details

Remove




ID: ojkchikaholjmcnefhjlbohackpeeknd
Inspect views [service worker](#)

Details

Remove



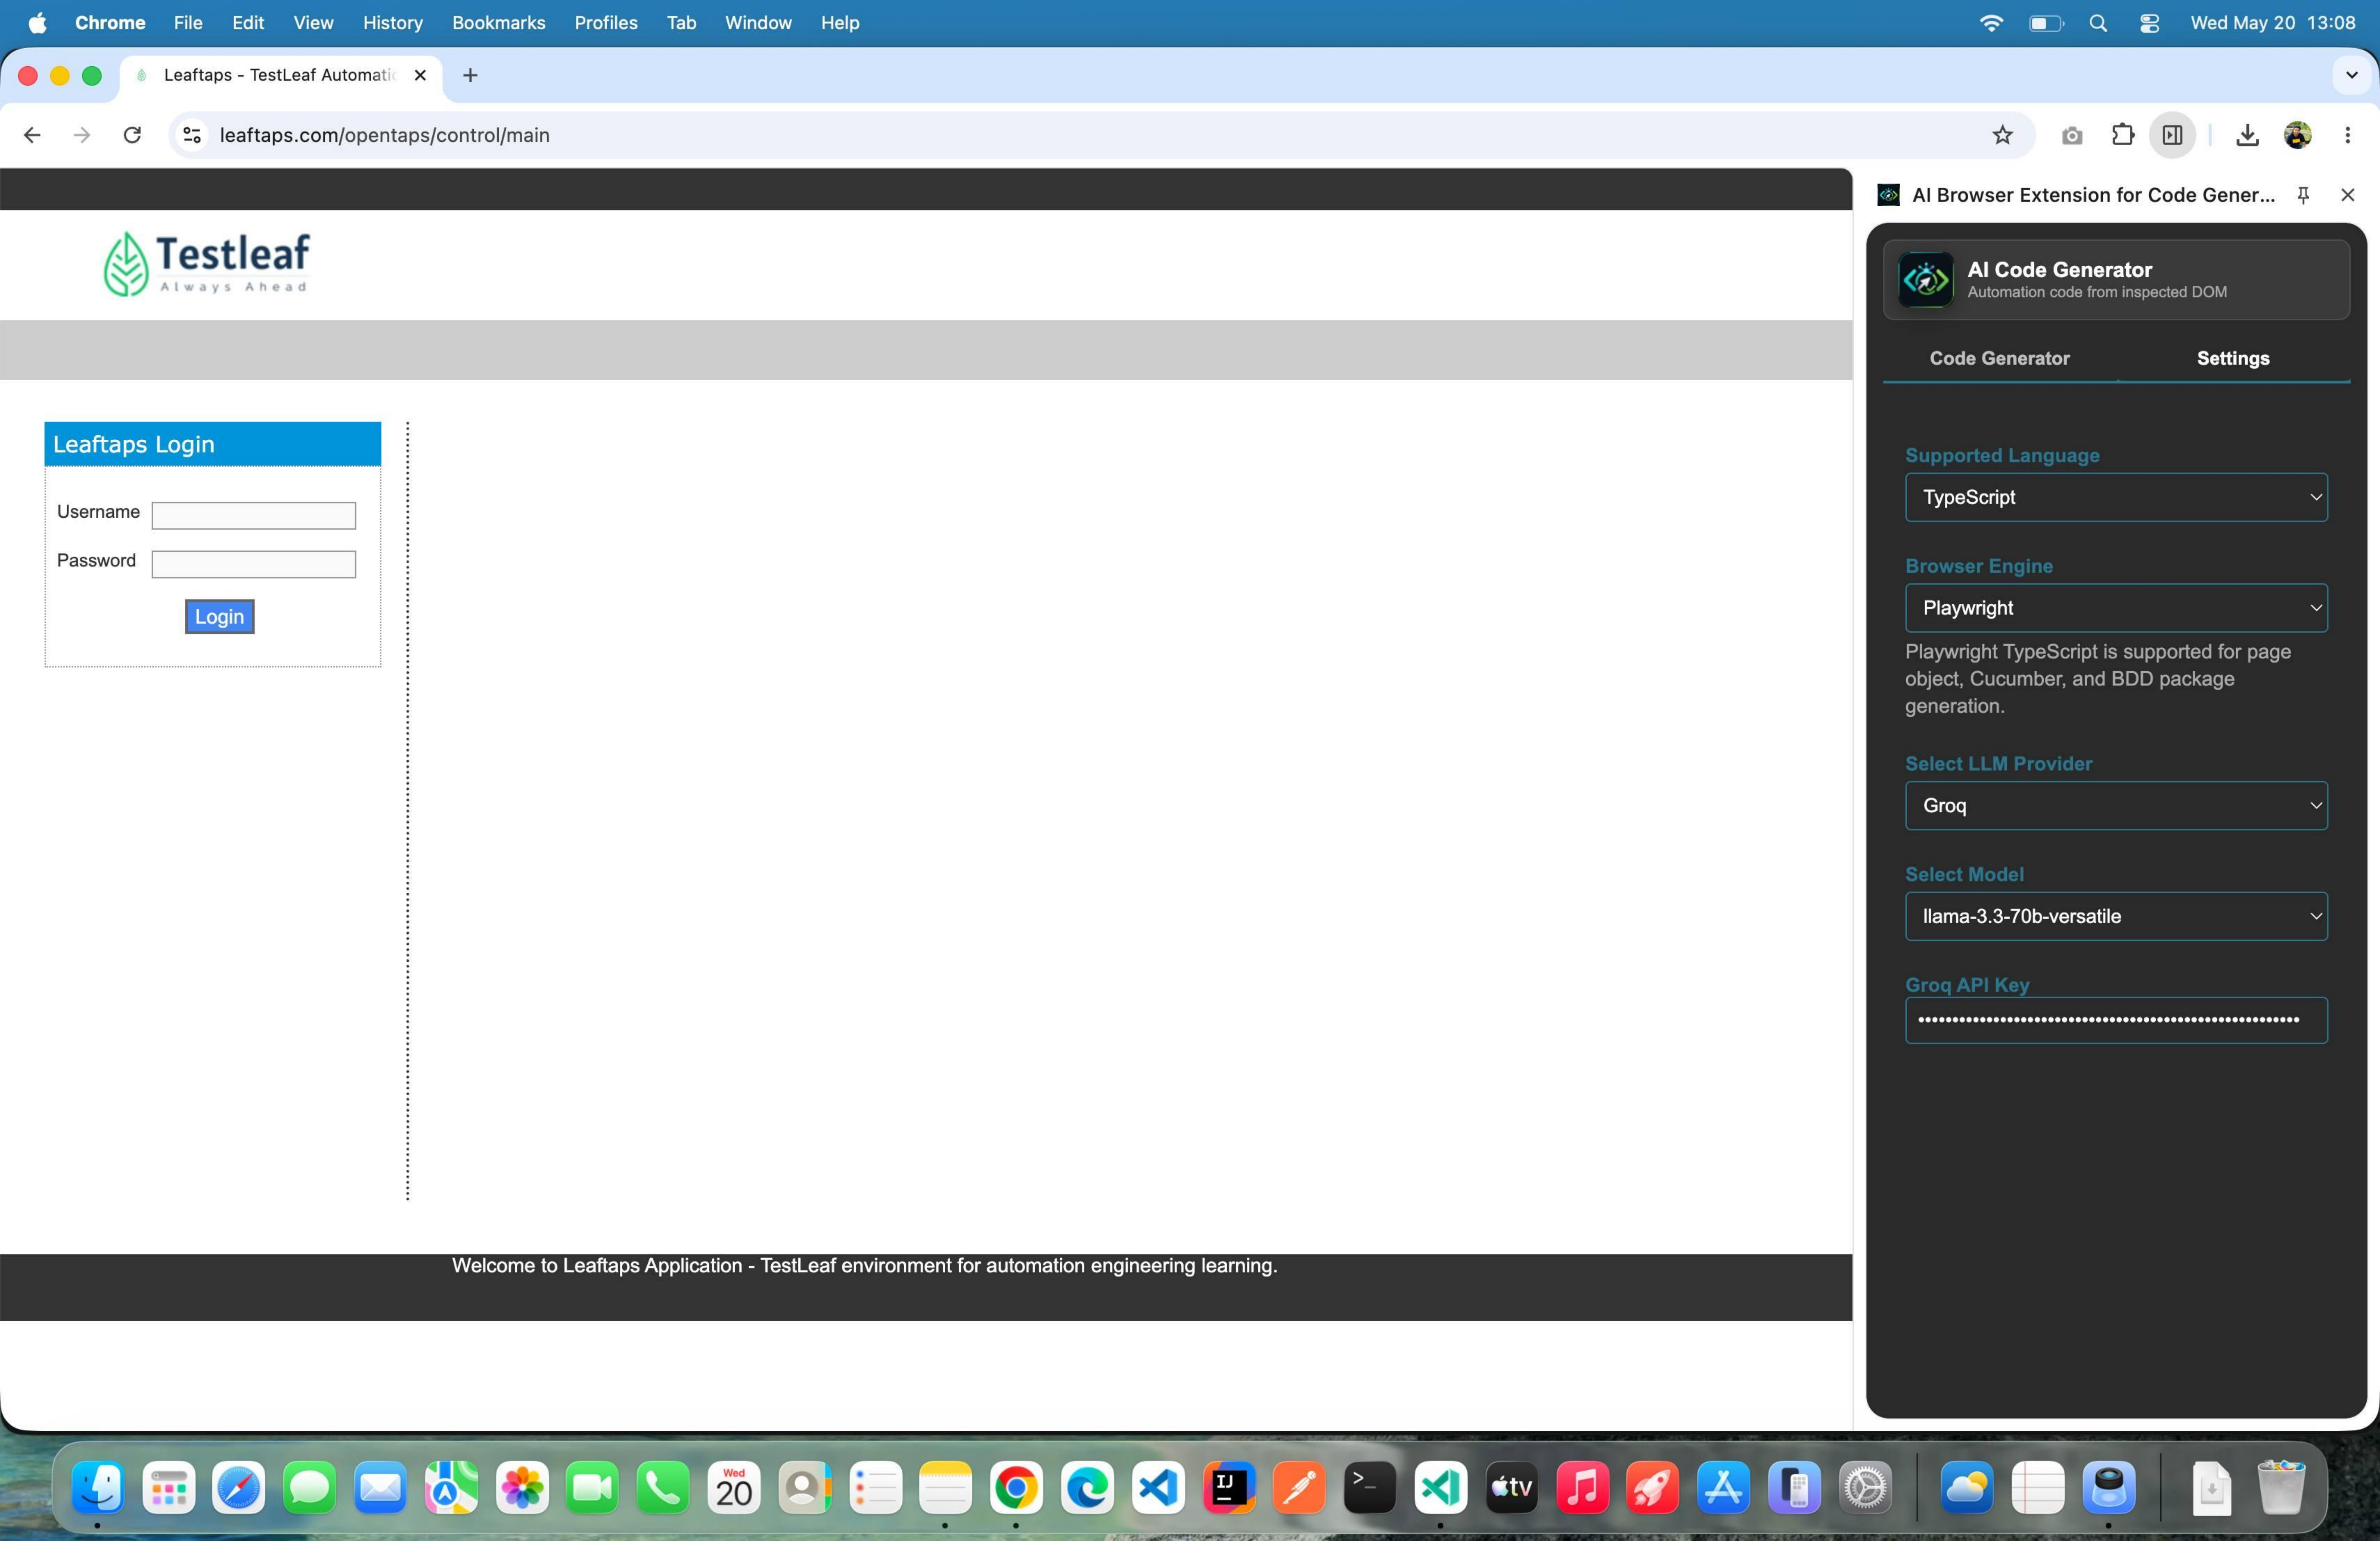

LeafTaps Login

Username

Password

Login

Welcome to LeafTaps Application - TestLeaf environment for automation engineering learning.

AI Browser Extension for Code Gener...

AI Code Generator

Automation code from inspected DOM

Code Generator

Settings

Supported Language

TypeScript

Browser Engine

Playwright

Playwright TypeScript is supported for page object, Cucumber, and BDD package generation.

Select LLM Provider


Groq

Select Model

llama-3.3-70b-versatile

Groq API Key

.....

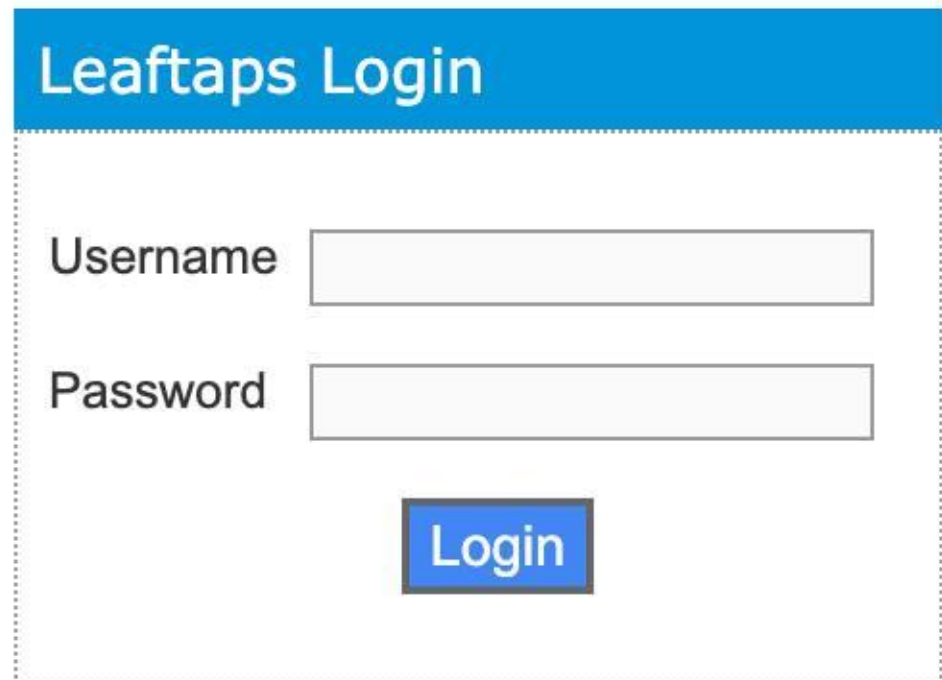

AI Browser Extension for Code Gener...



Settings

Selenium Java - Feature File

 **Serenity BDD** Playwright BDD


■ **Page Class**

- **Serenity BDD**

Generating Selenium Java output.


Provide additional information

 Generate

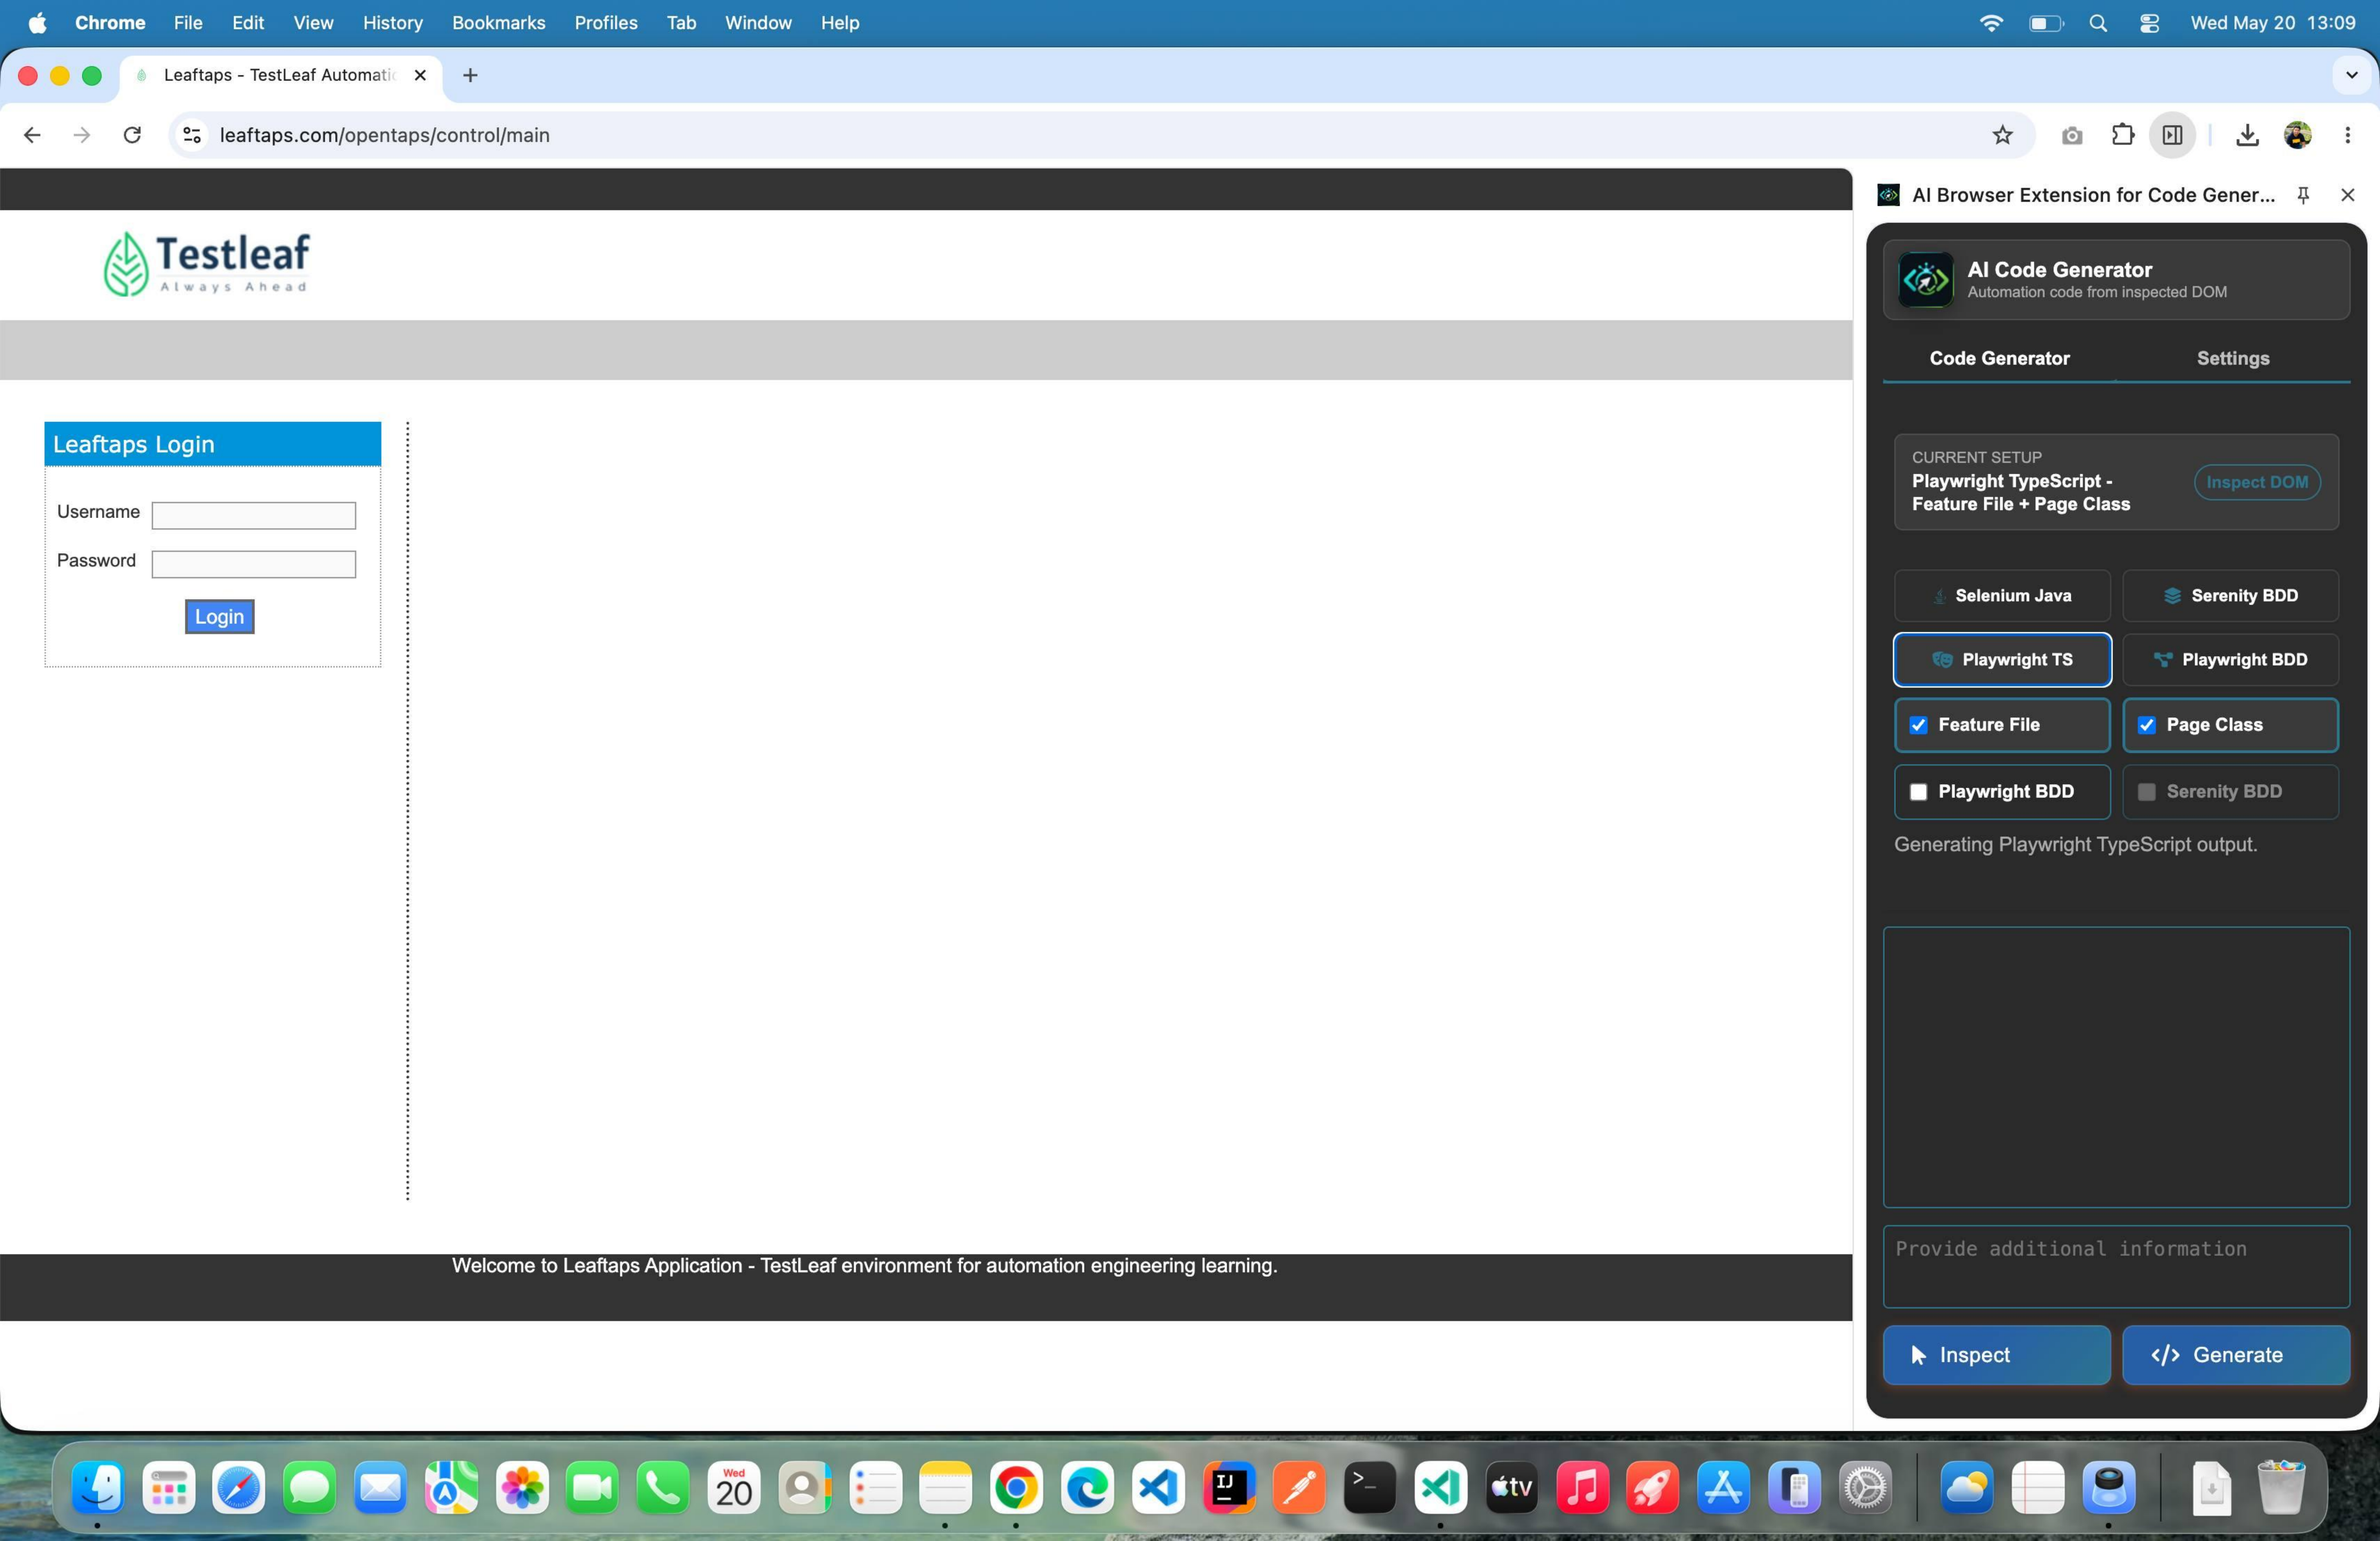



AI Browser Extension for Code Gener...



Settings

Playwright TypeScript - Feature File + Page Class

 Serenity BDD Playwright BDD


Page Class

- **Serenity BDD**

Generating Playwright TypeScript output.

Provide additional information

 **Generate**

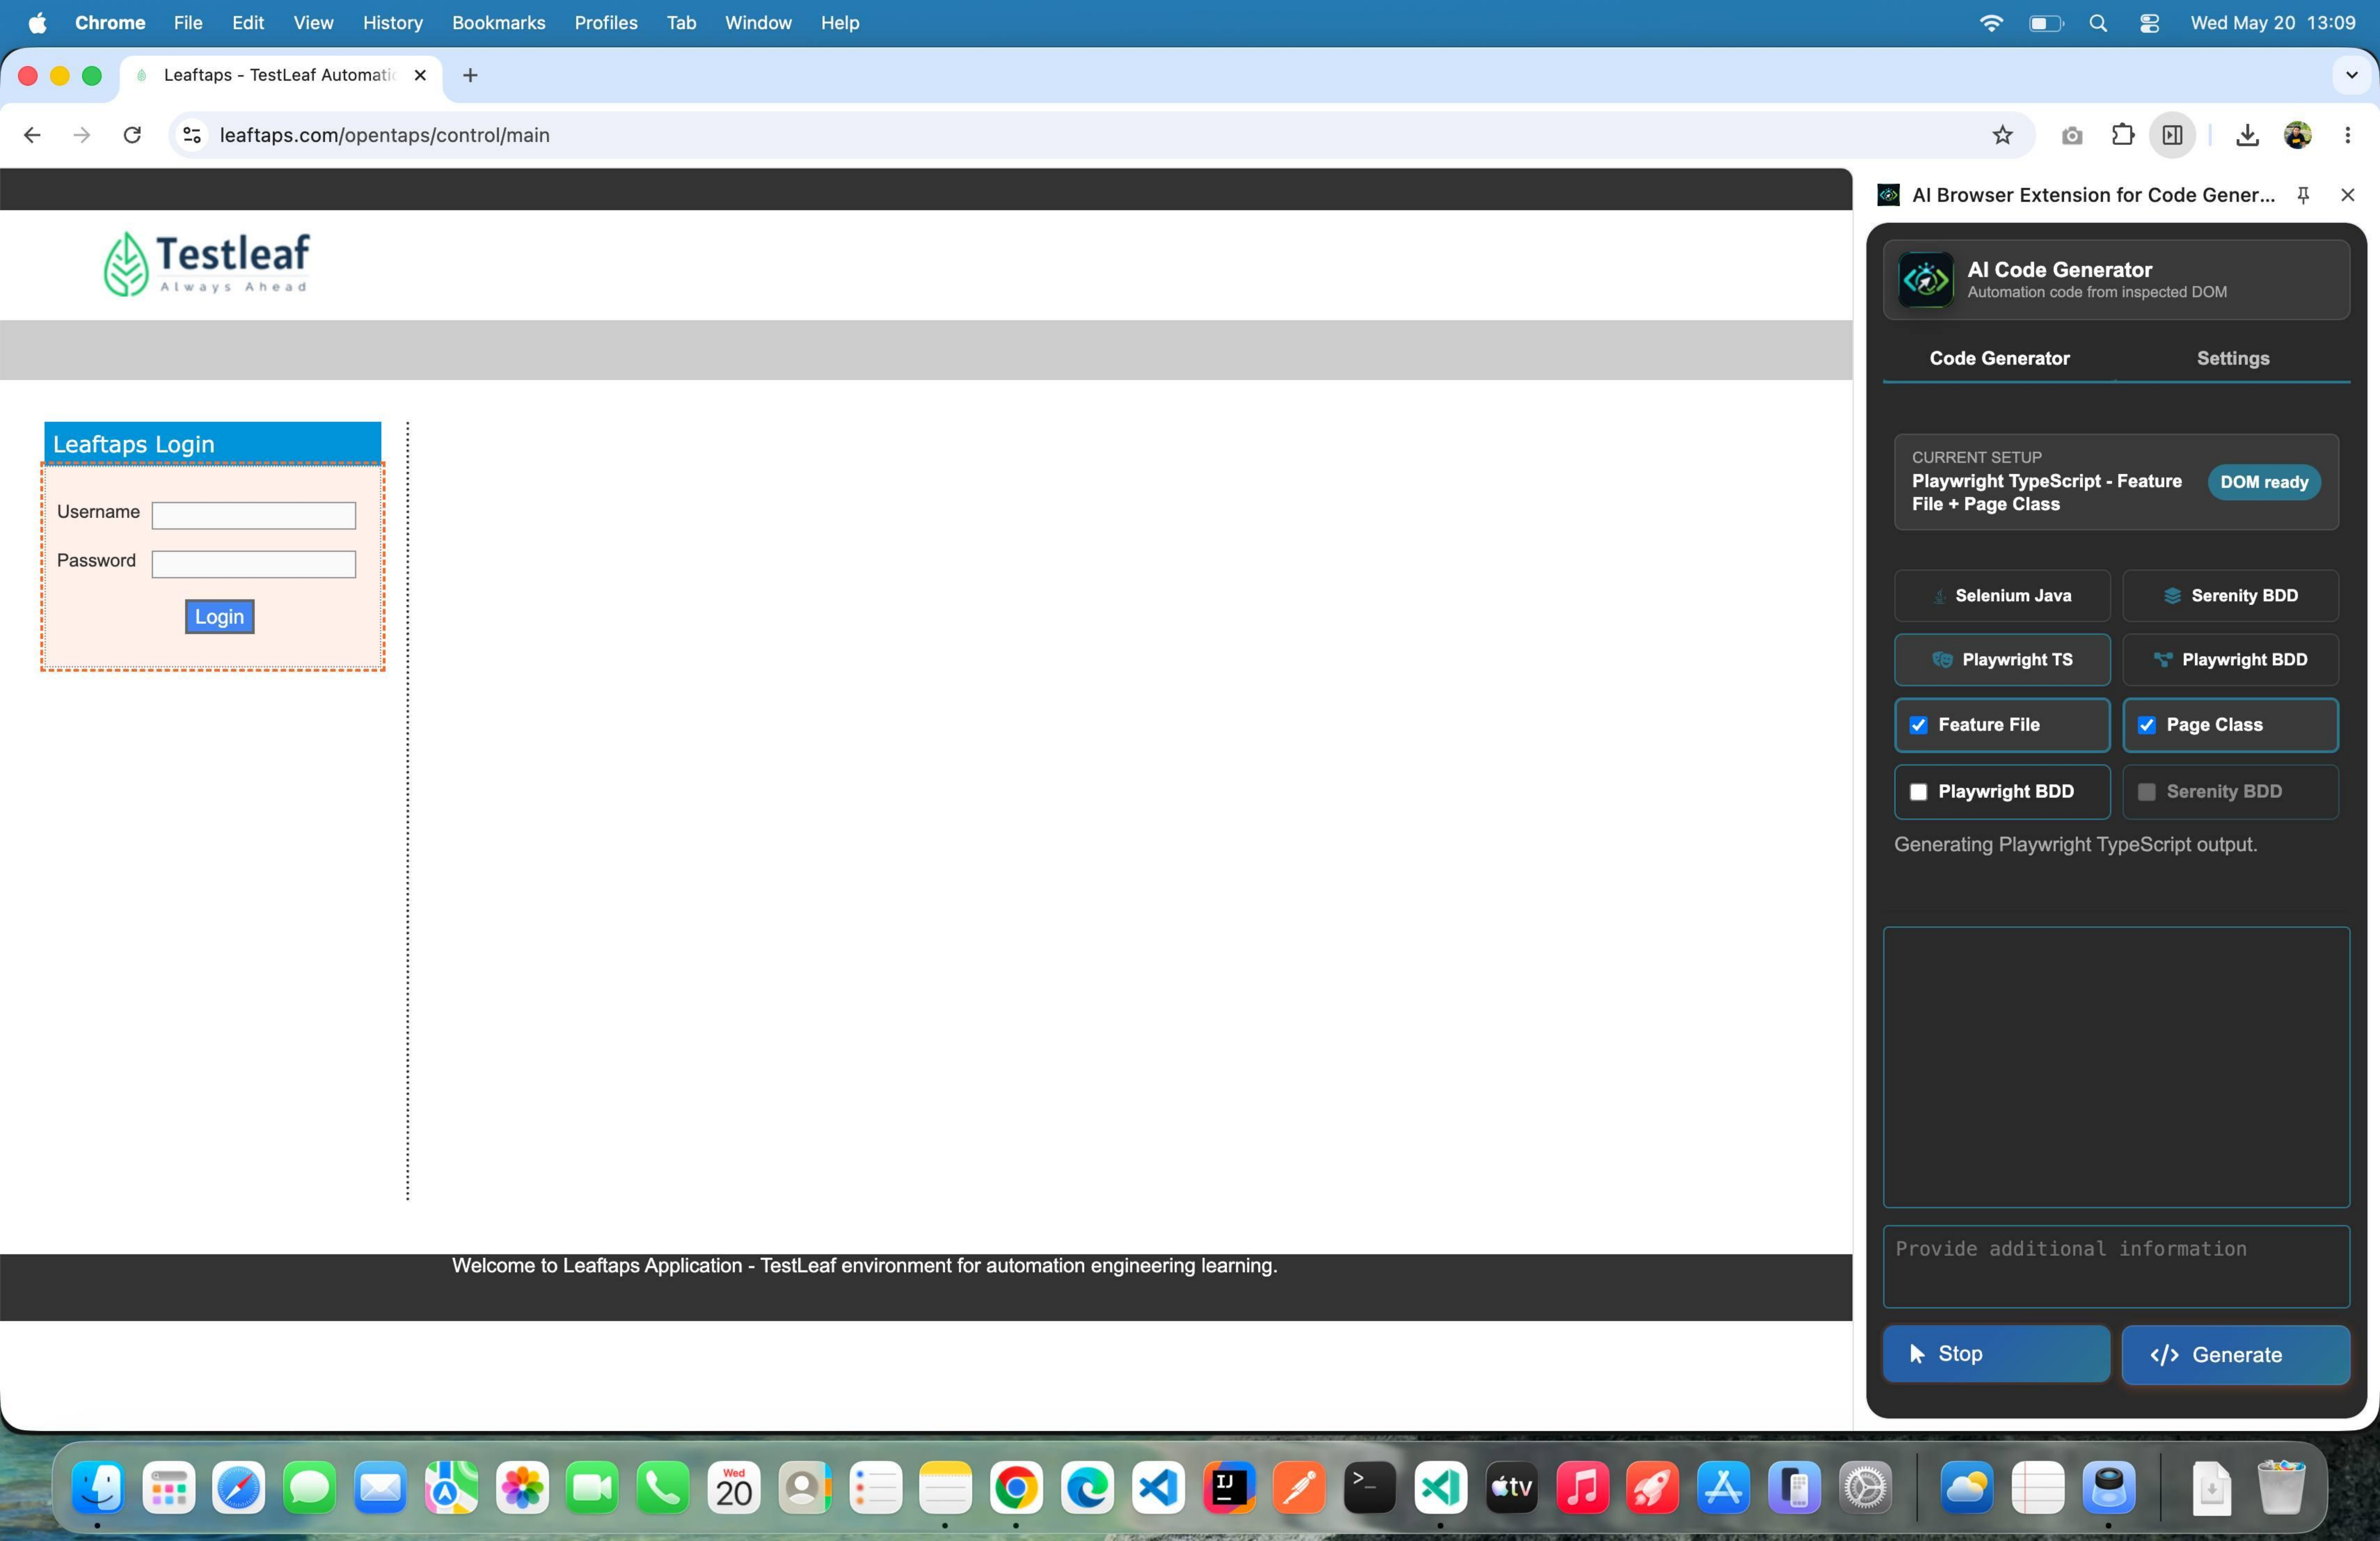


LeafTaps Login

Username

Password

Login

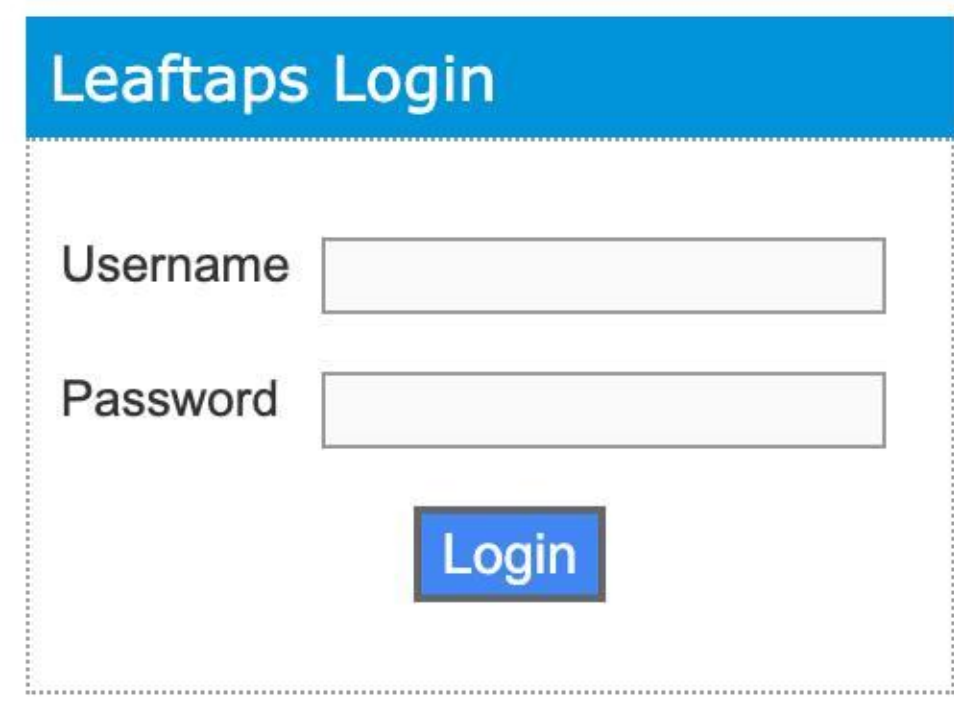 AI Browser Extension for Code Generation

Code Generator

Settings

 **Selenium Java** Serenity BDD **Playwright TS**

Playwright BDD

- ✓ **Feature File**

Page Class

- Playwright BDD

■ **Serenity BDD**

Generating Playwright TypeScript output.


 **Reset Chat**

Feature: Login to OpenTaps

```
Scenario Outline: Successful login with valid credentials
  Given I open the login page
  When I type "<username>" into the Username field
  And I type "<password>" into the Password field
  And I click the Login button
  Then I should be logged in successfully
```

Examples:

username	password
"demouser"	"crmsfa"

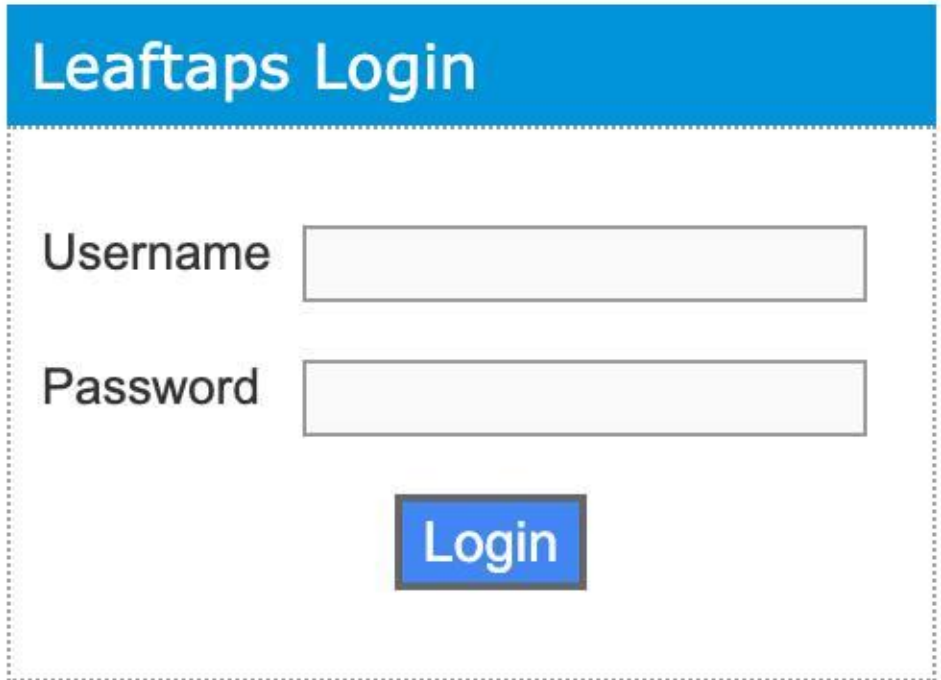

Welcome to LeafTaps Application - TestLeaf environment for au

Playwright TypeScript - Feature File + Page Class

 Serenity BDD Playwright BDD

Page Class

■ **Serenity BDD**

Generating Playwright TypeScript output.

 Reset Chat

 Copy


```
import { Given, When, Then, Before, After } from '@cucumber/cucumber';
import { Browser, BrowserContext, chromium, expect, Page } from '@playwright/test';

let browser: Browser;
let context: BrowserContext;
let page: Page;

Before(async function () {
  browser = await chromium.launch({ headless: true });
  context = await browser.newContext();
  page = await context.newPage();
});

After(async function () {
  await browser.close();
});

Given('I open the login page', async function () {
  await page.goto('https://leaftaps.com/opentaps/control/main');
});
```

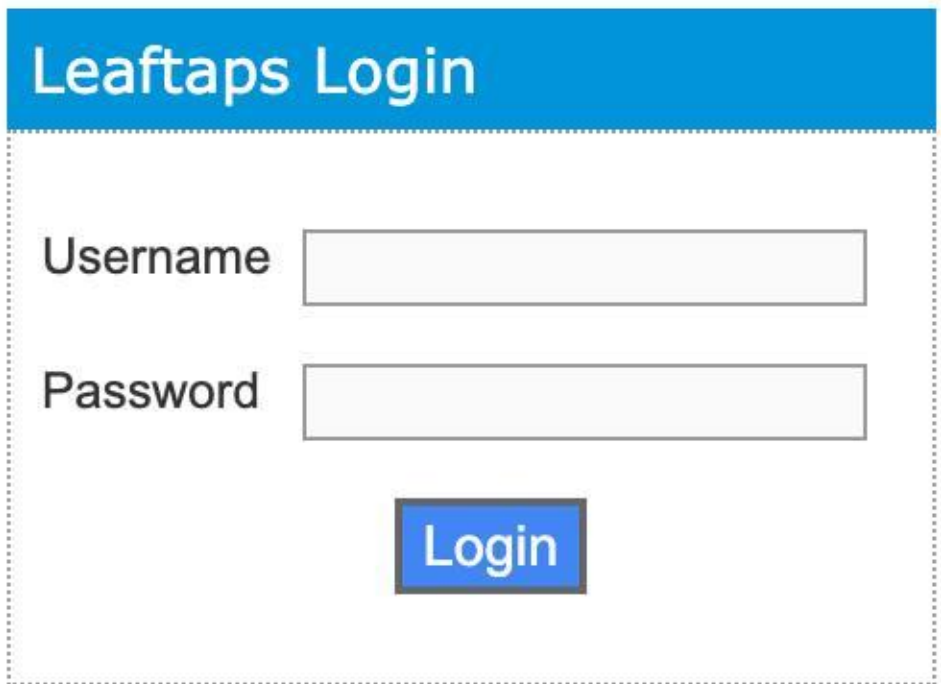Welcome to LeafTaps Application - TestLeaf environment for au

✚ ✕

 **Reset Chat**

```
Before(async function () {
    browser = await chromium.launch({ headless: true });
    context = await browser.newContext();
    page = await context.newPage();
});

After(async function () {
    await browser.close();
});

Given('I open the login page', async function () {
    await page.goto('https://leaftaps.com/opentaps/control/main');
});

When('I type {string} into the Username field', async function (username: string) {
    await page.getByLabel('Username').fill(username);
});

When('I type {string} into the Password field', async function (password: string) {
    await page.getByLabel('Password').fill(password);
});

When('I click the Login button', async function () {
    await page.getByRole('button', { name: 'Login' }).click();
});

Then('I should be logged in successfully', async function () {
    await expect(page.locator('.welcome_message')).toBeVisible();
});
```

Provide additional information



Generate