

Instructor Notes:

Add instructor
notes here.



Instructor Notes:

Explain the
lesson coverage

Lesson Objectives



In this lesson, we will learn:

- Introduction to Servlet
- Role of Servlets in Web application design
- Advantages of Servlets
- HTTP Basics
- Basic Servlet Architecture : Servlet Container
- Servlet Lifecycle
- Ease of Developing Servlets through Annotations
- Servlet Configuration and Accessing Initial/Context Parameters via Annotations
- Retrieving Information

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

2

Lesson Objectives:

This lesson introduces Servlets 3.0 and ease of development through Annotations ,
The lesson contents are:

- 3.1: Introduction to Servlet
- 3.2: Role of Servlets in Web Application Design
- 3.3: Advantages of Servlets
- 3.4: HTTP Basics
- 3.5: Basic Servlet Architecture: Servlet Container
- 3.6: Servlet Lifecycle
- 3.7: Elements of Web Application
- 3.8: Ease of Developing Servlets through Annotations
- 3.9: Servlet Configuration and Accessing Initial / Context Parameters via Annotations
- 3.10: Retrieving Information

Instructor Notes:

3.1: Introduction to Servlet What are Servlets?



Servlets are Java programs that extend the functionality of a Web server and capable of generating a dynamic response to a particular request using the HTTP Request / Response paradigm

Servlets are not tied to a specific client-server protocol but they are most commonly used with HTTP and the word "Servlet" is often used in the meaning of "HTTP Servlet"

- It is available and runs on all major web and application servers
- It is platform and server independent

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

3

Introduction to Servlet:

Java servlets are a key component of server-side Java Development. Servlets are modules of Java code that run in a server application to answer client requests.

These are small, pluggable extensions to server that enhance the server's functionality. Servlets allow developers to extend and customize any Java-enabled server.

When servlets are used to generate dynamic content for a web page or otherwise extend the functionality of a web server, is like creating a web application!

Since servlets are written in the highly portable Java language and follow a standard framework, they provide a means to create sophisticated server extensions in a server and operating system independent way.

Although servlets can respond to any type of request, they are commonly used to extend the applications hosted by web servers. For such applications, Java Servlet technology defines HTTP-specific servlet classes. We shall see more on this in the coming sections.

Servlets first came on the scene around 1997. As of March 26 2010, the current version of the servlet specification is 3.0. The minimum platform requirement for Servlet 3.0 is JDK 1.6.

Instructor Notes:

Explain each of these points with an example.

- Example, for point #1 : based on book search, all books related to a particular category – say “Java” are returned in a neat tabular fashion

- Point # 2: For a registration form, user is sent an appropriate message like “successfully registered!” on successful registration.

- Point #3: Some kind of login servlet that authenticate user before providing access to any other resources on the web site

- Point# 4 : A search for a particular book, say servlets, will return a list of books from some database at server side...

3.2: Role of Servlets in Web Application Design What Can Servlets Do?



Servlets can do the following functions:

- Dynamically build and return an HTML file based on nature of client request
- Process user input passed in an HTML form and return an appropriate response
- Provide user authentication and other security mechanisms
- Interact with server resources such as databases, other applications and network files to return useful information to the client
- Automatically attach web page design elements such as headers or footers, to all pages returned by server
- Forward requests from one server to another for load balancing purpose
- Manage state information on top of the stateless HTTP

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

4

Role of Servlets in Web Application Design:

Servlets can read explicit data sent in by the client in browser. This data can come from an HTML page into which user has entered data. Servlets can also read implicit request data which is sent by browser as part of request header.

Servlets can dynamically generate response and send content back to client. This process may involve talking to databases, executing another server-side component, and so on.

The response sent can be in form of pure HTML, plain text, XML, GIF images, or even as compressed data.

Instructor Notes:

Explain these points. Mention that Servlets being Java programs, all advantages of Java are applicable to Servlets too.

3.3: Advantages of Servlets

Advantages of Servlets



Servlets provide the following advantages:

- Crash Resistance
- Cross-Platform
- Cross-Server
- Durable
- Dynamically Loadable across the Network
- Extensible
- Multithreaded
- Protocol Independent
- Secure

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

5

Advantages of Servlets over CGI:

Servlets provide the following advantages:

Compiled: Servlets are compiled into Java byte-codes. This improves performance through compile-time code optimization. Server-side JIT compilers dramatically improve the performance of JVM.

Compilation also offers the advantages of strong error and type checking. Since many errors are flushed out during the compilation, servlets are more stable and easier to develop and debug.

Crash Resistance: The JVM does not allow servlets direct access to memory locations, thereby eliminating crashes that results from invalid memory accesses. In addition, before execution, the JVM verifies that compiled Java class files are valid and do not perform illegal operations. Finally, rather than crashing, the JVM will propagate an exception up the calling chain until it is caught. Thus, a poorly written or malicious servlet cannot crash the server.

Cross-Platform: Since servlets are written in Java, they enjoy the same cross platform support as any program. This “write once, run anywhere” capability allows servlets to be easily distributed throughout the enterprise without rewriting for each platform.

Cross-Server: Servlets can be run on virtually every popular web server that is in use today. More than a dozen software vendors currently provide native support for servlets within their products. For those servers that do not currently offer native servlet support, there are many third party add-ons that allow these servers to load and run servlets.

Instructor Notes:

Explain HTTP basics, the GET and POST methods, their differences. Briefly explain the other HTTP methods too

3.4: HTTP Basics

HTTP Basics – a Revisit



HTTP is a request-response oriented protocol.

An HTTP request consists of a request method, a URL, header fields and a body (which can be empty).

An HTTP response contains a result code, textual information with respect to code, header fields and a body.

The recognized request methods are GET, HEAD, PUT, POST, DELETE, OPTIONS, and TRACE.

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

6

Basic Servlet Architecture:

HTTP Basics – a Revisit:

HTTP is the protocol that is used by a WWW client (for example: a browser) to send a request to a Web Server.

HTTP is a request-response oriented stateless protocol. An HTTP request consists of a request method, a URL, header fields, and a body (which can be empty). An HTTP response contains a result code, textual information w.r.t code, header fields and a body.

When client request a URL in a Web Browser, the default method is GET for the request. With a GET request, the input parameters are appended to the URL. A GET request does not have a body.

With a POST request the input parameters are transmitted in the body.

The response should contain a body with the response data and header fields, which describe the body (especially Content-Type and Content-Encoding).

Instructor Notes:


3.5: Basic Servlet Architecture : Servlet Container

Servlet Container



What is a Web Server?

- To know what is a Servlet container we need to know what is a Web Server first

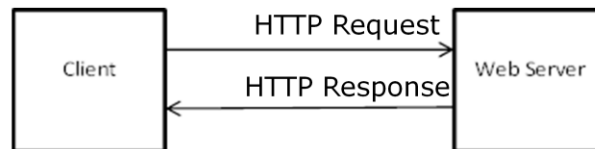

A web server uses HTTP protocol to transfer data. In a simple situation, a user types in a URL (e.g. www.servletdemos.com/static.html) in browser (a client), and get a web page to read. So what the server does is sending a web page to the client. The transformation is in HTTP protocol which specifies the format of request and response message.

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

7

Since we using WildFly 8.x which is an Application server which will host the Servlet Container to handle the web components.

We could also use the Web server for the same purpose.

Since HTTP is a web oriented protocol, thus we have taken the term to be as "Web Server"


Instructor Notes:

3.5: Basic Servlet Architecture : Servlet Container Servlet Container / Servlet Engine / Web Container



What is a Servlet Container / Servlet Engine / Web Container

- Client can request only static web page from Server. If client wants to read Web page based upon input (that requires processing), basic idea of servlet container is to dynamically generate the Web page on the server side
- Servlet container is essentially a part of a web server that interacts with the servlets. Servlet Container is container for servlets

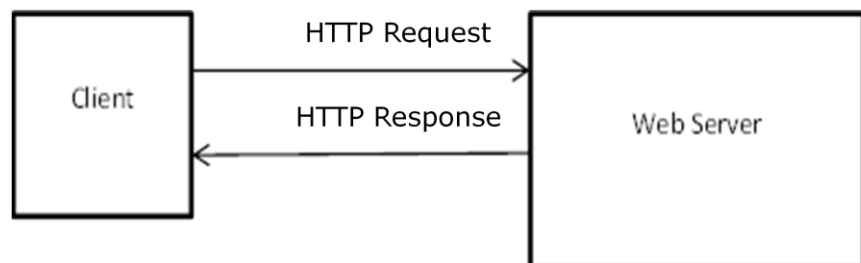

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

8

When a request is sent, it is handled by the web server. If response is available within the web server it will be returned by the server to the client.

If response is not available and requires some processing then request will be processed by the Web Container.

The web container will then process the request and handover the response back to web server. The web server will then handover response back to client.

The web container delegates the request processing to web components like Servlets and JSP.

For example: If we request for a page as `www.gmail.com`, then same page is returned as response for all users. **This is a static content**

Whereas after entering your login credentials respective inbox details per user is retrieved as a response. **This is dynamic content**

Instructor Notes:

3.5: Basic Servlet Architecture : Servlet Container Servlet Container / Servlet Engine / Web Container



Advantages of Servlet Container

- Providing communication support between Web Components and Web Server
- Life cycle support for Web Components
- Networking support
- Enabling Web Security
- Multi threading support for Web Components

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

9

Providing communication support between Web Components and Web Server: Servlet as a web component does not communicate with Web Server directly. All the communication happens via Web container

Life cycle support for Web Components: Life cycle of Web components (Servlets and JSP) is managed by the container

Networking support: Web components do not need to open network and socket connections all is taken care by Web server

Enabling Web Security: Access to Web components can be secured by granting privileges.

Multi Threading support: Web components are multi-thread, for every request there is one thread generated. Thus all threads are managed by container. We do not need to do explicit multi-threading.

Instructor Notes:

Explain the Servlet hierarchy.

Explain how a protocol independent servlet can extend the functionality of any type of server including Web server, mail server etc

3.5:Basic Servlet Architecture : Servlet API




A servlet is an instance of a class which implements the `javax.servlet.Servlet` interface.

Servlet is web component inside Servlet Container

Most servlets extend one of the standard implementations of that interface, namely `javax.servlet.GenericServlet` or `javax.servlet.http.HttpServlet`.

In Servlet 3.0, there is `javax.servlet.annotation` package for creating servlets via annotations



Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

10

Basic Servlet Architecture:

Servlet API:

Servlets use classes and interfaces from three packages: `javax.servlet`, `javax.servlet.http`.

A Servlet, in its most general form, is an instance of a class which implements the `javax.servlet.Servlet` interface. Most Servlets extend one of the standard implementations of that interface, namely `javax.servlet.GenericServlet` and `javax.servlet.http.HttpServlet`.

As of Servlet 3.0, make use of package `javax.servlet.annotation` to create Servlets. A protocol-independent servlet should subclass `GenericServlet`, while an HTTP servlet should subclass `HttpServlet`, which is itself a subclass of `GenericServlet`! (refer to the above figure).

Notice that the classes do not belong to the core Java API. They are extensions to the core API and hence `javax`!

Instructor Notes:

Explain the lifecycle methods. Concept of dispatching doXXX() methods which is done by server methods must be explained to participants in depth,

Thereby highlight the consequence of overriding service method

3.5:Basic Servlet Architecture : Servlet API Servlet Interface Life Cycle Methods



init():

- It is executed once when the servlet is first loaded.

service():

- It is called in a new thread by server for each request.

destroy():

- It is called when server deletes servlet instance.

These lifecycle methods are implemented in GenericServlet class.

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

11

Basic Servlet Architecture:

Servlet Interface Life Cycle Methods:

The Servlet interface defines methods to initialize a servlet, to service requests, and to remove a servlet from the server. These are known as life-cycle methods and are called in the following sequence:

The init() method is guaranteed to be called only once during the Servlet's lifecycle. The Servlet performs one-time setup configurations in this method. It stores the ServletConfig[*] object so that it can be retrieved later by calling the Servlet's getServletConfig() method (This is handled by GenericServlet). The ServletConfig object contains Servlet parameters and a reference to the Servlet's ServletContext[*].

service() method gets called every time a new request comes in. The method is called concurrently (that is, multiple threads may call this method at the same time) so it should be implemented in a thread-safe manner.

When servlet needs to be unloaded (for example: since a new version should be loaded or the server is shutting down), the destroy() method is called.

This method too is guaranteed to be called only once during the Servlet's lifecycle. All resources which were allocated in init() should be released in destroy().

We shall be covering entire lifecycle of a typical servlet in the next section.

[*] : The ServletConfig and ServletContext interfaces are explained in the next slide.

Instructor Notes:

Explain the lifecycle of processing a request

3.5: Basic Servlet Architecture : Request Processing Steps to process a Request



Web server receives HTTP request

Web server forwards the request to servlet container

The servlet is dynamically retrieved and loaded into the address space of the container, if it is not in the container

The container invokes the `init()` method of the servlet for initialization(invoked once when the servlet is loaded first time)

The container invokes the `service()` method of the servlet to process the HTTP request, i.e., read data in the request and formulate a response. The servlet remains in the container's address space and can process other HTTP requests

Web server return the dynamically generated results to the client

Presentation Title | Author | Date

| © 2017 Capgemini. All rights reserved.

12

From the life cycle of a servlet object, we can see that servlet classes are loaded to container by class loader dynamically. Each request is in its own thread, and a servlet object can serve multiple threads at the same time. When it is no longer being used, it should be garbage collected by JVM.


Like any Java program, the servlet runs within a JVM. To handle the complexity of HTTP requests, the servlet container comes in. The servlet container is responsible for servlets' creation, execution and destruction.

Instructor Notes:

Explain the lifecycle of processing a request

3.5: Basic Servlet Architecture : Request Processing

How Container handles a request

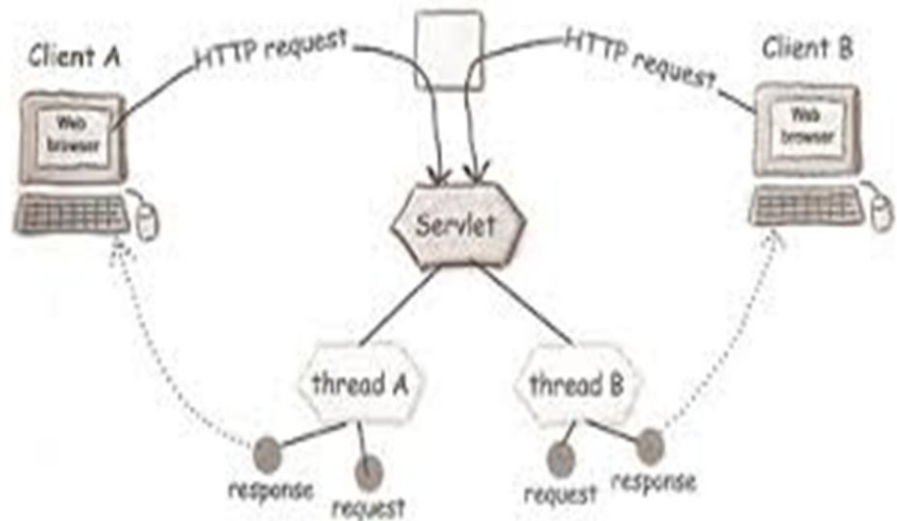

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

13

Every request coming to the container from the client for a particular servlet will be treated as a separate thread.

Each thread will have its own copy of the request / response objects.

After the processing of a particular request is completed the threads would be garbage collected. But the servlet instance would still be there in memory.

Thus for processing multiple requests multiple threads are created.

Instructor Notes:

Explain the
GenericServlet


Explain the figure.

Also explain about
ServletConfig and
ServletContext
interfaces

3.5: Basic Servlet Architecture : Hierarchy GenericServlet class

`javax.servlet.GenericServlet`

- It is protocol independent
- It makes writing servlets easier
 - It provides simple versions of `init()` and `destroy()` and of the methods in the `ServletConfig` interface.
 - It also implements the `log` method, declared in the `ServletContext` interface.
- To write a generic servlet, override the abstract `service()`.

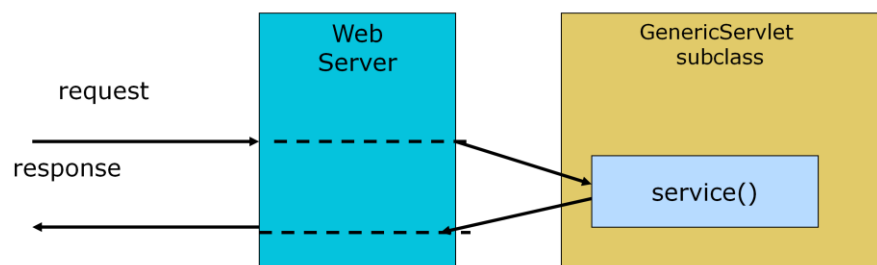

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

14

Basic Servlet Architecture:

GenericServlet:

All the lifecycle methods are implemented in `GenericServlet` class. Thus if `GenericServlet` class is extended to create a servlet, all the methods may be overridden to provide implementations. Optionally, just override the `service()` method to handle the request in the manner required!

ServletContext interface :

It defines a set of methods that a servlet uses to communicate with its servlet container, for example, to get the MIME type of a file, dispatch requests, or write to a log file.

There is one context per “web application” per JVM.

ServletContext attributes can be used to share information among a group of servlets.

The ServletContext object is contained within the ServletConfig object, which the Web server provides the servlet when the servlet is initialized.

ServletConfig interface:

This is a servlet configuration object used by a servlet container used to pass information to a servlet during initialization.

It is implemented by `GenericServlet`.

All of its initialization parameters can be set in deployment descriptor. Or else they can be passed via annotations. The ServletConfig parameters are specified for a particular servlet and are unknown to other servlets.

ServletContext and ServletConfig will be discussed in later sessions.


Instructor Notes:

Explain the figure and compare it vis-à-vis generic servlet

3.5: Basic Servlet Architecture : Hierarchy HttpServlet class

`javax.servlet.http.HttpServlet:`

- It has a built-in HTTP protocol support.
- Its subclass must override at least one of the following methods: `doGet()`, `doPost()`, `doHead()`, `doTrace()`, `doPut()`, `doDelete()`
- One must not override the `service()` method, since it dispatches a request to the different `doXXX()` methods for different HTTP requests.

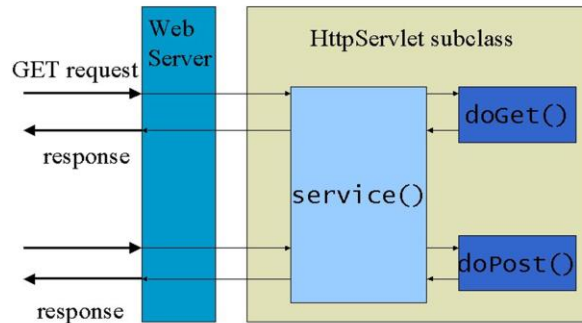

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

15

Basic Servlet Architecture:

HttpServlet:


`init()` and `destroy()` can be overridden to manage resources that are held for the life of the servlet. Servlet can implement `getServletInfo()` to provide information about itself. The `service()` method of `HttpServlet` dispatches a request to different Java methods for different HTTP request methods. It recognizes the standard HTTP/1.1 methods like GET, HEAD, PUT, POST, DELETE, OPTIONS and TRACE. Other methods are answered with a Bad Request HTTP error.

Do not override the `service()` method because it handles setup and dispatching to all the `doXXX()` methods. Since `service()` method dispatches to `doXXX()` methods, it passes its request and response objects to these methods.

An HTTP servlet generally overrides `doGet()` to handle GET requests and `doPost()` to handle POST type of requests.

Instructor Notes:

Explain the sequence diagram about the life cycle of Servlets

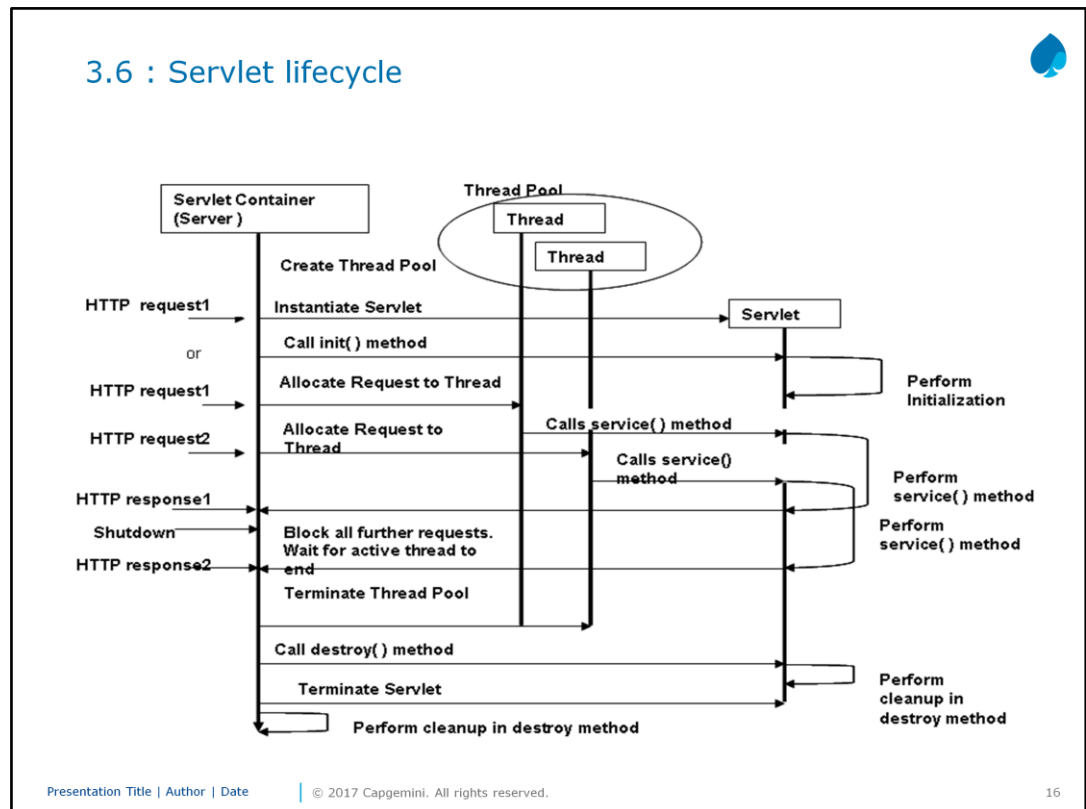**Basic Servlet Architecture:****Servlet Life Cycle:**

The process by which a server invokes a servlet can be broken down into the nine steps described below and as shown in the figure in the above slide:

The server loads the servlet when the client first requests it or, if configured to do so, at server start-up. The servlet may be loaded from either a local or remote location using the standard Java class loading facility. This step is equivalent to the following code:

```
Class c= Class.forName("com.igate.MyServlet");
```

The server creates one or more instances of the servlet class. Depending on the implementation, the server may create a single instance that services all requests through multiple threads or create a pool of instances from which one is chosen to service each new request. This step is equivalent to the following Java code:

```
Servlet s= (Servlet) c.newInstance();
```

The server constructs a ServletConfig object that provides initialization information to the servlet.

The server calls the servlet's `init(ServletConfig cfg)` method. The `init()` method is guaranteed to finish execution prior to the servlet processing the first request. If the server created multiple servlets instances (step 2), then the `init` method is called one time for each instance.

Instructor Notes:

Ask participants what does a web app typically consist of before showing this slide.

Demonstrate how to create war in eclipse

3.7: Elements of a Web Application

Web Application Composition



Web applications can be packaged and signed, using standard Java Archive tools, into a Web ARchive format (war) file.

A web application may consist of the following items:

- Servlets
- Java Server Pages
- Utility Classes
- Static documents (html, images, Sound, and So on)
- Client side applets, beans, and classes
- Descriptive meta information which ties all the above elements together

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

17

Elements of a Web Application:

Web Archive (WAR) files provide a convenient way of bundling Web applications in a single file. Having a single file instead of many small files makes it easier to transfer the web application from server to server.

A WAR file is really just a JAR file with a .war extension. We can use the jar command to create it.

For example: `jar cvf myWebApp.war *`

However, we can also use the ANT tool or IDE like Eclipse to automate the process!

A Web application is a collection of web elements that can be bundled and run on multiple containers (servers) from multiple vendors.

A web application is rooted at a specific path within a web server called context root (see figure on the next slide).


For example, a catalog application can be located at <http://www.mycorp.com/catalog>. All requests that start with this prefix will be routed to the ServletContext, which represents the catalog application.

The servlet container must enforce a one to one correspondence between a web application and a ServletContext. A ServletContext object can be viewed as a Servlet's view onto its application.

Instructor Notes:

Explain the various elements of the web application like context root, web.xml, the WEB-INF folder and the lib folder.

Explain that though we are going to use IDE (Eclipse), if a folder structure needs to be created it must be in this format.

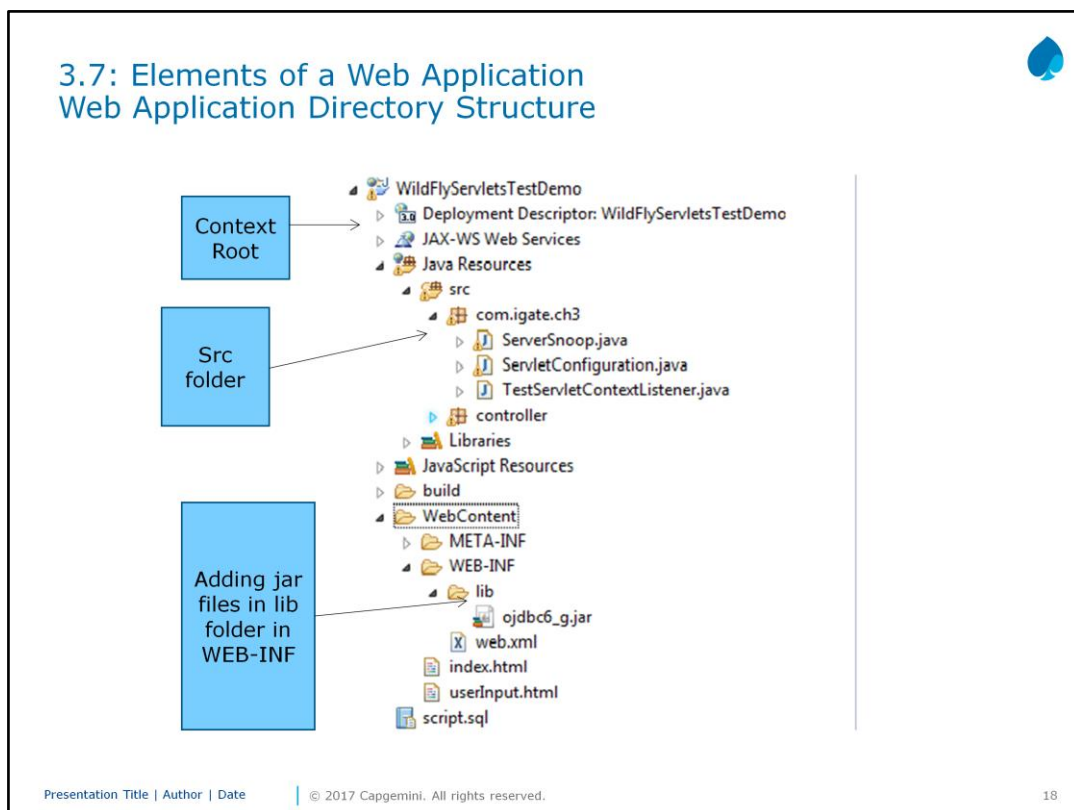**Elements of a Web Application:****Directory Structure:**

A web application exists as a structured hierarchy of directories. The root of this hierarchy (called Context Root) serves as a document root for serving files that are part of this context. For example, for a web application located at /Catalog in a web server, the index.html file located at the base of the web application hierarchy can be served to satisfy a request to /Catalog/index.html.

A special directory exists within the application hierarchy named "WEB-INF". This directory contains all things related to the application that are not in the context root of the application. Note that the WEB-INF node is not part of the public document tree of the application. No file contained in the WEB-INF directory may be served directly to a client.

The contents of the WEB-INF directory are:

web.xml: It is a deployment descriptor. As of Servlets 3.0, the creation of this file can be omitted.

classes directory: It is for servlet and utility classes. The classes in this directory are used by the application class loader to load classes from.

lib directory: It contains all .jar files. It may contain servlets, beans, and other utility classes useful to the web application. All such archive files are used by the web application class loader to load classes.

src: It is optional and will contain source code.

See the figure given in the above slide. The context-root here is called servlets-demo, which contains all web elements for a specific web application. For example: To invoke index.html, the url will be: `http://<server-name>:<port-no>/servlet-demo/html/index.html`.

Note: If an IDE like Eclipse Luna 4.4 is used, the folder structure might be a bit different in the IDE!

Instructor Notes:

Explain the contents of web.xml. This file creation from Servlet 3.0 is optional.

Mention that it creates list of welcome files.

3.8: Ease of developing Servlets through Annotations Web Application Configuration Descriptor - optional



```
<?xml version="1.0" encoding="UTF-8"?>
<web-app xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xmlns="http://java.sun.com/xml/ns/javaee"
xsi:schemaLocation="http://java.sun.com/xml/ns/javaee
http://java.sun.com/xml/ns/javaee/web-app_3_0.xsd"
id="WebApp_ID" version="3.0">
  <display-name>WildFlyServletsTestDemo</display-name>
  <welcome-file-list>
    <welcome-file>index.html</welcome-file>
    <welcome-file>index.htm</welcome-file>
    <welcome-file>index.jsp</welcome-file>
    <welcome-file>default.html</welcome-file>
    <welcome-file>default.htm</welcome-file>
    <welcome-file>default.jsp</welcome-file>
  </welcome-file-list>
</web-app>
```

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

19

Elements of a Web Application:

Refer to Lesson 02 : To understand the steps for selecting the checkbox for web.xml

Web Application Configuration Descriptor (web.xml): is optional since Servlets 3.0
A deployment descriptor is an XML document with an .xml extension. It defines a component's deployment settings. The information provided by a deployment descriptor is declarative and therefore it can be modified without changing the source code of a bean. The Java EE server reads the deployment descriptor at run time and acts upon the component accordingly.

The web.xml file in the WEB-INF directory is a deployment descriptor. The following types of configuration and deployment information exist in the web application deployment descriptor:

- ServletContext Init Parameters
- Session Configuration
- Servlet / JSP Definitions
- Servlet / JSP Mappings
- Mime Type Mappings
- Welcome File list
- Error Pages
- Security

All of these types of information are conveyed in the deployment descriptor. A partial entry is shown in the code listing in the above slide.

Instructor Notes:

3.8: Ease of developing Servlets through Annotations Annotations and their Need



Annotations can be described as metadata. These are metadata for the code written; and do not contain any business logic

They specify a standard way of defining metadata in code

Annotations are tightly coupled with the code

Application development becomes easy due to annotations

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

20

Why Were Annotations Introduced?

Prior to annotation (and even after) XML were extensively used for metadata and somehow a particular set of Application Developers and Architects thought XML maintenance was getting troublesome. They wanted something which could be coupled closely with code instead of XML which is very loosely coupled (in some cases almost separate) from code. Interesting point is XML configurations were introduced to separate configuration from code.

Suppose, you want to set some application wide constants/parameters. In this scenario, XML would be a better choice because this is not related with any specific piece of code. If you want to expose some method as a service, annotation would be a better choice as it needs to be tightly coupled with that method and developer of the method must be aware of this.

Another important factor is that annotation defines a standard way of defining metadata in code. Prior to annotations people also used their own ways to define metadata. Some examples are – using marker interfaces, comments, transient keywords etc. Each developer decided his own way to decide metadata, but annotation standardized things.

These days most frameworks use combination of both XML and Annotations to leverage positive aspects of both.

Instructor Notes:

3.8: Ease of developing Servlets through Annotations
Differences between Servlets 2.0 and Servlets 3.0

Servlet 2.0	Servlets 3.0
Creation of Servlets and other components via XML mappings	Creation of Servlets and other components via annotations
No such feature	Pluggability support for 3 rd party frameworks
No such feature	Asynchronous processing of Servlets

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

21

Pluggability Support for 3rd Party frameworks and Asynchronous processing of Servlets - details of which are shared in the Appendix.

Creation of Servlets and other components via XML mappings – details of which are shared in the Appendix.

In the subsequent slides we would be seeing creation of Servlets and other components via annotations.

Instructor Notes:

Mention about the @WebServlet annotation, and its various attributes. Also specify about importance of loadOnStartup element.

3.8: Ease of developing Servlets through Annotations

URL Mapping of Servlets and Annotations



@WebServlet Annotation:

javax.servlet.annotation.WebServlet is a class-level annotation that affirms the annotated class as a servlet and holds metadata about the declared servlet

The urlMappings attribute is a mandatory attribute of @WebServlet that specifies the URL pattern that invokes this servlet

Here is the much simplified version written to the Servlet 3.0 API.

As MyServlet is annotated as a servlet using the @WebServlet annotation, it gets initialized during the startup of the web container. Note that the deployment descriptor is optional in this case.

```
@WebServlet(name = "Basic ", urlPatterns={"/MyApp"}, loadOnStartup=1)
public class MyServlet extends HttpServlet{
    public void doGet(HttpServletRequest req, HttpServletResponse res){      ....  }}
```

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

22

When a request arrives, the container matches the URL in the request with the servlet's URL Patterns and if the URL pattern matches, the corresponding servlet will be invoked to serve the request. All other attributes of this annotation are optional, with reasonable defaults.

The **name attribute** specifies the name of servlet. It could be different from Servlet class, URL Pattern. Rather is just a dummy name given to servlets. This attribute is not mandatory.

It also has **loadOnStartup** attribute, this is used to specify - If you want to do something on the startup of the servlet (i.e. the element loadOnStartup with value greater or equal to zero, 0), you need put the code in a init method or in the constructor of the servlet: As we know the init() method is the first life cycle method of servlet.

loadOnStartup also specifies that it will be the first servlet to execute before the client request comes for the servlet and the init() method would run.

For comparison, a code snippet for writing a Java servlet using the old Servlet 2.5 API is shown below. In Servlet 2.5, the web container will initialize the servlet only if you configure the details of the servlet in the deployment descriptor

```
public class MyServlet extends HttpServlet {
    public void doGet (HttpServletRequest req, HttpServletResponse res)
    {
        ....
    }
}
```

Deployment descriptor (web.xml)

```
<web-app>
    <servlet>
        <servlet-name>MyServlet</servlet-name>
        <servlet-class>samples.MyServlet</servlet-class>
    </servlet>
    <servlet-mapping>
        <servlet-name>MyServlet</servlet-name>
        <url-pattern>/MyApp</url-pattern>
    </servlet-mapping>
</web-app>
```

Instructor Notes:

Explain what is deploying a servlet in a container

3.8: Ease of developing Servlets through Annotations Writing First Servlet

```
import java.io.*;
import javax.servlet.*;
import javax.servlet.http.*;
import javax.servlet.annotation.WebServlet;

@WebServlet("/HelloWorld")
public class HelloWorld extends HttpServlet {
    protected void doGet(HttpServletRequest request,
        HttpServletResponse response) throws ServletException, IOException {
        response.setContentType("text/html");
        PrintWriter out = response.getWriter();
        out.println("<HTML>");
        out.println("<HEAD><TITLE>Hello World</TITLE>");
        out.println("<BODY>");
        out.println("<BIG>Hello World</BIG>");
        out.println("</BODY></HTML>");
    }
}
```

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

23

Elements of a Web Application:

The above servlet prints a simple hello world.

This code snippet is using @WebServlet annotation.

Here the URL pattern mapping is embedded within the same annotation. The class also extends HttpServlet and overrides the doGet(request, response) method.

Make use of the annotation @WebServlet above the class name which will create the servlet – HelloWorld inside the container. The servlet will now be referred by the name "HelloWorld". The "/HelloWorld" is the URL Pattern of servlet, that would be used to invoke servlet from web browser.

URL pattern could be any logical name example: "/Hello". It need not be necessarily same name of Servlet. A servlet could have multiple URL patterns.

The doGet() method is overridden to service all incoming requests. Line 8 uses HttpServletResponse object to set the content type of the response. Line 9 uses the response object to retrieve a PrintWriter object to send responses. The remaining lines dynamically generate the HTTP response back to the browser client!

Following are minimum steps needed to create any servlet:

Write servlet

Import the necessary Java packages.

Inherit from GenericServlet or the HTTP convenience class HttpServlet.

Override the service method or the doXXX() methods.

Save the file with a .java filename extension.

2. Deploy the servlet in a container. The process for deploying (installing) a servlet into a webserver (container) varies from webserver to webserver.

Test the servlet by invoking the servlet from a JDK1.8-compatible browser. The URL typically will be of the form:

http://host_name:port/servletcontext/servlet/servlet_class_name

For example: http://localhost:9090/WildFlyServletsTestDemo/HelloWorld,

where WildFlyServletsTestDemo is the context root and HelloWorld is the name of the servlet.

If the server is installed on the same machine as the browser, then the server name can also be referred to as localhost.

Instructor Notes:

Execute
HelloWorld
.java

Demo

Execute the HelloWorld servlet



The screenshot shows a web browser window with the address bar containing the URL `http://localhost:9090/WildFlyServletsTestDemo/HelloWorld`. The main content area of the browser displays the text "Hello World" in a large, black, serif font.

Presentation Title | Author | Date | © 2017 Capgemini. All rights reserved. 24

Note:

We shall use Eclipse Luna 4.4 with WildFly 8.x

To create a web application in Eclipse, follow the given steps:

In Project Explorer, right-click and select New → Dynamic Web Project.

Give a name for the project, say WildFlyServletsTestDemo. Ensure target runtime selected is WildFly 8.x, configure the server.

Check on the check box to create (web.xml – deployment descriptor) as it is optional under Servlets 3.0 and click Finish.

Create servlet class under src folder and within package controller . Refer HelloWorld.java class. At this point compile servlet, but since we are using IDE, this process is automatic. The servlet-api.jar is already part of build path, since we are using WildFly.

As we make use of annotation thus no changes required in web.xml.

Start the browser in Eclipse and run the servlet by invoking it with the following URL:

`http://localhost:9090/WildFlyServletsTestDemo/HelloWorld`

Hello World should be seen on the browser window!


The web application could be packaged into a .WAR file.

Right click and select context root → Export → WAR File. Select the destination and click Finish.

This WAR file could be dropped into an web server like Wildfly and Tomcat (into its webapps folder) and invoke servlet using any browser!

Instructor Notes:

Explain the concept of a Listener. Especially, the ServletContext Listener

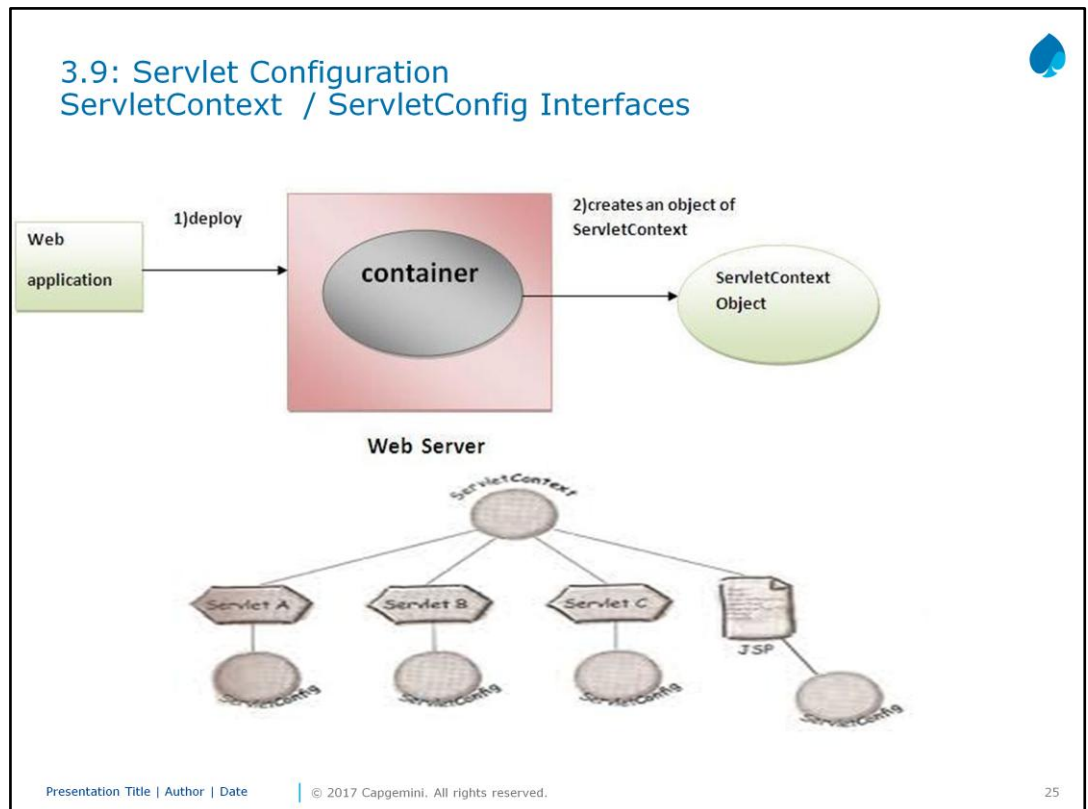

The Container is responsible for creating the ServletContext object when the application gets deployed. ServletContext Object can be shared among multiple web components.

ServletConfig object will be created by the container for every servlet. This object cannot be shared between multiple web components.

More on these interfaces in the next subsequent slides

Instructor Notes:

Explain
the
concept of
a Listener.
Especially,
the
ServletContext
Listener

3.9: Servlet Configuration

Servlet Context Listener



Implementations of this interface receive notifications about changes to the servlet context of the web application they are part of. To receive notification events, the implementation class must be annotated with `@WebListener` annotation

Servlet Context Listener will be used to set the context parameters that would be shared by the entire web application

As Servlet Context is created when application is deployed the listener will execute the lifecycle methods that is `contextCreated(ServletContextEvent)` and `contextDestroyed(ServletContextEvent)` in background

ServletContext object could be obtained via the ServletContextEvent object and then the contextual parameters can be set inside the ServletContext object.

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

26

ServletContextListener is a listener which would get notified for the changes in the ServletContext once the ServletContext object gets created.

As ServletContext is created per Web application, data can be configured in listener which can be shared throughout the application.

Once the Listener is implemented need to override the life cycle methods as `contextCreated()` and `contextDestroyed()`, each of them taking a parameter of type ServletContextEvent; this object can be used to obtain the ServletContext object. (`ServletContextEvent.getServletContext()`)

Refer below listing to have an idea about the Listener:

```
@WebListener
public class TestServletContextListener implements
ServletContextListener {
    public void contextDestroyed(ServletContextEvent sc) {
    }
    public void contextInitialized(ServletContextEvent sc) {
    }
}
```

Instructor Notes:

Explain how initial parameters would need to be set using ServletConfig.

Explain how context parameters would need to be set using ServletContext

3.9: Servlet Configuration and Accessing Initial Parameters via Annotations

Initializing Servlets: Init Parameters / Context Parameters

When Servlets' first lifecycle method – `init()` is invoked by the container, two objects are handed over to servlet

ServletConfig

- To pass certain configuration information to servlet
- ServletConfig is per servlet and cannot be shared between servlets
- ServletConfig is available from `init()` method onwards. It is also available in `service()` method.
- ServletConfig object could be obtained via: `getServletConfig()` method, which is inherited from `GenericServlet` class
- Demo: `ServletConfiguration.java`

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

27

There are 2 versions of `init`:

`init()`

`init(ServletConfig config)`

Both these methods could be overridden. If we override parameterized version of `init(ServletConfig config)` there is a need to give a call explicitly to `super.init(config)`. By seeing this call the container would invoke the parameterized `init()` from the `GenericServlet` hierarchy and then give a call for the default version of `init()` handing over the `ServletConfig` and `ServletContext` objects.

Even if we override default version of `init()`, the container would still invoke the parameterized `init(ServletConfig config)` from the `GenericServlet` hierarchy and then give a call for the default version of `init()` handing over the `ServletConfig` and `ServletContext` objects.

This is due to Servlet Hierarchy discussed in previous slides.

Since Servlet 3.0 we have made use of annotation to declare init parameter.
Example: `@WebInitParam(name = "name", value = "My Servlet")`

For Servlet Context parameters, there is a need to configure a Listener : `ServletContextListener` – which will implement the lifecycle methods of `ServletContext`.

And then the contextual parameters could be set.

Refer Demo `TestServletContextListener.java` for same.

The context parameters could be then retrieved inside a servlet.

Instructor Notes:

Explain how initial parameters would need to be set using ServletConfig.

Explain how context parameters would need to be set using ServletContext

3.9: Servlet Configuration and Accessing Initial Parameters via Annotations

Initializing Servlets: Init Parameters / Context Parameters



ServletContext

- Object per web application and can be shared between multiple servlets
- ServletContext is available from init() method onwards. It is also available in service() method.
- ServletContext object could be obtained via: getServletContext() method, which is inherited from GenericServlet class
- Demo: ServletConfiguration.java and TestServletContextListener.java

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

28

There are 2 versions of init:

init()

init(ServletConfig config)

Both these methods could be overridden. If we override parameterized version of init(ServletConfig config) there is a need to give a call explicitly to super.init(config). By seeing this call the container would invoke the parameterized init() from the GenericServlet hierarchy and then give a call for the default version of init() handing over the ServletConfig and ServletContext objects.

Even if we override default version of init(), the container would still invoke the parameterized init(ServletConfig config) from the GenericServlet hierarchy and then give a call for the default version of init() handing over the ServletConfig and ServletContext objects.

This is due to Servlet Hierarchy discussed in previous slides.

Since Servlet 3.0 we have made use of annotation to declare init parameter.
Example: @WebInitParam(name = "name", value = "My Servlet")

For Servlet Context parameters, there is a need to configure a Listener : ServletContextListener – which will implement the lifecycle methods of ServletContext.

And then the contextual parameters could be set.

Refer Demo TestServletContextListener.java for same.

The context parameters could be then retrieved inside a servlet.

Instructor Notes:

Run the servlet to show how to retrieve initialization and context parameters

Demo


Execute the ServletConfiguration servlet that reads initialization parameters and context parameters



Presentation Title | Author | Date
© 2017 Capgemini. All rights reserved.
29

Note:

Refer com.igate.ch3.ServletConfiguration.java class. Notice that we have used GenericServlet to create the servlet.

For the ServletContext , a Listener is created called TestServletContextListener that would implement the Lifecycle methods of ServletContext.

```
public class InitSnoop extends GenericServlet {
    public void service(ServletRequest req, ServletResponse res)
        throws ServletException, IOException {
        res.setContentType("text/plain");
        PrintWriter out = res.getWriter();
        out.println("Init Parameters:");
        //retrieves all init parameters from web.xml
        Enumeration params = getInitParameterNames();
        while (params.hasMoreElements()) {
            String name = (String) params.nextElement();
            out.println(name + ": " + getInitParameter(name));
        }
    }
}
```

retrieve init parameters from web.xml
http://localhost:8080/Servlet-Demo/initsnoop

The browser shows the init parameters with values as shown above

Instructor Notes:

3.10: Retrieving information

Retrieving Information



Many a times, information about the environment in which a web application is running needs to be known.

Sometimes information about the server that is executing servlets or which client is sending the request needs to be known.

Sometimes information regarding the requests that the application is handling is required to be known

We shall now see a number of methods that provide this information to servlets

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

30

In the Servlet Hierarchy, there is a Listener associated with different objects like ServletContext, HttpSession etc; that would be invoked when these objects are created.

A Listener is a java class that would implement the ServletContextListener interface and would implement the lifecycle methods of ServletContext:

`contextInitialized(ServletContextEvent se)`

`contextDestroyed(ServletContextEvent se)`

We are using the annotation `@WebListener` above the Listener class name that would instruct the container to create the ServletContextListener and invoke it when a ServletContext object is created by Container. Data or configuration information that needs to be shared across multiple servlets could be set up in the ServletContext here. ServletContext is obtained via the `ServletContextEvent.getServletContext()` method.

Instructor Notes:

The last method (`getAttribute()`) may not be understood at this point. Inform participants that this method will be covered in detail later

3.10: Retrieving information Getting Information about the Server



There are four methods that a servlet can use to learn about its server: These are as follows:

- `public String ServletRequest.getServerName()`
- `public String ServletRequest.getServerPort()`
- `public String ServletContext.getServerInfo()`
- `public String ServletRequest.getAttribute(String name)`

```
req.getServerName(): localhost
req.getServerPort(): 9090
getServletContext().getServerInfo(): WildFly 8.1.0.Final - 1.0.15.Final
getServerInfo() name: WildFly 8.1.0.Final - 1.0.15.Final
getServletContext().getAttribute("attribute"): null
```

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

31

Retrieving Information:

Getting Information about the Server:

A servlet can find out much about the server in which it is executing. It can learn the hostname, listening port, and server software, among other things. A servlet can display this information to a client, use it to customize its behavior based on a particular server package, or even use it to explicitly restrict the machine on which the servlet will run.

`getServerName()` method returns the host name of the server to which the request was sent.

`getServerPort()` method returns the port number to which the request was sent

`getServerInfo()` method returns the name and version of the server software as: JBossWeb/2.0.1.GA.

`getAttribute()` returns the value of the named server attribute as an Object or null if the attribute does not exist. The attributes are server dependent. We shall see this in detail in the session on inter-servlet communication.

Instructor Notes:

Refer to
demos for
these
methods

3.10: Retrieving information Getting Info about client m/c and user



Getting Information about client machine:

- `public String ServletRequest.getRemoteAddr()`: It retrieves the IP address of the client machine.
- `public String ServletRequest.getRemoteHost()`: It retrieves the hostname of the client machine.

Getting Information about User:

- `public String HttpServletRequest.getRemoteUser()`: It returns the login of the user, if the user has been authenticated, or null if not.

Retrieving Information:

Getting Info About client m/c and user:

A servlet has the ability to find out about the client machine and for pages requiring authentication, about the actual user. This information can be used for logging access data, associating information with individual users, or restricting access to certain clients.

A servlet can use `getRemoteAddr()` and `getRemoteHost()` to retrieve the IP address and hostname of the client machine, respectively.

The information comes from the socket that connects the server to the client, so the remote address and hostname may be that of a proxy server. An example remote address might be "192.26.80.1320" while an example of remote host might be "dist.engr.com".

The method `getRemoteUser()` of the `HttpServletRequest` gives the username of the client. With the remote user's name, a servlet can save information about each client. Over the long term, it can remember each individual's preferences. For the short term, it can remember the series of pages viewed by the client and use them to add a sense of state to a stateless HTTP protocol. A simple servlet that uses `getRemoteUser()` can greet its clients by name and remember when each user last logged in.

Instructor Notes:

Summary



In this lesson, we have learnt:

- Role of Servlets in web application design
- Basic Servlet Architecture
 - HTTP Basics
 - Servlet Lifecycle
- Elements of a Web Application
- Developing Servlets
- Initializing Servlets
- Getting Information about the Server, Client and User

Presentation Title | Author | Date

© 2017 Capgemini. All rights reserved.

33

Summary:

This lesson introduced us to servlets, web applications. We have seen how to create simple servlets, install on server and execute it. We learnt about the servlet lifecycle and the Servlet API. We also saw how to initialize servlets using `init()` method and how to find information about the server, the client making the request and the user.

Instructor Notes:

Answers for the
Review Questions:

Answer 1: service

Answer 2:
GenericServlet

Review Questions



Question 1: Which Method in a HttpServlet is not recommended to be overridden?

- Option 1: init
- Option 2: destroy
- Option 3: service
- Option 4: doGet
- Option 5: doPost

Question 2: What is the superclass of HttpServlet?

- Option 1: GenericServlet
- Option 2: Servlet
- Option 3: SuperHttpServlet

Instructor Notes:

Answers for the
Review
Questions:

Answer 3:
Server-side
components

Answer 4: init,
doGet and
service

Review Questions



Question 3: Servlets are:

- Option 1: Server-side components
- Option 2: Client-side components
- Option 3: Neither Client-side or Server-side components
- Option 4: Data tier components

Question 4: When a servlet receives an HTTP GET Request for the first time, which of these methods will be called? (Assume the servlet is not preloaded)

- Option 1: init
- Option 2: doPost
- Option 3: processRequest
- Option 4: doGet
- Option 5: service

Instructor Notes:

Review Questions



Question 5: What is the significance of using annotation `@WebServlet("/HelloWorld")` above `public class HelloWorld` extends `HttpServlet` `{}`

- Option 1: Instruct container to create Servlet Hello with URL Pattern `"/HelloWorld"`
- Option 2: Instruct container to create Servlet HelloWorld with URL Pattern `"/Hello"`
- Option 3: Instruct container to create Servlet HelloWorld with URL Pattern `"/HelloWorld"`
- Option 4: No significanc

Instructor Notes:

Review Questions



Question 6: How to pass Initialization parameters to servlet

- Option 1: creating mapping in xml file
- Option 2: making use of annotation @WebInitParam
- Option 3: making use of annotation @WebContextParam
- Option 4: configuring a listener