Name: Vein Carmell G. Pangilinan
Course and Section: IT342 - G2
Project Name: StillNess
Date: 3/30/2026

Phase 2: Mobile Development

Mobile User Registration and Login

GitHub Repository Link

Repository URL	https://github.com/veinP/IT342-Pangilinan-Stillness.git
Repository Name	IT342-Pangilinan-Stillness
Mobile Directory	mobile/
Language	Kotlin
Layout	XML Layout

Final Commit for Phase 2

Commit Message	IT342 Phase 2 – Mobile Development Completed
Commit Hash	c2d9fb3ad360adbb55f42ee3c83eb4517518d7b7
Commit Link	https://github.com/veinP/IT342-Pangilinan-Stillness/commit/c2d9fb3ad360adbb55f42ee3c83eb4517518d7b7

Screenshots

1. Registration Screen

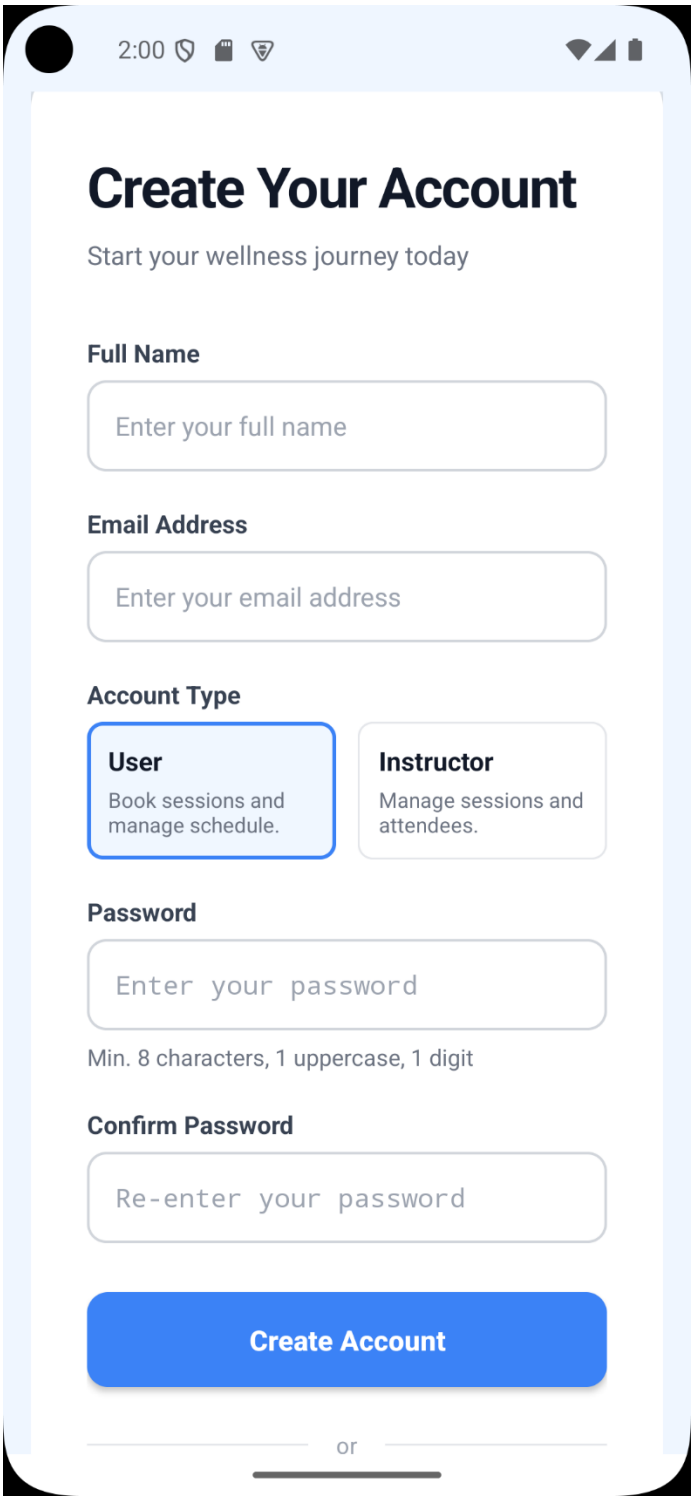

2. Successful Registration

```
2026-03-30 10:02:04.061  7153-7153  REGISTER_SUCCESS        edu.cit.pangilinan.stillness        D  Status Code: 201 Created
2026-03-30 10:02:04.061  7153-7153  REGISTER_SUCCESS        edu.cit.pangilinan.stillness        D  Full Name: Bein Doe
2026-03-30 10:02:04.061  7153-7153  REGISTER_SUCCESS        edu.cit.pangilinan.stillness        D  Email: beindoe@gmail.com
2026-03-30 10:02:04.061  7153-7153  REGISTER_SUCCESS        edu.cit.pangilinan.stillness        D  Account created successfully!
```

3. Login Screen

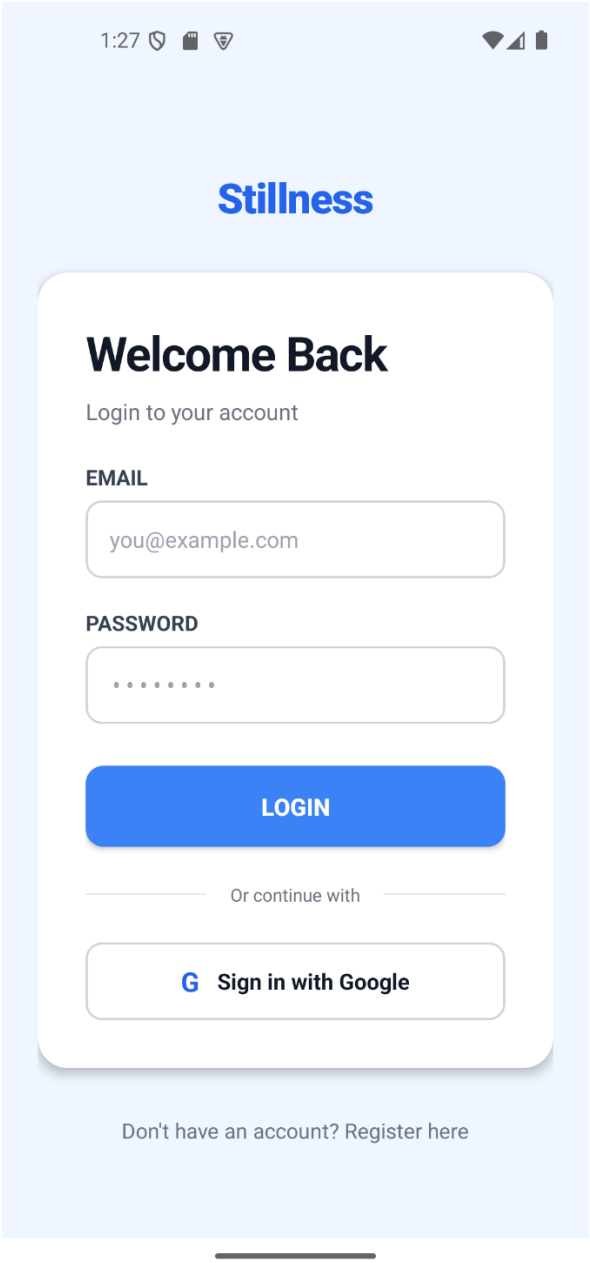

4. Successful Login

```
2026-03-30 10:04:23.754  7153-7313  LOGIN_SUCCESS          edu.cit.pangilinan.stillness  D  Code: 200
2026-03-30 10:04:23.754  7153-7313  LOGIN_SUCCESS          edu.cit.pangilinan.stillness  D  Token: eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJiZWluZG9lQGdtYWlsLmNvbSIsImlhdCI6MTc
2026-03-30 10:04:23.754  7153-7153  LOGIN_SUCCESS          edu.cit.pangilinan.stillness  D  Status Code: 200 OK
2026-03-30 10:04:23.754  7153-7153  LOGIN_SUCCESS          edu.cit.pangilinan.stillness  D  Token: eyJhbGciOiJIUzI1NiJ9.eyJzdWIiOiJiZWluZG9lQGdtYWlsLmNvbSIsImlhdCI6MTc
2026-03-30 10:04:23.754  7153-7153  LOGIN_SUCCESS          edu.cit.pangilinan.stillness  D  User Email: beindoe@gmail.com
```

5. After Login Screen

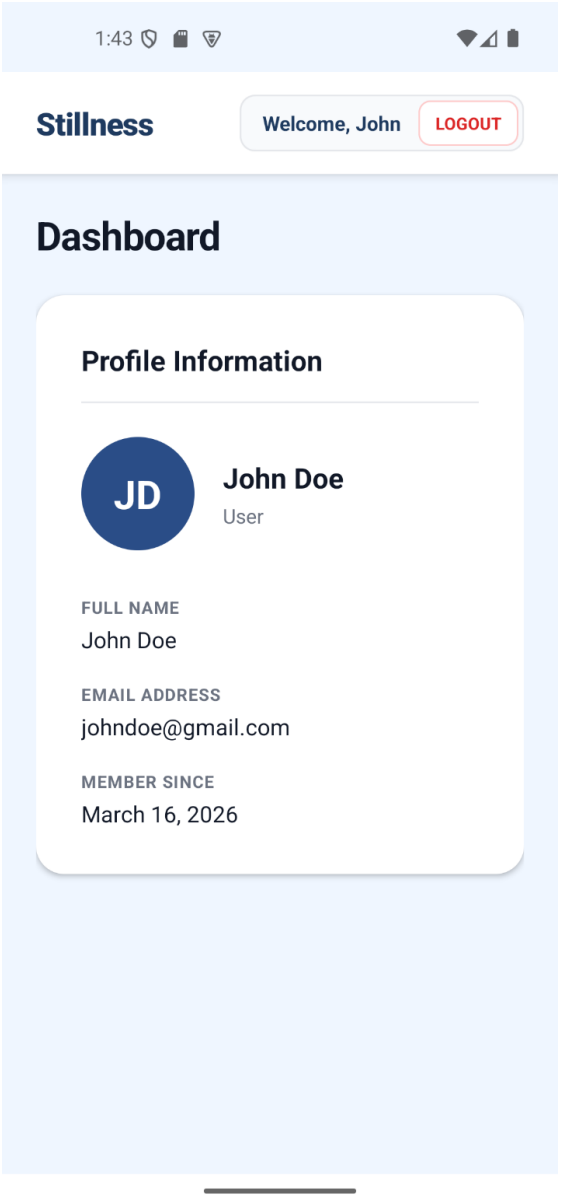

6. Database Record (Supabase)

Update row from `users`

id uuid	56e4416f-6188-4bc1-98a2-cdef05c95ba4
email varchar	beindoe@gmail.com

Optional Fields

These are columns that do not need any value

created_at timestamp	03/30/2026 10:02:09 AM
email_verified bool	FALSE
full_name varchar	Bein Doe

Short Implementation Summary

1. Mobile User Registration

Registration Fields

Field	Type	Notes
Full Name	EditText	Required — must not be blank
Email Address	EditText	Required — valid email format
Password	EditText (hidden)	Min 8 chars, ≥1 uppercase, ≥1 digit
Confirm Password	EditText (hidden)	Must match password field

How Registration Works

The mobile registration screen collects the user's full name, email address, password, and password confirmation via an XML-based layout. Input validation is performed client-side before the request is sent to the backend.

Upon tapping the Register button, the app sends an HTTP POST request to the backend endpoint:

```
POST /api/v1/auth/register
```

The request body contains the fields in JSON format. The Spring Boot backend validates the inputs using Jakarta Bean Validation. If validation passes and no duplicate email exists, a new user record is created in the Supabase database and a 201 Created response is returned along with the user data and JWT token. If validation fails, an appropriate error message is displayed to the user.

2. Mobile User Login

Login Fields

Field	Type	Notes
Email Address	EditText	Required — valid email format
Password	EditText (hidden)	Required

How Login Works

The mobile login screen presents fields for email and password. After the user taps Sign In, the app validates that both fields are non-empty and that the email is properly formatted before making the API call.

The app sends an HTTP POST request to the backend endpoint:

```
POST /api/v1/auth/login
```

The backend verifies credentials through Spring Security's AuthenticationManager. On success, a JWT access token and a refresh token are returned. The mobile app stores the JWT locally and uses it for subsequent authenticated requests. The user is then redirected to the main screen of the app. On failure (incorrect credentials), a 401 Unauthorized response is received and an error message is displayed.

3. API Integration

The mobile app communicates with the Phase 1 Spring Boot backend using Retrofit (or your HTTP client of choice) over HTTP. The base URL points to the locally running or deployed backend server.

Method	Endpoint	Description	Auth
POST	`/api/v1/auth/register`	Register new user account	No
POST	`/api/v1/auth/login`	Authenticate and receive JWT	No

Responses are parsed from JSON. The JWT token received after login is stored (e.g., in SharedPreferences or EncryptedSharedPreferences) and attached as a Bearer token header for any subsequent authenticated API calls.