

Instructor: Date:

Learner: Regional Branch:

Program: Center:

CONTENT

- Let's Start! • Let's Explore! • Let's Practice! • Extension Activity • Target Words • Learning Points



Let's Start!

Understanding Higher Levels of Abstraction.



Learning Outcome:

Understand information about web applications, their principles and basic concepts in a range of work contexts. Describe applications for an operating system for personal computers in a range of work contexts.

Ask your partner:

- Do you think it is important to check cache and cookies in a browser? Why? Why not?
- What are the types of requests that a user can make to a server?

Can Do Statements:


- I can understand written information about properties and methods of the request object in ASP.NET.
- I can use terms related to the request object in ASP.NET.
- I can write questions and answers to check my understanding on the request object in ASP.NET.





Let's Explore!

A programming student is giving a presentation about request objects in ASP.NET.

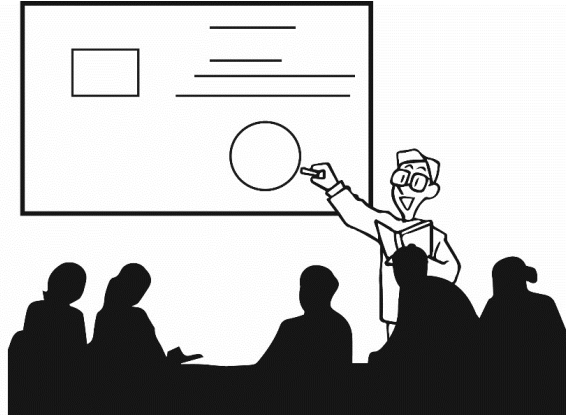

Instructions: Read the text below.

How could we define the Request Object in ASP.NET? Well, during this presentation, I will try to explain all aspects regarding this object. First of all, it's important to know that when a user sends an HTTP request, the Request Object is the one in charge of recovering the values or abstractions sent by the client browser to the server. These values enable browsers to load pages, which means that this kind of objects is wrapped by an instance of `System.Web.HttpRequest` class.

But how do we set the Request Object when coding? It depends on the type of function that we aim to set, so we need to focus on methods and properties that can be defined by the Request Object. Methods are related to the operations that can be performed by classes or objects, and properties, for their part, are fields of objects or classes.

What methods and properties can the Request Object specify? Concerning methods for the Request Object. We have, for instance, `Request.BinaryRead` to retrieve and store data sent in a Post request. We can also mention `SaveaAS` to keep a record of requests in a disk, `GetType` to define the type of an instance, `ValidateInput` to provide security, and `Map Image Coordinate` to describe the image-field parameters, among others.

In terms of properties, it is possible to bring up different examples: `Request.Cookies` Collection which makes reference to the value of cookies sent in HTTP request, `Request.Form` Collection which gathers all form values, `Request.QueryString` that is related to all HTTP query string variables, and `UserHostAddress`, that gets the address of a remote client.



Let's Practice!

How could we define the Request Object in ASP.NET?

Instructions: Select the correct option to correctly complete each sentence.

1. I will (*decide to choose / try to explain / expect to care*) all aspects regarding Request Object.
2. It's (*easy to pay / difficult to provide / important to know*) that when a user sends an HTTP request, the Request Object recovers the values or abstractions sent by the client browser to the server
3. These values enable browsers (*to load pages / to pass pages / to create pages*), which means that this kind of objects is wrapped by an instance of System.Web.HttpRequest class.
4. Different methods and properties can be defined by the Request Object; they are set depending on the type of function that we (*want to think / consider to load / aim to set*).



Let's Practice!

How do we set the Request Object when coding?

Instructions: Read the clues. Find the words in the word search below.

1. _____ are operations that can be performed by classes or objects.
2. _____ are fields of objects or classes
3. _____ keeps a record of any request in a disk.
4. Request.Cookies Collection makes reference to the _____ of cookies sent in HTTP request.
5. GetType defines the type of an _____.
6. Request.BinaryRead _____ and stores data sent in a Post request.

V	D	E	G	E	L	I	S	A	E	V	A	S	D	N	U
E	Q	N	B	O	L	S	I	T	H	A	T	H	G	H	M
L	O	F	N	O	I	T	A	T	C	E	P	X	E	P	E
J	R	R	S	W	G	C	I	L	D	T	B	A	G	R	U
V	E	E	F	H	V	T	V	C	B	S	I	O	E	O	I
D	T	S	U	O	M	E	T	H	O	D	S	T	E	P	O
S	R	I	M	R	Y	G	R	E	K	L	G	T	V	E	T
S	I	T	E	V	A	T	E	S	O	V	L	Z	I	R	I
O	E	A	P	R	O	V	I	D	E	S	Q	Y	T	T	L
T	V	S	D	C	O	B	D	M	V	Q	O	Z	I	I	L
I	E	M	I	N	S	T	A	N	C	E	N	G	N	E	I
N	S	G	T	T	E	O	V	T	R	H	E	K	I	S	C
A	O	S	U	F	L	O	R	E	C	I	T	A	S	P	O
N	E	P	H	N	X	L	M	W	H	I	C	H	E	V	P
A	V	A	L	U	E	U	I	T	A	V	L	Z	D	X	E
B	M	B	U	Z	D	N	A	H	G	N	I	P	L	E	H



Extension Activity

Object Request's Methods and Properties.

Instructions: Complete the following steps. Fill in the Self-Assessment.

- Do some further research about properties and methods of the Request Object in ASP.NET and the way they relate one another.
- Create a mind map to explain your findings.
- Use examples to illustrate methods and properties in your explanation.
- Prepare an oral presentation to explain your mind map.
- Show your findings to the class.

Self-Assessment

Yes

No

- I do further research about properties and methods of the request object in ASP.NET.
- I create a mind map to explain my findings.
- I use examples to illustrate properties and methods in my explanation.
- I prepare an oral presentation to explain my mind map.
- I show my findings to my class.

☐	☐
☐	☐
☐	☐
☐	☐
☐	☐



Target Words

- cookie** (noun): a small piece of data that has information about a user
e.g. Request.Cookies Collection which makes reference to the value of cookies sent in HTTP request.
- query string** (noun): a set of variables defined in a URL to request pages or applications
e.g. Request.QueryString that is related to all HTTP query string variables.
- load** (verb): to make information appear on a website or application interface
e.g. These values enable browsers to load pages.
- instance** (noun): a specification of an object in object-oriented programming
e.g. This kind of objects is wrapped by an instance of System.Web.HttpRequest class
- retrieve** (verb): to locate and recover something
e.g. We have, for instance, Request.BinaryRead to retrieve and store data sent in a Post request.
- value** (noun): a variable declared in order to store or point data
e.g. The Request Object is the one in charge of recovering the values or abstractions sent by the client browser to the server.



Learning Points

Infinitives

You use **verbs followed by to-infinitive** to communicate *necessity, obligation, desire* or *suggestion* and sometimes to give an *opinion*.

We use **to + infinitive** in these specific cases:

1. After certain verbs:

These verbs may vary according to their communicative intention:

- *Verbs of thinking or feeling:* decide, choose, hope, like, prefer, expect, etc.
- *Verbs of speaking:* promise, agree, refuse, etc.
- *Verbs of purpose:* have, need, plan, try, refuse, agree, etc.
- *Other verbs:* want, help, manage, etc.

Examples:

- We have **decided to use** a different app.
- The company is **planning to develop** our application soon.
- This directive **attempts to make** the application run.
- We **agreed to choose** another development platform.

2. After adjectives:

Examples:

- It's **important to get** this topic.
- It's **difficult to code** certain application functions in ASP.NET.
- Some methods are **complicated to understand**.

3. To express a purpose:

Examples:

- This object is declared **to load** pages.
- Its main function is **to retrieve** values from the server.
- This is done **to set** different functions.

Examples

- I will try to explain all aspects regarding this object.
- It's important to know that when a user sends an HTTP request, the Request Object is the one in charge of recovering the values or abstractions sent by the client browser to the server.
- It depends on the type of function that we aim to set.



Learning Points

Simple Present Tense in Third-Person Singular

The **simple present tense** is frequently used to talk about routines, permanent situations or general truths.

These are some examples:

Routines:

- *The company frequently **uses** ASP.NET to create applications.*

Permanent situations:

- *He **works at** a software development company.*

General truths:

- *An application **fails**, every time there is an error in the source code.*

When we use the present simple in third-person singular (he, she, it), the main verb always is modified from its base form in the following cases:

1. If the verb ends with a **consonant**, you need to add the letter -s to the verb.

Example:

- *It **gets** all the information.*

2. If the verb ends in **-sh**, **-ch**, **-ss**, **-x** or **-o**, you need to add **-es** to the verb.

Example:

- *It **watches** all data and **does** everything to interpret it.*

3. If the verb ends in **-y**, you need to change it for i and then add **-es**.

Example:

- *The server **tries** to collect all variables.*

Examples

- *It depends on the type of function that we aim to set, so we need to focus on methods and properties that can be defined by the Request Object.*
- *Request.Cookies Collection which makes reference to the value of cookies sent in HTTP request.*
- *UserHostAddress, that gets the address of a remote client.*