



Instructor: Date:

Learner: Regional Branch:

Program: Center:

CONTENT

- Let's Start!
- Let's Explore!
- Let's Practice!
- Extension Activity
- Target Words
- Learning Points



Let's Start!

Let's talk about strings in PHP.



Learning Outcome:

Understand information about common solutions to problems in spoken or written documents.
Talk about programming and data base related to hypertext preprocessor in spoken or written documents.

Can Do Statements:

- I can give examples to understand what a string is.
- I can talk about the functions of different strings in PHP.
- I can explain what a constant is in PHP.

Ask your partner:


- How do you usually count the number of characters inside a script?
- Have you ever tried to make a variable global for a whole script? How did you do it?



Let's Explore!

Getting Acquainted with* Strings and Constants in PHP

*"Getting acquainted with" means to familiarize with something; to know something in depth.

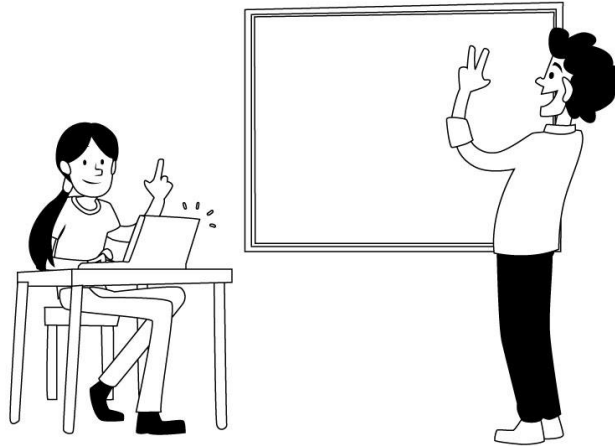

Instructions: Read the text below.

Professor Adams had me prepare this presentation, so I have to tell you about my experience with Strings and Constants in PHP. Pay close attention because if I hadn't been studying PHP for the last year, I wouldn't have known about the importance of these topics for our career; and, besides, I'll have you answer some questions at the end. For starters, I'll give you a brief definition and some examples. I found out that strings are a series of characters put together; like in a sequence of elements that use some character encoding. Some of them are: `Strrev()`, `Strlen(string)`, `Ucwords(string)`, etc.

If I hadn't asked the teacher about the functions of strings, he wouldn't have told me that the people who created PHP had several functions for strings created. An example of a string function is `Strlen(string)`; this function gives you the length of the string itself. So, if you write `echo strlen("Welcome to Cloudways")` the output will be "20". Another example is the function `Strrev(string)`. The creators had this function reverse the string. So, by writing `echo strrev("Welcome to Cloudways")` the result will be "syawduo!C ot emocleW".

Now, I wouldn't have been able to identify what constants are if I hadn't read an online article, and I want to tell you a little bit about them too. Constants are identifiers for simple values that cannot change during the execution of the script, and they can be used across said script. Unlike normal variables, you don't need to use a "\$" sign, so If you want to create a constant you can use the `"define()"` function.

I hope this information I just gave you is useful. Now, I'm going to ask you some questions, I hope you're ready!





Let's Practice!

Jack is explaining what a constant is in PHP.

Instructions: Read the paragraph. Underline all the mistakes in the dialogue.

Jack: Now, I wouldn't have being able to identify what constants are if I haven't read an online article, and I want to tell you a little bit about them too. Constants are identifiers for simple values that cannot change during the execution of the script, and they can be used across said script. Unlike normal variables, you don't need to use a "\$" sign, so If you want to create a constant you can use the "define()" function. Furthermore, constants are global; that means that they can be automatically used in the whole script.

John: Thanks, Jack! I wouldn't had been able to understand all this information if you haven't been here.

Jack: Well, if I haven't read this, I wouldn't having been able to help you!



Let's Practice!

Thanks to Jack, I think I might pass the test.

Instructions: Match column A with column B. Read the sentences aloud. Check your pronunciation with your instructor.

COLUMN A

1. I'll have my script written
2. I had my string length defined using
3. My teacher had me study functions
4. My boss had Ana retrieve
5. I'll have all the strings functions

COLUMN B

- a. reviewed for the test.
- b. like the "Str_word_count(string)" function.
- c. using strings in PHP.
- d. the reverse in a string using the "strrev()" function.
- e. the "Strlen(string)" function.



Extension Activity

Let's look for more information about functions of different strings in PHP.

Instructions: Complete the following steps. Fill in the Self-Assessment.

- Look for information about different functions of strings in PHP.
- Take notes about the information you read.
- Make a chart to show five strings with their functions.
- Write a report to explain how these five strings work in PHP with examples.
- Use causative with have, third conditional in negative, and some sentences in past, present, and future in your report.
- Share your report with your class.

Self-Assessment

Yes No

- I search information about different functions of strings in PHP.
- I summarize the information I read.
- I make a chart to show some strings with their functions.
- I write a report to explain how some strings work in PHP with examples.
- I use causative with have, third conditional in negative, and some sentences in past, present, and future in my report.
- I present my work in front of my classmates and teacher.

☐ ☐☐ ☐☐ ☐☐ ☐☐ ☐☐ ☐



Target Words

- **character** (noun): a number, letter, punctuation mark or even a symbol that can be encoded by a computer
e.g. Strings are a series of characters put together; like in a sequence of elements that use some character encoding.
- **length** (noun): the extent of something
e.g. The function "Strlen(string)"; gives you the length of the string itself.
- **output** (noun): a computing process that consists in transferring a computer's internal information to output devices, such as disks or display screens
e.g. If you write "echo strlen("Welcome to Cloudways") the output will be "20".
- **reverse** (verb): to turn something in its opposite order or position
e.g. Another example is the function Strev(string). The creators had this function reverse the string.
- **identifier** (noun): a symbol that allows a quick recognition in a code
e.g. Constants are identifiers for simple values that cannot change during the execution of the script, and they can be used across said script.
- **sign** (noun): a mark or a designated symbol that has a specific meaning
e.g. Unlike normal variables, you don't need to use a "\$" sign, so If you want to create a constant you can use the "define()" function.



Learning Points

Third Conditional in Negative Form

We use the **third conditional** or the unreal past conditional in **the negative form** to talk about the imaginary results of actions that didn't happen.

We use **the third conditional in negative statements** when we want to talk about the results of an action that could have been avoided, but it wasn't.

Take a look at the following structure to describe an unreal situation that we cannot change:

If+ subject + **had not/ hadn't** + **main verb in past participle** + complement
+ **comma (,)** + subject + **would not/ wouldn't have** + **main verb in past participle** + complement





Learning Points

Example:

*If I **hadn't used** the function to count the characters, I **wouldn't have known** the number of characters in the string.*

Remember that you can reverse the clauses. Doing this will not change the meaning of the sentence and you won't need to add a comma to separate them.

Example:

*I **wouldn't have known** the number of characters in the string if I **hadn't used** the function to count the characters.*

On the other hand, the third conditional in negative form can have the negative connotation just in one of the two clauses, either the if-clause or the result clause. However, the meaning can change. Look at the following statements:

Examples:

*If I **had known** that PHP was so useful for designing web pages, I **wouldn't have wasted** my time looking for other programs.*

(In this case, the person regrets that he didn't know about PHP, so he wasted his time looking for other programs. He is upset.)

*If I **hadn't known** that PHP was so useful for designing web pages, I **would have wasted** my time looking for other programs.*

(In this case, the person imagines a hypothetical situation. If he hadn't known about PHP, he would have wasted his time. Fortunately, it didn't happen, so he is pleased.)

Examples

- *If I hadn't been studying PHP for the last year, I wouldn't have known about the importance of these topics for our career.*
- *If I hadn't asked the teacher about the functions of strings, he wouldn't have told me that the people who created PHP had several functions for strings created.*



Learning Points

Causative with Have

We use **the causative with the verb have** when we want to talk about something that someone has done for us or for another person.

When using “**have**” as a causative you say that an action was done but you didn’t do it yourself, instead, you asked or requested it to be done by someone else.

There are two ways to use “**have**” as a causative:

In the first one, you don’t need to mention who did the action. Use the following structure if you want to do it this way:

Subject + **have** (you can use any tense) + object + **main verb in past participle**

Example:

*I **have** my scripts **reviewed** every time I’m done with one of them.*

(In this case, we don’t know who the reviewer is.)

The second way to use “**have**” as a causative is by mentioning the person who did the action. You can use the following structure:

Subject + **have** (you can use any tense) + agent (who does the action) + **main verb in base form** + object

Example:

*I **had** John **write** my script using strings*

Examples

- *I’ll have you answer some questions at the end.*
- *The creators had this function reverse the string.*

