

DRAUPNIR

Console and JARNGREIPR Design System

Visual language, information architecture, user flows, accessibility and the build specification for every screen of the DRAUPNIR console

Document reference	VLD-UX-DRAUPNIR-001
Revision	1.0
Status	Issued for build. Forward specification, not a repository survey
Date of issue	28 August 2026
Author and owner	JB Benjamin, Chief Executive Officer
Asset owner	Veldris Ltd, company no. 17366869, 128 City Road, London EC1V 2NX
Programme	Midgard Suite, CIM-56
Governs	DRAUPNIR console and the JARNGREIPR design system
Companion documents	VLD-SAD-DRAUPNIR-001 Rev 1.3; VLD-INF-SINDRI-001 Rev 3.3
Precedence	Governs frontend matters. The SAD governs architectural matters
Classification	CONFIDENTIAL — RECIPIENT EYES ONLY

REVISION HISTORY

Rev	Date	Author	Summary of change
1.0	2026-08-28	JB Benjamin	Initial issue. Design principles, users and contexts, JARNGREIPR token system and component library, thirty one screen inventory, four user journeys, interaction and accessibility specification, sixty two acceptance criteria and five build prompts

DISTRIBUTION AND HANDLING

This document is confidential to Veldris Ltd and is issued to named recipients only. It specifies the interface through which commercially released artefacts are approved and published. It is not to be reproduced, forwarded or disclosed in whole or in part without the written authority of the author.

CONTENTS

PART 1 FOUNDATIONS	4
1 Purpose, scope and status	4
2 Design principles	4
3 Users and contexts of use	5
PART 2 JARNGREIPR VISUAL LANGUAGE	7
4 Tokens	7
5 Component library	10
6 Content and microcopy	11
PART 3 ARCHITECTURE, SCREENS AND FLOWS	13
7 Information architecture	13
8 Screen inventory	14
9 Key screens in detail	16
10 User journeys	19
11 Interaction model	19
12 Accessibility	20
PART 4 BUILD SPECIFICATION	21
13 Acceptance criteria	21
14 Build prompts	24
15 Delivery sequence and effort	27
16 Design operations	27
17 Open questions	27

PART 1 FOUNDATIONS

1 Purpose, scope and status

1.1 Purpose

This document specifies the visual design, interaction model, information architecture and user flows for the DRAUPNIR console, and for JARNGREIPR, the design system it is built on. It is the design authority for the frontend work described in Prompts 8 and 9 of VLD-SAD-DRAUPNIR-001.

The console is the surface through which the fifty six Midgard Commonwealth Intelligence Models are curated, trained, reweighted, evaluated, approved and released. Everything the pipeline records is only as useful as the interface that surfaces it, and an approval control that can be pressed without reading the evidence produces a signature that means nothing.

1.2 Status

This is a forward specification. No DRAUPNIR repository exists at the time of writing. Every screen, component, token and flow described here is **SPECIFIED**, meaning it is a requirement on the implementation, and none is **OBSERVED**. Wireframes are low fidelity: they fix layout, hierarchy, content and state, not final visual treatment. Values shown in them are illustrative and are not real data.

Where this document and VLD-SAD-DRAUPNIR-001 disagree on a frontend matter, this document governs. Where they disagree on an architectural matter, the SAD governs.

1.3 Scope

In scope: design principles, users and contexts of use, the visual language and its tokens, the component library, the screen inventory, the navigation model, the four primary journeys, interaction and accessibility requirements, content and microcopy standards, design operations, and the prompts and acceptance criteria by which the frontend is to be produced.

Out of scope: the backend API, which is SAD section 8; the Midgard Suite customer facing interfaces, which will adopt JARNGREIPR but are specified separately; and the Veldris marketing identity, which is a separate brand asset.

1.4 Naming

JARNGREIPR, the iron gloves with which a smith handles work too hot to touch by hand, is the design system. The name follows the Veldris standard recorded in VLD-INF-SINDRI-001 section 1.5, which reserves gods and realms to the Midgard product line and draws infrastructure naming from smiths, dwarves and their works.

The choice is not decorative. The console exists so that an operator can handle a process otherwise too large, too slow and too consequential to hold directly.

2 Design principles

Six principles in priority order. Where two conflict, the lower ranked yields.

#	Principle	What it means in practice
1	Evidence before decision	Any control that commits an irreversible act sits below the evidence for it. The approve button is beneath the gate results, never beside a summary badge. A decision made without seeing the basis is a decision the audit record cannot defend
2	State the truth about state	The interface says what is happening, including when what is happening is bad. A partitioned site says so. A degraded run says so. Nothing hides behind a spinner

#	Principle	What it means in practice
		that resolves into a generic failure
3	Disabled with a reason, never enabled to fail	An action that cannot succeed is disabled and the reason is stated in place. The alternative teaches operators that errors are random
4	The record is the product	Lineage, ledger and provenance are primary navigation, not an export. An auditor reaches a complete chain in three interactions or fewer
5	Fast to read, slow to destroy	Reading is optimised for scanning: dense tables, live updates, keyboard navigation. Destruction is deliberately slow: two steps, the consequence in words, the artefact name typed for a release withdrawal
6	One visual language across the estate	JARNGREIPR is a separate package because the Midgard Suite will adopt it. A component built only for this console is a component built twice

DESIGN DECISION U1. The approve control sits below the evidence, not in a sticky action bar.

Rationale. A persistent action bar is the conventional pattern and is better for speed. It also lets an approver sign without passing the gate results, which defeats the only structural control available at Site 0, where separation of duties does not exist. Speed is the wrong optimisation for the one irreversible action in the system.

Alternative rejected. A sticky footer with the approve control always visible, which is faster and removes the reason the control exists.

3 Users and contexts of use

Four roles, defined in SAD section 9.4. At Site 0 one individual holds several of them, which the interface must handle without pretending otherwise.

Role	What they are doing	Frequency	Pressure
Curator	Registering sources, declaring licences and personal data, running curation	Bursts of several sources, then nothing for days	Low. Accuracy matters more than speed
Operator	Composing specifications, submitting runs, watching progress, diagnosing failures	Daily, with longer sessions when something fails	Moderate. A failure that idles an appliance costs hours
Approver	Reading gate evidence, signing, publishing	Weekly to a few times a week	High consequence, low frequency. Rare enough to be unfamiliar, serious enough to matter
Auditor	Reconstructing how a released model was made	Rare, usually under external scrutiny	High. Often performed with a third party watching

3.1 Contexts

Context	Device	Density	Purpose
Workstation	Desktop browser, 1440 px and above	Comfortable	All four journeys. The primary context
CON-A, STEDI U10 to U12	9 inch 1280 x 720 touch panel driven directly by DVALIN	Compact	Local appliance status. Read only. Works when the API and the network do not
CON-B, TANGIR	9 inch 1280 x 720 touch panel driven by REGIN	Compact	Thermal, fabric and queue dashboards in kiosk mode. Read only
Remote	Desktop browser over WireGuard	Comfortable	As workstation, over a slower link

DESIGN DECISION U2. CON-A is not a small version of the console.

Rationale. CON-A exists because the DGX Spark has no baseboard management controller, so it is the only console that survives a total network failure. Its entire value is that it depends on nothing beyond the appliance it is attached to. Rendering the web console on it would make it depend on the API, the network and the scheduler, which is exactly what it is there to outlive.

Alternative rejected. A responsive console layout at 1280 x 720, which is less code and forfeits the only console that works during an outage.

3.2 Anti-goals

The console is not a chat interface, not a notebook, and not a general purpose model playground. It offers no inference against released models; that is the Midgard Suite. Every feature request beginning "while we are in here" is assessed against that boundary.

PART 2 JARNGREIPR VISUAL LANGUAGE

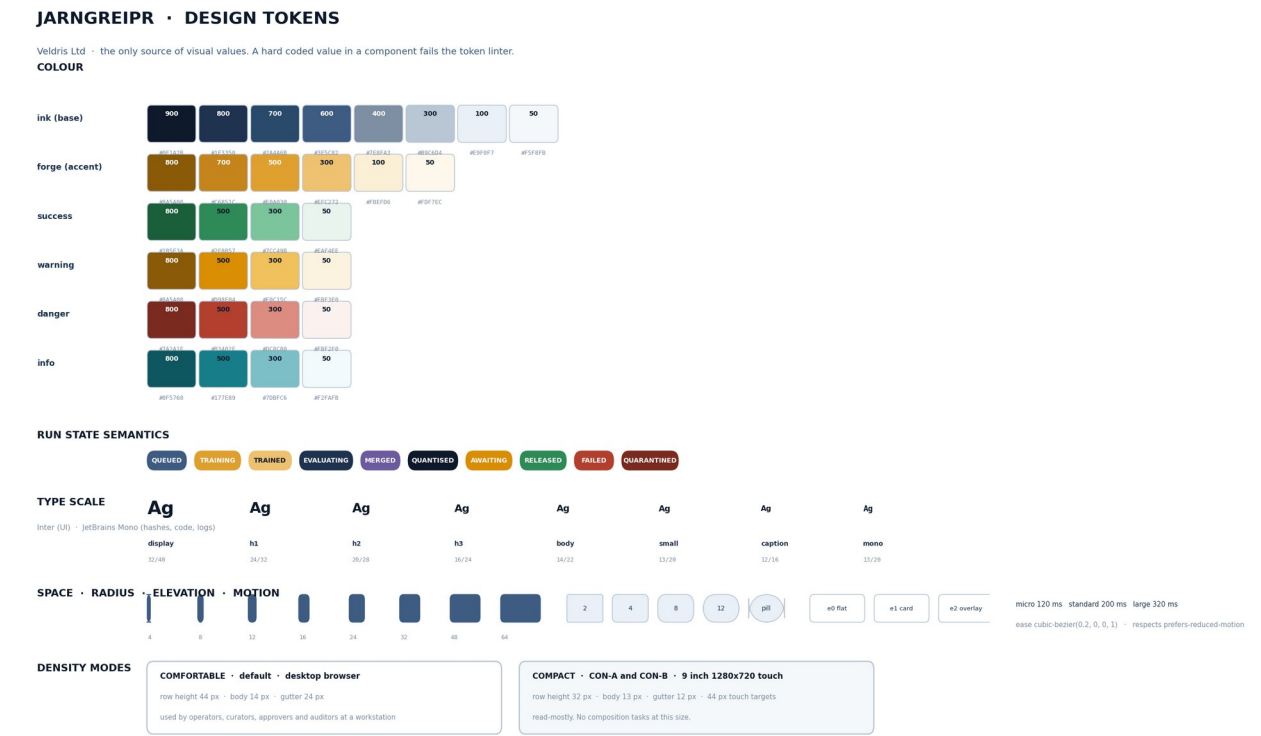


Figure 1. JARNGREIPR design tokens

4 Tokens

Tokens are the only source of visual values. A hard coded colour, spacing, radius or duration in any component fails the token linter and fails acceptance criterion AC-V3.

4.1 Colour

Ramp	Purpose	Values
ink	Text, surfaces, chrome, borders	900 #0E1A2B, 800 #1F3350, 700 #2A4A6B, 600 #3E5C82, 400 #7E8FA3, 300 #B9C6D4, 100 #E9F0F7, 50 #F5F8FB
forge	Accent, primary action, active navigation, training state	800 #8A5A08, 700 #C6851C, 500 #E0A030, 300 #EFC272, 100 #FBEFD6, 50 #FDF7EC
success	Passed gates, released, healthy	800 #1B5E3A, 500 #2E8B57, 300 #7CC49B, 50 #EAF4EE
warning	Margin breach, sole approver notice, attention	800 #8A5A08, 500 #D98E04, 300 #F0C15C, 50 #FBF3E0
danger	Failure, rejection, destructive action	800 #7A2A1F, 500 #B3402F, 300 #DC8C80, 50 #FBF2F0
info	Network, fabric, informational	800 #0F5760, 500 #177E89, 300 #7DBFC6, 50 #F2FAFB
merge	Reweighting, merged artefacts, partition state	500 #6C5B9E, 100 #E8E2F5, 50 #F4F1FA

Dark theme surfaces: base #0B1420, raised #14202F, overlay #1D2C3E, primary text #E9F0F7, secondary text #7E8FA3. Accent and semantic ramps shift one step lighter in dark theme to hold contrast.

4.2 Run state semantics

State colour is a token, not a per component choice, so a state reads the same on a table row, a card, a badge and a timeline.

State	Token	Rationale
QUEUED	ink 600	Inert. Nothing is happening yet
TRAINING	forge 500	The active state, and the accent of the whole system
TRAINED	forge 300	Active work finished, not yet judged
EVALUATING	ink 800	Under judgement
MERGED	merge 500	Reweighting is a distinct kind of act and reads distinctly
QUANTISED	ink 900	Near release, deliberately sober
AWAITING_APPROVAL	warning 500	Requires a human. Warning, not danger: nothing is wrong
RELEASED	success 500	Terminal and good
FAILED	danger 500	Terminal and bad, recoverable by retry
QUARANTINED	danger 800	Withdrawn and retained. Darker than failed, because it is a decision rather than an accident

Colour never carries meaning alone. Every state renders as a text label inside its pill, and every gate result renders a value and a margin beside its colour.

4.3 Typography

Inter for interface text. JetBrains Mono for hashes, identifiers, log output, specifications and any value the user may need to compare character by character.

Role	Size / line height	Weight	Use
display	32 / 40	600	Page title on a detail screen
h1	24 / 32	600	Screen title
h2	20 / 28	600	Section
h3	16 / 24	600	Card and panel title
body	14 / 22	400	Default
small	13 / 20	400	Table cells at comfortable density, secondary text
caption	12 / 16	400	Column headers, metadata, timestamps
mono	13 / 20	400	Hashes, identifiers, logs, YAML

Hashes are truncated to eight characters followed by an ellipsis, with the full value on hover and a copy control. A truncated hash is never presented without a way to obtain the whole of it.

4.4 Space, radius, elevation, motion

Space scale on a 4 px base: 4, 8, 12, 16, 24, 32, 48, 64. Radius: 2 for inputs, 4 for cards, 8 for panels, 12 for dialogs, pill for badges. Elevation in three levels only: flat, card, overlay. Motion: 120 ms micro, 200 ms standard, 320 ms large, easing `cubic-bezier(0.2, 0, 0, 1)`, all suppressed under `prefers-reduced-motion`.

4.5 Density

Mode	Row height	Body	Gutter	Context
Comfortable	44 px	14 px	24 px	Desktop browser. Default
Compact	32 px	13 px	12 px	CON-A and CON-B at 1280 x 720. Touch targets remain 44 px regardless

Compact reduces chrome and spacing. It never reduces touch target size, and it never introduces a composition task. Both consoles are read only.

4.6 Iconography and data visualisation

Icons are a single stroke weight from one set, used only where a label alone is ambiguous. No icon carries meaning without a text label beside it or an accessible name.

Charts use the ink and forge ramps, never a categorical rainbow. A loss curve is forge; a baseline comparison is ink 400. Gate margins render as a signed number with a colour, never as a bare colour. Any chart conveying a pass or fail also states the value.

5 Component library

JARNGREIPR • UNIVERSAL COMPONENT STATES

Every component ships all six. A component with only a happy path is not complete and fails AC-U2.

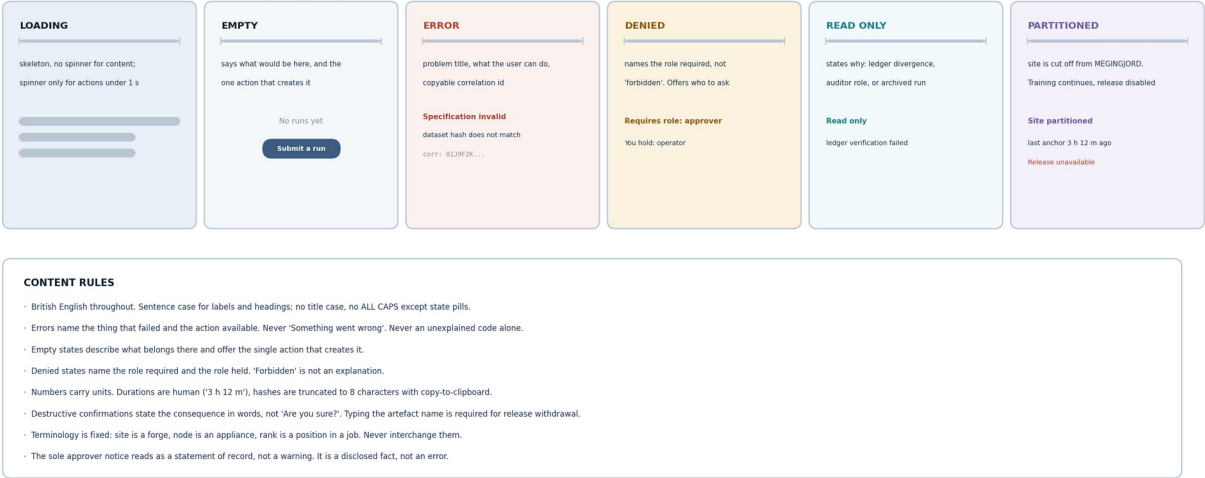


Figure 2. Universal component states and content rules

5.1 Primitives

Component	Notes beyond the obvious
Button	Four intents: primary, secondary, danger, ghost. Loading state disables and announces. No icon only button without an accessible name
Input, textarea	Label always visible. Placeholder never substitutes for a label. Error text below, associated by aria-describedby
Select, combobox	Native select where the option set is short. Combobox with filtering above twelve options
Checkbox, radio, toggle	Toggle is for an immediate effect, checkbox for a value submitted later. The two are not interchangeable
Table	Sortable, column visibility, sticky header, row density from the density token. Header cells are <code>th</code> with scope
Badge and pill	Carries the state token. Text always present
Tooltip	Supplementary only. Never the sole carrier of information, never on touch only
Dialog	Focus trapped, restores focus on close, escape closes unless destructive
Drawer	For detail beside a list without losing list context
Toast	Transient confirmations only. Never an error that requires action
Tabs, breadcrumb, pagination	Cursor based pagination. No page numbers, because the underlying data grows during reading

5.2 Composites

Component	Purpose	Critical detail
Run card	A run on the board	State pill, progress, node, elapsed, and estimated remaining. Estimate is omitted rather than guessed when step time is not yet stable
Gate card	One gate result	Value, baseline, margin and pass or fail. Never a bare tick
Evidence	The full E1 to E6 set	Sits above any decision control. Sortable by margin so the tightest result is

Component	Purpose	Critical detail
panel		findable
Lineage tree	Release back to base licence and corpus	Renders gaps explicitly as a marked node, never by omission
Sweep matrix	Merge points against gate results	Highlights the selected point and states the trade in words beneath
Log viewer	Run output	Virtualised. Follows tail by default, releases follow on scroll up, and says so
Ledger entry viewer	One transition	Actor, timestamp, transition, payload, entry hash and previous hash
Capacity gauge	Appliance and vault utilisation	Thresholds from policy, not hard coded
Diff viewer	Specification and policy versions	Used when comparing a retried run against its predecessor
Spec editor	Compose a run	Schema validation inline, dry run before submit, never submits on enter

5.3 The six universal states

Every component ships all six. A component with only a happy path is incomplete and fails AC-V2.

State	Rule
Loading	Skeleton for content. A spinner only for an action expected to complete within a second
Empty	Says what would be here and offers the single action that creates it
Error	Problem title, the action available, and a copyable correlation identifier
Denied	Names the role required and the role held. "Forbidden" is not an explanation
Read only	States why: ledger divergence, auditor role, or an archived run
Partitioned	The site is cut off from MEGINGJORD. Training continues, release is unavailable, and both facts are stated

6 Content and microcopy

British English throughout. Sentence case for labels and headings. No title case. Capitals reserved for state pills and acronyms.

Rule	Example
Errors name the thing that failed and the action available	"Out of memory during the backward pass. A sequence of 14,208 tokens exceeded the cutoff of 8,192." Not "Something went wrong"
Empty states describe what belongs there	"No runs yet" with a submit control, not "No data"
Denied states name roles	"Requires role: approver. You hold: operator"
Numbers carry units, durations are human	"11 h 04 m", "62.4 GB", "+1.2 pp"
Destructive confirmations state the consequence	"This withdraws MIDGARD-CIM-GBR-v1.0 from the registry. Existing downloads are unaffected. Type the artefact name to confirm." Not "Are you sure?"
Terminology is fixed	Site is a forge. Node is an appliance. Rank is a position in a job. Never interchanged

Rule	Example
The sole approver notice is a statement of record	"You submitted this run and you are approving it." Not a warning, not an error. A disclosed fact

DESIGN DECISION U3. Terminology is enforced by a lint rule over user facing strings, not by review.

Rationale. VLD-INF-SINDRI-001 Decision S12 separates site, node and rank because the estate already used "node" in two senses. A convention held only by reviewer memory decays. A rule that fails a build does not.

Alternative rejected. A glossary in the contributor guide, which is what every project has and which is why every project drifts.

PART 3 ARCHITECTURE, SCREENS AND FLOWS

7 Information architecture

DRAUPNIR CONSOLE • INFORMATION ARCHITECTURE AND USER JOURNEYS

Built on JARNGREIPR, the Veldris design system. Coloured paths are the four primary journeys.

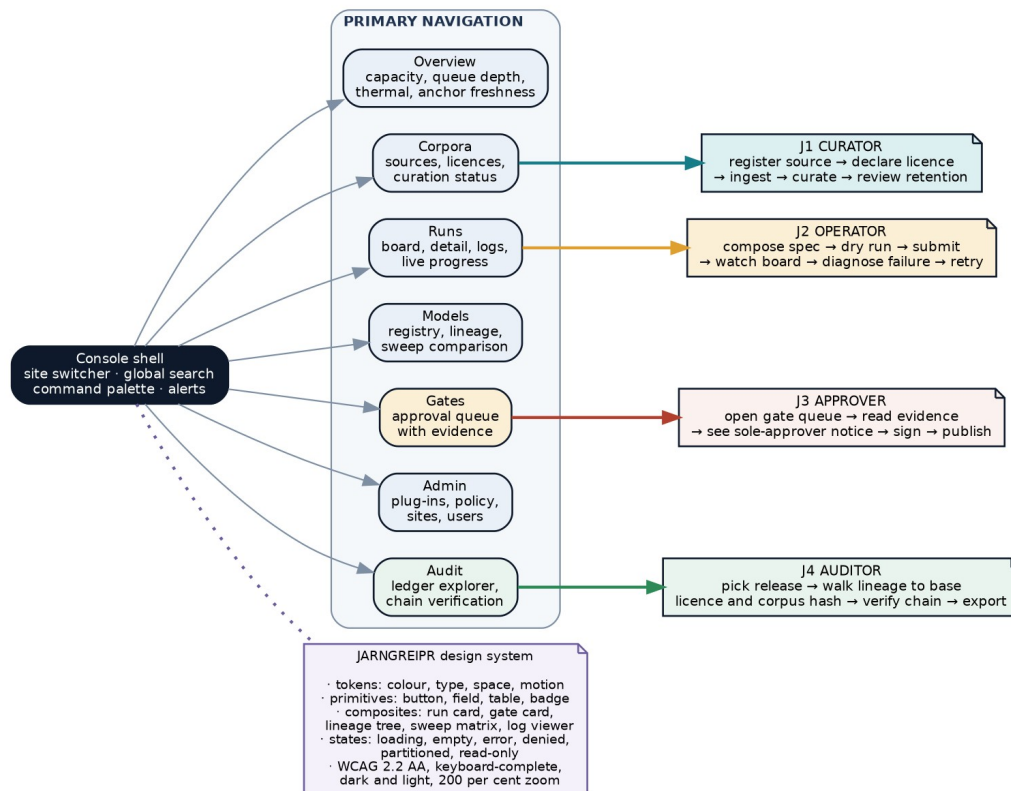


Figure 3. Console information architecture

Seven primary sections, chosen to match the shape of the work rather than the shape of the data model. Corpora, Runs, Models and Gates correspond to the four journeys. Overview, Admin and Audit are supporting. The shell carries the site switcher, global search, the command palette and the alert tray. Site context is always visible, because a Forge Matrix with more than one site makes an unlabelled view dangerous rather than merely unclear.

8 Screen inventory

DRAUPNIR CONSOLE · SCREEN INVENTORY AND NAVIGATION MODEL

Every screen is listed. Screens marked with a role are unreachable without it. CONFIDENTIAL — RECIPIENT EYES ONLY

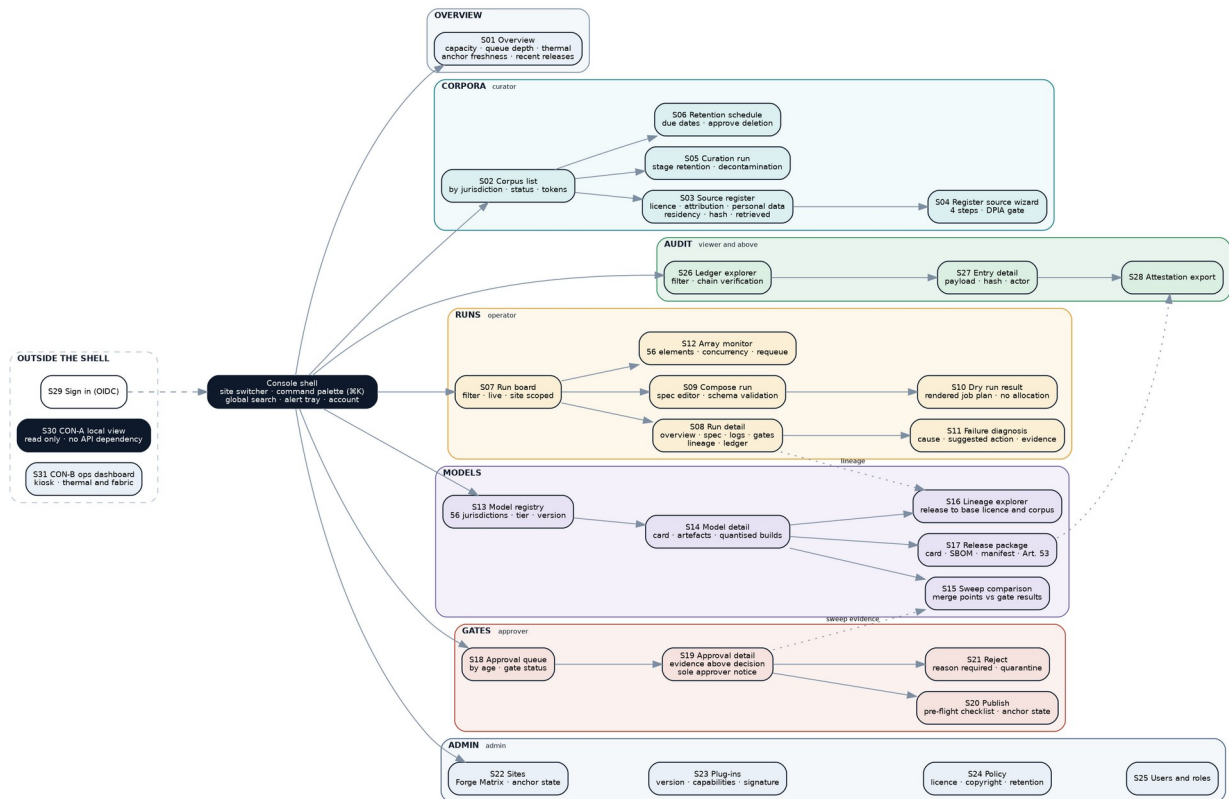


Figure 4. Screen inventory and navigation model

Thirty one screens. Every screen has a purpose, a primary action, and a defined behaviour in all six universal states.

Ref	Screen	Purpose	Primary action	Role
S01	Overview	Health of the site at a glance	Navigate to the thing that needs attention	viewer
S02	Corpus list	Corpora by jurisdiction with status and token count	Open a corpus	viewer
S03	Source register	Every source with licence, attribution, personal data, residency, hash	Register a source	curator
S04	Register source wizard	Four steps ending at the data protection gate	Continue, or resolve the gate	curator
S05	Curation run	Stage by stage retention and decontamination result	Re-run a stage	curator
S06	Retention schedule	Corpora approaching the 24 month deletion point	Approve a retention action	approver
S07	Run board	All runs, filtered, live	Submit a run	operator
S08	Run detail	One run across six tabs	Cancel, or retry	operator
S09	Compose run	Specification editor with inline validation	Dry run	operator
S10	Dry run result	The rendered job plan, no allocation consumed	Submit	operator
S11	Failure diagnosis	Cause, suggested action, supporting evidence	Retry with the correction applied	operator
S12	Array monitor	The fifty six element adapter array	Requeue a single	operator

Ref	Screen	Purpose	Primary action	Role
			element	
S13	Model registry	All jurisdictions with tier and version	Open a model	viewer
S14	Model detail	Card, artefacts and quantised builds	Open lineage	viewer
S15	Sweep comparison	Merge points against gate results	Select a merge point	operator
S16	Lineage explorer	Release back to base licence and corpus hashes	Export attestation	viewer
S17	Release package	Card, SBOM, manifest, Article 53 artefacts	Download the package	viewer
S18	Approval queue	Artefacts awaiting decision, by age	Review	approver
S19	Approval detail	Full evidence, then the decision	Sign and approve	approver
S20	Publish	Pre-flight checklist and anchor state	Publish to registry	approver
S21	Reject	Reason required, artefact quarantined	Reject	approver
S22	Sites	The Forge Matrix, anchor state per site	Register a site	admin
S23	Plug-ins	Version, capabilities, signature status	Enable or disable	admin
S24	Policy	Licence, copyright and retention policy versions	Publish a policy version	admin
S25	Users and roles	Named accounts and their roles	Assign a role	admin
S26	Ledger explorer	Filterable ledger with chain verification	Verify chain	viewer
S27	Ledger entry detail	Payload, actor, entry and previous hash	Copy entry	viewer
S28	Attestation export	Signed lineage bundle	Export	viewer
S29	Sign in	OIDC, hardware backed second factor for approver	Sign in	none
S30	CON-A local view	Local appliance state, no API dependency	None. Read only	none
S31	CON-B ops dashboard	Thermal, fabric and queue in kiosk mode	None. Read only	none

9 Key screens in detail

DRAUPNIR CONSOLE • WIREFRAMES 1 • RUN BOARD AND RUN DETAIL

Journey J2, Operate. Low fidelity: layout, hierarchy and state only. Visual values come from the token sheet.

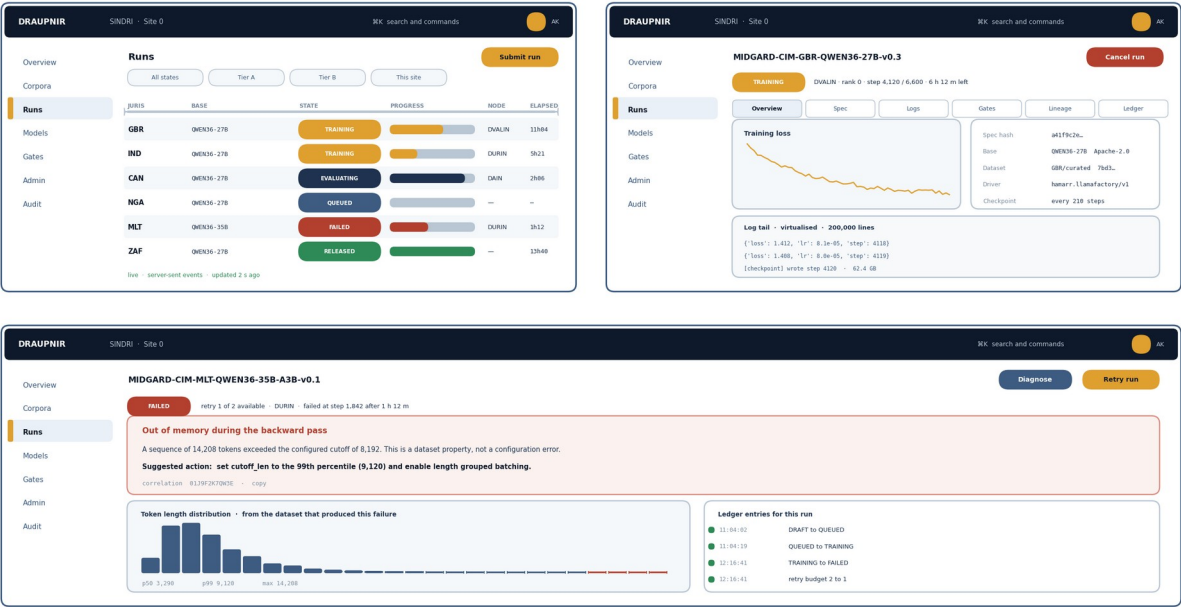


Figure 5. Run board and run detail

9.1 S07 Run board and S08 Run detail

The board is the operator's home. Six columns at comfortable density: jurisdiction, base, state, progress, node, elapsed. Live by server sent events, with the freshness stated in words beneath the table rather than implied by an animation.

Run detail carries six tabs, in this order because it is the order of enquiry when something is wrong: Overview, Specification, Logs, Gates, Lineage, Ledger. The loss curve and the run facts sit side by side above a virtualised log tail, so the three questions an operator asks first are answered without a tab change.

9.2 S11 Failure diagnosis

A failure screen that shows only a stack trace transfers the diagnostic work back to the operator. This screen states the cause in a sentence, the suggested correction as a concrete parameter change, and the evidence for both.

The wireframe shows the out of memory case, which is the most common failure in this pipeline and is almost always a long sequence in the data rather than a configuration error. The screen therefore renders the token length distribution from the dataset that produced the failure, with the 99th percentile marked, because that is the number the operator needs in order to act.

DRAUPNIR CONSOLE · WIREFRAMES 2 · GATE QUEUE AND APPROVAL

Journey J3. Approve. Evidence sits above the decision control, so approving requires seeing the results.

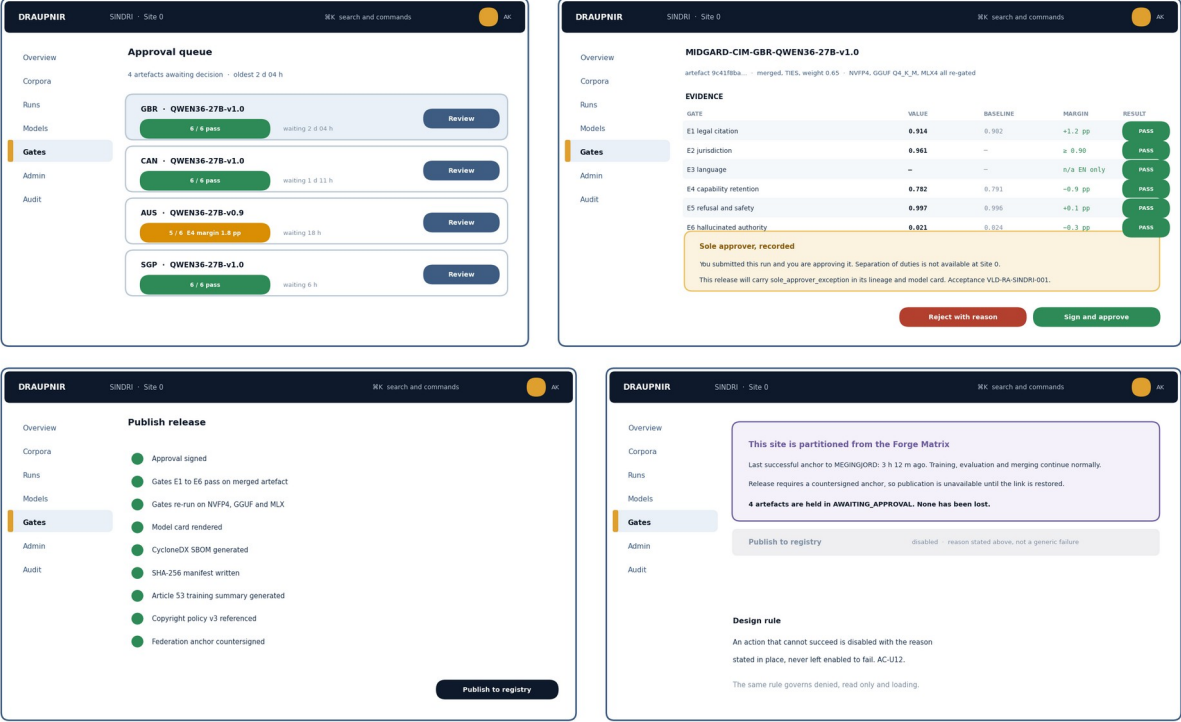


Figure 6. Gate queue, approval, publish and partitioned state

9.3 S18 Approval queue and S19 Approval detail

The queue orders by waiting time, not by jurisdiction, so nothing ages quietly. Each entry shows the gate summary and the age.

Approval detail is the screen this whole document exists for. The evidence table renders all six gates with value, baseline, margin and result. Below it, and only below it, sits the sole approver notice and then the two decision controls. The notice is styled as warning rather than danger because nothing is wrong: it is a disclosed fact about how this release was approved, and it will appear in the lineage and the model card whatever the approver does next.

9.4 S20 Publish and the partitioned variant

Publish is a pre-flight checklist of nine conditions, all of which must be green. The ninth is the federation anchor. When the site is partitioned, the checklist cannot complete, and the screen states why in a panel above a disabled control rather than allowing the attempt and returning an error.

DRAUPNIR CONSOLE · WIREFRAMES 3 · LINEAGE, SWEEP AND CORPUS

Journeys J4 Audit and J1 Curate. A complete lineage must be reachable in three interactions or fewer.

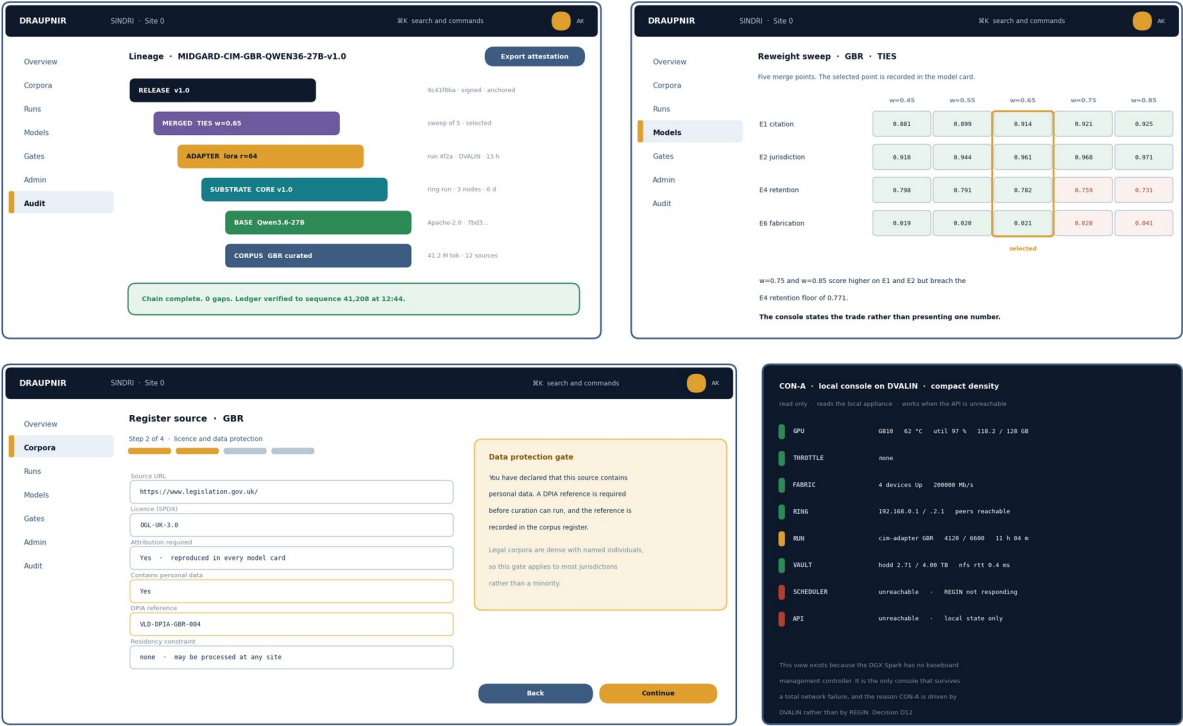


Figure 7. Lineage, sweep comparison and corpus registration

9.5 S16 Lineage explorer

A vertical chain from release to corpus, each node carrying its identifying hash and its key fact. The banner beneath states chain completeness and the ledger sequence verified. A gap renders as a marked node with what is missing, never as a shorter tree.

9.6 S15 Sweep comparison

The reweighting decision is a trade, and the screen presents it as one. Five merge points against four gates, with values that breach a floor shown in danger and the selected point outlined. The sentence beneath states the trade in words, because a matrix of twenty numbers does not by itself tell an operator that the higher scoring points fail a different gate.

9.7 S04 Register source wizard

Four steps, with the data protection gate at step two. When personal data is declared, the DPIA reference field becomes required and a panel explains why, including the observation that legal corpora are dense with named individuals so the gate applies to most jurisdictions rather than a minority. The residency constraint field records the sites permitted to hold the corpus.

9.8 S30 CON-A local view

Rendered by DVALIN, not by the console. Eight lines of local state: GPU, throttle, fabric, ring, current run, vault, scheduler and API. The last two are expected to read unreachable during an outage, and the view continues to function, which is its purpose.

10 User journeys

DRAUPNIR CONSOLE • THE FOUR PRIMARY JOURNEYS

Each is an end to end Playwright test and the acceptance evidence for AC-U1. Red is an error path.

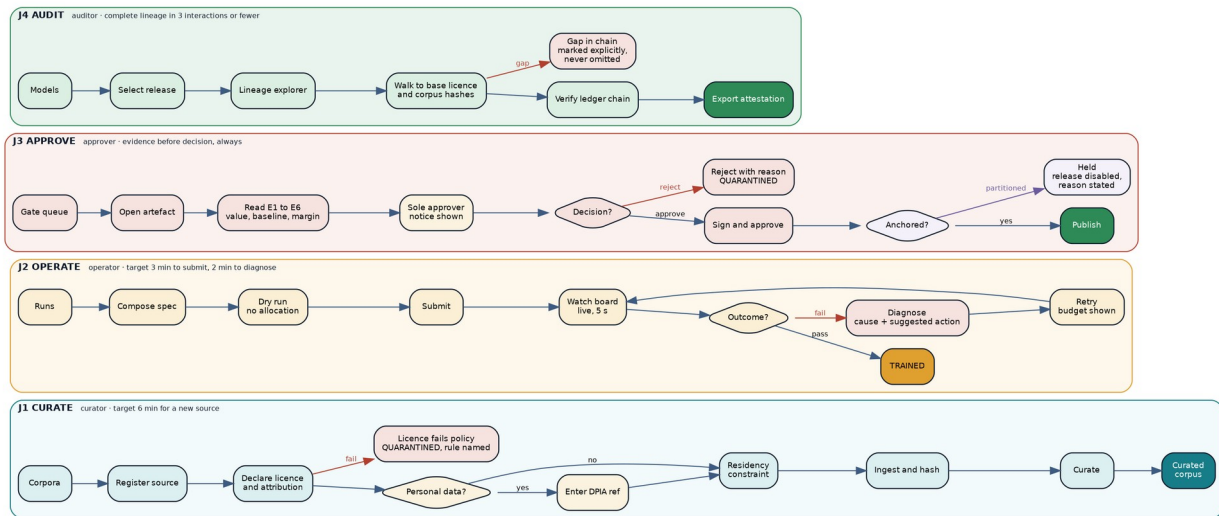


Figure 8. The four primary journeys

Each journey is an end to end Playwright test and constitutes the acceptance evidence for AC-J1 to AC-J4.

10.1 J1 Curate

Corpora, register source, declare licence and attribution, answer the personal data question, supply a DPIA reference where required, set any residency constraint, ingest and hash, curate. Error path: a licence that fails policy quarantines the source and names the failing rule.

Target: a new source registered and curating within six minutes.

10.2 J2 Operate

Runs, compose specification, dry run, submit, watch the board, and on failure diagnose and retry. The dry run step exists so that a specification error costs nothing; an allocation on this estate is the scarce resource.

Target: three minutes to submit, two minutes from failure to a corrected retry.

10.3 J3 Approve

Gate queue, open artefact, read all six gate results, see the sole approver notice, decide. On approval the anchor state is checked; where the site is partitioned the artefact is held and the reason stated. On rejection a reason is required and the artefact is quarantined rather than deleted.

Target: no time target. This journey is deliberately not optimised for speed.

10.4 J4 Audit

Models, select release, lineage explorer, walk to base licence and corpus hashes, verify the ledger chain, export the attestation. A gap in the chain is rendered explicitly.

Target: a complete lineage reached in three interactions or fewer.

11 Interaction model

Concern	Specification
Live updates	Server sent events carrying state deltas. The board reflects a change within five seconds. No full list polling
Command palette	⌘K or Ctrl+K. Covers navigation, run submission, search across runs, models, corpora and ledger

Concern	Specification
	entries
Keyboard	Every function reachable and operable by keyboard. Visible focus indicator throughout. Tables support arrow navigation and type ahead
Focus management	A dialog traps focus and restores it on close. A navigation change moves focus to the new page heading
Optimistic updates	Not used. A state change is shown when the ledger has recorded it. An optimistic interface that later reverts is worse than one that waits
Destructive actions	Two step, consequence in words. Release withdrawal requires typing the artefact name
Long output	Log and ledger views virtualise. Two hundred thousand lines must not degrade the browser
Deep links	Every screen has a URL that restores its state, including filters and the selected site
Session expiry	Warned before it happens, with work preserved. A specification in progress is never lost to a token refresh

12 Accessibility

Conformance target: WCAG 2.2 level AA, verified by automated scan on every route and by a recorded manual keyboard pass.

Requirement	Specification
Contrast	4.5:1 body text, 3:1 large text and interface components, in both themes
Keyboard	Complete operation without a mouse. No keyboard trap. Skip link to main content
Focus	Visible indicator meeting the 2.2 focus appearance criterion. Never removed for aesthetics
Target size	24 by 24 CSS pixels minimum, 44 by 44 on touch contexts
Zoom and reflow	Usable at 200 per cent and at 320 px width without loss of function
Motion	<code>prefers-reduced-motion</code> respected across every animated component
Screen reader	Live regions announce run state changes and gate results. Tables use proper header association. Every icon has an accessible name
Forms	Labels visible and associated. Errors announced and linked to the field. No error conveyed by colour alone
Language	<code>lang</code> set. Jurisdiction content in a non-English language carries its own <code>lang</code>

DESIGN DECISION U4. Accessibility is verified per route in continuous integration, not audited once before release.

Rationale. A single pre-release audit finds the violations present on that day and does nothing about the ones added the following week. Per route automated scanning plus a component level check in the design system catches regressions where they are cheap.

Alternative rejected. An external audit before release, which produces a certificate and a list, and no mechanism to keep either true.

PART 4 BUILD SPECIFICATION

13 Acceptance criteria

Sixty two criteria across five sets. Every Must passes before the frontend is accepted. These extend, and do not replace, the AC-U set in VLD-SAD-DRAUPNIR-001 section 12.2b.

13.1 Visual system

Ref	Criterion	Priority
AC-V1	Every token in section 4 exists in the token package and is consumed by name. Light and dark ramps both present	Must
AC-V2	Every component ships all six universal states with a Storybook story for each. A component missing a state fails the build	Must
AC-V3	No component contains a hard coded colour, spacing, radius or duration. A token linter enforces this in continuous integration	Must
AC-V4	Run state colour comes from the state token in every context: table row, card, badge, timeline. No component defines its own	Must
AC-V5	No information is conveyed by colour alone. Every state renders a text label, every gate result renders a value	Must
AC-V6	Dark theme meets the same contrast thresholds as light. Verified by automated contrast check on every token pair in use	Must
AC-V7	Compact density reduces row height and gutter but never reduces touch target below 44 px	Must
AC-V8	Hashes render truncated to eight characters with the full value available and a copy control. No truncated hash without a route to the whole	Must
AC-V9	Charts use the ink and forge ramps. No categorical rainbow palette appears anywhere	Should
AC-V10	Icons carry an accessible name and never appear without a label or an equivalent	Must
AC-V11	JARNGREIPR builds and publishes as a package independently of the console application	Must
AC-V12	Visual regression snapshots exist for every component in every state and a diff fails the build	Must

13.2 Screens

Ref	Criterion	Priority
AC-S1	All thirty one screens in section 8 exist and are reachable by their documented route	Must
AC-S2	Every screen has a defined and implemented behaviour in all six universal states	Must
AC-S3	Every screen has a URL that restores its full state including filters and selected site	Must
AC-S4	The run board renders six columns at comfortable density and states data freshness in words	Must
AC-S5	Run detail presents its six tabs in the documented order, with the loss curve, run facts and log tail visible without a tab change	Must
AC-S6	Failure diagnosis states a cause in a sentence and a suggested correction as a concrete parameter change	Must
AC-S7	For the out of memory case, failure diagnosis renders the token length distribution with the 99th percentile marked	Must

Ref	Criterion	Priority
AC-S8	Approval detail places the full six gate evidence table above the decision controls. No decision control is reachable without the evidence in the viewport first	Must
AC-S9	The sole approver notice renders in warning style, states the fact plainly, and appears before the decision controls, not in a confirmation after	Must
AC-S10	Publish renders a nine item pre-flight checklist including anchor state	Must
AC-S11	Lineage renders a gap as a marked node stating what is missing, never as a shorter tree	Must
AC-S12	Sweep comparison marks the selected point and states the trade in a sentence beneath the matrix	Must
AC-S13	The register source wizard makes the DPIA reference required when personal data is declared, and explains why	Must
AC-S14	The residency constraint field is present and records permitted sites	Must
AC-S15	CON-A renders from DVALIN, depends on no API call, and continues to display local state with the network disconnected	Must
AC-S16	CON-B runs in kiosk mode and recovers automatically after an appliance restart	Should

13.3 Journeys

Ref	Criterion	Target	Priority
AC-J1	J1 Curate completes end to end in Playwright, including the licence failure path to quarantine	6 min unassisted	Must
AC-J2	J2 Operate completes end to end including dry run, submission, failure and corrected retry	3 min submit, 2 min diagnose	Must
AC-J3	J3 Approve completes end to end including the partitioned hold path and the rejection path	No time target	Must
AC-J4	J4 Audit reaches a complete lineage and exports an attestation	3 interactions or fewer	Must
AC-J5	Each journey test is the acceptance evidence, stored in docs/acceptance/ with its trace	Must	
AC-J6	An unassisted first time user completes J1 and J2 within target in a recorded session with two participants	Should	

13.4 Interaction

Ref	Criterion	Priority
AC-X1	The run board reflects a state change within 5 s by server sent events. No full list polling appears in the network trace	Must
AC-X2	The command palette opens on the platform shortcut and covers navigation, submission and search across all four entity types	Must
AC-X3	Every function is reachable and operable by keyboard alone, verified by a recorded manual pass	Must
AC-X4	Dialogs trap focus and restore it on close. Navigation moves focus to the new page heading	Must
AC-X5	No optimistic update appears anywhere. A state change renders only once the ledger has recorded it	Must

Ref	Criterion	Priority
AC-X6	Destructive actions are two step with the consequence in words. Release withdrawal requires typing the artefact name	Must
AC-X7	A log view with 200,000 lines scrolls smoothly, demonstrating virtualisation	Must
AC-X8	Log tail follow is on by default, releases on scroll up, and the state is stated	Should
AC-X9	Session expiry is warned before it occurs and an in progress specification survives a token refresh	Must
AC-X10	Where more than one site is registered, every view states its site. No unscoped aggregate view exists	Must
AC-X11	A partitioned site states the condition and disables release with the reason in place	Must
AC-X12	Every error surface renders the problem title, the available action and a copyable correlation identifier	Must

13.5 Accessibility and content

Ref	Criterion	Priority
AC-A1	Automated axe scan on every one of the thirty one routes returns zero serious or critical violations	Must
AC-A2	Contrast meets 4.5:1 body and 3:1 large and interface, in both themes, verified by automated token pair check	Must
AC-A3	Manual keyboard pass recorded with findings, covering all four journeys	Must
AC-A4	Focus indicator visible throughout and meeting the WCAG 2.2 focus appearance criterion	Must
AC-A5	Targets meet 24 by 24 CSS px minimum and 44 by 44 in touch contexts	Must
AC-A6	Console usable at 200 per cent zoom and 320 px width with no loss of function	Must
AC-A7	<code>prefers-reduced-motion</code> respected in every animated component	Must
AC-A8	Live regions announce run state changes and gate results to a screen reader	Must
AC-A9	Form errors are announced, linked to their field, and never conveyed by colour alone	Must
AC-A10	Non-English jurisdiction content carries its own <code>lang</code> attribute	Must
AC-A11	All user facing strings are British English, sentence case, and pass the terminology lint rule for site, node and rank	Must
AC-A12	No error string reads "Something went wrong" or equivalent. Every error names what failed	Must
AC-A13	Every empty state names what belongs there and offers the action that creates it	Must
AC-A14	Every denied state names the role required and the role held	Must
AC-A15	A screen reader user completes J3 Approve unassisted in a recorded session	Should

14 Build prompts

Five prompts, executed in order, with review between. They expand Prompts 8 and 9 of VLD-SAD-DRAUPNIR-001 and replace them for frontend work.

Standing instruction to prepend to every prompt in this section.

You are building the DRAUPNIR console and the JARNGREIPR design system for Veldris Ltd, specified in VLD-UX-DRAUPNIR-001. Read that document and VLD-SAD-DRAUPNIR-001 before writing code. Treat both as requirements.

Rules for every task:

1. React 18 with TypeScript, strict mode. Vite. `tsc --noEmit` and eslint must pass.
2. Tokens are the only source of visual values. If you type a hex, a pixel value or a duration into a component, you have made an error.
3. Every component ships six states: loading, empty, error, denied, read only, partitioned.
4. The API client is generated from `openapi.json`. A hand-written client method fails review.
5. No optimistic updates. Render state when the ledger has recorded it.
6. WCAG 2.2 AA is a build gate, not a later pass.
7. British English, sentence case, terminology lint for site, node and rank.
8. No em dashes in code, comments, documentation or user facing strings.
9. If this document and the SAD conflict on a frontend matter, this document wins. On an architectural matter, the SAD wins.
10. If the specification is ambiguous, stop and state the ambiguity. Do not guess.

14.1 Prompt UX-0, foundation and tooling

Establish the frontend workspace and its quality gates before any component.

Deliver:

```
web/                pnpm workspace, Vite, React 18, TypeScript strict
web/packages/jarngreipr/ empty package with build and publish configured
web/apps/console/    empty application shell
Storybook configured against jarngreipr
vitest + Testing Library
Playwright with four empty journey specs, named J1 to J4
axe-core wired into both Storybook and Playwright
token linter: fails on any literal colour, spacing, radius or duration
terminology linter: fails on misuse of site, node, rank in user facing strings
visual regression harness against Storybook stories
```

Requirements:

- Every gate runs in CI and none is skippable on main.
- The four Playwright specs exist and fail with a clear "not implemented" message. An empty harness that runs is worth more than a good one added late.
- The token linter must fail the build on a planted violation. Prove it.

Exit condition:

- AC-V3, AC-V12 harnesses operational.
- A planted hard-coded hex fails CI.
- A planted use of "node" meaning a forge fails CI.

14.2 Prompt UX-1, tokens and theming

Build the JARNGREIPR token layer.

Deliver:

tokens for colour (7 ramps, light and dark), typography, space, radius, elevation, motion, density
CSS custom property output and a typed TypeScript export
theme provider with light, dark and system, persisted per user
density provider with comfortable and compact
automated contrast checker over every token pair in use

Requirements:

- Values are exactly those in VLD-UX-DRAUPNIR-001 section 4. Do not improve them. If a value is wrong, raise it rather than silently changing it.
- Run state tokens per section 4.2. The mapping lives in the token layer, not in any component.
- Compact density reduces row height, body size and gutter. It must NOT reduce touch target size below 44 px. Enforce with a test.
- The contrast checker runs in CI and fails on any pair below threshold.

Exit condition:

- AC-V1, AC-V4, AC-V6, AC-V7 pass.
- Switching theme and density changes no component code.

14.3 Prompt UX-2, primitives

Build the JARNGREIPR primitive components.

Deliver:

button, input, textarea, select, combobox, checkbox, radio, toggle, table, badge, pill, tooltip, dialog, drawer, toast, tabs, breadcrumb, pagination
one Storybook story per component per state (six states each)
axe check on every story
visual regression snapshot on every story

Requirements:

- Section 5.1 notes are requirements, not suggestions. In particular: labels always visible; placeholder never substitutes for a label; tooltips never carry sole information; toasts never carry errors requiring action; pagination is cursor based with no page numbers.
- Dialogs trap focus and restore it on close.
- Table renders th with scope, supports arrow navigation and type ahead.
- Every icon-bearing control has an accessible name.
- No component reads a raw token value; all consume the typed export.

Exit condition:

- AC-V2, AC-V5, AC-V10, AC-A4, AC-A5 pass at component level.
- Every story passes axe with zero serious or critical violations.

14.4 Prompt UX-3, composites

Build the JARNGREIPR composite components.

Deliver:

run card, gate card, evidence panel, lineage tree, sweep matrix,

log viewer, ledger entry viewer, capacity gauge, diff viewer, spec editor

Requirements per section 5.2:

- Run card omits the remaining-time estimate rather than guessing when step time is not yet stable.
- Gate card always renders value, baseline, margin and result. Never a bare tick.
- Evidence panel is sortable by margin so the tightest result is findable.
- Lineage tree renders a gap as a MARKED NODE stating what is missing. It must be impossible to render a gap by omission; write a test that proves it.
- Sweep matrix highlights the selected point and renders a trade sentence beneath, generated from the data, not hard coded.
- Log viewer virtualises; follow-tail on by default, releases on scroll up, and the state is stated in words.
- Spec editor validates against the JSON Schema inline and never submits on Enter. Dry run is the primary action; submit is secondary.

Exit condition:

- AC-V8, AC-S11, AC-S12, AC-X7, AC-X8 pass at component level.
- A test proves the lineage tree cannot omit a gap.

14.5 Prompt UX-4, screens and journeys

Build the console application: all thirty one screens and the four journeys.

Deliver:

web/apps/console/ shell, routing, all screens S01 to S29
 tools/stedi-view/ S30 CON-A local view
 kiosk config S31 CON-B dashboard
 four Playwright journey specs, now implemented

Requirements:

- Screen inventory of section 8 in full. Each screen: purpose, primary action, six states, deep-linkable URL restoring filters and site.
- S19 Approval detail: the evidence table is above the decision controls and the decision controls must not be reachable without the evidence entering the viewport first. Write a Playwright assertion for this.
- S09 Compose run: dry run is primary. Submitting without a dry run requires an extra confirmation.
- S11 Failure diagnosis: cause sentence, concrete suggested correction, and for the OOM case the token length distribution with p99 marked.
- S30 CON-A: rendered by DVALIN, NO API dependency, no shared code path with the web console that could introduce one. Test it with the network down.
- Shell: site switcher always visible, command palette on the platform shortcut, alert tray, global search.
- No optimistic updates anywhere.

Exit condition:

- AC-S1 through AC-S16, AC-J1 through AC-J5, AC-X1 through AC-X12, AC-A1 through AC-A14 pass.
- Recorded manual keyboard pass covering all four journeys, with findings.

15 Delivery sequence and effort

Prompt	Deliverable	Depends on	Indicative effort
UX-0	Workspace, gates, harnesses	SAD Prompt 0	3 to 4 days
UX-1	Tokens and theming	UX-0	2 to 3 days
UX-2	Primitives	UX-1	6 to 9 days
UX-3	Composites	UX-2	7 to 10 days
UX-4	Screens and journeys	UX-3, SAD Prompt 7	12 to 18 days
	Total		30 to 44 working days

UX-0 through UX-3 depend only on SAD Prompt 0 and can run in parallel with the entire backend. Only UX-4 requires the API from SAD Prompt 7. This is the reason the design system is specified as a separate package: it removes the frontend from the backend critical path entirely.

The SAD Rev 1.3 estimate allocated 15 to 22 days across its Prompts 8 and 9. This document's 30 to 44 days is the same work specified properly. The difference is thirty one screens enumerated rather than implied, six states per component rather than a happy path, and accessibility as a gate rather than a later pass.

16 Design operations

Concern	Practice
Source of truth	Tokens live in code. Any design tool file is downstream of the token package, never upstream of it
Component documentation	Storybook is the documentation and the visual regression target. There is no separate component wiki to fall out of date
Handoff	There is no handoff. This document plus Storybook is the specification; a screen is done when its stories and journey test pass
Review gates	A component enters the library only with six states, an axe pass, a visual snapshot and a story. A screen enters the console only with a deep-linkable URL and defined behaviour in all six states
Change control	A token change is a versioned release of the JARNGREIPR package. The console upgrades deliberately, so a visual change is never accidental
Skill	<code>jarngreipr-component</code> , specified in SAD section 11G, scaffolds a conforming component with all six states, stories, axe test and snapshot. Its output must pass the gates unmodified

17 Open questions

Ref	Question	Owner	Needed by
UX-Q1	Is Inter acceptable as the interface typeface, or does Veldris have a licensed brand face that the Midgard Suite will also use? Changing it later is a token change, but the metrics differ enough to affect table density	Veldris	UX-1
UX-Q2	Should the console default to dark theme? The two rack consoles sit in a room with 1 kW of equipment and are read at a glance; the workstation context may differ	Veldris	UX-1
UX-Q3	Does any Commonwealth public sector buyer impose an accessibility standard beyond WCAG 2.2 AA, such as a national profile? The build targets AA regardless, but a known requirement would be evidenced differently	Veldris commercial	UX-4
UX-Q4	Is a recorded usability session with two participants achievable, given the team	Veldris	UX-4

Ref	Question	Owner	Needed by
	size? AC-J6 and AC-A15 are marked Should for that reason and can be withdrawn if not		