Binary search works on a sorted sequence. It compares the target with the middle element. If the target is smaller, it discards the upper half; if it is larger, it discards the lower half. Repeating this process makes the search interval shrink logarithmically.

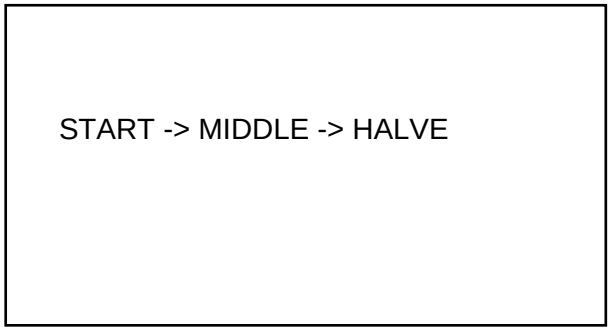

Breadth-first search visits nodes of a graph layer by layer. A queue tracks the frontier. It explores all neighbors of the current node before moving to nodes farther away. A visited set prevents repeated processing of the same node.