


Frontend part :-

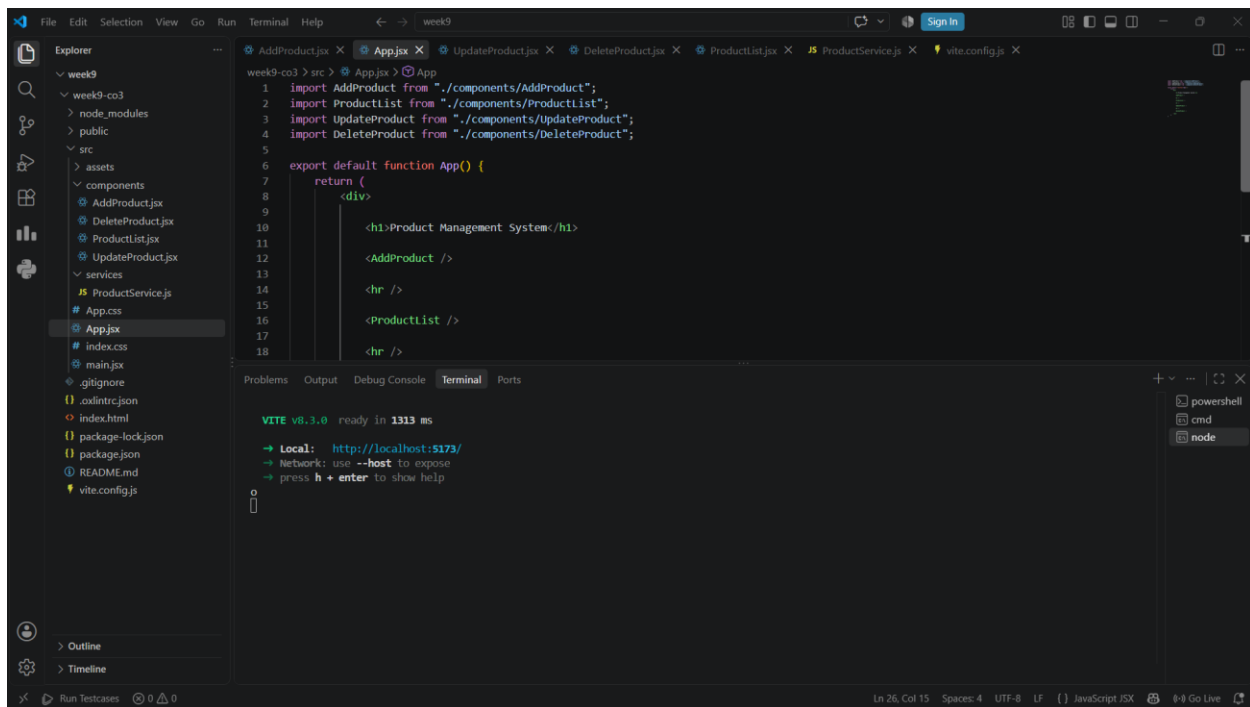


The screenshot shows the VS Code editor with the `App.jsx` file open. The file contains the following code:

```
1 import AddProduct from "../components/AddProduct";
2 import ProductList from "../components/ProductList";
3 import UpdateProduct from "../components/UpdateProduct";
4 import DeleteProduct from "../components/DeleteProduct";
5
6 export default function App() {
7   return (
8     <div>
9       <h1>Product Management System</h1>
10
11       <AddProduct />
12
13       <hr />
14
15       <ProductList />
16
17       <hr />
18     </div>
19   );
20 }
```

The terminal output shows the Vite development server running on `localhost:5173`:

```
VITE v8.3.0 ready in 1313 ms
→ Local: http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
```

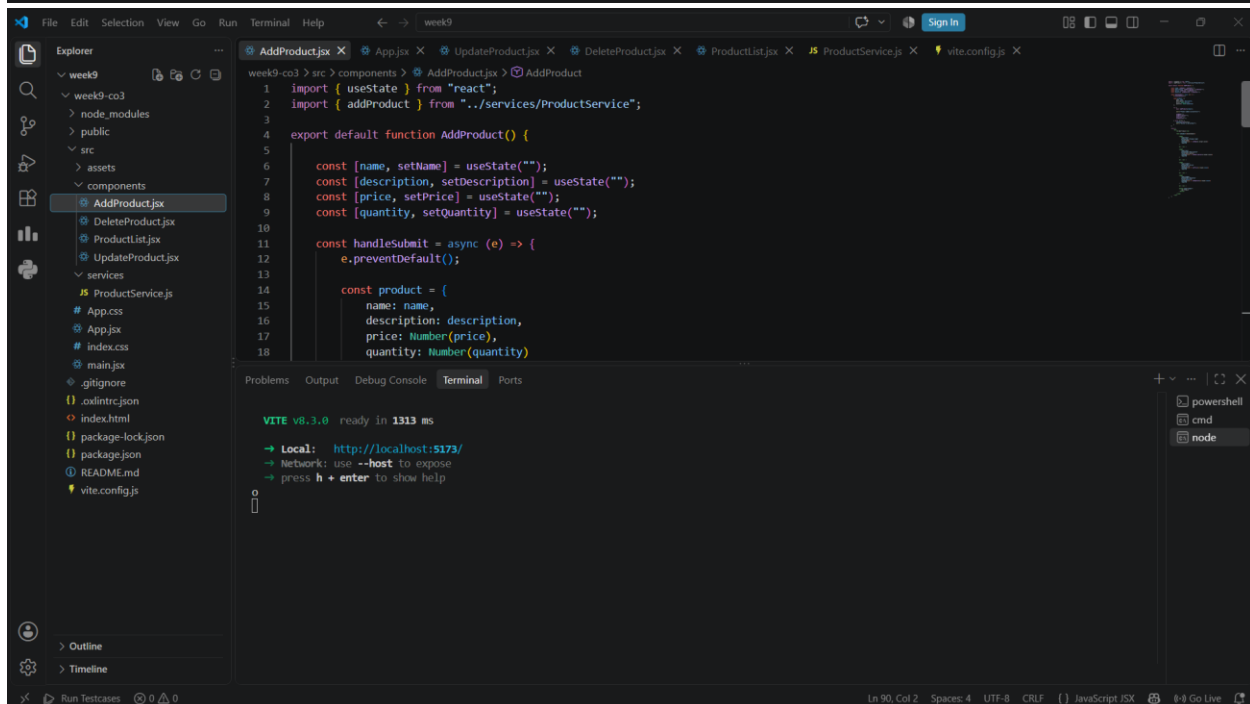


The screenshot shows the VS Code editor with the `AddProduct.jsx` file open. The file contains the following code:



```
1 import { useState } from "react";
2 import { addProduct } from "../services/ProductService";
3
4 export default function AddProduct() {
5
6   const [name, setName] = useState("");
7   const [description, setDescription] = useState("");
8   const [price, setPrice] = useState("");
9   const [quantity, setQuantity] = useState("");
10
11   const handleSubmit = async (e) => {
12     e.preventDefault();
13
14     const product = {
15       name: name,
16       description: description,
17       price: Number(price),
18       quantity: Number(quantity)
19     };
20
21     addProduct(product);
22   };
23 }
```


The terminal output shows the Vite development server running on `localhost:5173`:

```
VITE v8.3.0 ready in 1313 ms
→ Local: http://localhost:5173/
→ Network: use --host to expose
→ press h + enter to show help
```

Output:-

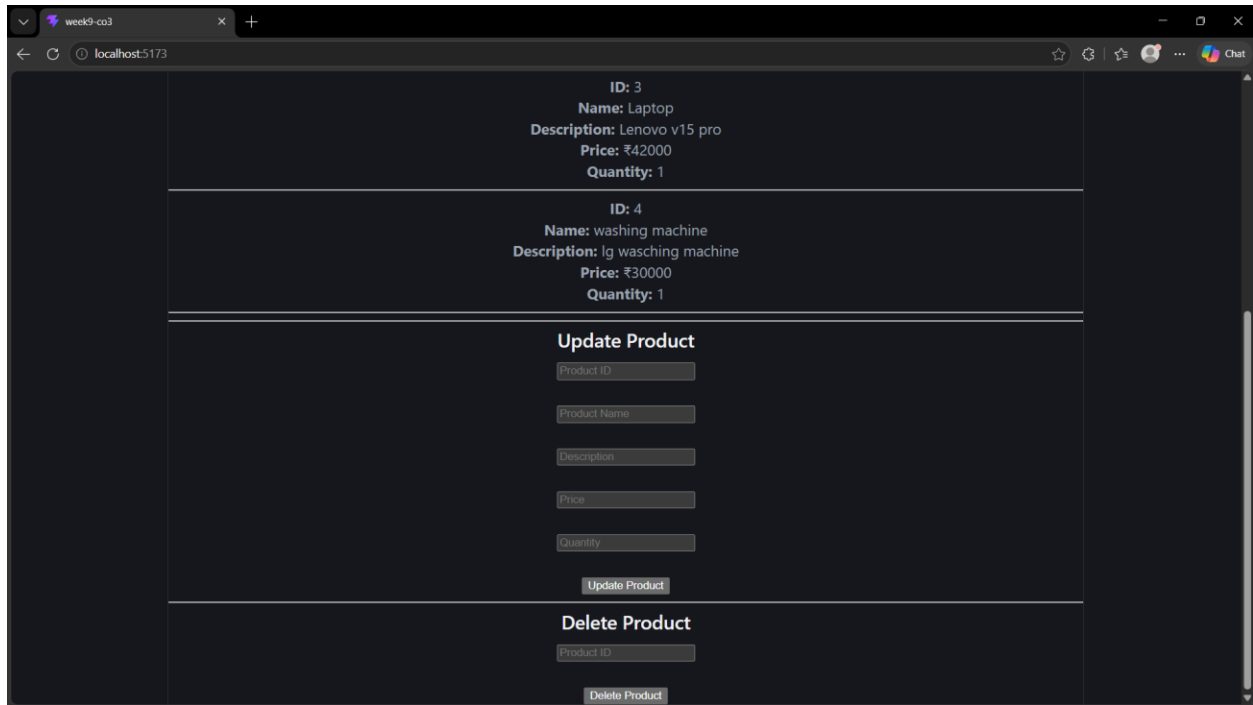

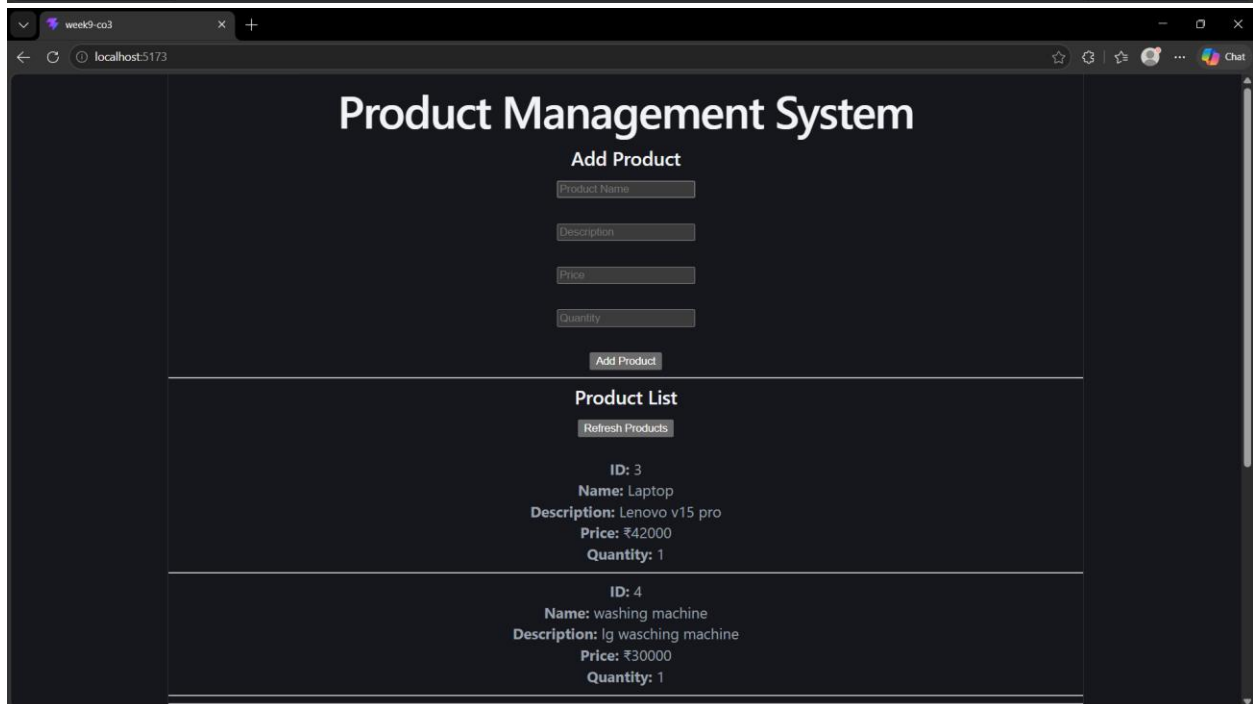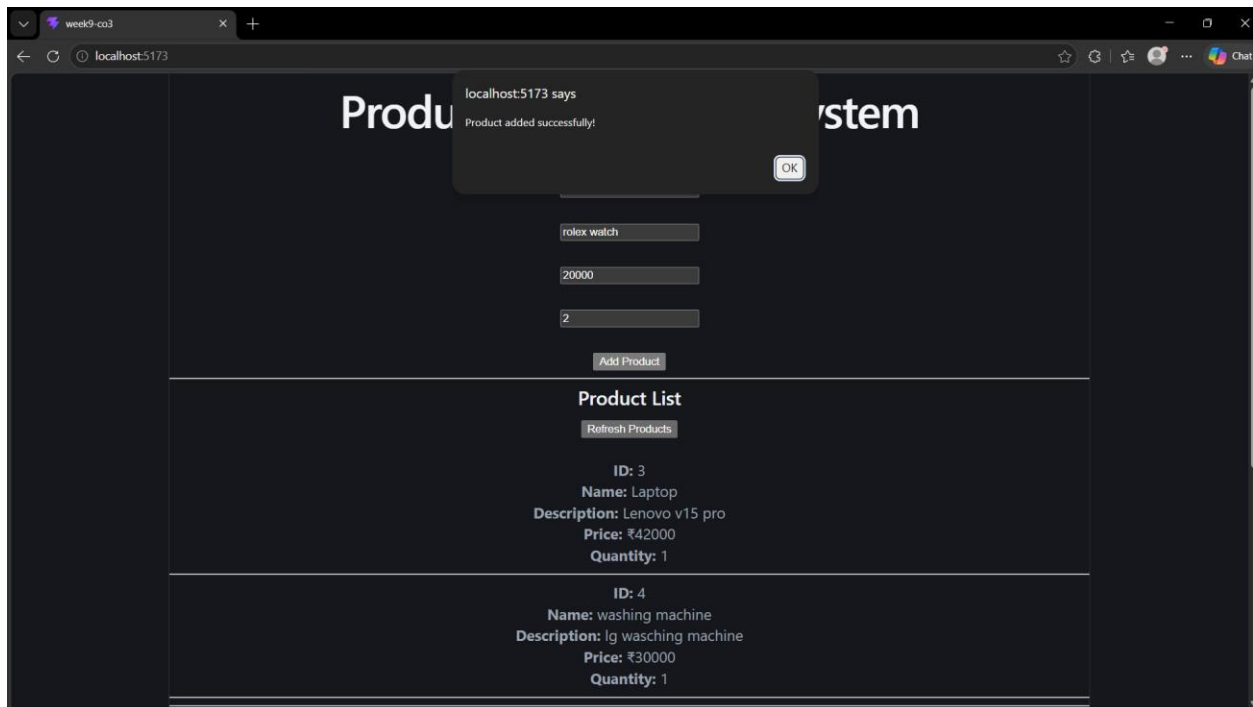

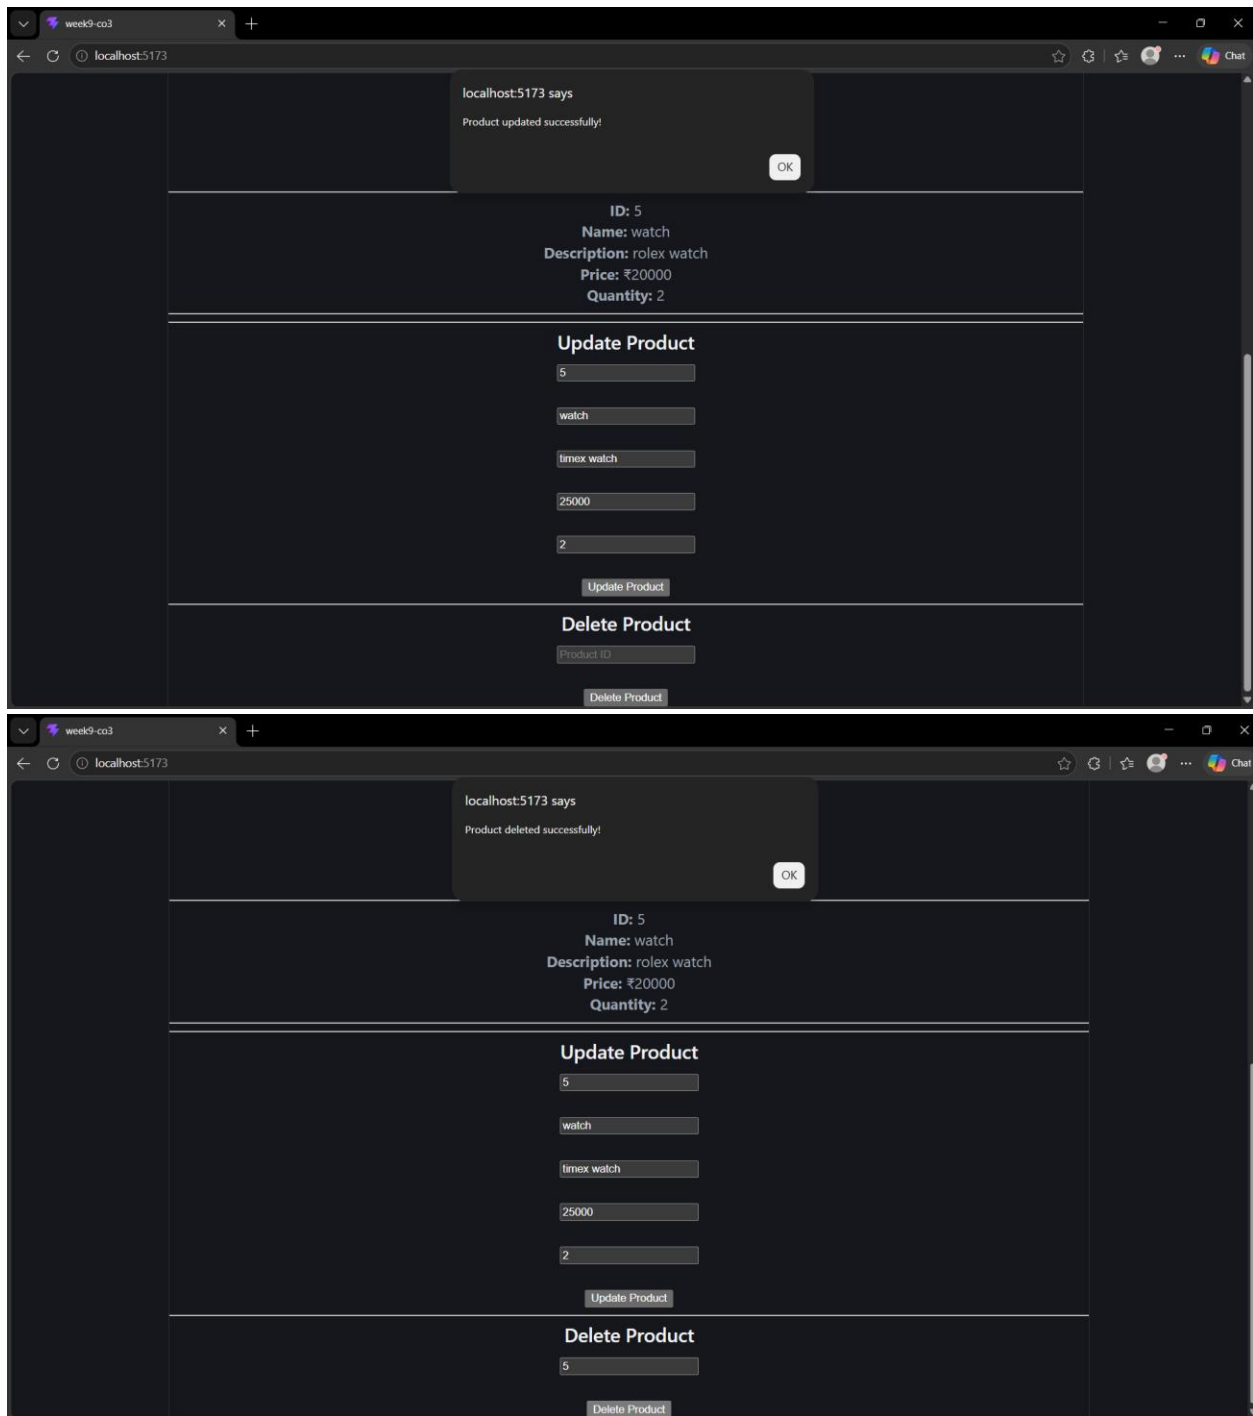

Backend part:-

