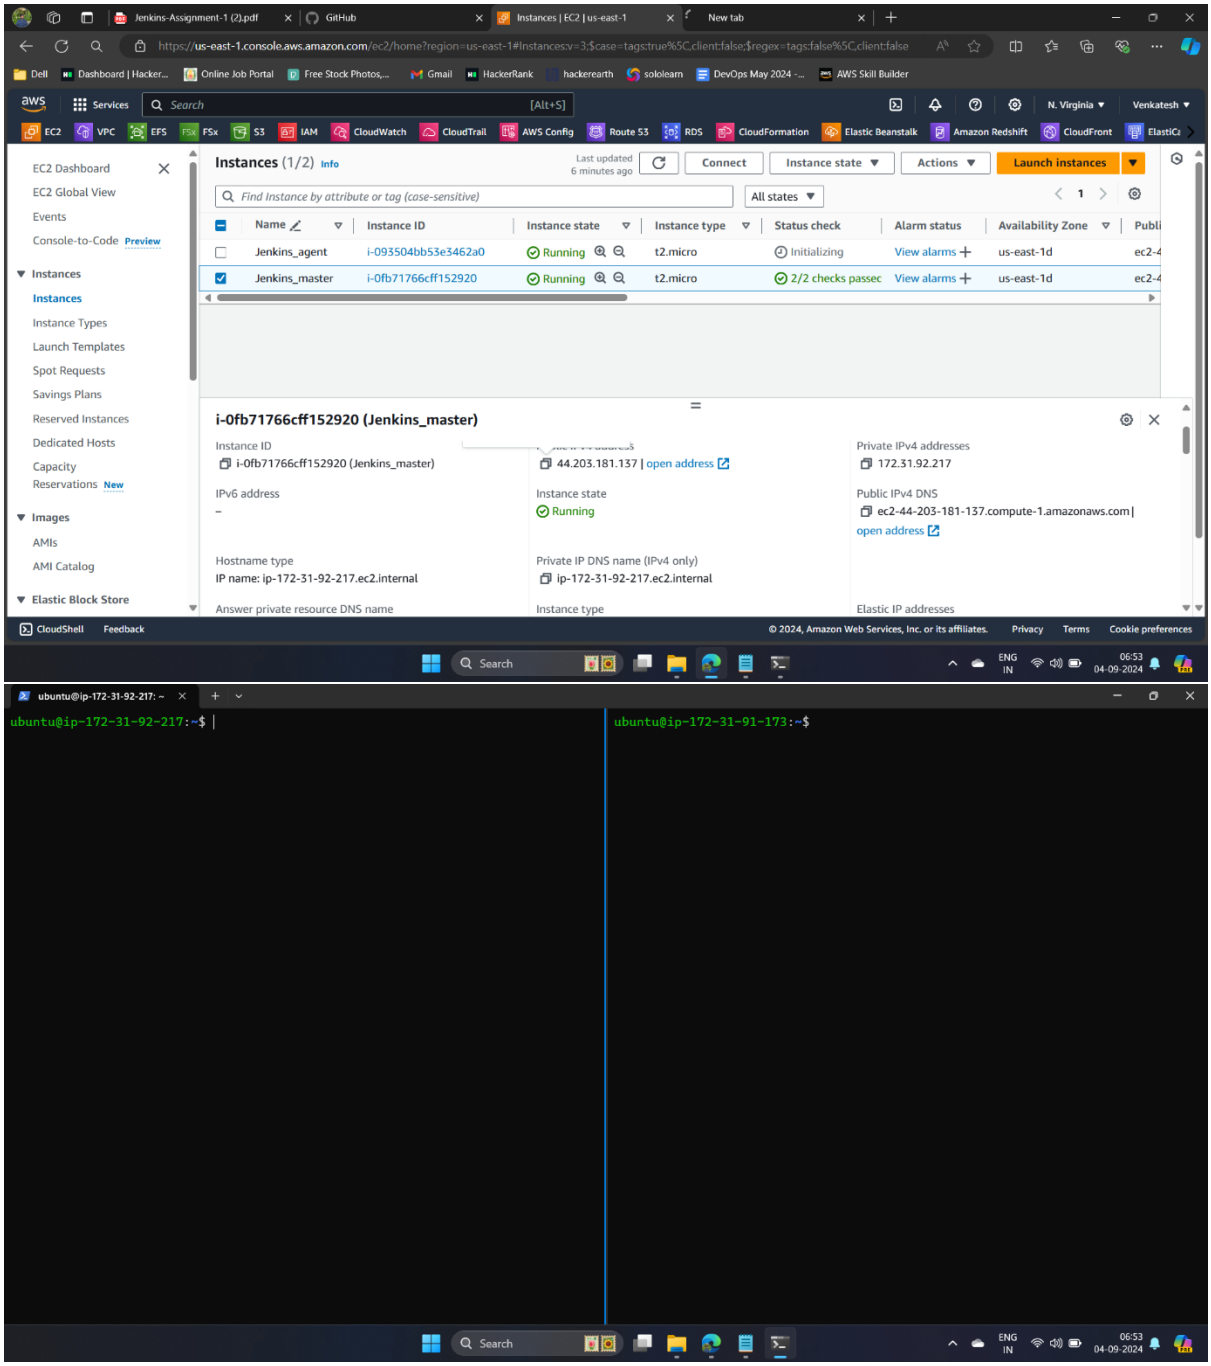
Jenkins-Assignment-1 (2).pdf
GitHub
Instances | EC2 | us-east-1
New tab
https://us-east-1.console.aws.amazon.com/ec2/home?region=us-east-1#Instances:v=3;$case=tags:true%5C,client:false;$regex=tags:false%5C,client:false
Dell
Dashboard | Hacker...
Online Job Portal
Free Stock Photos,...
Gmail
HackerRank
hackerearth
sololearn
DevOps May 2024 -...
AWS Skill Builder
Services
Search
[Alt+S]
N. Virginia
Venkatesh
EC2
VPC
EFS
FSx
S3
IAM
CloudWatch
CloudTrail
AWS Config
Route 53
RDS
CloudFormation
Elastic Beanstalk
Amazon Redshift
CloudFront
EC2 Dashboard
EC2 Global View
Events
Console-to-Code Preview
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations New
Images
AMIs
AMI Catalog
Elastic Block Store
Instances (1/2) Info
Last updated 6 minutes ago
Connect
Instance state
Actions
Launch instances
Find Instance by attribute or tag (case-sensitive)
All states
Name
Instance ID
Instance state
Instance type
Status check
Alarm status
Availability Zone
Jenkins_agent
i-093504bb53e3462a0
Running
t2.micro
Initializing
View alarms
us-east-1d
Jenkins_master
i-0fb71766cff152920
Running
t2.micro
2/2 checks passec
View alarms
us-east-1d
i-0fb71766cff152920 (Jenkins_master)
Instance ID
i-0fb71766cff152920 (Jenkins_master)
44.203.181.137 | open address
Private IPv4 addresses
172.31.92.217
IPv6 address
-
Instance state
Running
Public IPv4 DNS
ec2-44-203-181-137.compute-1.amazonaws.com | open address
Hostname type
IP name: ip-172-31-92-217.ec2.internal
Private IP DNS name (IPv4 only)
ip-172-31-92-217.ec2.internal
Answer private resource DNS name
Instance type
Elastic IP addresses
CloudShell
Feedback
© 2024, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences
Search
ENG IN
06:53 04-09-2024

ubuntu@ip-172-31-92-217: ~
ubuntu@ip-172-31-92-217:~$
ubuntu@ip-172-31-91-173:~$
Search
ENG IN
06:53 04-09-2024

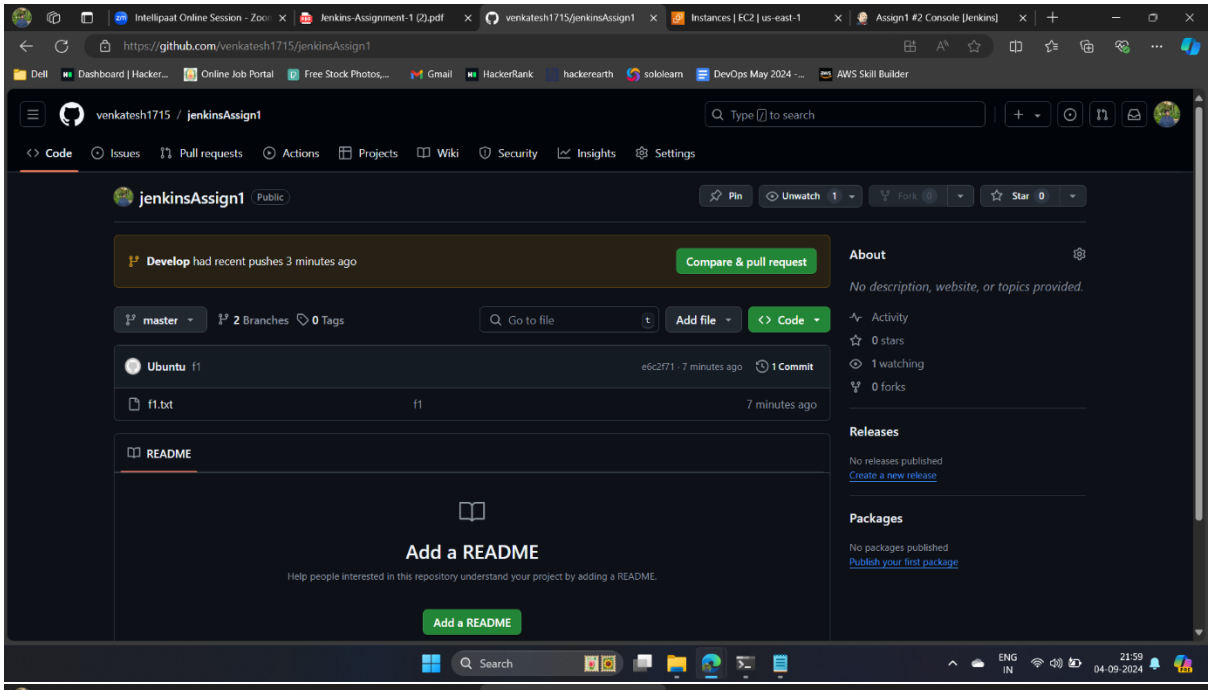
https://github.com/venkatesh1715/jenkinsAssign1
venkatesh1715 / jenkinsAssign1
Code Issues Pull requests Actions Projects Wiki Security Insights Settings
jenkinsAssign1 Public
Pin Unwatch 1 Fork 0 Star 0
Develop had recent pushes 3 minutes ago
Compare & pull request
master 2 Branches 0 Tags
Go to file
Add file
Code
Ubuntu f1
e6c2f71 · 7 minutes ago
1 Commit
f1.txt
f1
7 minutes ago
README
Add a README
Help people interested in this repository understand your project by adding a README.
Add a README
About
No description, website, or topics provided.
Activity
0 stars
1 watching
0 forks
Releases
No releases published
Create a new release
Packages
No packages published
Publish your first package

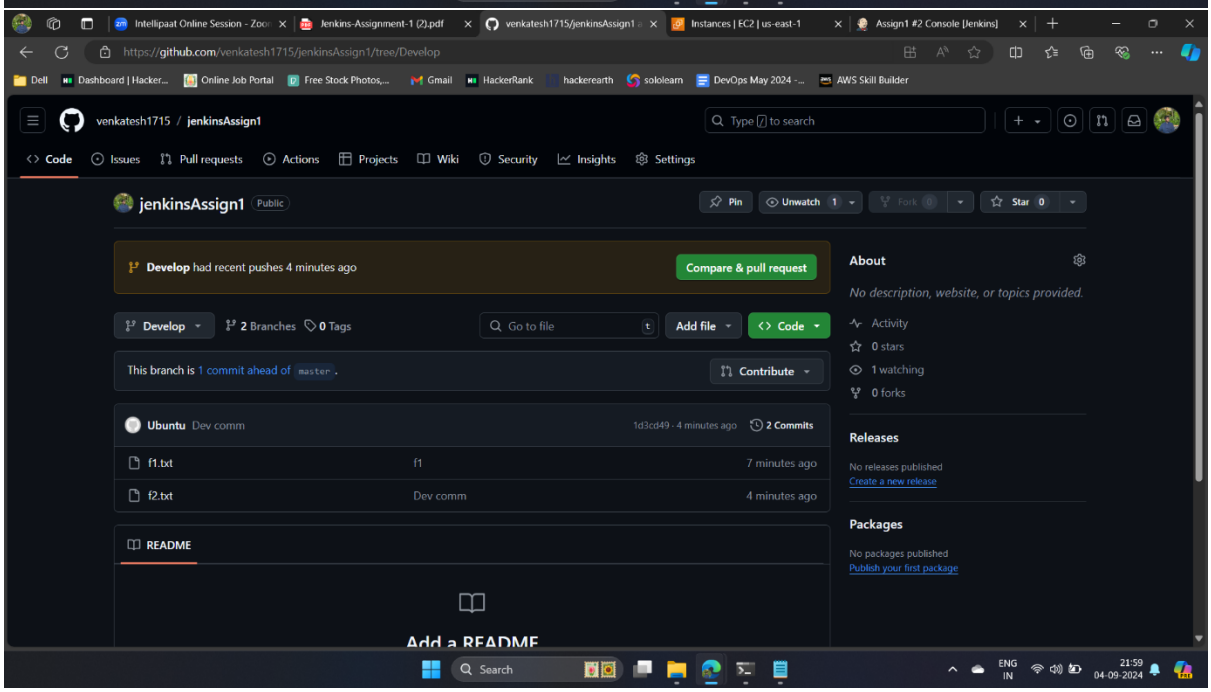
https://github.com/venkatesh1715/jenkinsAssign1/tree/Develop
venkatesh1715 / jenkinsAssign1
Code Issues Pull requests Actions Projects Wiki Security Insights Settings
jenkinsAssign1 Public
Pin Unwatch 1 Fork 0 Star 0
Develop had recent pushes 4 minutes ago
Compare & pull request
Develop 2 Branches 0 Tags
Go to file
Add file
Code
This branch is 1 commit ahead of master.
Contribute
Ubuntu Dev comm
1d3cd49 · 4 minutes ago
2 Commits
f1.txt
f1
7 minutes ago
f2.txt
Dev comm
4 minutes ago
README
About
No description, website, or topics provided.
Activity
0 stars
1 watching
0 forks
Releases
No releases published
Create a new release
Packages
No packages published
Publish your first package

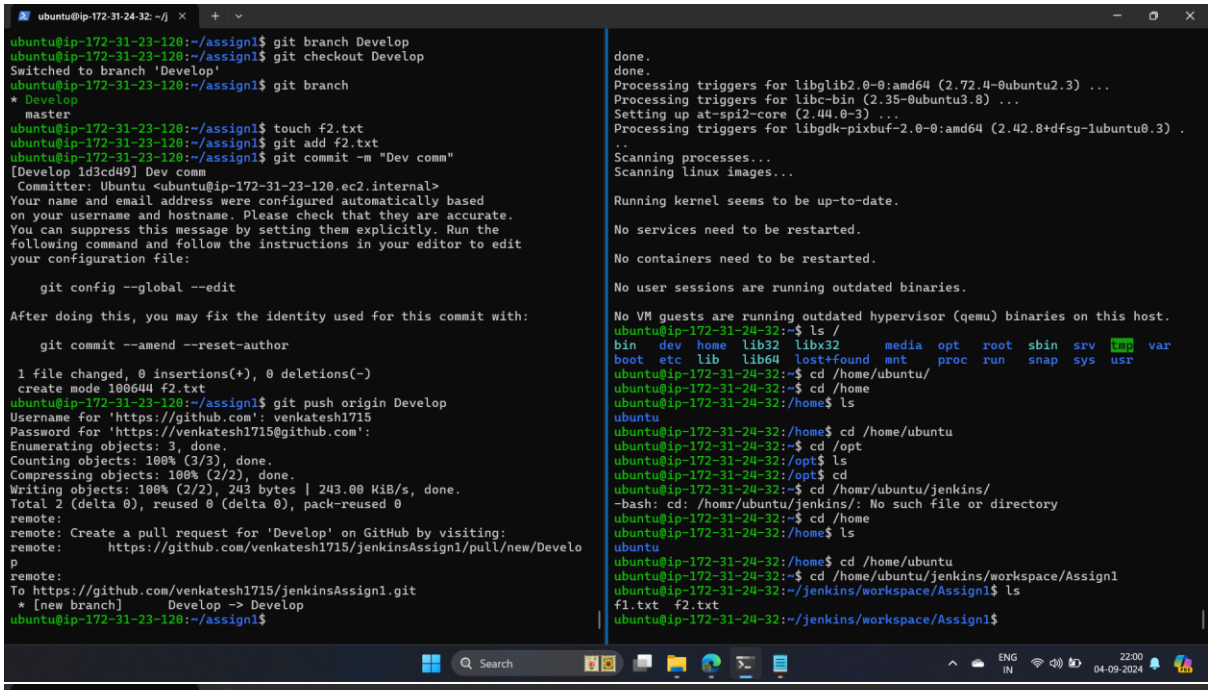
ubuntu@ip-172-31-24-32: ~/j
ubuntu@ip-172-31-23-120:~/assign1$ git branch Develop
ubuntu@ip-172-31-23-120:~/assign1$ git checkout Develop
Switched to branch 'Develop'
ubuntu@ip-172-31-23-120:~/assign1$ git branch
* Develop
master
ubuntu@ip-172-31-23-120:~/assign1$ touch f2.txt
ubuntu@ip-172-31-23-120:~/assign1$ git add f2.txt
ubuntu@ip-172-31-23-120:~/assign1$ git commit -m "Dev comm"
[Develop 1d3cd49] Dev comm
Committer: Ubuntu <ubuntu@ip-172-31-23-120.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:
git config --global --edit
After doing this, you may fix the identity used for this commit with:
git commit --amend --reset-author
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 f2.txt
ubuntu@ip-172-31-23-120:~/assign1$ git push origin Develop
Username for 'https://github.com': venkatesh1715
Password for 'https://venkatesh1715@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 243 bytes | 243.00 KiB/s, done.
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'Develop' on GitHub by visiting:
remote: https://github.com/venkatesh1715/jenkinsAssign1/pull/new/Develo
p
remote:
To https://github.com/venkatesh1715/jenkinsAssign1.git
* [new branch] Develop -> Develop
ubuntu@ip-172-31-23-120:~/assign1$
done.
done.
Processing triggers for libglib2.0-0:amd64 (2.72.4-0ubuntu2.3) ...
Processing triggers for libc-bin (2.35-0ubuntu3.8) ...
Setting up at-spi2-core (2.44.0-3) ...
Processing triggers for libgdk-pixbuf-2.0-0:amd64 (2.42.8+dfsg-1ubuntu0.3) .
..
Scanning processes...
Scanning linux images...
Running kernel seems to be up-to-date.
No services need to be restarted.
No containers need to be restarted.
No user sessions are running outdated binaries.
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-24-32:~$ ls /
bin dev home lib32 libx32 media opt root sbin srv tmp var
boot etc lib lib64 lost+found mnt proc run snap sys usr
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /opt
ubuntu@ip-172-31-24-32:/opt$ ls
ubuntu@ip-172-31-24-32:/opt$ cd
ubuntu@ip-172-31-24-32:~$ cd /homr/ubuntu/jenkins/
-bash: cd: /homr/ubuntu/jenkins/: No such file or directory
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/jenkins/workspace/Assign1
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$ ls
f1.txt f2.txt
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$
Search
ENG
IN
22:00
04-09-2024

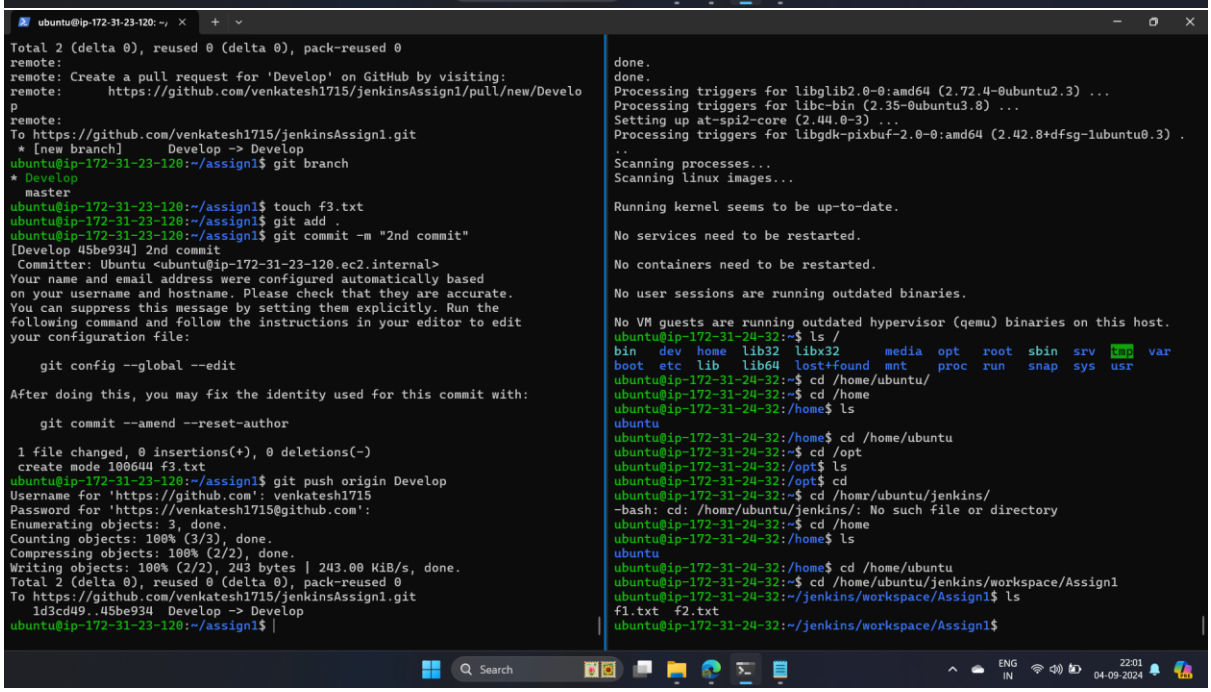
ubuntu@ip-172-31-23-120: ~/
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'Develop' on GitHub by visiting:
remote: https://github.com/venkatesh1715/jenkinsAssign1/pull/new/Develo
p
remote:
To https://github.com/venkatesh1715/jenkinsAssign1.git
* [new branch] Develop -> Develop
ubuntu@ip-172-31-23-120:~/assign1$ git branch
* Develop
master
ubuntu@ip-172-31-23-120:~/assign1$ touch f3.txt
ubuntu@ip-172-31-23-120:~/assign1$ git add .
ubuntu@ip-172-31-23-120:~/assign1$ git commit -m "2nd commit"
[Develop 45be934] 2nd commit
Committer: Ubuntu <ubuntu@ip-172-31-23-120.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:
git config --global --edit
After doing this, you may fix the identity used for this commit with:
git commit --amend --reset-author
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 f3.txt
ubuntu@ip-172-31-23-120:~/assign1$ git push origin Develop
Username for 'https://github.com': venkatesh1715
Password for 'https://venkatesh1715@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 243 bytes | 243.00 KiB/s, done.
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/venkatesh1715/jenkinsAssign1.git
1d3cd49..45be934 Develop -> Develop
ubuntu@ip-172-31-23-120:~/assign1$
done.
done.
Processing triggers for libglib2.0-0:amd64 (2.72.4-0ubuntu2.3) ...
Processing triggers for libc-bin (2.35-0ubuntu3.8) ...
Setting up at-spi2-core (2.44.0-3) ...
Processing triggers for libgdk-pixbuf-2.0-0:amd64 (2.42.8+dfsg-1ubuntu0.3) .
..
Scanning processes...
Scanning linux images...
Running kernel seems to be up-to-date.
No services need to be restarted.
No containers need to be restarted.
No user sessions are running outdated binaries.
No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-24-32:~$ ls /
bin dev home lib32 libx32 media opt root sbin srv tmp var
boot etc lib lib64 lost+found mnt proc run snap sys usr
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /opt
ubuntu@ip-172-31-24-32:/opt$ ls
ubuntu@ip-172-31-24-32:/opt$ cd
ubuntu@ip-172-31-24-32:~$ cd /homr/ubuntu/jenkins/
-bash: cd: /homr/ubuntu/jenkins/: No such file or directory
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/jenkins/workspace/Assign1
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$ ls
f1.txt f2.txt
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$
Search
ENG
IN
22:01
04-09-2024

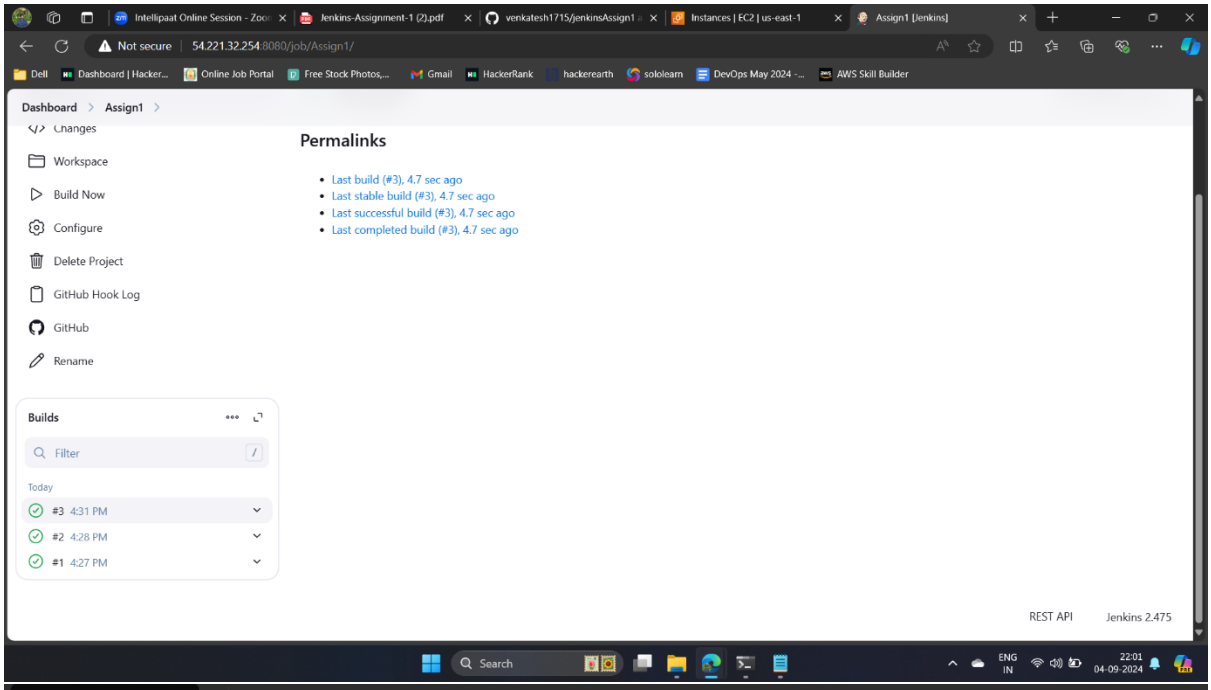

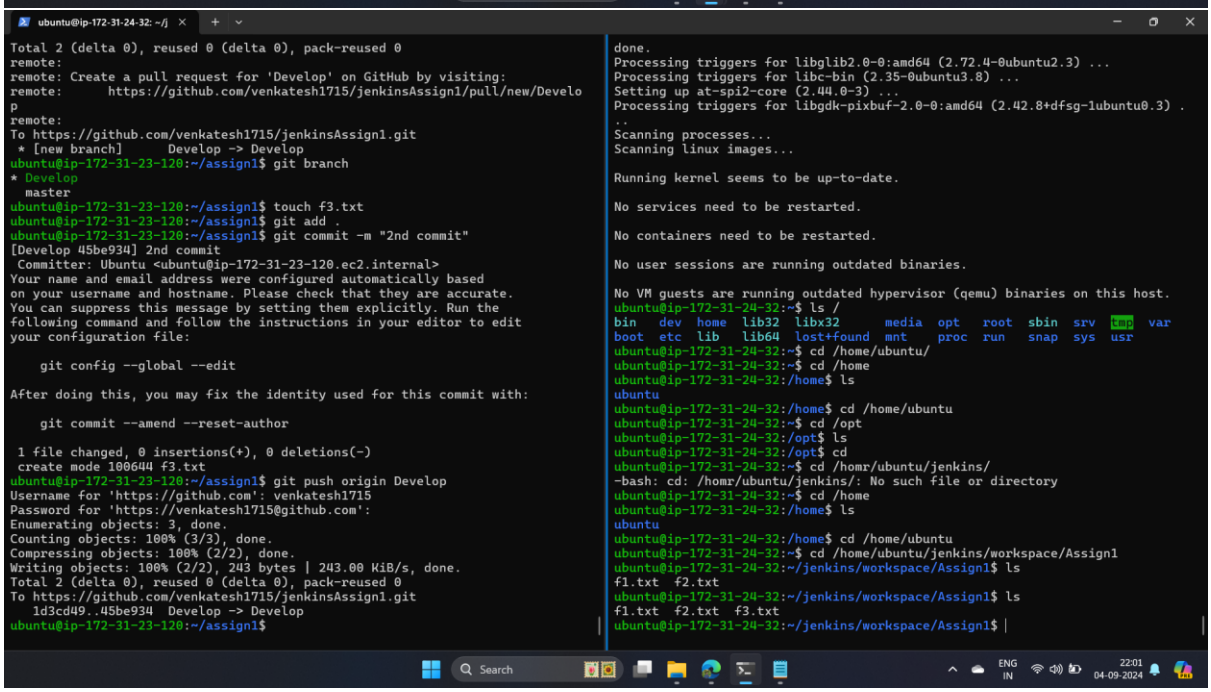

```
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
remote:
remote: Create a pull request for 'Develop' on GitHub by visiting:
remote:      https://github.com/venkatesh1715/jenkinsAssign1/pull/new/Develo
p
remote:
To https://github.com/venkatesh1715/jenkinsAssign1.git
 * [new branch]      Develop -> Develop
ubuntu@ip-172-31-23-120:~/assign1$ git branch
* Develop
  master
ubuntu@ip-172-31-23-120:~/assign1$ touch f3.txt
ubuntu@ip-172-31-23-120:~/assign1$ git add .
ubuntu@ip-172-31-23-120:~/assign1$ git commit -m "2nd commit"
[Develop 45be934] 2nd commit
 Committer: Ubuntu <ubuntu@ip-172-31-23-120.ec2.internal>
Your name and email address were configured automatically based
on your username and hostname. Please check that they are accurate.
You can suppress this message by setting them explicitly. Run the
following command and follow the instructions in your editor to edit
your configuration file:

    git config --global --edit

After doing this, you may fix the identity used for this commit with:

    git commit --amend --reset-author

 1 file changed, 0 insertions(+), 0 deletions(-)
 create mode 100644 f3.txt
ubuntu@ip-172-31-23-120:~/assign1$ git push origin Develop
Username for 'https://github.com': venkatesh1715
Password for 'https://venkatesh1715@github.com':
Enumerating objects: 3, done.
Counting objects: 100% (3/3), done.
Compressing objects: 100% (2/2), done.
Writing objects: 100% (2/2), 243 bytes | 243.00 KiB/s, done.
Total 2 (delta 0), reused 0 (delta 0), pack-reused 0
To https://github.com/venkatesh1715/jenkinsAssign1.git
   1d3cd49..45be934  Develop -> Develop
ubuntu@ip-172-31-23-120:~/assign1$
```

```
done.
Processing triggers for libglib2.0-0:amd64 (2.72.4-0ubuntu2.3) ...
Processing triggers for libc-bin (2.35-0ubuntu3.8) ...
Setting up at-spi2-core (2.44.0-3) ...
Processing triggers for libgdk-pixbuf-2.0-0:amd64 (2.42.8+dfsg-1ubuntu0.3) .
..
Scanning processes...
Scanning linux images...

Running kernel seems to be up-to-date.

No services need to be restarted.

No containers need to be restarted.

No user sessions are running outdated binaries.

No VM guests are running outdated hypervisor (qemu) binaries on this host.
ubuntu@ip-172-31-24-32:~$ ls /
bin   dev  home  lib32  libx32      media  opt   root  sbin  srv  tmp  var
boot  etc  lib   lib64  lost+found  mnt    proc  run   snap  sys  usr
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /opt
ubuntu@ip-172-31-24-32:/opt$ ls
ubuntu@ip-172-31-24-32:/opt$ cd
ubuntu@ip-172-31-24-32:~$ cd /homr/ubuntu/jenkins/
-bash: cd: /homr/ubuntu/jenkins/: No such file or directory
ubuntu@ip-172-31-24-32:~$ cd /home
ubuntu@ip-172-31-24-32:/home$ ls
ubuntu
ubuntu@ip-172-31-24-32:/home$ cd /home/ubuntu
ubuntu@ip-172-31-24-32:~$ cd /home/ubuntu/jenkins/workspace/Assign1
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$ ls
f1.txt  f2.txt
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$ ls
f1.txt  f2.txt  f3.txt
ubuntu@ip-172-31-24-32:~/jenkins/workspace/Assign1$
```