



(/)

Redeem
Voucher

Welcome
Venkat

- Tests
(/certo-meter/online-tests)
- Preparation Content
(/certo-meter/lessons)
- Notice Board
(/certo-meter/current-affairs)
- Discussions
(/certo-meter/discussions)

Hello Venkat! This is your 1st attempt

Set-03

YOUR SCORE:
0/ 30


YOUR TIME:
1 MIN

YOUR PERCENTILE:
25%

VIEW SOLUTIONS

Over All Analysis


Name

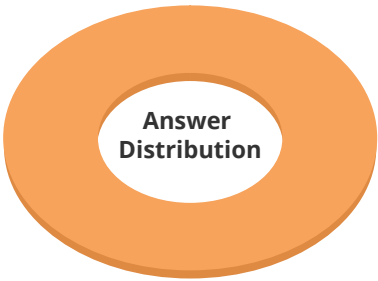

Correct

Incorrect

Unattempted

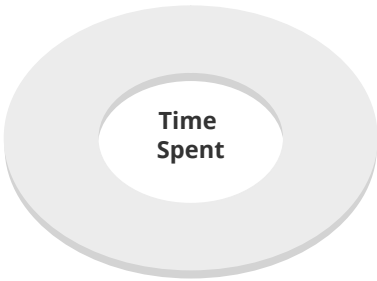

Correct Answers

Incorrect Answers

Unattempted Questions

Unused Time

Sections	Score	Time Spent
Name	0/30	0 min, 0 sec
Total	0/30	1/30 Min

VIEW IN TABLE FORMAT

ANSWER DISTRIBUTION

You have attempted 0 questions out of which 0 questions are correct, 0 questions are incorrect and 30 questions are unattempted.

TIME DISTRIBUTION

Out of the total duration of 30 minutes, 1 minutes have been utilized throughout. A time duration of 0 minutes have been utilized for correct answers and 0 minutes have been utilized for incorrect answers. A duration of 29 minutes is unused.

SECTIONAL COMPARISON

Sectional Comparison**Time Analysis**

Section Wise Report



SOLUTIONS

[< Prev](#)[Next >](#)**JUMP TO QUESTION**

LL SECTIONS ▼

LL STATUS ▼

Question No:

4

Question ID:

700741.0

Answer Status:

Missed

Time Taken:

0 Sec

Given the code fragment:

```
public class Employee {
    String name;
    boolean contract;
    double salary;
    Employee() {
        // line n1
    }
    public String toString(){
        return name - ":" + contract + ":" + salary;
    }
    public static void main(String[] args) {
        Employee e = new Employee();
        // line n2
        System.out.print(e);
    }
}
```

Which two modifications, when made independently, enable the code to print joe:true:100.0?

1 2 3**4 5 6****7 8 9****10 11 12****13 14 15****16 17 18****19 20 21****22 23 24****25 26 27****28 29 30**

A) Replace line n2 with:

```
e.name = "Joe";  
e.contract = true;  
e.salary = 100;
```

B) Replace line n2 with:

```
this.name = "Joe";  
this.contract = true;  
this.salary = 100;
```

C) Replace line n1 with:

```
this.name = new String("Joe");  
this.contract = new Boolean(true);  
this.salary = new Double(100);
```

D) Replace line n1 with:

```
name = "Joe";  
contract = TRUE;  
salary = 100.0f;
```

E) Replace line n1 with:

```
this("Joe", true, 100);
```

A. Option A

B. Option B

C. Option C

D. Option D

E. Option E

A
A

B
B

C
C

D
D

E
E

Bookmark 

[< Prev](#)

[Next >](#)

The Correct Answer is **A, C**

DETAILED SOLUTION

(because no constructor with Employee(String, Boolean, Double. D is wrong because TRUE is not boolean and cannot convert float to double. B is wrong because cannot use "this" in Static context. I think in option A also e.salary should be 100.0)

QUESTION DISCUSSIONS

No Discussions Yet!

RAISE ISSUE