




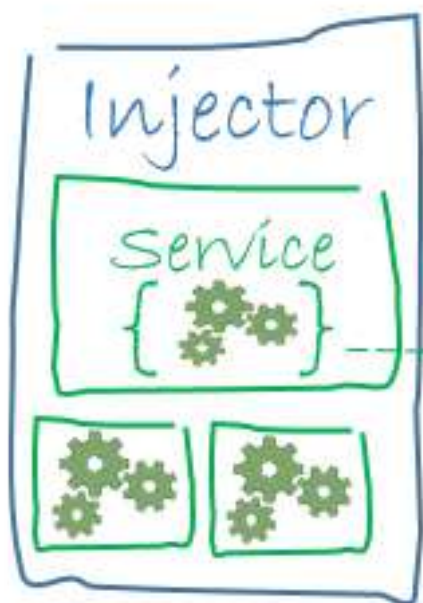

Property Binding

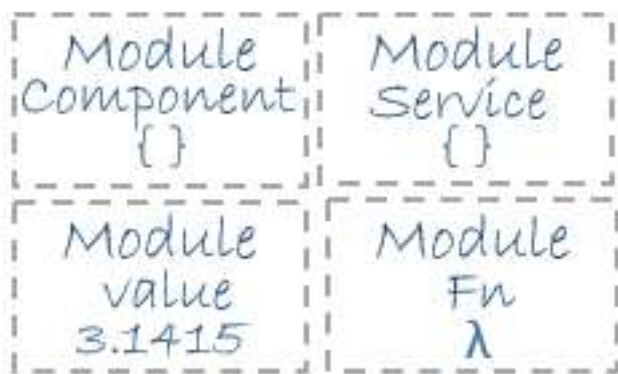

Event Binding

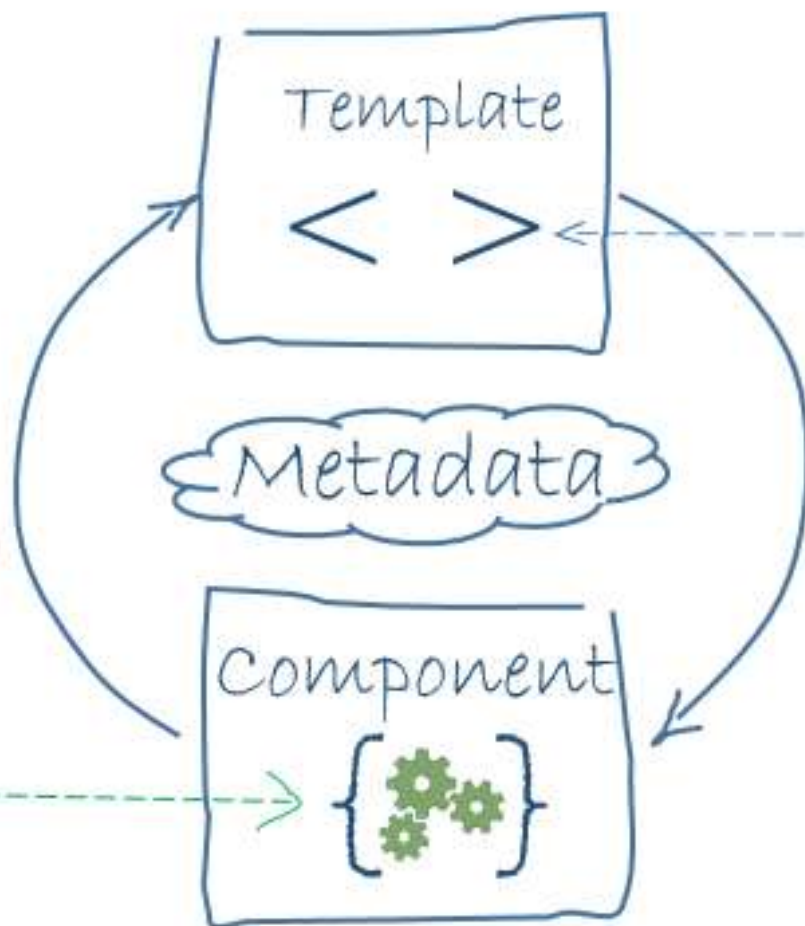



The architecture diagram identifies the eight main building blocks of an Angular application:

- **Modules** -> Angular has its own modularity system called NgModules. NgModules are containers for a cohesive block of code dedicated to an application domain, a workflow, or a closely related set of capabilities. Every Angular application has at least one NgModule class, the root module.
- **Components** -> Components are the main building block for Angular applications. Each component consists of:
 - An HTML template that declares what renders on the page
 - A TypeScript class that defines behavior
 - A CSS selector that defines how the component is used in a template
- **Templates** -> A template is a form of HTML that tells Angular how to render the component
- **Metadata** -> The Decorator is a tag or definition that Angular puts on top of the class to distinguish between classes and some of them, and to define some data, settings, or information about the defined class. This information is called metadata.
- **Data binding** -> is the process that establishes a connection between the app UI and the data it displays.
- **Directives** -> Directives are classes that add additional behavior to elements in your Angular application. Angular contain built-in directives to manage forms, lists, styles, and what users see.
- **Services** -> Service is a broad category encompassing any value, function, or feature that an application needs.
- **Dependency injection** -> Dependency injection, or DI, is one of the fundamental concepts in Angular. DI is wired into the Angular framework and allows classes with Angular decorators, such as Components, Directives, Pipes, and Injectables, to configure dependencies that they need.