


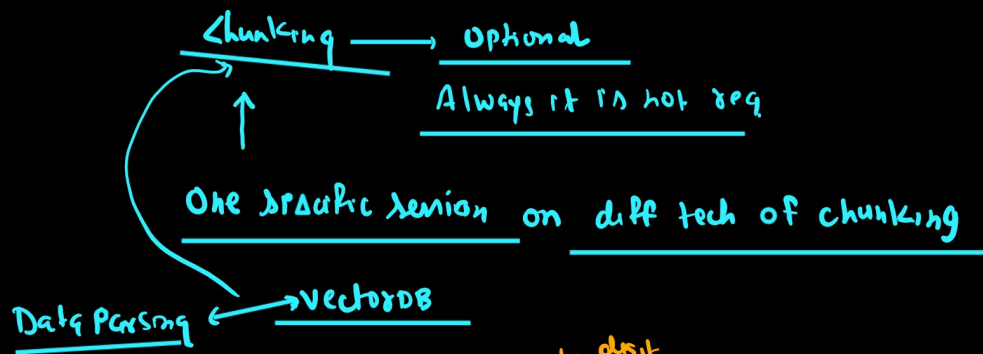


10 digit
↓
Phone no. 87 70 20 32 58

Some asking you your phone number

Chunk


2 digit { 87 } { 877 }
 { 70 } { 020 }
 { 20 } { 3258 }
 { 32 } { }
 { 58 } { }
 3 digit

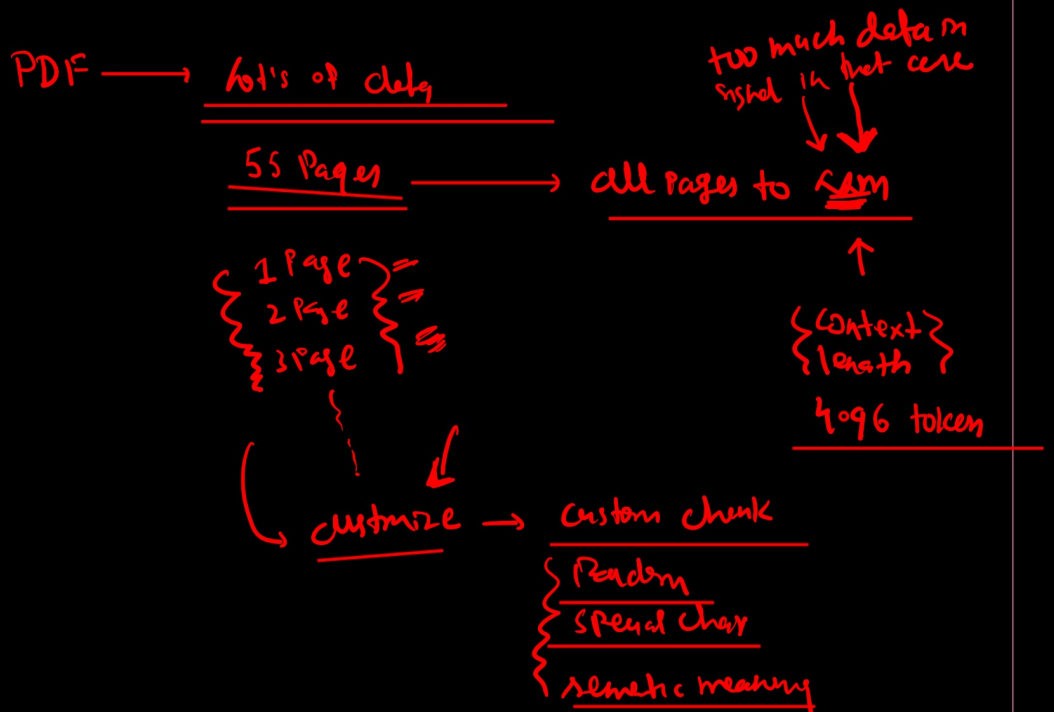


$\text{rag_chain} = \left(\underbrace{("context": \text{retriever})}_{\text{VectorDB}} \mid \underbrace{\text{format_docs}}_{\text{(Document object).page-content}} \mid \underbrace{("question": \text{RunnablePassthrough()})}_{\text{low many Parameter V4 model}} \mid \underbrace{\text{prompt}}_{\text{final}} \mid \underbrace{\text{llm}}_{\text{final}} \mid \underbrace{\text{StrOutputParser()}}_{\text{(Output object).str}} \right)$

RAG seems very simple

So many moving component

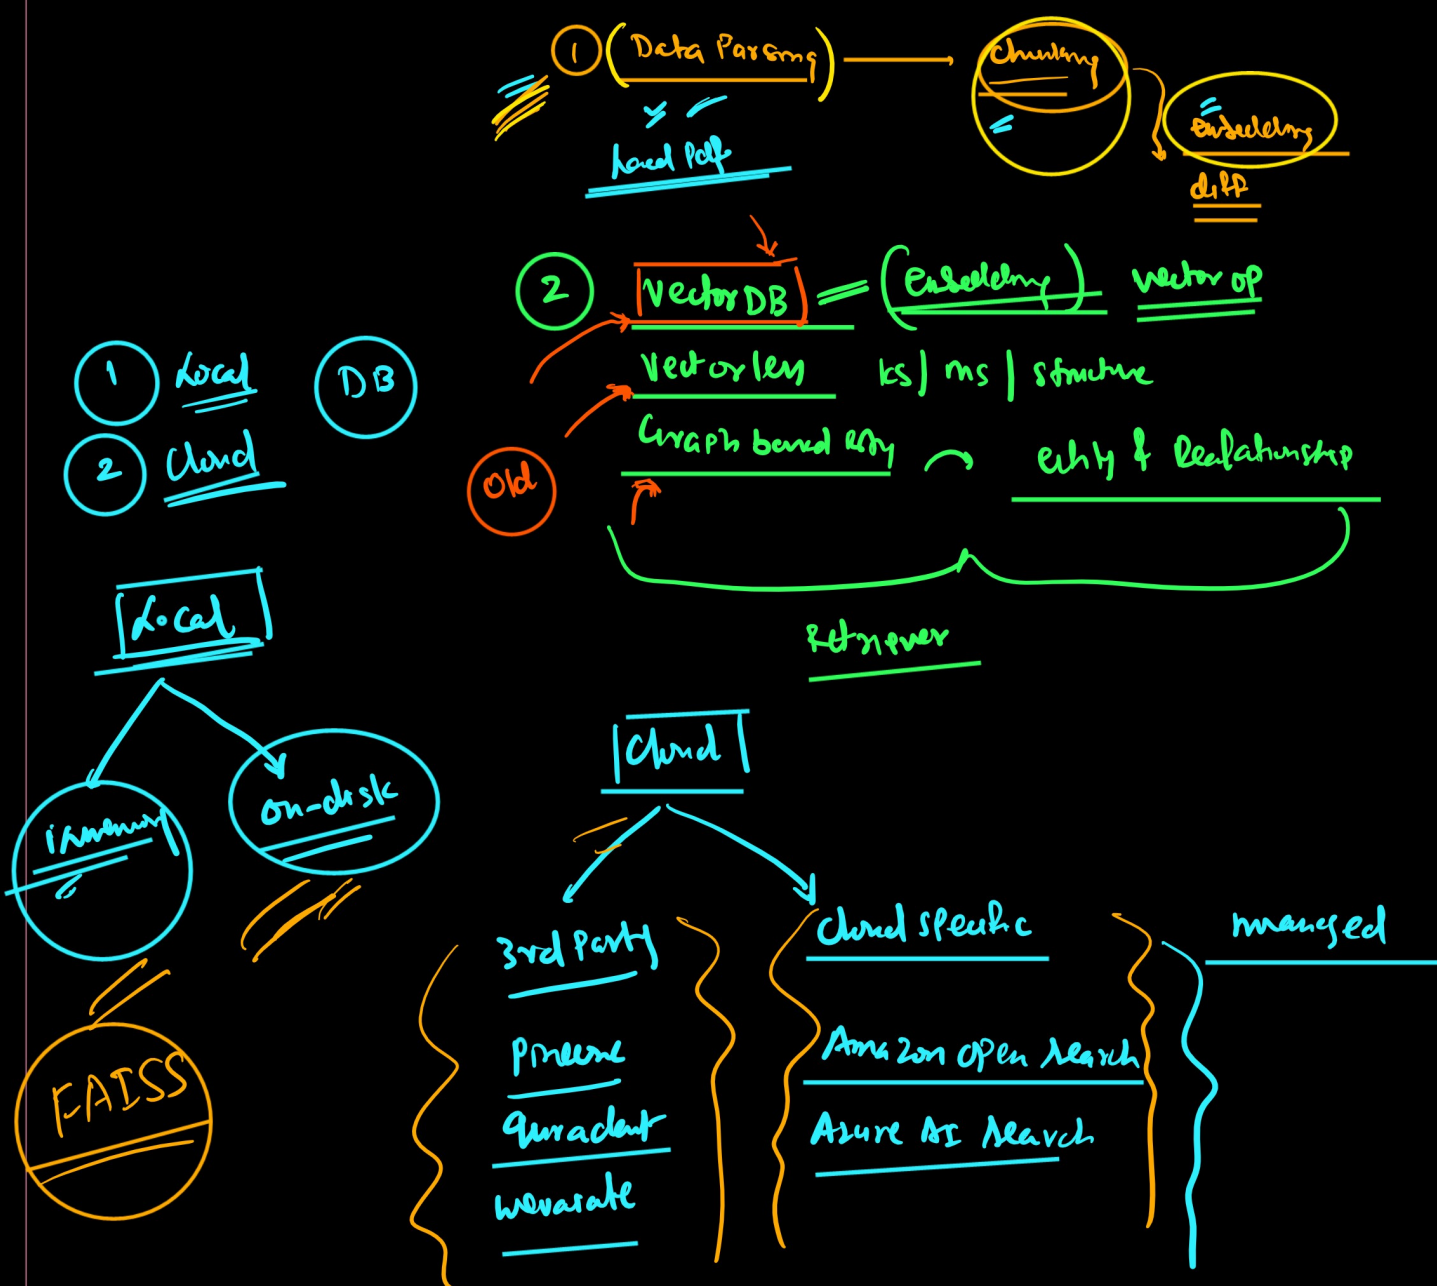

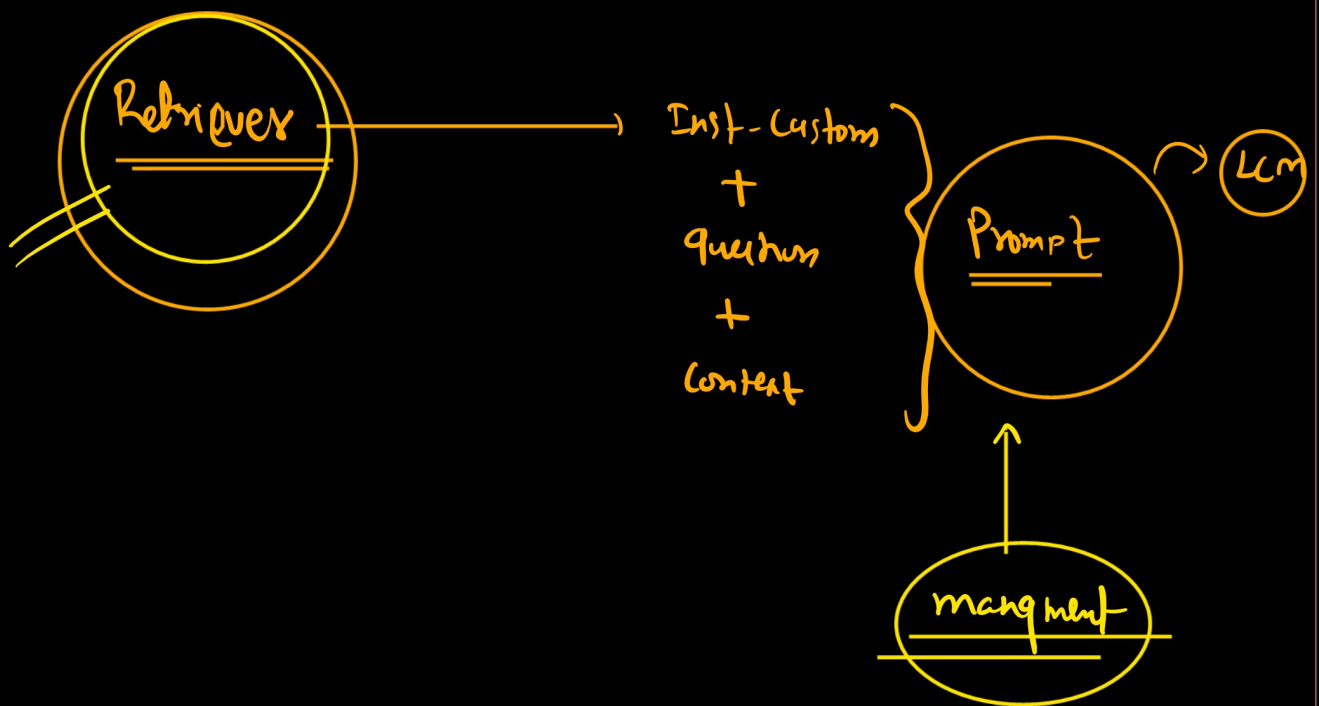

- ① Parsing
- ② chunking
- ③ embedding
- ④ vectorDB
- ⑤ llm
- ⑥ Graph RAG
- ⑦ Retriever
- ⑧ Prompt management
- ⑨ wrapper
- ⑩ output parser

END Result

many moving Component

moving Component ⇒ Component which is affecting to END result