1) Program to store student name in student database.

no.of students name are not fixed, each student name length is also not fixed.

Char **p; // double pointer.
We want to store strings (names).
Names means string here.

1) first allocate memory for the pointer.
2) each pointer need to point to some other location, which we can say as other dynamic block.

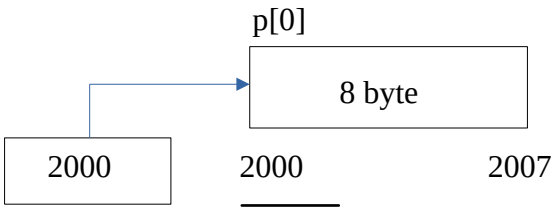

P 3000

```
cnt=0;
i=0;
char **p=NULL;
p=realloc(p,(cnt+1)*sizeof(*p);
p[i]=getstring();
i++;
,
```

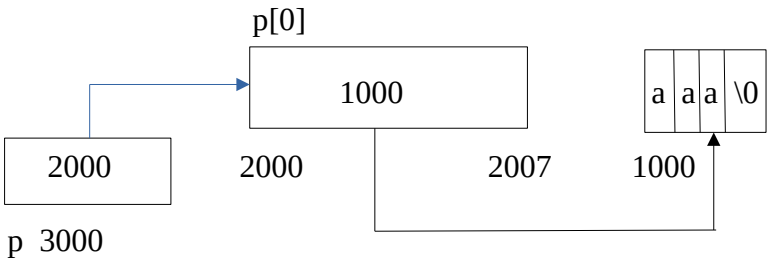

p 3000

p=realloc(1000,(cnt+1)*sizeof(*p);

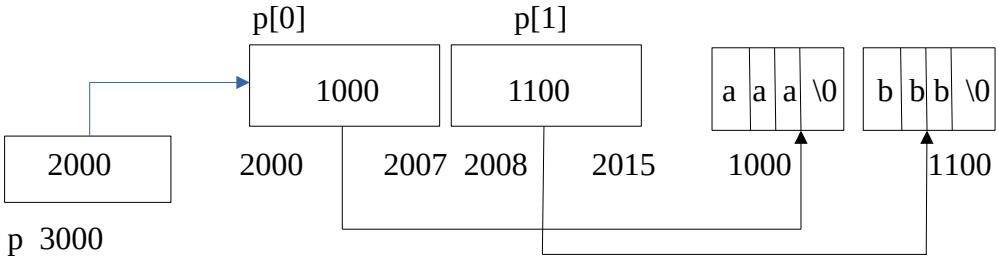

p 3000

same way 8 student name updated (now cnt = 8)

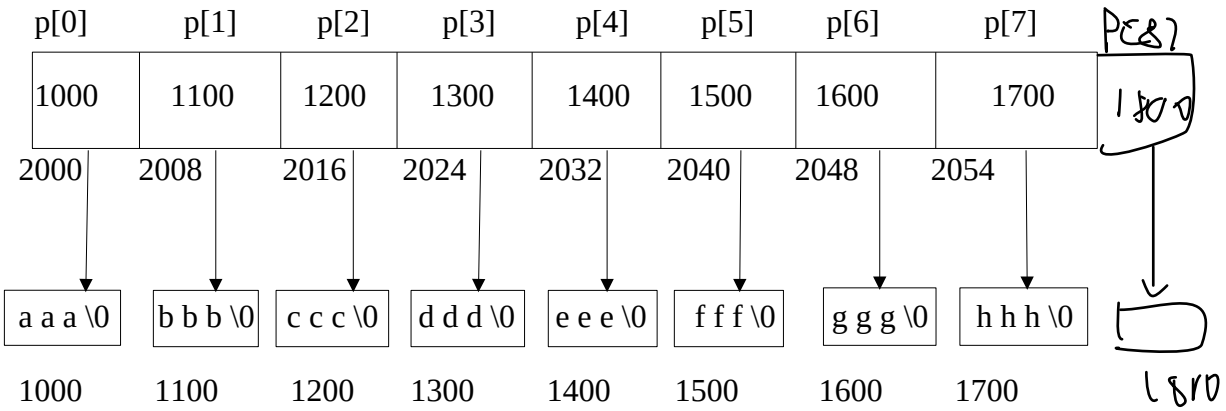

delete index (i=3)

cnt =8;

```
char *temp;
temp=p[i];
free(temp);
memmove(p+i,p+i+1,(cnt-1-i)*sizeof(*p));
cnt--;
p=realloc(p,cnt*sizeof(*p));
```

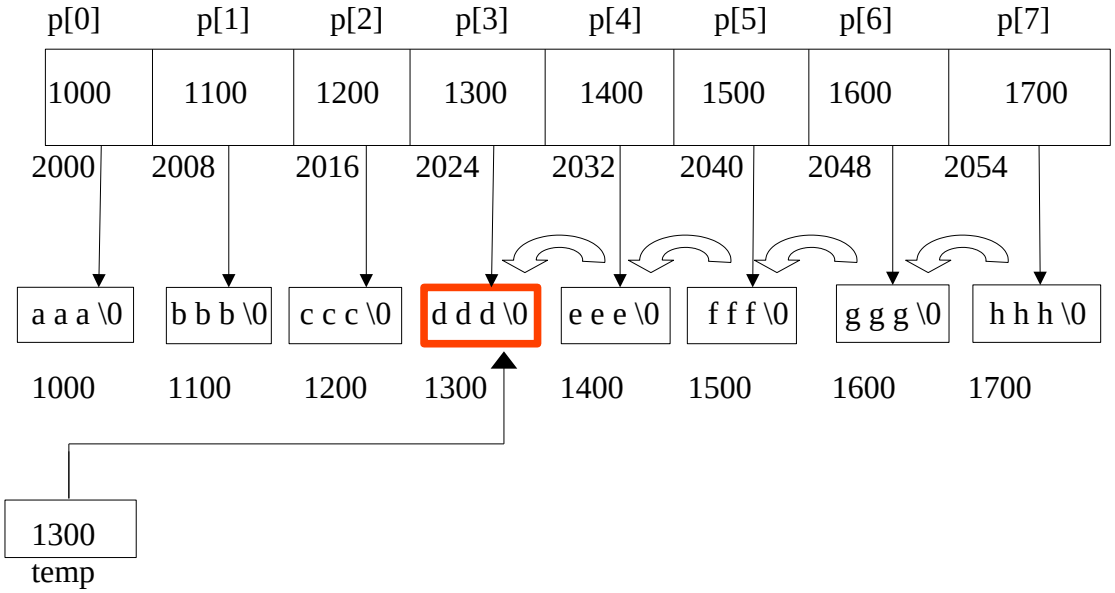

if we want to delete index 3, memmove can be used

1300 ← 1400
1400 ← 1500
1500 ← 1600
1600 ← 1700

delete (arr,index);

memmove(p+index,p+index+1,(cnt-i-1)*sizeof(*p));
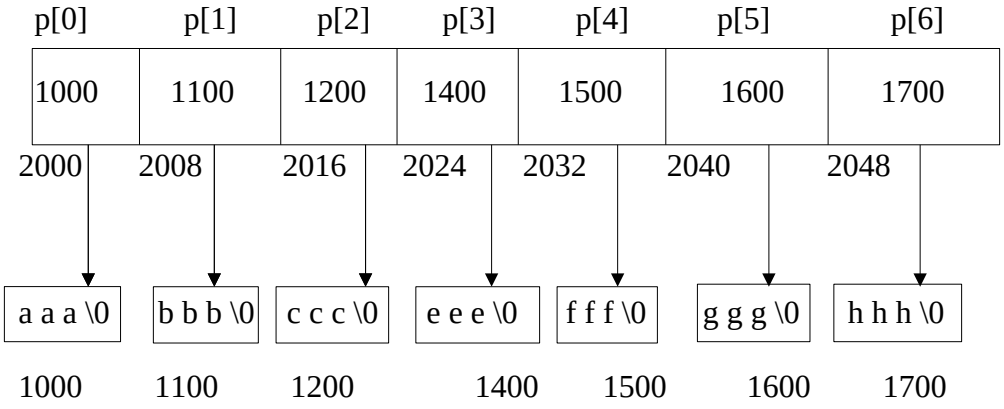
total no of index location / count of student =8.
total no of index location – current index – 1.
(8 – 3 – 1) * sizeof(*p)
4*8
32
char *temp=p[i];
free(temp);