Compiler

IDE

Vi Editor
gcc compiler
} Linux

=> Few Linux Commands

=> Compiler Basics

GUI Vs CUI

LAB Time : 7:00 to 10:00

Power on PC => login: v23he7a1

Passwd: 123↵

Command Prompt

tilde / home Directory

[v23he7a1 @ System ~] $ ls

User name

host name


working Directory

window

run → cmd↵

C:\> Command↵

C:\Users\vector>

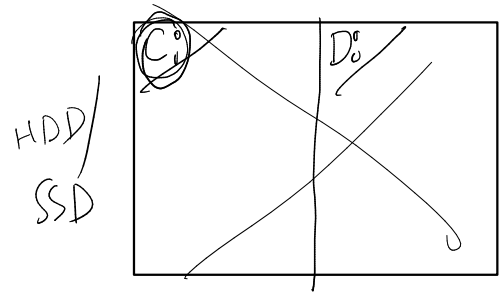


UNIX / LINUX

~~UNIX~~ / LINUX

Every folder/directory, having two Entries Bydefault:

- Link to self
- .. Link to parent

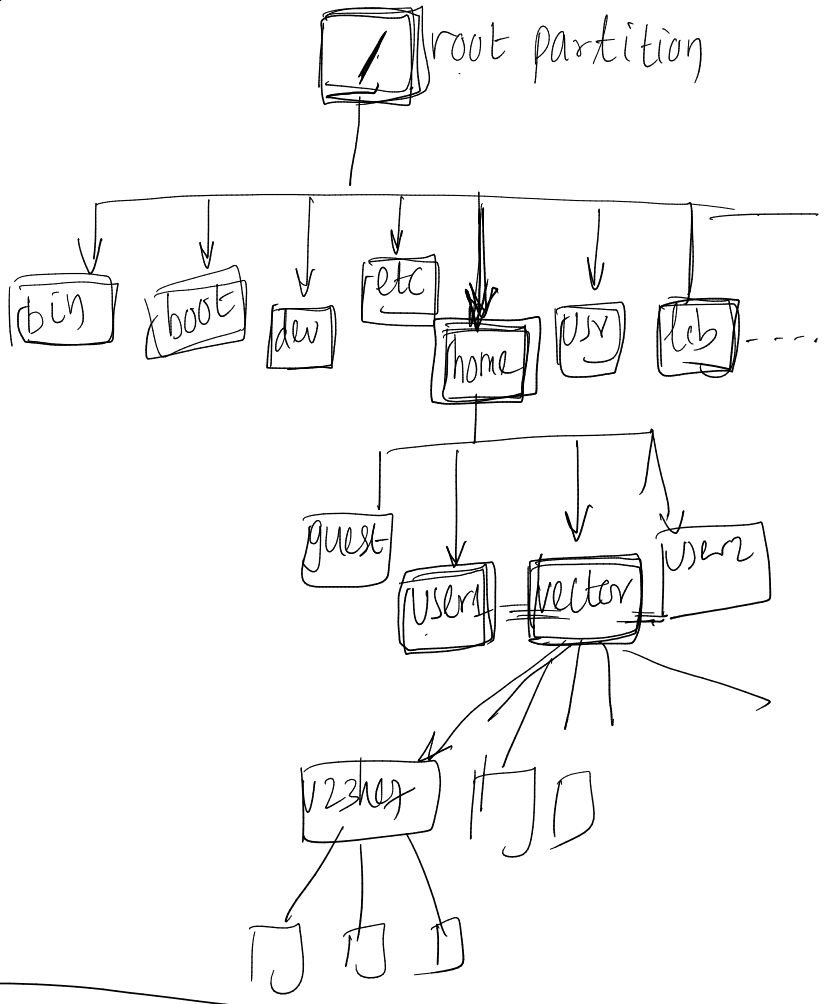

$pwd

$ls

$cd

$mkdir


$date

command line Editor

- pico
- nano
- cat
- ed
- vi
- etc..

programming editors on Linux

- emac
-
-

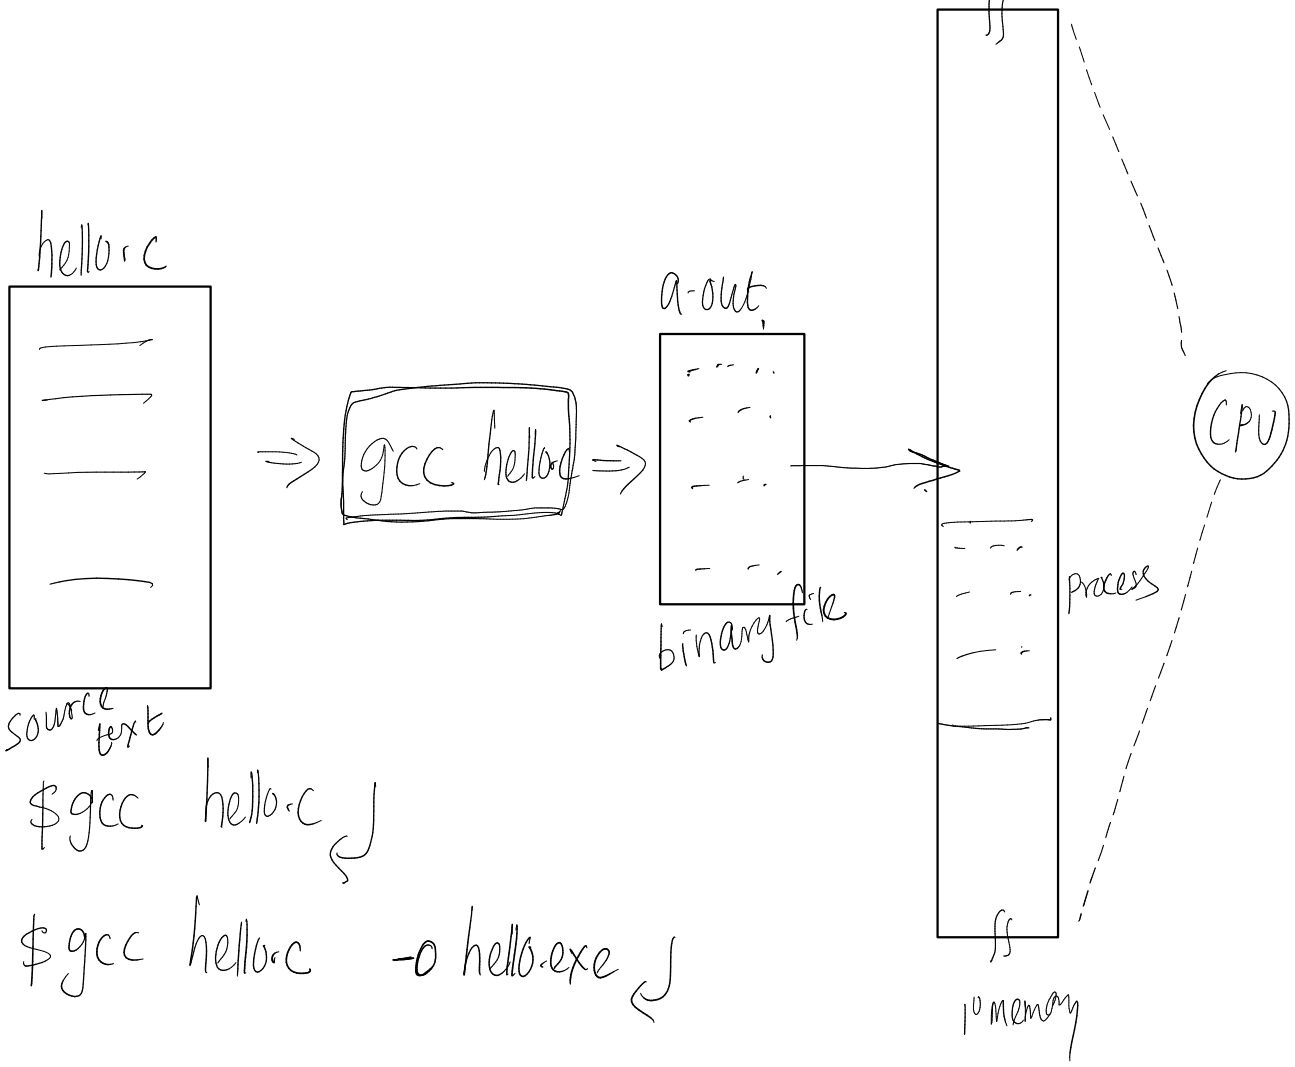

$gcc hello.c ↵

$gcc hello.c -o hello.exe ↵

$passwd ↵

cp

rm → file

-r directory

rmdir → works for Empty Directory only

mv → rename

$ mv a.out hello.exe ↵

$ cp srcfile Destfile

$ cp Path/file Path/filename ↵

URL

lms.vectorinstitute.in

V23he7a1

Vector#123.